



Submittal Data Sheet

VISTA 1.5 Ton 2 X 2 Ceiling Cassette Heat Pump System

FFA18AVJU9-RXV18AVJU9

FEATURES

- AUTO mode with automatic cooling/heating selection based on indoor temperature
- COOL / HEAT / DRY / FAN operating modes
- Configurable airflow pattern (2, 3, or 4-way discharge)
- Indoor airflow direction adjustable via remote control (field setting)
- Built-in drain pump with float switch safety control
- Air filter cleaning indicator with adjustable intervals
- COOL/HEAT mode lock function (field programmable)
- Auto-restart function after power interruption
- Automatic system protection (voltage fluctuation, compressor delay, defrost cycle)
- Quiet and continuous airflow operation with indoor air circulation
- Ceiling-mounted cassette design with compact installation footprint
- R32 refrigerant system for improved efficiency and environmental compliance
- Flexible installation with suspension mounting and configurable piping/wiring
- R32 inverter outdoor unit for efficient operations.
- Compatible with multiple indoor unit models (split system configuration)
- Extended cooling operation range with low ambient capability (up to -4°F with optional kit)
- Compact footprint with horizontal airflow outdoor design
- Single-phase 208/230V power supply compatibility
- Heavy-duty casing designed for outdoor installation environments
- Anti-corrosion installation considerations for long durability
- Optional drain pan heater (heat pump models) for low-temperature operation
- Airflow clearance design recommendations for optimized performance
- Operating temperature limits are 50°F to 114.8°F in cooling mode and 5°F to 64.4°F in heating mode.

BENEFITS

- Customized airflow and temperature distribution for enhanced occupant comfort
- Reliable and consistent performance with intelligent auto mode, restart capability, and system protection features
- Improved indoor air quality & maintenance convenience with filter cleaning alerts and easy service access
- Reduced downtime and long-term reliability through built-in drain pump, safety mechanisms, and protection controls
- Energy-efficient and eco-friendly operation using R32 refrigerant technology
- Easy installation and adaptability for various ceiling applications and room configuration.
- Reliable year-round performance with both cooling and heating capabilities
- Improved efficiency in extreme conditions with extended low-ambient cooling operation
- Flexible system design allowing longer piping runs and easy integration with indoor units
- Enhanced durability with corrosion protection and robust outdoor construction
- Simplified installation and maintenance through clear piping layout, labeling, and pump-down functionality
- Stable and quiet operation
- Energy-efficient and environmentally friendly operation using R32 refrigerant

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

VISTA 1.5 Ton 2 X 2 Ceiling Cassette Heat Pump System
FFA18AVJU9-RXV18AVJU9

SYSTEM PERFORMANCE

Indoor Unit Model No.	FFA18AVJU9	Indoor Unit Name:	VISTA R-32 1.5 Ton 2 X 2 Ceiling Cassette
Outdoor Unit Model No.	RXV18AVJU9	Outdoor Unit Name:	Daikin R-32 1.5 Ton Heatpump Ductless ODU
Rated Cooling Capacity (Btu/hr):	17,400	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):	12,270	Rated Piping Length(ft):	25
Max/Min Cooling Capacity (Btu/hr):	18,800 / 5,100	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):	1.670	Heating Input Power (kW):	2.15
SEER2 (Non-Ducted/Ducted):	18.20 /	HSPF2 (Non-Ducted/Ducted):	8.5 /
EER2 (Non-Ducted/Ducted):	11.50 /	Heating COP (Non-Ducted/Ducted):	1.8 /
Rated Heating Capacity (Btu/hr):	21,600	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Max/Min Heating Capacity (Btu/hr):	21,800 / 5,400		

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	50 - 115
Holding Refrigerant Charge (lbs):	2.45	Heating Operation Range (°F WB):	5 - 64
Additional Charge (oz/ft):	0.22	Max. Pipe Length (Vertical) (ft):	66
Pre-charge Piping (Length) (ft):	49	Cooling Range w/Baffle (°F DB):	-4 - 115
Max. Pipe Length (Total) (ft):	99		
Max Height Separation (Ind to Ind ft):	0		
Fan/Compressor Drive Input:			


Submittal Data Sheet

VISTA 1.5 Ton 2 X 2 Ceiling Cassette Heat Pump System
FFA18AVJU9-RXV18AVJU9

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	/ 60 /	Airflow Rate (H/M/L) (CFM):	508/431/314
Power Supply Connections:		Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):		Gas Pipe Connection (inch):	1/2
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	10-1/4 x 22-5/8 x 22-5/8	Condensate Connection (inch):	1-1/32
Ext. Static Pressure (Rated/Max) (inWg):	/	Sound Pressure (H/M/L) (dBA):	44/40/32
Net Weight (lb):	36	Sound Power Level (dBA):	

DIMENSIONAL DRAWING - INDOOR UNIT

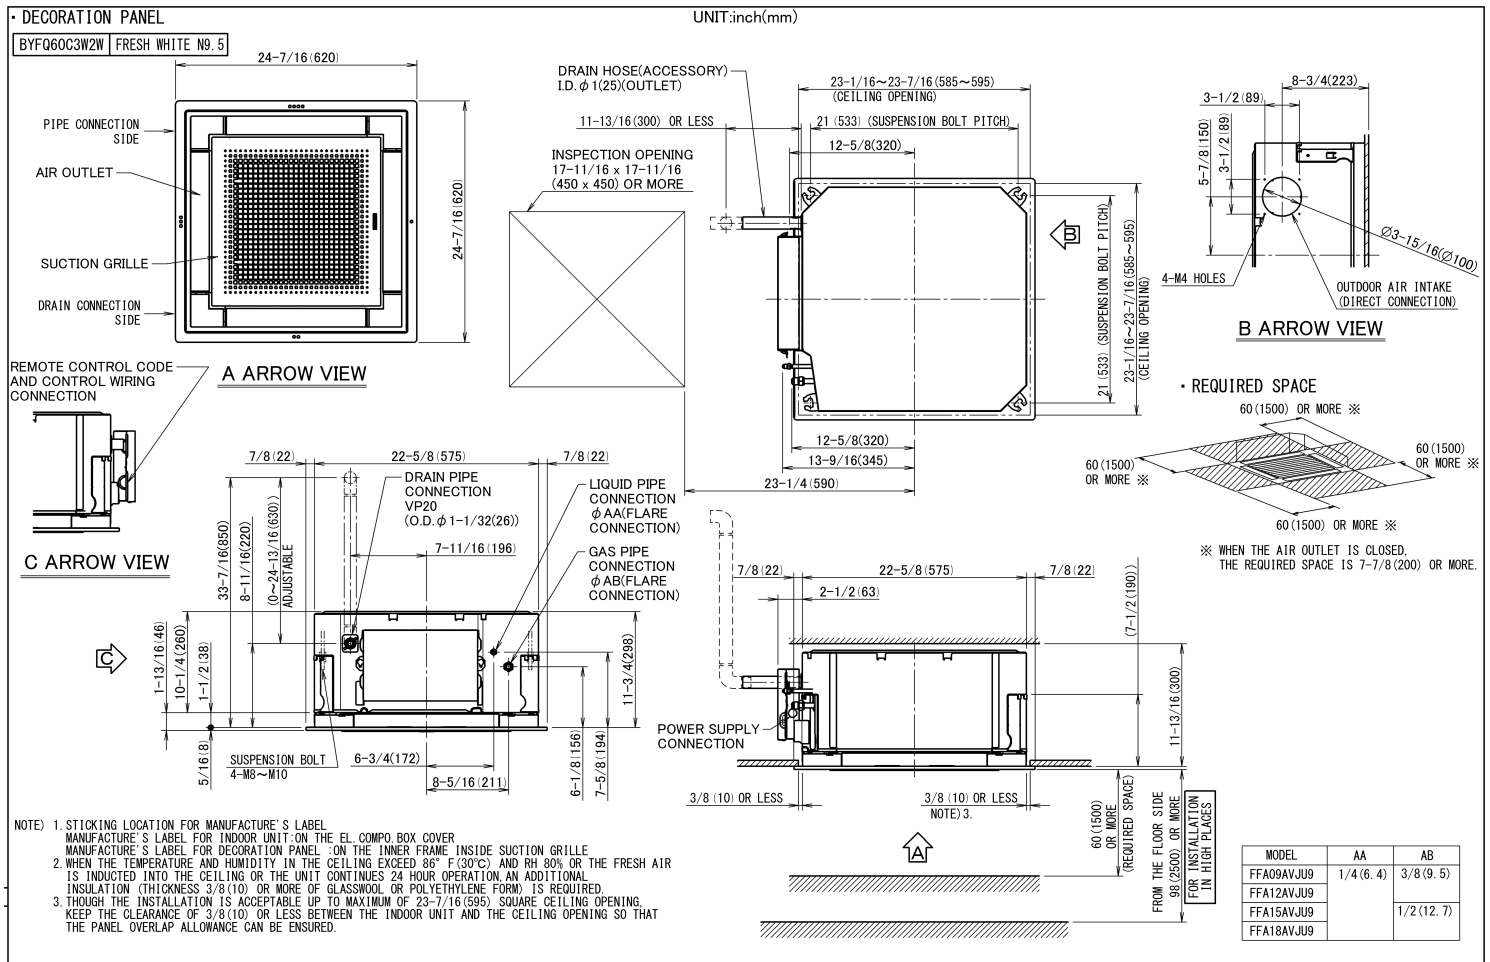

Submittal Data Sheet

VISTA 1.5 Ton 2 X 2 Ceiling Cassette Heat Pump System

FFA18AVJU9-RXV18AVJU9

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Compressor Stage:	Inverter
Power Supply Connections:	L1,L2,Ground	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	17.9	Airflow Rate (H/M) (CFM):	/2,327
Max Overcurrent Protection (MOP) (A):	20	Gas Pipe Connection (inch):	1/2
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	1/4
Rated Load Amps RLA(A):		Sound Pressure (H) (dBA):	55
Dimensions (HxWxD) (in):	29-1/2 x 34-1/4 x 12-5/8	Sound Power Level (dBA):	
Net Weight (lb):	113		

DIMENSIONAL DRAWING - OUTDOOR UNIT

