Features

Unregulated Converters

- Single output rail
- Industry standard pinout
- 1kVDC/1s or 2kVDC/1s basic isolation
- High efficiency for low power applications
- UL94V-0 package material
- Optional continuous short circuit protection
- Fully encapsulated
- Efficiency up to 76%

RECOM
DC/DC Converter

RM

0.25 Watt SIP4 Single Output

3 YEAR warranty

Description

The RM series DC/DC converter has been designed for isolating or converting DC power rails with very light loads. Efficiencies are typically 10% higher than a comparable 0.5W or 1W converters run at the same low load.



Selection Guide

Part Number	nom. Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ. (1) [%]	max. Capacitive Load (2) [µF]
RM-xx3.3S (3,4)	3.3, 5, 12, 15, 24	3.3	75	62-70	1000
RM-xx05S (3,4)	3.3, 5, 12, 15, 24	5	50	66-72	470
RM-xx09S (3,4)	3.3, 5, 12, 15, 24	9	28	70-72	470
RM-xx12S (3,4)	3.3, 5, 12, 15, 24	12	21	70-72	150
RM-xx15S (3,4)	3.3, 5, 12, 15, 24	15	17	70-76	150

Notes:

Note1: Efficiency is tested at nominal input and full load at +25°C ambient

Note2: Max Cap Load is tested at nominal input and full resistive load and is defined as the capacitive load that will allow start up in under 1s without damage to the converter

UL60950-1 certified
CAN/CSA-C22.2 No. 60950-1-03 certified
IEC60950-1 certified
EN60950-1 certified
EN55032 compliant

Model Numbering

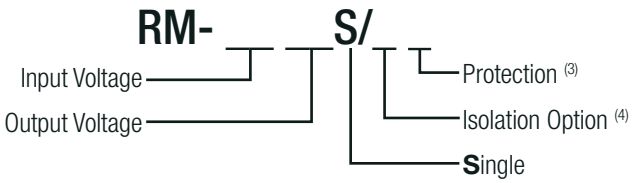

Notes:

Note3: standard part is without continuous short circuit protection
add suffix „/P“ for continuous short circuit protection

Note4: add suffix „/H“ for 2kVDC/1s isolation
or add suffix „/HP“ for continuous short circuit protection and 2kVDC/1s isolation

Ordering Examples:

RM-1205S/P: 12V Input Voltage, 5V Output Voltage, Single Output with continuous short circuit protection
RM-0505S/HP: 5V Input Voltage, 5V Output Voltage, Single Output with 2kVDC/1s isolation and continuous short circuit protection

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm up unless otherwise stated)

BASIC CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range			±10%	
Minimum Load		0%		
Internal Operating Frequency		50kHz	90kHz	105kHz
Output Ripple and Noise	20MHz BW			50mVp-p

Efficiency vs. Load

RM-xx05S

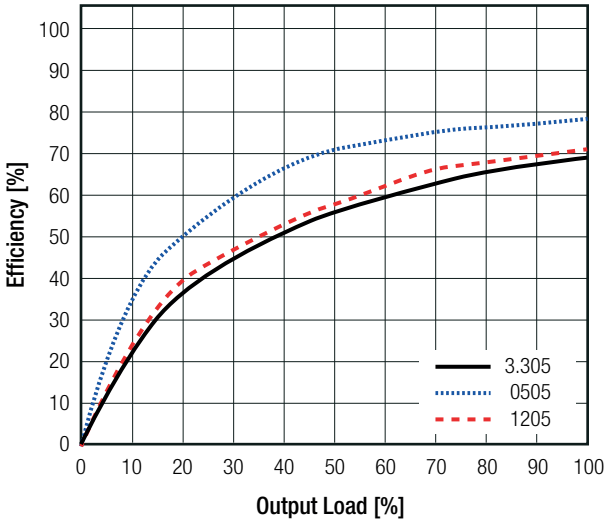

RM-xx12S

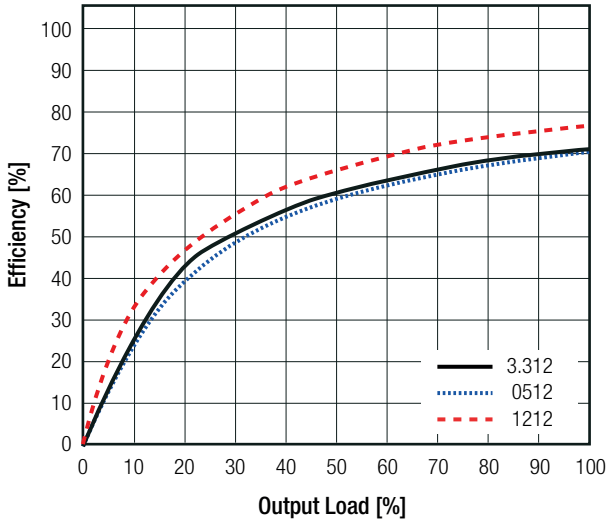

RM-xx15S

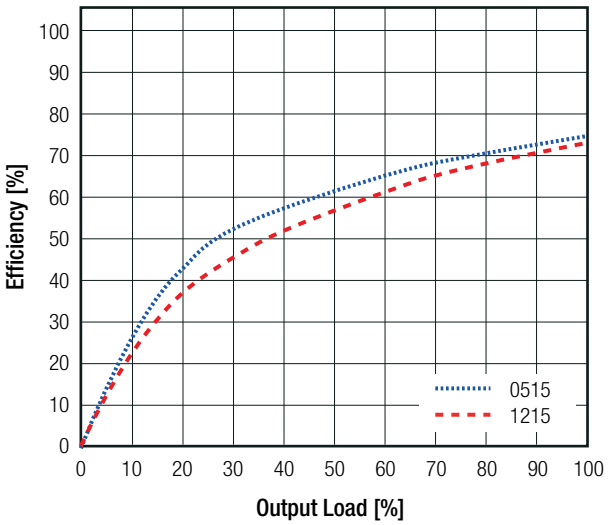

REGULATIONS

Parameter	Condition	Value
Output Accuracy		±5.0% max.
Line Regulation	low line to high line	±1.2% of 1.0% Vin typ.

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm up unless otherwise stated)

Parameter	Condition		Value
Load Regulation [5]	10% to 100% load	3.3Vout 5Vout 12, 15, 24Vout	20.0% max. 15.0% max. 10.0% max.

Notes:

Note5: Operation below 10% load will not harm the converter, but specifications may not be met

Deviation vs. Load

RM-xx05S

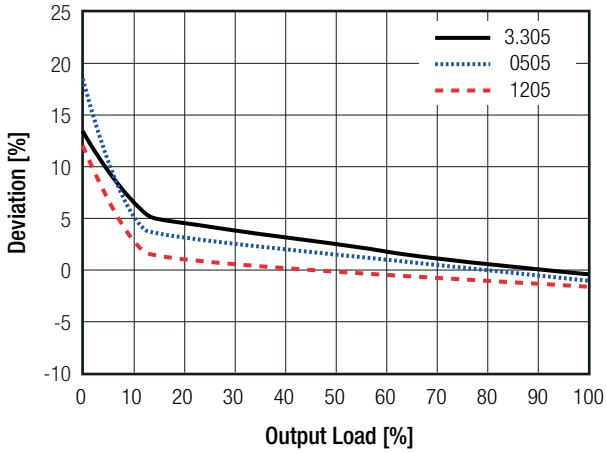

RM-xx12S

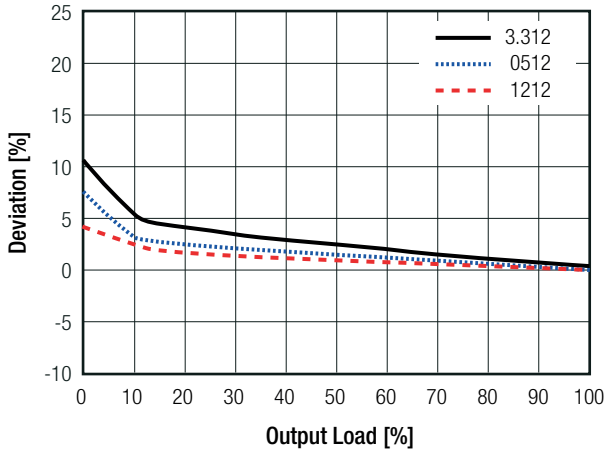

RM-xx15S

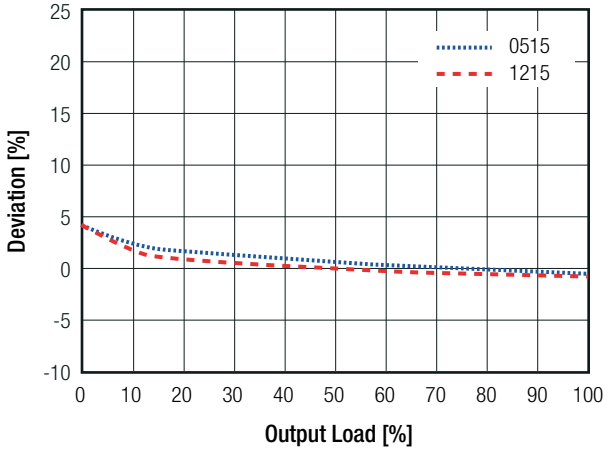

PROTECTIONS

Parameter	Type			Value
Short Circuit Protection (SCP)	without suffix with suffix "/P"			1 second continuous
Isolation Voltage [6]	I/P to O/P	without suffix	tested for 1 second rated for 1 minute	1kVDC 500VAC/60Hz
		with suffix "/H"	tested for 1 second rated for 1 minute	2kVDC 1.4kVAC/60Hz
Isolation Resistance				10GΩ min.
Isolation Capacitance				25pF min. / 82pF max.
Insulation Grade				basic

Notes:

Note6: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note7: Refer to local wiring regulations if input over-current protection is also required. Recommended fuse: T0.5A slow blow type

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm up unless otherwise stated)

ENVIRONMENTAL

Parameter	Condition		Value
Operating Temperature Range	full load @ free air convection (see graph)		-40°C to +85°C
Operating Altitude			2000m
Operating Humidity	non-condensing		95% RH max.
Pollution Degree			PD2
MTBF	according to MIL-HDBK-217F, G.B.	+25°C +85°C	1327 x 10^3 hours 302 x 10^3 hours

Derating Graph
(@ free air convection)

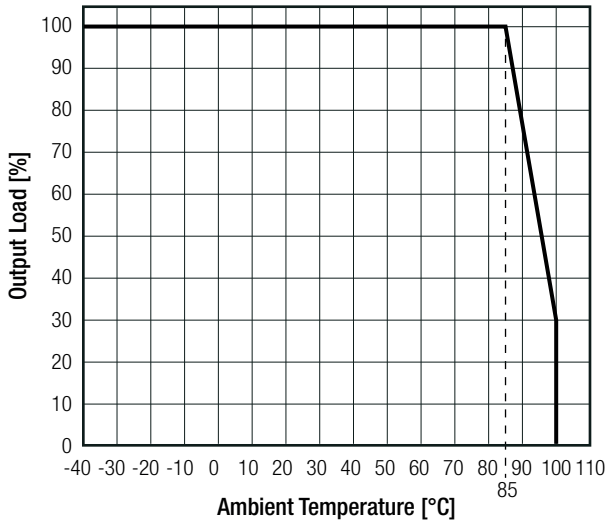

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	SPCLVD1602031	IEC60950-1:2005, 2nd Edition + A2:2013 EN60950-1:2006 + A2:2013
Information Technology Equipment, General Requirements for Safety	E358085-A4-UL	UL60950-1, 2nd Edition:2007 CAN/CSA C22.2 No. 60950-1-03, 2nd Edition:2007
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS 2+		RoHS-2011/65/EU + AM-2015/863

EMC Compliance	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements	with external filter (see filter suggestion below)	EN55032, Class B EN55032, Class A

EMC Filter Suggestion according to EN55032

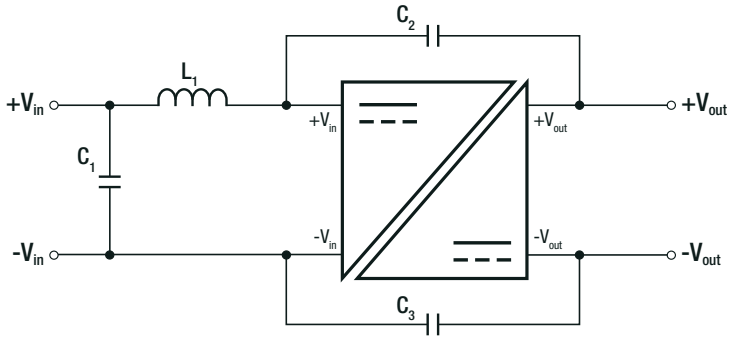

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm up unless otherwise stated)

Component List Class A

MODEL	C1	L1	C2 (safety)	C3 (safety)
RM-0505S	10µF 100V MLCC	N/A	N/A	N/A
RM-1205S				2.2nF
RM-2405S				N/A

Component List Class B

MODEL	C1	L1	C2 (safety)	C3 (safety)
RM-0505S	10µF 100V MLCC	22µH choke RLS-226	1nF	2.2nF
RM-1205S				
RM-2405S				

Notes:

Note8: Filter suggestions are valid for indicated part numbers only. For other part numbers, please contact RECOM tech support for advice

DIMENSION AND PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	case potting PCB	non-conductive black plastic (UL94 V-0) epoxy, (UL94 V-0) FR4, (UL94 V-0)
Dimension (LxWxH)		11.5 x 6.0 x 10.0mm
Weight		1.4g typ.

Dimension Drawing (mm)

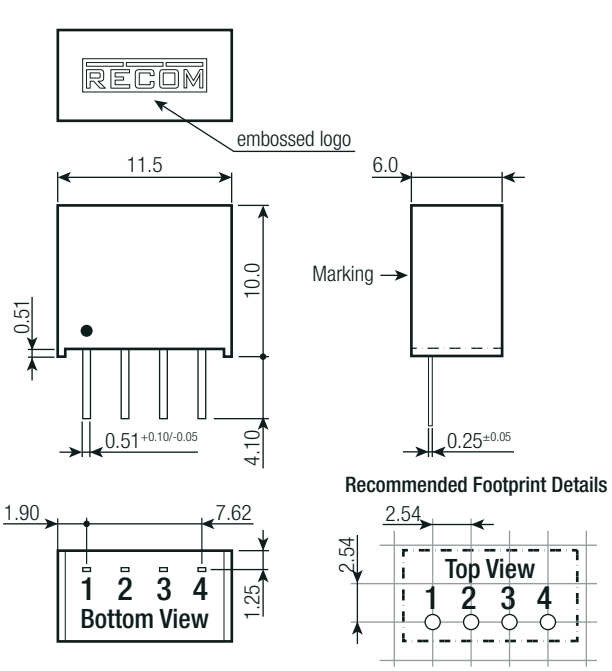



Pinning information

Pin #	Single
1	-Vin
2	+Vin
3	-Vout
4	+Vout

Tolerance:
xx.x= ±0.5mm
xx.xx= ±0.25mm

PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimension (LxWxH)	tube	520.0 x 16.0 x 9.0mm
Packaging Quantity	tube	42pcs
Storage Temperature Range		-55°C to +125°C
Storage Humidity	non-condensing	95% RH max.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RECOM:

RM-0505S/H RM-0505S/HP RM-0505S/P RM-0509S RM-0509S/H RM-0509S/HP RM-0509S/P RM-0512S RM-0512S/H RM-0512S/HP RM-0512S/P RM-0515S RM-0515S/H RM-0515S/HP RM-0515S/P RM-053.3S RM-053.3S/H RM-053.3S/HP RM-053.3S/P RM-1205S RM-1205S/H RM-1205S/HP RM-1205S/P RM-1209S RM-1209S/H RM-1209S/HP RM-1209S/P RM-1212S RM-1212S/H RM-1212S/HP RM-1212S/P RM-1215S RM-1215S/H RM-1215S/HP RM-1215S/P RM-123.3S RM-123.3S/H RM-123.3S/HP RM-123.3S/P RM-1505S RM-1505S/H RM-1505S/HP RM-1505S/P RM-1509S RM-1509S/H RM-1509S/HP RM-1509S/P RM-1512S RM-1512S/H RM-1512S/HP RM-1512S/P RM-1515S RM-1515S/H RM-1515S/HP RM-1515S/P RM-153.3S RM-153.3S/H RM-153.3S/HP RM-153.3S/P RM-2405S RM-2405S/H RM-2405S/HP RM-2405S/P RM-2409S RM-2409S/H RM-2409S/HP RM-2409S/P RM-2412S RM-2412S/H RM-2412S/HP RM-2412S/P RM-2415S RM-2415S/H RM-2415S/HP RM-2415S/P RM-243.3S RM-243.3S/H RM-243.3S/HP RM-243.3S/P RM-3.305S RM-3.305S/H RM-3.305S/HP RM-3.305S/P RM-3.309S RM-3.309S/H RM-3.309S/HP RM-3.309S/P RM-3.312S RM-3.312S/H RM-3.312S/HP RM-3.312S/P RM-3.315S RM-3.315S/H RM-3.315S/HP RM-3.315S/P RM-3.33.3S RM-3.33.3S/H RM-3.33.3S/HP RM-3.33.3S/P RM-0505S