RM44 and RM58 rotary magnetic encoders

The RM44/RM58 is an encoder for integration onto electric motors or other devices for measuring shaft position and rotational speed.

The solid metal housing provides highest IP protection classes, high EMC immunity, extended operating temperature range and best possible shock and vibration resistance.

The output signals are provided in industry standard absolute, incremental, analogue sinusoidal and linear voltage formats. Available are resolutions of up to 13 bit absolute SSI and/ or 8,192 counts per revolution incremental for 5 V or 24 V power supply.

A system accuracy of ±0.5° can be achieved with supplied magnet. For easy integration onto or into the shaft, a range of magnetic actuators is also available.

Product range

RM44/RM58AC
Analogue with a single sine/cosine cycle per revolution.

RM44/RM58DC
BiSS-C interface with up to 8,192 counts per revolution.

RM44/RM58I
Incremental with 80 to 2,048 pulses per revolution (320 to 8,192 counts per revolution with x 4 evaluation) and/ or complementary analogue outputs with a single sine/cosine cycle per revolution.

RM44/RM58SC
Synchro serial interface (SSI) with 320 to 8,192 positions per revolution.

RM44/RM58SI
Synchro serial interface (SSI) with 320 to 8,192 positions per revolution and incremental with 80 to 2,048 pulses per revolution (320 to 8,192 counts per revolution with x 4 evaluation).

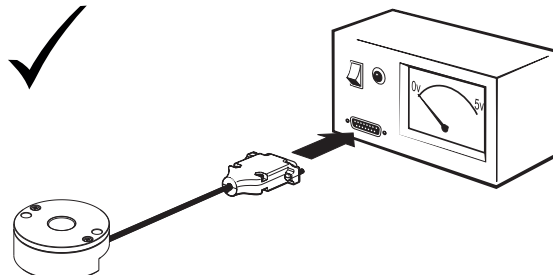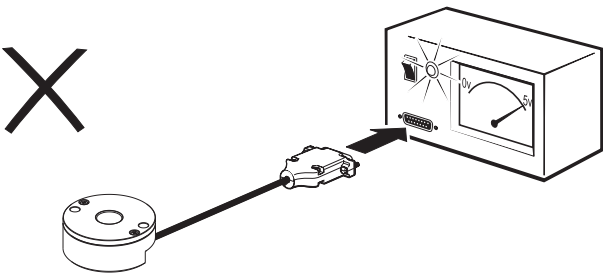**RM44/RM58Vx**
Linear voltage output in a range of variants.

- **Easy to install – with self locating design**
- **Inexpensive solution for OEM integration**
- **Fully sealed to IP68**
- **High reliability from proven non-contact sensing technology**
- **CE compliant, including RoHS - see Declaration of conformity**

A **RENISHAW** associate company

Storage and handling
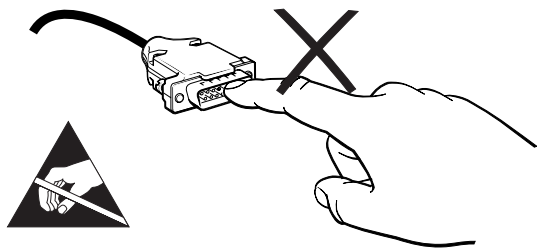
> **IMPORTANT:** Power to RM44 encoders must be supplied from a DC SELV supply complying with the essential requirements of EN (IEC) 60950 or similar specification.
>
> The RM44 series encoders have been designed to the relevant EMC standards, but must be correctly integrated to achieve EMC compliance. In particular, attention to shielding arrangements is critical.
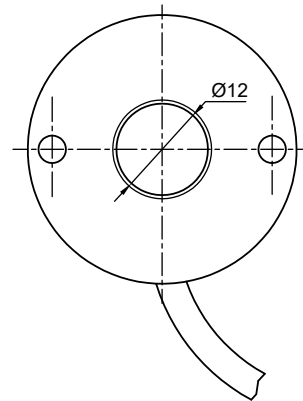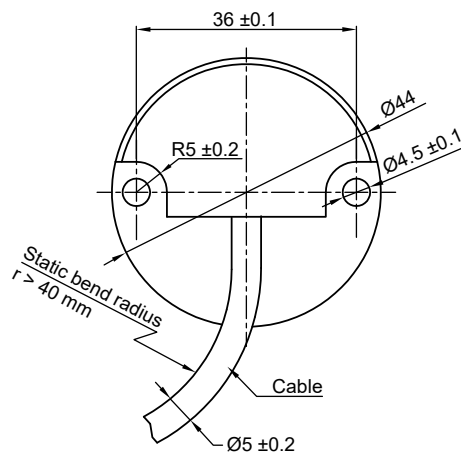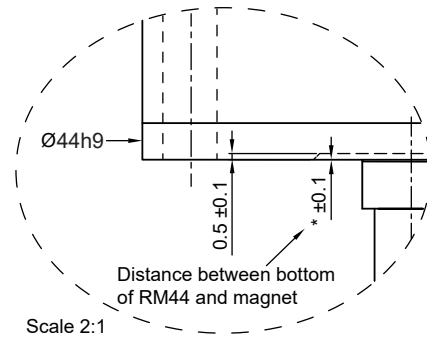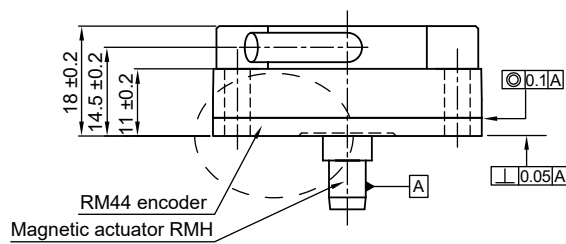

Connections
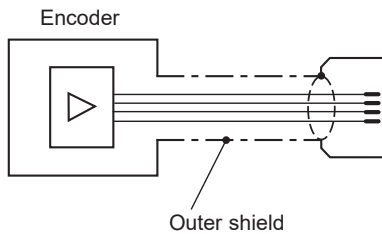
RM44/RM58AC		RM44/RM58DC		RM44/RM58IA, IC, IG		RM44/RM58IB, IE		RM44/RM58SC		RM44/RM58SI		RM44/RM58Vx	
Function	**Wire colour**	**Function**	**Wire colour**	**Function**	**Wire colour**	**Function**	**Wire colour**	**Function**	**Wire colour**	**Function**	**Wire colour**	**Function**	**Wire colour**
Shield - see connection diagram				Shield - see connection diagram				Shield - see connection diagram					
V_{dd}	Red	V_{dd}	Red	V_{dd}	Red	V_{dd}	Red	V_{dd}	Red	V_{dd}	Red	V_{dd}	Red
GND	Orange	GND	Blue	GND	Blue	GND	Blue	GND	Blue	GND	Blue	GND	Orange
V_A	Black	MA+	White	A	Grey	A	Grey	Clock+	White	A	Grey	V_{out}	Black
V_B	Brown	SLO+	Green	B	Green	B	Green	Data+	Green	B	Green		
		MA−	Brown	Z	White	Z	White	Clock−	Brown	Z	White		
		SLO−	Yellow	A−	Pink			Data−	Yellow	A−	Pink		
				B−	Yellow					B−	Yellow		
				Z−	Brown					Z−	Brown		
										Clock+	Black		
										Data+	Grey/Pink		
										Clock−	Violet		
										Data−	Red/Blue		

Operating and electrical specifications

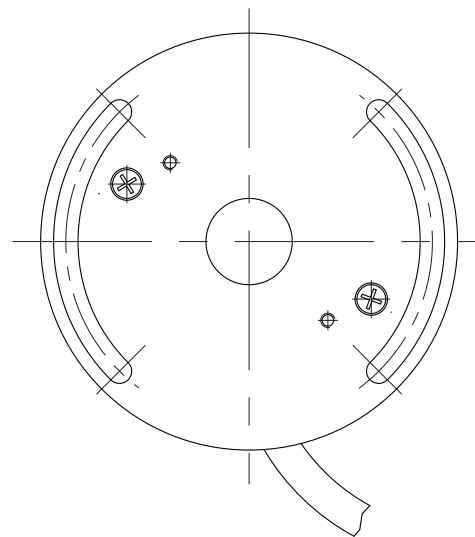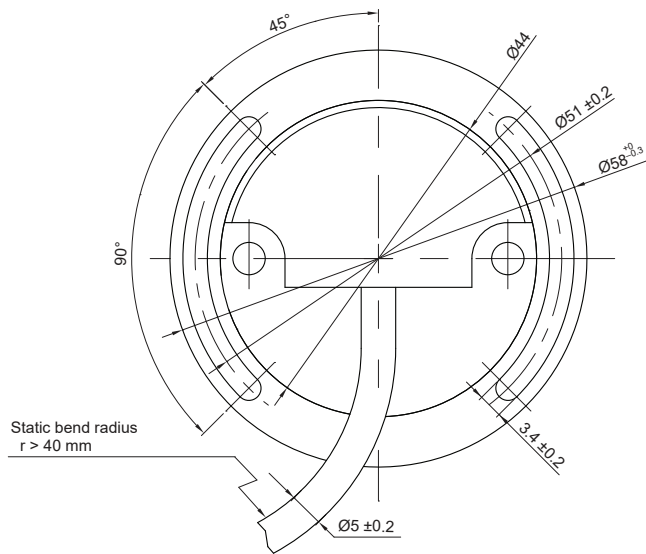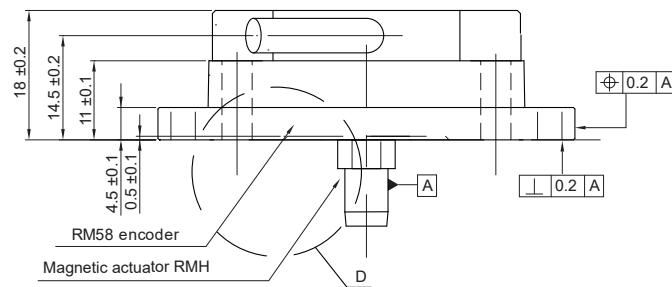|	
EMC compliance	EN 61326
Cable	Outside diameter 5 mm
Mass	Encoder unit 1 m cable (no connector) IP64 112 g, IP68 129 g. Magnetic actuator <2 g
Environmental sealing	IP64 (IP68 optional) EN 60529

RM44 dimensions

Dimensions and tolerances in mm

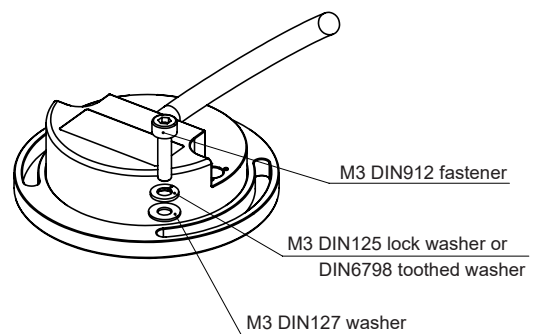RM44 encoder
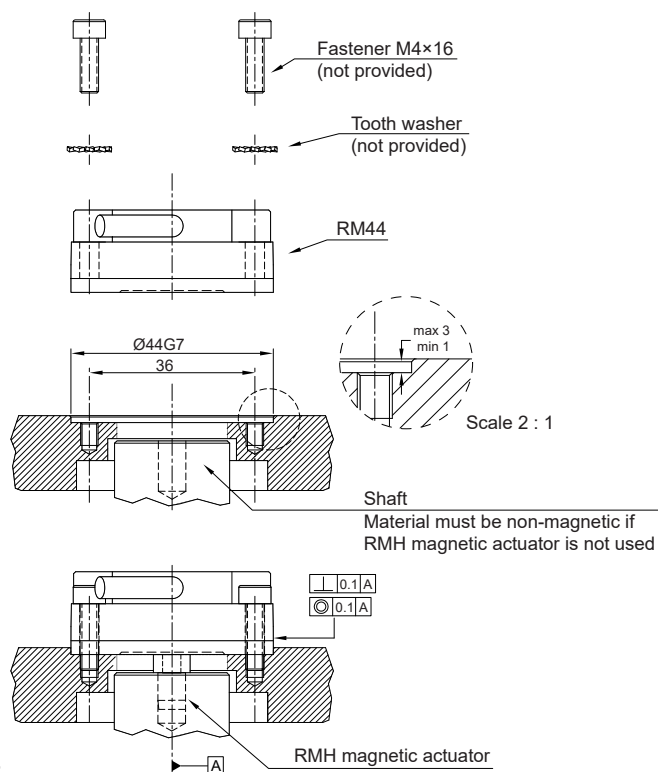Magnetic actuator RMH

Ø44h9
Distance between bottom of RM44 and magnet
Scale 2:1

36 ±0.1
R5 ±0.2
Ø44
Ø4.5 ±0.1
Static bend radius r > 40 mm
Cable
Ø5 ±0.2

Ø12

Data sheet
RM44D01_14

RM58 dimensions
Dimensions and tolerances in mm

18 ±0.2
14.5 ±0.2
11 ±0.1
4.5 ±0.1
0.5 ±0.1

⊕ 0.2 A

A

⊥ 0.2 A

RM58 encoder

Magnetic actuator RMH

D

0.5 ±0.1
* ±0.1

Distance between bottom of
RM58 and magnet actuator

Detail D
Scale 2 : 1

45°
90°
Ø44
Ø51 ±0.2
Ø58 +0/-0.3

Static bend radius
r > 40 mm

3.4 ±0.2

Ø5 ±0.2
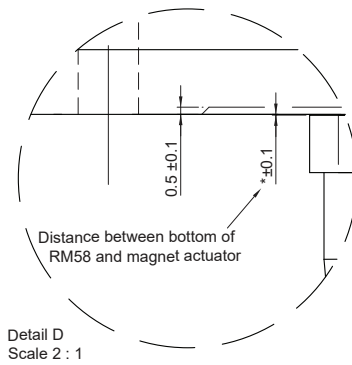
RM44 installation drawing
Dimensions and tolerances in mm

Fastener M4×16
(not provided)

Tooth washer
(not provided)

RM44

Ø44G7
36

max 3
min 1

Scale 2 : 1

Shaft
Material must be non-magnetic if
RMH magnetic actuator is not used

⊥ 0.1 A
◎ 0.1 A

RMH magnetic actuator

A

M3 DIN912 fastener

M3 DIN125 lock washer or
DIN6798 toothed washer

M3 DIN127 washer

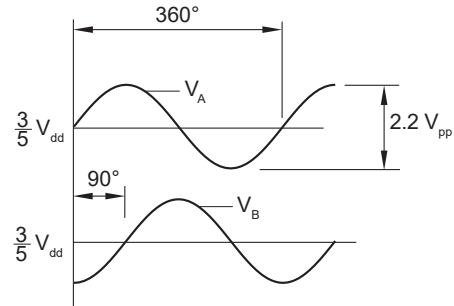Clockwise (CW) rotation of magnetic actuator

4

Output specifications – 5 V supply

RM44 / RM58AC – Analogue sinusoidal outputs

2 channels V_A V_B sinusoids (90° phase shifted, single ended)

Power supply	V_{dd} = 5 V ±5 %
Current consumption	13 mA
Outputs	Signal amplitude 2.2 ±0.2 V_{pp} Signal offset $\frac{3}{5} V_{dd}$ ±5 mV
Internal serial impedance	720 Ω
Maximum speed	60,000 rpm
Maximum cable length	3 m
Operating temperature	–40 °C to +125 °C (IP64) –40 °C to +85 °C (IP68)

Timing diagram

V_A leads V_B by 90° for clockwise rotation of magnetic actuator.

RM44 / RM58DC – Absolute natural binary BiSS-C interface

Output code	Natural binary
Power supply	V_{dd} = 5 V ±5 %
Current consumption	Max. 50 mA
Clock input	MA (RS422)
Data output	SLO (RS422)
Accuracy	Typ. ±0.5°
Hysteresis	0.18°
Resolution	320, 400, 500, 512, 800, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192 positions per revolution
Maximum speed	30,000 rpm
Operating temperature	–40 °C to +125 °C (IP64) –40 °C to +85 °C (IP68)
Max MA frequency	8 MHz

Recommended signal termination

For data output lines only

**Timing diagram – BiSS-C**
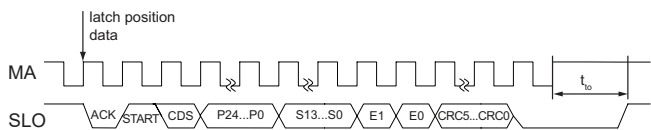
Data	Length	Description
P24 – P0	0 to 24 bit	Revolution counter value (length depends on the settings chosen)
S12 – S0	3 to 13 bit	Position inside the revolution (length depends on the resolution)
E1 – E0	2 bit	Error data
CRC5 – CRC0	5 to 6 bit	Cyclic redundancy check data; polynomial 0x43; inverted bit output

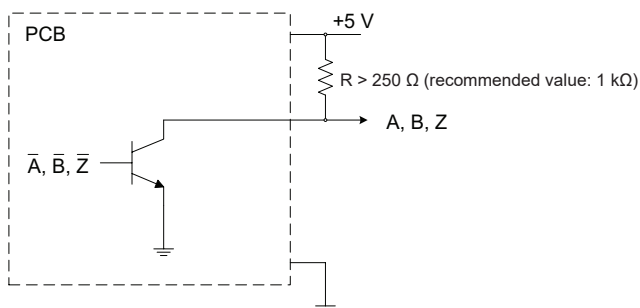| Error	E0	E1
No error	1	1
Amplitude error	0	1
Too high velocity	1	0
Undervoltage; Configuration; System error	0	0
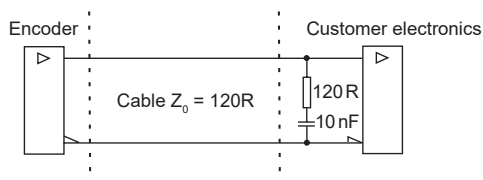
For more information on BiSS-C protocol please visit www.biss-interface.com.

RM44 / RM58IE – Incremental, open collector
Low cost alternative for ball bearing encoders
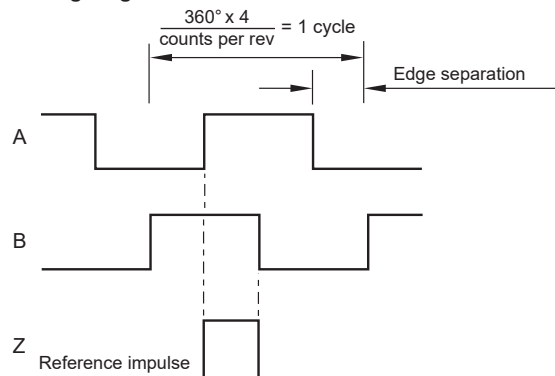
Power supply	V_{dd} = 5 V ±5 %
Current consumption	35 mA (not loaded)
Output signals	A, B, Z
Maximum output load	20 mA
Accuracy	Typ. ±0.5°
Hysteresis	0.18°
Resolution	80 to 2,048 pulses per revolution (320, 400, 500, 512, 800, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192 counts per revolution)
Maximum speed	30,000 rpm
Maximum cable length	20 m
Operating temperature	–40 °C to +125 °C (IP64) –40 °C to +85 °C (IP68)

Timing diagram

B leads A for clockwise rotation of magnetic actuator.

Recommended signal termination

RM44 / RM58IC – Incremental, RS422
Square wave differential line driver to RS422

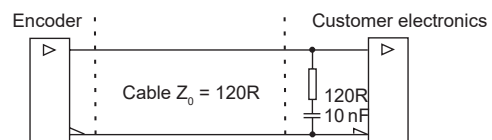|	
Power supply	V_{dd} = 5 V ±5 %
Current consumption	Max. 35 mA
Output signals	A, B, Z, A–, B–, Z– (RS422)
Accuracy	Typ. ±0.5°
Hysteresis	0.18°
Resolution	80 to 2,048 pulses per revolution (320, 400, 500, 512, 800, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192 counts per revolution)
Maximum speed	30,000 rpm
Maximum cable length	50 m
Operating temperature	–40 °C to +125 °C (IP64) –40 °C to +85 °C (IP68)

Timing diagram

Complementary signals not shown

B leads A for clockwise rotation of magnetic actuator.

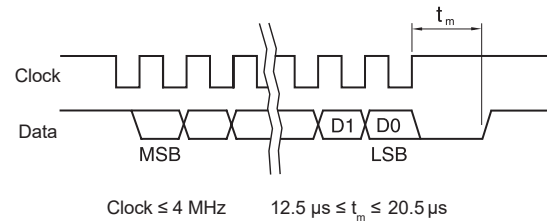**Recommended signal termination**

RM44 / RM58SC – Absolute binary synchro-serial interface (SSI)

Serial encoded absolute position measurement

Output code	Natural binary
Power supply	V_{dd} = 5 V ±5 %
Current consumption	Max. 35 mA
Data output	Serial data (RS422)
Data input	Clock (RS422)
Accuracy	Typ. ±0.5°
Hysteresis	0.18°
Resolution	320, 400, 500, 512, 800, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192 positions per revolution
Maximum speed	30,000 rpm
Maximum cable length	100 m (at 1 MHz)
Operating temperature	−40 °C to +125 °C (IP64) −40 °C to +85 °C (IP68)

Timing diagram

Clock ≤ 4 MHz   12.5 µs ≤ t_m ≤ 20.5 µs

Position increases for clockwise rotation of magnetic actuator.

Recommended signal termination
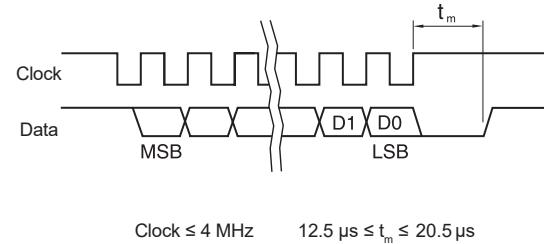
For data output lines only
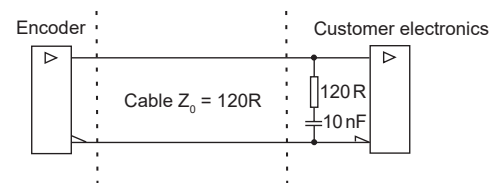
RM44 / RM58SI – Absolute binary synchro-serial (SSI) + Incremental, RS422

Complex feedback device for absolute position at start up as well as during operation + incremental outputs.
Both the incremental and the SSI output always have the same fixed resolution.

Output code	Natural binary
Power supply	V_{dd} = 5 V ±5 %
Current consumption	Max. 35 mA
Incremental outputs	A, B, Z, A−, B−, Z− (RS422)
Data output	Serial data (RS422)
Data input	Clock (RS422)
Accuracy	Typ. ±0.5°
Hysteresis	0.18°
Resolution	80 to 2,048 pulses per revolution (320, 400, 500, 512, 800, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192 counts per revolution)
Maximum speed	30,000 rpm
Maximum cable length	50 m
Operating temperature	−40 °C to +125 °C (IP64) −40 °C to +85 °C (IP68)

Timing diagram - SSI

Clock ≤ 4 MHz   12.5 µs ≤ t_m ≤ 20.5 µs
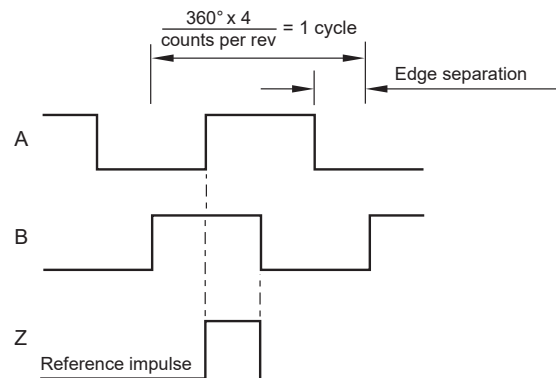
Position increases for clockwise rotation of magnetic actuator.

Timing diagram - Incremental
Complementary signals not shown

$$\frac{360° \times 4}{\text{counts per rev}} = 1 \text{ cycle}$$
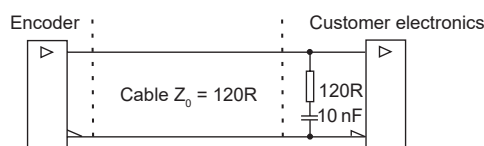
B leads A for clockwise rotation of magnetic actuator.

Recommended signal termination

For incremental signals + SSI data output lines only

## RM44 / RM58Vx – Linear voltage output

Alternative for potentiometers

Power supply	V_{dd} = 5 V ± 5 %
Current consumption	Typ. 26 mA
Output voltage	0 V to V_{dd}
Output loading	Max. 10 mA
Nonlinearity	1 %
Maximum speed	30,000 rpm
Maximum cable length	20 m
Operating temperature	–40 °C to +125 °C (IP64) –40 °C to +85 °C (IP68)

φ_{period}	N_{period}	N_{step}	φ_{step}
360°	1	1,024	0.35°
180°	2	1,024	0.18°
90°	4	1,024	0.09°
45°	8	512	0.09°

Output type and electrical variant

φ_{period} Rotation	360°	180°	90°	45°
Clockwise	VA	VB	VC	VD
Counterclockwise	VE	VF	VG	VH

Timing diagram

Detail A
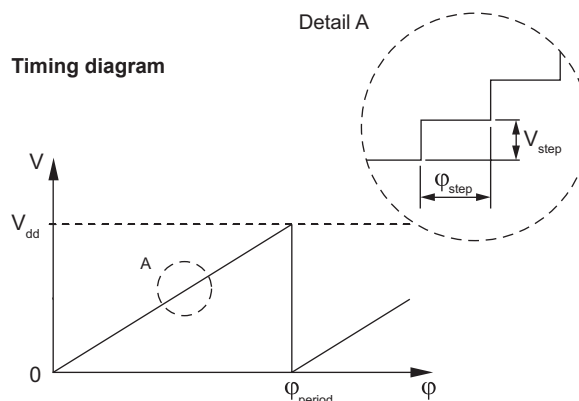
$$\varphi_{step} = \frac{\varphi_{period}}{N_{step}} \qquad V_{step} = \frac{V_{dd}}{N_{step}}$$

φ_{period} = Angle covered in one period (one sawtooth)
V_{period} = Output voltage range for one period
φ_{step} = Step angle (angular movement needed to register a change in the position)
V_{step} = Output voltage range for one step
N_{period} = Number of periods in one revolution
N_{step} = Number of steps in one period
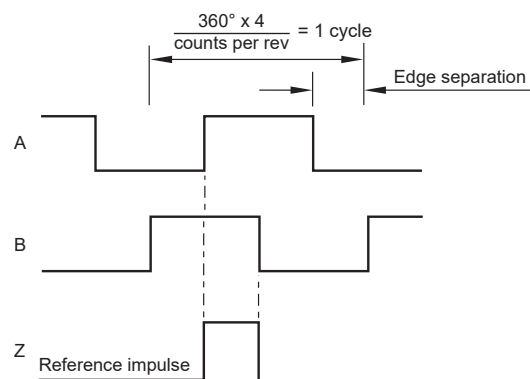

Output specifications - 24 V supply

RM44 / RM58IA – Incremental, push-pull

Square wave output

Power supply	V_{dd} = 8 V to 26 V
Current consumption	50 mA
Output signals	A, B, Z, A–, B–, Z– (RS422)
Maximum output load	30 mA
Accuracy	Typ. ±0.5°
Hysteresis	0.18°
Resolution	80 to 2,048 pulses per revolution (320, 400, 500, 512, 800, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192 counts per revolution)
Maximum speed	30,000 rpm
Maximum cable length	20 m
Operating temperature	–40 °C to +125 °C (IP64) –40 °C to +85 °C (IP68)

Timing diagram

Complementary signals not shown
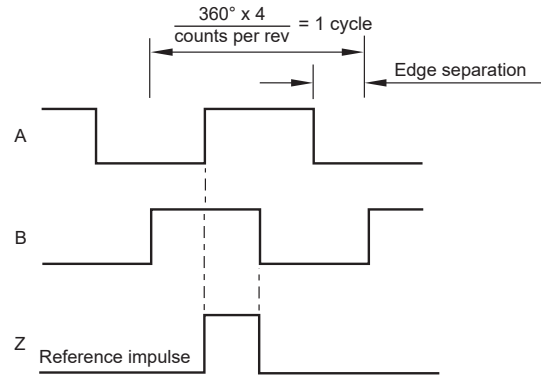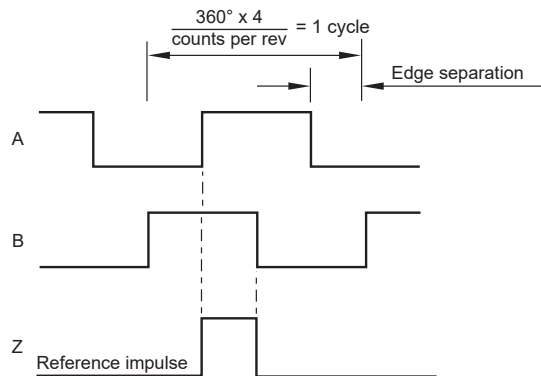

B leads A for clockwise rotation of magnetic actuator.
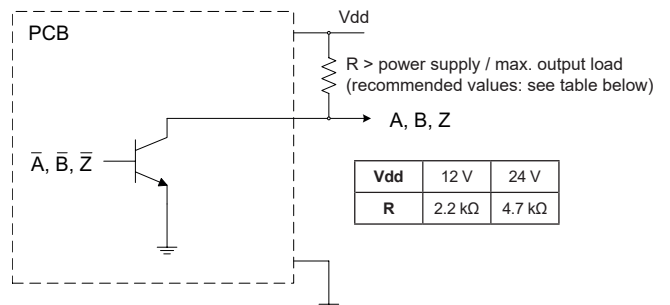
RM44 / RM58IG – Incremental, push-pull
Square wave output

Power supply	V_{dd} = 8 V to 26 V
Current consumption	50 mA
Output signals	A, B, Z, A–, B–, Z– (5 V RS422)
Maximum output load	30 mA
Accuracy	Typ. ±0.5°
Hysteresis	0.18°
Resolution	80 to 2,048 pulses per revolution (320, 400, 500, 512, 800, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192 counts per revolution)
Maximum speed	30,000 rpm
Maximum cable length	20 m
Operating temperature	–40 °C to +125 °C (IP64) –40 °C to +85 °C (IP68)

Timing diagram

Complementary signals not shown

B leads A for clockwise rotation of magnetic actuator.

RM44 / RM58IB – Incremental, open collector NPN
Square wave output

Power supply	V_{dd} = 8 V to 26 V
Current consumption	50 mA
Output signals	A, B, Z
Maximum output load	20 mA
Accuracy	Typ. ±0.5°
Hysteresis	0.18°
Resolution	80 to 2,048 pulses per revolution (320, 400, 500, 512, 800, 1,000, 1,024, 1,600, 2,000, 2,048, 4,096, 8,192 counts per revolution)
Maximum speed	30,000 rpm
Maximum cable length	20 m
Operating temperature	–40 °C to +125 °C (IP64) –40 °C to +85 °C (IP68)

Timing diagram

Recommended signal termination

R > power supply / max. output load
(recommended values: see table below)

Vdd	12 V	24 V
R	2.2 kΩ	4.7 kΩ

A **RENISHAW** associate company

9

Part numbering

Encoder system   =   Encoder body   +   Magnetic actuator or flange

RM44 encoder-sensor unit
eg. **RM44IC0013B10F2E10**

Magnetic actuator
eg **RMA06A3A00**

Flange
eg **RE58A10**
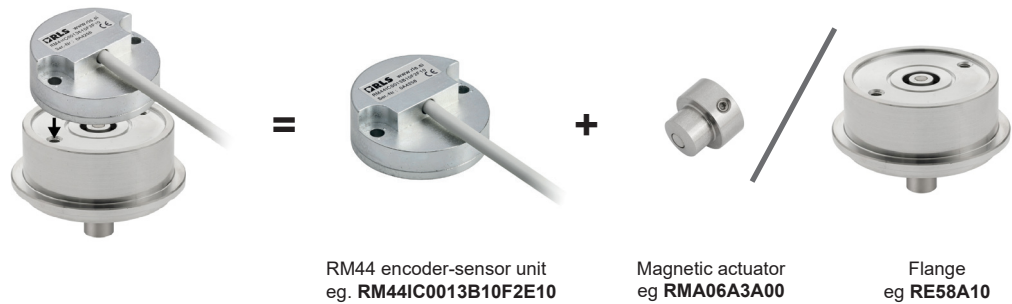
RM44   IC   00   13B   10   F   2   E   10

Series
RM44 - Ø44 mm body
RM58 - Ø58 mm body

Output type
AC - Analogue sinusoidal, 5 V
DC - Absolute natural binary BiSS-C, RS422,
      5 V
IA - Incremental, push pull, 24 V
IB - Incremental, open collector NPN, 24 V
IC - Incremental, RS422, 5 V
IE - Incremental, open collector, 5 V
IG - Incremental, RS422, 5 V, supply 24 V
SC - Absolute binary synchro-serial (SSI),
      RS422, 5 V
SI - SSI + Incremental, RS422, 5 V
Vx - Linear voltage:

Linear voltage output 0 - 5 V, supply 5 V DC				
	360°	180°	90°	45°
CW	**VA**	**VB**	**VC**	**VD**
CCW	**VE**	**VF**	**VG**	**VH**

Shaft size
00 - n/a

Special requirements
10 - No special requirements
      (standard)
1M - Cable length in meters

Environment and material
E - IP64, die-cast body (Zinc alloy),
      standard EMC grade (standard)
F - IP68, die-cast body (Zinc alloy),
      standard EMC grade

Body style and cable exit
2 - Cylindrical body, radial cable exit

Connector options
F - Flying lead (no connector)

Cable length
10 - 1.0 meter (or 10 meters if **1M** special requirement is chosen)

Resolution
For **AC**:
01S - One sine/cosine period per revolution
For **DC, IA, IB, IC, IE, IG, SC** and **SI** (counts/positions per revolution):

Decimal			Binary		
D32 - 320	**D80** - 800	**2D0** - 2000	**07B** - 128	**10B** - 1024	**13B** - 8192
D40 - 400	**1D0** - 1000		**08B** - 256	**11B** - 2048	
D50 - 500	**1D6** - 1600		**09B** - 512	**12B** - 4096	

For **Vx**:
10B - 1024 counts/positions per revolution

> **NOTE**: Not all combinations are valid.

Magnetic actuators and magnets ordering information

Dimensions and tolerances in mm

Actuator for integration onto shaft

Ø10
magnet
6
7
14
Ø*H8
Ø15 -0.1

Shaft = Ø*h7
Fixing: Grub screw provided
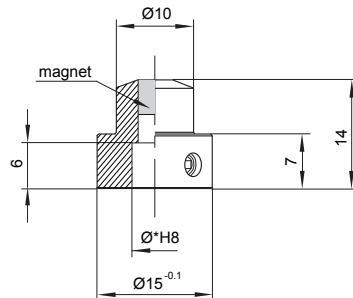
Part numbers:

For resolutions up to 9 bit absolute (512 cpr incremental)
RMA04A2A00 – Ø4 mm shaft   **RMA10A2A00** – Ø10 mm shaft
RMA05A2A00 – Ø5 mm shaft   **RMA19A2A00** – Ø3/16" shaft
RMA06A2A00 – Ø6 mm shaft   **RMA25A2A00** – Ø1/4" shaft
RMA08A2A00 – Ø8 mm shaft   **RMA37A2A00** – Ø3/8" shaft

For resolutions from 10 bit absolute (800 cpr incremental) and above
RMA04A3A00 – Ø4 mm shaft   **RMA10A3A00** – Ø10 mm shaft
RMA05A3A00 – Ø5 mm shaft   **RMA19A3A00** – Ø3/16" shaft
RMA06A3A00 – Ø6 mm shaft   **RMA25A3A00** – Ø1/4" shaft
RMA08A3A00 – Ø8 mm shaft   **RMA37A3A00** – Ø3/8" shaft

Actuator for integration into shaft

with N-pole marker

Ø8
magnet
$4^{\pm0.05}$
12
Ø6h8

Hole = Ø6G7
Fixing: Glue (recommended – LOCTITE 648 or LOCTITE 2701)

Part numbers:

For resolutions up to 9 bit absolute (512 cpr incremental)
RMH06A2A00

For resolutions from 10 bit absolute (800 cpr incremental) and above
RMH06A3A00

With N-pole marker scribed to a ± 5° accuracy:

For resolutions up to 9 bit absolute (512 cpr incremental)
RMH06A2A02

For resolutions from 10 bit absolute (800 cpr incremental) and above
RMH06A3A02

Magnet for direct recessing in non-ferrous shafts

$Ø4^{\pm0.1}$
$4^{\pm0.1}$

Fixing: Glue (recommended – LOCTITE 648 or LOCTITE 2701)

Part numbers:

For resolutions up to 9 bit absolute (512 cpr incremental)
RMM44A2A00 (individually packed) – for sample quantities only
RMM44A2C00 (packed in tubes)

For resolutions from 10 bit absolute (800 cpr incremental) and above
RMM44A3A00 (individually packed) – for sample quantities only
RMM44A3C00 (packed in tubes)

RE58 flange part numbering

Refer to RE58 datasheet for further details.

Part numbers:

RE58A10 - Ø58 mm, 10 mm shaft   **RE58B06** - Ø58 mm, 6 mm shaft   **RE58C10** - Ø58 mm, 10 mm shaft

All RE58 flanges are supplied with required washer and M4 fasteners for RM44 encoder attachment.

RLS®

Document issues

Issue	Date	Page	Amendments done
11	15. 10. 2018	3, 4	RM58 installation drawing added, RM44 dimensions amended
12	19. 12. 2019	2	Connections amended
		5, 9	Signal termination amended
13	3. 2. 2020	4	RM58 dimension tolerance amended
14	17. 9. 2020	1, 2, 5, 10	RM44/58DC interface added
		3	RM44 dimensions drawing amended

A **RENISHAW** associate company