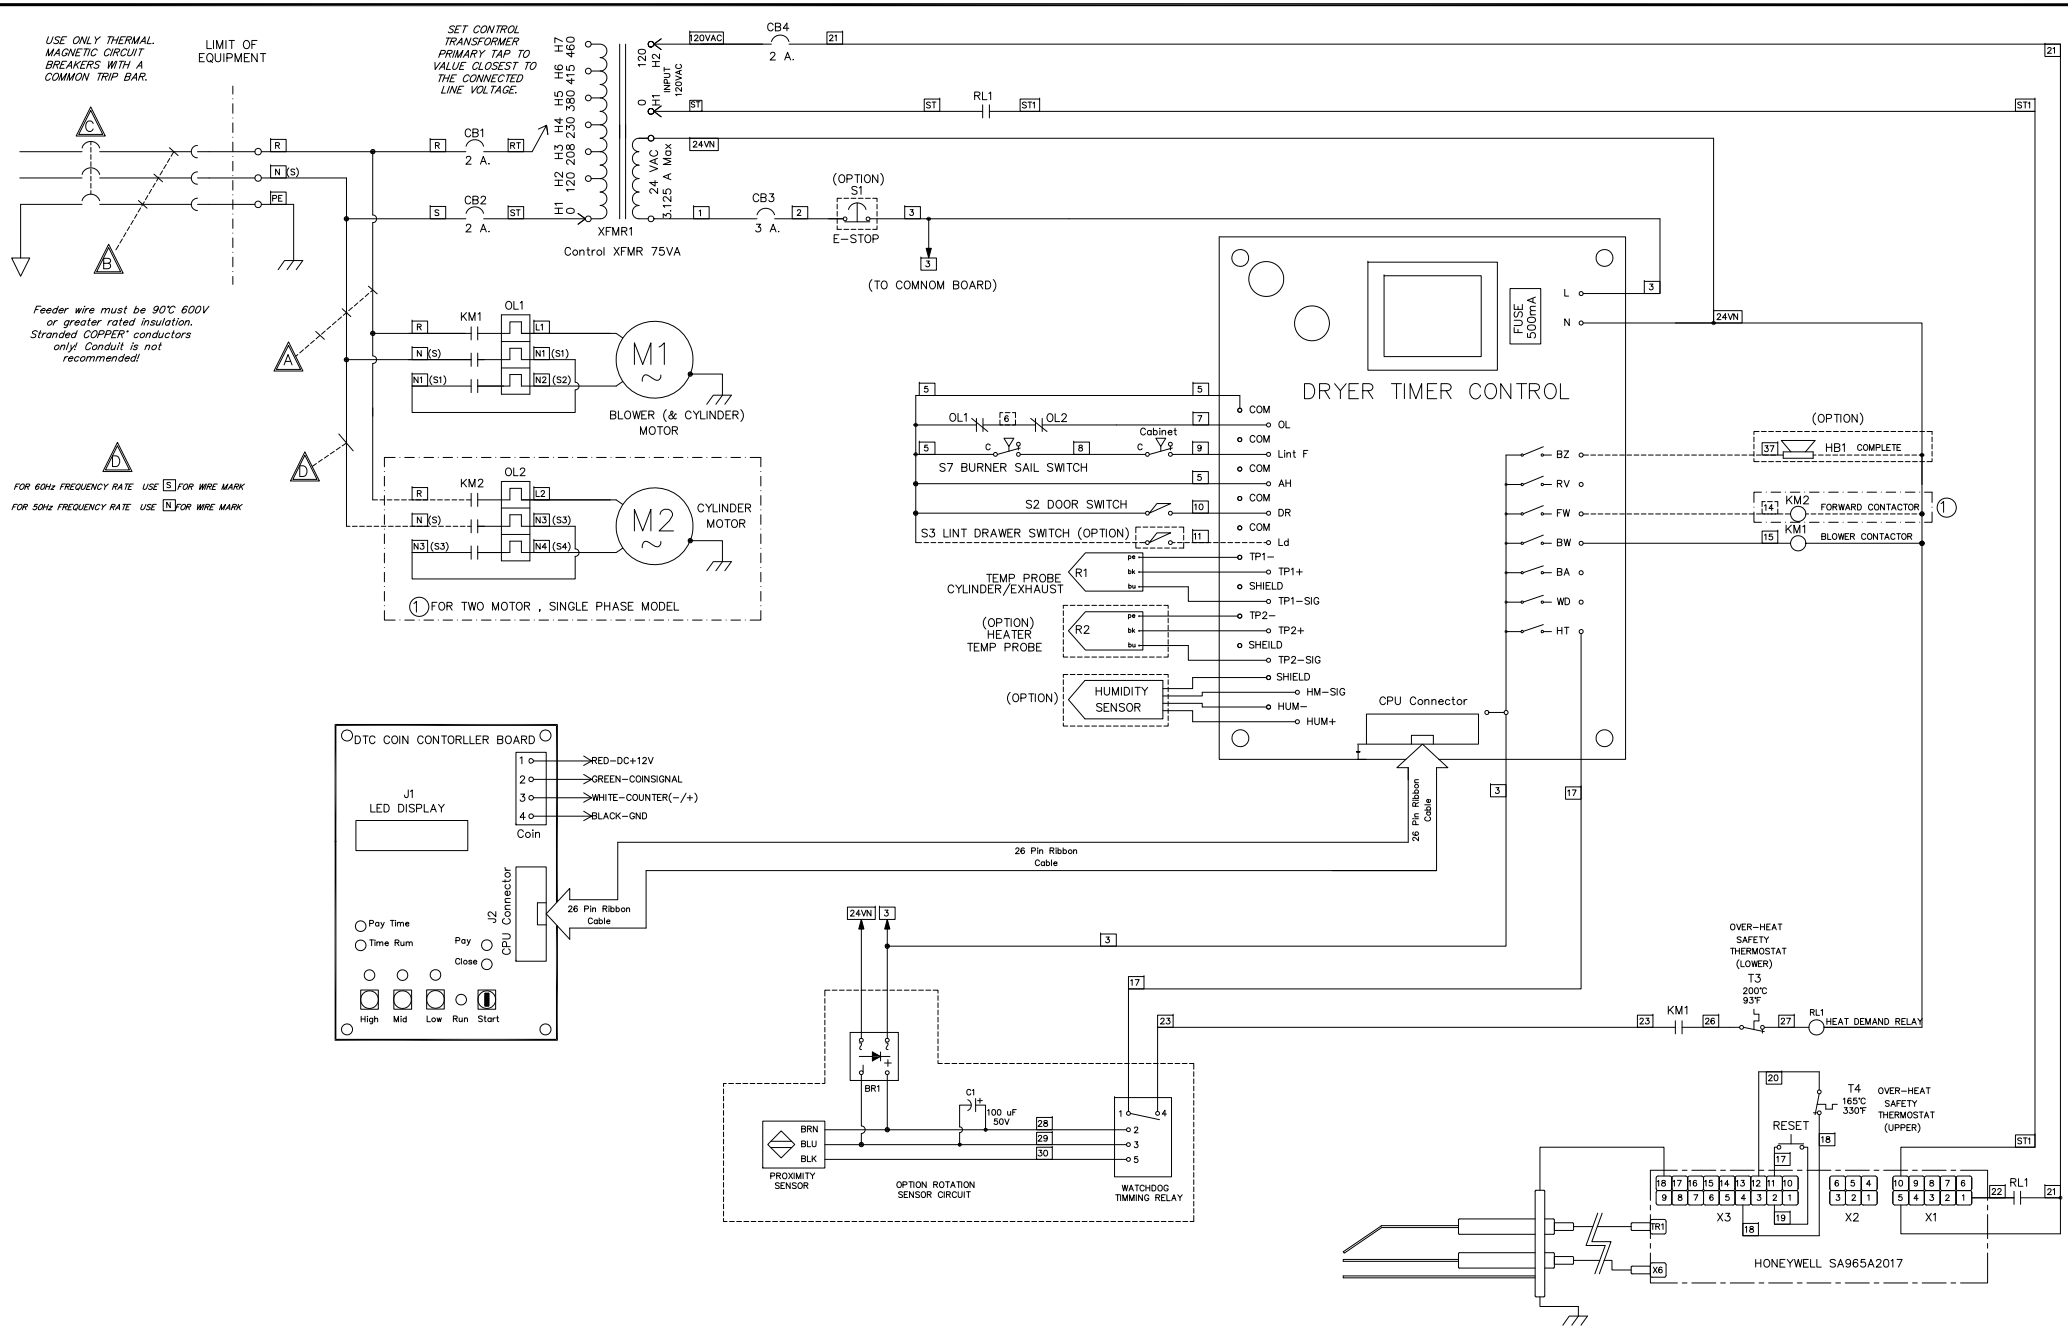

Model & Service	Wire Size (A)	Blower Mot.	Drive Mot. (①)	Feeder Wire (B)	Breaker/Fuse (C)
DC-30 208-240V	14 AWG	1/2HP	1/2HP	14 AWG.2.5mm2	15 A/10 A
380-480V	14 AWG	1/2HP	1/2HP	14 AWG.2.5mm2	10 A/5 A
DC-50 208-240V	14 AWG	1HP	1HP	14 AWG.2.5mm2	15 A/10 A
380-480V	14 AWG	1HP	1HP	14 AWG.2.5mm2	10 A/5 A

RELAY TERMINAL

NOTES:
- DASHED LINES AND Ⓞ INDICATE OPTIONAL FEATURES.
- ALL RELAYS AND SWITCH SHOWN IN OFF POSITION.
- ALL WIRE RUNS TO THE DOOR SWITCH,LINT DRAWER SWITCH,AND THERMOSTATS MUST BE RATED 150℃,300V OR GREATER.
- [3] INDICATES WIRE NUMBERS.

!!NOTE!!
THIS GROUND PATH IS CRITICAL IT MUST BE A SHORT CONDUCTOR TO BE PANEL AND THE ATTACHING SCREW MUST BE TIGHT

REV. 00	PRODUCT NAME.
APP.	DRYER IMAGE
CHK.	
DESIGN.	DESCRIPTION DRYER FAMILY,DTC-COIN,GAS 208-240V/50-60Hz./1PH.
DRW. Warut M.	
DATE. 06/02/16	FILE D:\EL16\SM-DRYER\DC\GAS
SCALE. NONE	DWG. No. EL16-DCDCGN-100