
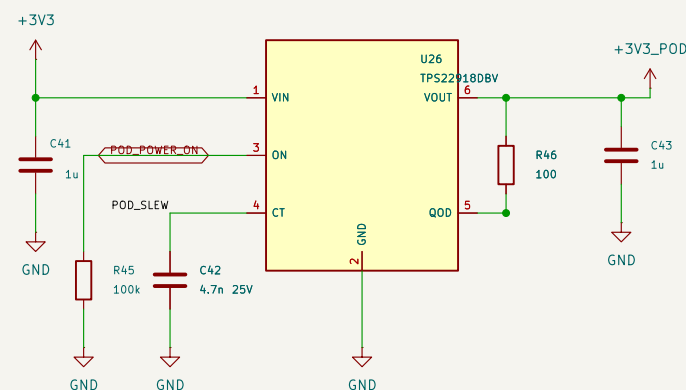


HAPTIC BRACELET / MAIN PCBA

250 kbaud logical ring; ESP TX -> pod 0 -> ... -> pod 7 -> RETURN -> ESP RX.
Physical six-wire chain; RETURN runs back through the same links. No electrical connection across clasp.

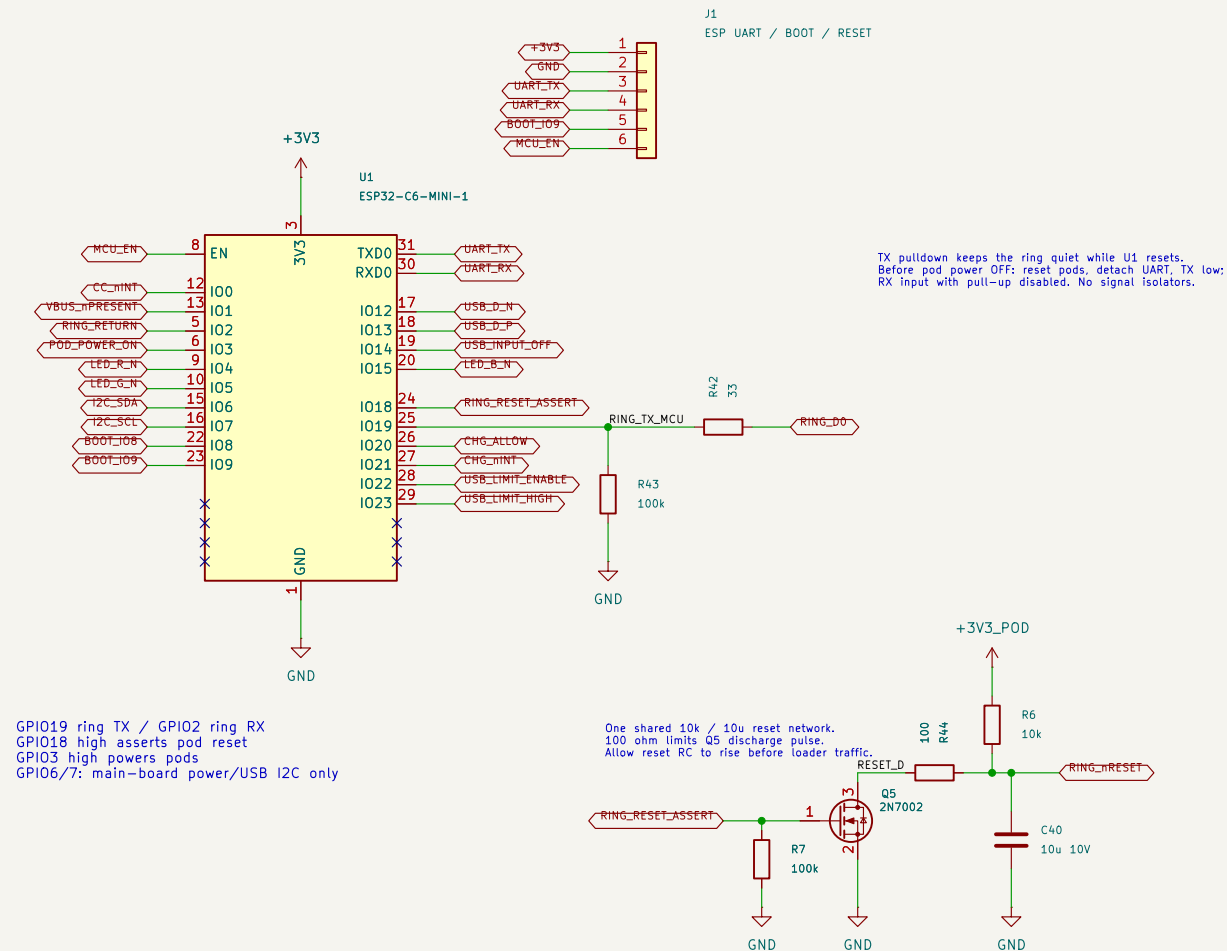

POD SUPPLY: default OFF; ESP, USB and charger stay powered.
CT controls ramp; QOD discharges the ring after shutdown.
Do not enable UART idle-high until POD_3V3 has settled.
Disable charging before removing required pod temperature sensing.

Local haptic pod and harness

File: local-pod.kicad_sch

Charger and regulated supply

File: power.kicad_sch

USB-C data and power

File: usb.kicad_sch

ESP reset, boot and decoupling

File: controller-support.kicad_sch

One wrist / ring pod schematic draft

Sheet: /
File: main.kicad_sch

Title: Controller and switched pod power

Size: A3

Date: 2026-09-12

Rev: 0.5

Id: 1/5

