Dri-Lite® Loose Tube Single Jacket All Dielectric

Series 11D

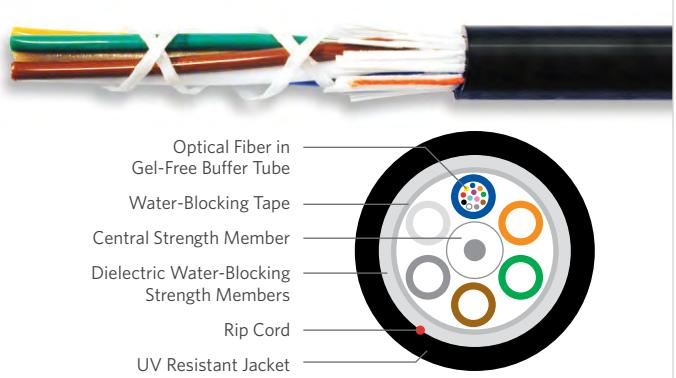

PRODUCT DESCRIPTION

Loose tube cables are the product of choice as the backbone in Outside Plant (OSP) environments. The durable loose tube design offers reliable transmission performance over a broad temperature range. Optical fibers and water-blocking elements are placed inside gel-free buffer tubes. The core is constructed by stranding the buffer tubes around a central member using a reverse oscillating lay (ROL). The core is wrapped with flexible strength members covered with a water-blocking tape, then encased with a black jacket. A rip cord is included under the jacket for ease of entry.

APPLICATIONS

- Underground duct and lashed aerial
- Trunk, distribution and feeder cable
- Local loop, metro, long-haul and broadband network

FEATURES / BENEFITS

FEATURES	BENEFITS
Available with up to 432-fiber	High fiber density
Multiple fiber types including hybrids	Multiple network applications
Central strength members available in metallic or dielectric	Metallic option offers ease of location, dielectric design eliminates grounding issues
Dry (SAP) core standard	Reduces cable prep and installation time
Standard tube size for all fiber counts	Reduces the number of tools required
Gel-free tubes	Speeds fiber access and cleanup

SPECIFICATIONS

Fiber Count	Available in 6-fiber up to 288-fiber
Standards Compliance	Telcordia® GR-20-CORE RDUP PE-90 Designation MLT ICEA S-87-640-2011 RoHS-compliant

Telcordia is a registered trademark of Ericsson Inc.

ENVIRONMENTAL SPECIFICATIONS

Operation/Storage	-40°C to +70°C
Installation	-30°C to +70°C

PART NUMBER KEY

1	1	_	_	_	x	D	0	y
1	2	3	4	5	6	7	8	9
Product family	Fiber count (006-288)				Fiber type	Internal designator	Water block/ marking (1-8)	

Contact Customer Service for availability of non-standard offerings.

PART NUMBERS AND PHYSICAL CHARACTERISTICS

Part Number[1]	Fiber Count	Nominal Diameter in (mm)	Approx. Weight lbs/kft (kg/km)	Maximum Tensile Loading Install lbs (N)	Maximum Tensile Loading Long Term lbs (N)	Minimum Bend Radius Install in (mm)	Minimum Bend Radius Long Term in (mm)
11006xD0y	6	0.41 (10.3)	47 (70)	600 (2,700)	200 (890)	8.2 (206)	4.1 (103)
11012xD0y	12	0.41 (10.3)	47 (70)	600 (2,700)	200 (890)	8.2 (206)	4.1 (103)
11024xD0y	24	0.41 (10.3)	47 (70)	600 (2,700)	200 (890)	8.2 (206)	4.1 (103)
11036xD0y	36	0.41 (10.3)	47 (70)	600 (2,700)	200 (890)	8.2 (206)	4.1 (103)
11048xD0y	48	0.41 (10.3)	47 (70)	600 (2,700)	200 (890)	8.2 (206)	4.1 (103)
11060xD0y	60	0.41 (10.3)	47 (70)	600 (2,700)	200 (890)	8.2 (206)	4.1 (103)
11072xD0y	72	0.43 (11.0)	61 (91)	600 (2,700)	200 (890)	8.6 (220)	4.3 (110)
11096xD0y	96	0.50 (12.7)	79 (118)	600 (2,700)	200 (890)	10.0 (254)	5.0 (127)
11144xD0y	144	0.63 (16.0)	124 (185)	600 (2,700)	200 (890)	12.6 (320)	6.3 (160)
11192xD0y	192	0.69 (17.6)	177 (264)	600 (2,700)	200 (890)	13.8 (352)	6.9 (176)
11216xD0y	216	0.63 (16.0)	120 (179)	600 (2,700)	200 (890)	12.6 (320)	6.3 (160)
11288xD0y	288	0.74 (18.9)	161 (240)	600 (2,700)	200 (890)	14.8 (378)	7.4 (189)

FIBER TYPES:	SINGLE MODE							HYBRID	MULTIMODE			
			TeraFlex® Bend Resistant						TeraFlex Bend Resistant Laser Optimized 50/125			
	Reduced Water Peak	Zero Water Peak	G.657.A1	G.657.A2	G.657.B3	NZDS	LEAF	Hybrid	TeraGain® 62.5/125	10G/150	10G/300	10G/550
[1]Replace "x" with:	3	2	K	J	L	8	S	H	6	M	N	P

See "Optical Fiber Specifications" in the "Technical Info" section for detailed fiber type specifications.

WATER BLOCK AND JACKET PRINT CODES

	Dry core		Dry core special	
	Feet	Meters	Feet	Meters
[1]Replace "y" with:	1	2	5	6

SUPERIOR ESSEX
800.551.8948
SuperiorEssex.com

Rev 08/16
Ed 13.2