## Short Title Address

Section

Submittals 09/23/2015

## **Table of Contents**

## Section No

- 1. Telecommunications Contractor
- 2. Key Personnel
- 3. Minimum Manufacturer Qualifications
- 4. Test Plan
- 5. Products
- 6. Shop Drawings

### Full Title

#### Address

Submittal No. 1
Spec Section: Section

Definable Feature of Work: Telecommunications

		Spec Ref	Description	Model/type/color	Part Number	Manufacturer	Comments
1	Document		Telecommunications Contractor				
2	Document		Key Personnel				
3	Document		Minimum Manufacturer Qualifications				
4	Document		Test Plan				
5	Product	6.5	Cable Guide	RediRail	SB13AL24FB	Cooper B-Line	
6	Product	4.69	Patch Panel	48 Port Patch Panel	OR-PHDHJU48	Ortronics	
7	Document		Shop Drawings				

# Telecommunications Contractor



### **Telecommunications Contractor**

Date: 09/23/2015

Project: Short Title

BCS service offers installation of commercial and industrial grade cabling solutions. BCS installations include inside plant cabling of Category 5e/6, fiber optics, coaxial, security and control cabling. BCS also provides outside plant cabling for high pair copper, fiber optics, and coaxial. All projects are supported by a Registered Certified Distribution Designer (BICSI, RCDD) and Certified BICSI Installers to ensure strict adherence to industry standards and a successful design and construction team.

#### PROJECTS:

- NOAA Pacific Regional Center, Main Facility
  - Provision and installation of approximately 2,000,000 feet of Category 6A cable serving 2,000 outlets. Provision and installation of 4, 12, 24, 48, 96 and 144, strand fiber optic horizontal and backbone cable. Cable systems were tested and certified per TIA/EIA standards. Completed October 2013.
- Fort Shafter, MP T-118 Renovation
  - Provision and installation of approximately 12,000 feet of Category 6 cable serving 40 outlets. Phased relocation of Military Police operations center to temporary trailer facility. Relocation of fiber optic data and telephony services. Test and re-test all outlets (copper and fiber) per I3A standards. Completed February 2012.
- Honolulu Police Department Fiber Optic Upgrade
  - Provision and installation of approximately 10,000 feet of 12-strand and 24-strand single mode fiber optic cable to establish dual fiber "rings". Fiber Optic cable was distributed and connected to 24 intermediate distribution frames. Competed April 2011.
- Fort Weaver Road Widening
  - Provision and installation of approximately 12,000 feet of 400 pair outside plant rated copper cable and 12,000 feet of 96-strand single mode fiber optic cable for the Army Signal Corps. Cable systems were tested and certified per I3A standards. Completed February 2011.

Key Personnel

KEY PERSONNEL							
	Full Title						
		<b>Address</b>					
Name Certification Contact # E-mail Address							
1.	Yokoi, David R.	BICSI RCDD	808-585-7999	david@bcshawaii.com			
2.	Yokoi, Ryan K.	BICSI ITS Technician	808-782-8884	ryan@bcshawaii.com			

# Information Technology Systems

The designation of

## **BICSI ITS TECHNICIAN**

is awarded to

# Ryan Yokoi

by BICSI in recognition of having successfully completed BICSI's registration and examination requirements.

BICSI President

BICSI Executive Director & Chief Executive Officer

BICSI

11/17/2012

11/17/2015

Issued

**Expires** 

The professional designation of



Registered Communications Distribution Designer is awarded to

## David R Yokoi

by BICSI® in recognition of having successfully completed BICSI's registration and examination requirements.

1/1/2013

Issued

12/31/2015

Expires

President, BICSI

BICSI Executive Director & Chief Executive Officer



# Minimum Manufacturer Qualifications



**Phone: 765.962.7561** Fax: 765.983.7150

www.Belden.com

Date 8/15/2011

Belden has been manufacturing cable and connectivity products for over 100 years. We comply with all aspects of TIA/EIA for all structured cabling, fiber optics and apparatus, including TIA568-C.1, TIA/EIA-568-B.2 and TIA-568-C.3.

Feel free to contact me for any additional information regarding the sale and use of Belden products.

Sincerely,

John Wojnicki Business Development Manager – Belden Vertical Markets

John.wojnicki@belden.com



446 Old County Rd Suite # 100-126 Pacifica, CA 94044 T: 408-533-3358 E:cswain@commscope.com www.commscope.com

To Whom it may concern,
CommScope is a manufacturer located in Hickory North Carolina and been in business since 1976. We comply with all aspects of TIA/EIA for all structured cabling, fiber optics and apparatus, including TIA-568-C.1, TIA/EIA-568-B.2 and TIA-568-C.3.
If you have any further questions, please contact me at the number above.
Best Regards,
Christian Swain
Territory Manager- Silicon Valley & Hawaii

509 W. Monroe Street Highland, IL 62249 Phone: 618/654-2184 Fax: 618/654-9114



August 15, 2011

To whom it may concern,

Cooper B-Line, a Division of Cooper Industries, is located in Highland, Il. Cooper B-Line has been in business since 1956. Cooper Industries was founded in 1833 and is headquartered in Houston, TX

Cooper B-Line is a global provider of innovative, labor-saving support systems and enclosure solutions for engineered facility subsystem applications and part of Cooper Industries plc (NYSE: CBE), operating facilities across the globe. Our products are used in a variety of settings for the commercial, industrial, utility and OEM markets. Cooper B-Line products are EIA-310-D, NEMA, NEBS GR-63, UL. IEC and ANSI/TIA/EIA-607 complaint were applicable.

Regards,

Robert Trimble, RCDD

Cooper B-Line - Western Regional Manager



Corning Cable Systems PO Box 489 Hickory, NC 28601 t 828-901-5000 www.corning.com

8/4/2011

#### To Whom It May Concern:

Corning Cable Systems, part of the Corning Incorporated telecommunications segment, is a leading manufacturer of fiber optic communications system solutions for voice, data and video network applications worldwide. With headquarters in Hickory, NC; Corning Cable Systems has 32 global locations and employees over 10,000 people. Corning Incorporated has been mass producing fiber optics since 1970 and Corning Cable Systems has been manufacturing fiber optic communications systems since 1977.

Corning Cable Systems complies with all TIA/EIA standards for fiber optic structured cabling including TIA-568-C, TIA-568-C.1 and TIA-568-C.3.

For any other concerns, please contact me immediately.

Sincerely,

Michael Weare

Federal Accounts Manager – West/Asia Pacific 562-522-0885

<u>Michael.weare@corning.com</u>



May 20, 2013

**Legrand Ortronics** 155 Eugene O'Neill Dr New London, CT 06320

RE: Manufacturer's Qualifications

To Whom it May Concern:

Legrand Ortronics has been in the business of manufacturing, assembly, and testing of telecommunications hardware, components, and cabling equipment for over 30 years. All products meet or exceed ANSI/TIA-568-C.1, ANSI/TIA-568-C.2, ANSI/TIA-568-C.3.

Sincerely,

Adam Murano **VP** Engineering

**Legrand Ortronics** 



### CERTIFICATION of COMPLIANCE



D legrand

125 Eugene O'Neill Drive, New London, CT 06320

July 17, 2012

ToWhom it May Concern:

Legrand/Ortronics, a cabling, equipment and hardware manufacturer, exceeds the minimum qualification of 3 years experience in the manufacturing, assembly and factory testing of components which comply with ANSI/TIA-568-C.1, ANSI/TIA-568-C.2 and ANSI/TIA-568-C.3.

Sincerely,

Signature:

Adam Murano V.P. Engineering Legrand/Ortronics



October 1, 2013

Superior Essex Communications LP 6120 Powers Ferry Rd., Suite 150 Atlanta, GA 30339

REF: Manufacturer Qualification Statement of Experience

To Whom It May Concern:

Superior Essex Communications LP has more than 55 years of experience as a telecommunications cable manufacturer. Superior Essex has grown to become a trusted name in wire and cable in North America as a cable supplier to most of the largest telecommunications service providers in the U.S. We have a broad portfolio of copper and fiber cable products used in outside plant and premises applications and we provide our products world-wide to support industry and government applications.

Superior Essex Communications LP has a minimum of 5 years of experience in the manufacturing, assembly and factory testing of cable products which comply with EIA/TIA-568-C.2, EIA/TIA-568-C.3, and previous revisions of these standards; also, ANSI/ICEA S-87-640, ANSI/ICEA S-98-688, ANSI/ICEA S-99-689 and ANSI/ICEA S-107-704.

For questions please contact us at 877-263-2818 or 800-551-8948. Specific product standards compliance may be viewed through our on-line catalog located at <a href="https://www.superioressex.com">www.superioressex.com</a> and by selecting Communications Cable.

Sincerely,

Lindsay Allen

Vice President – Marketing

Superior Essex Communications LP

Test Plan



### **Test Plan**

Date: <u>09/23/2015</u>

Project: Short Title

Testing the cabling infrastructure is performed by using an organized, systematic method to verify that the installation has been completed in accordance with all terms and conditions of the contract and industry standards per TIA-568-C.1, TIA-568-C.2 and TIA-568-C.3. See Spec Section 16050, Spec 3.02. This method is made up of three distinct phases which are:

- Phase 1 Visual verification and inspection of cables
- Phase 2 Performance cable testing with the various test equipment as required for each type of cable
- Phase 3 Documentation

#### Phase 1

The visual verification shall include an inspection of all pathways and spaces (where possible), telecommunications Closet and cables installed. Items to be inspected shall include:

- Infrastructure
- · Cable placement
- Cable markings for UL or third party certification markings
- Cable termination to confirm to color code for T568A pin assignments per TIA-568-C.1, TIA-568-C.2, TIA-568-C.3
- Visual confirmation for Category 5e and CATV cables, marking of outlets, cover plates, outlet/connector and patch panels
- Grounding and bonding
- · Compliance with codes, standards, and regulations

#### Phase 2

Once the visual verification has been completed and all discrepancies corrected, performance testing shall be conducted with the necessary equipment required for each cabling type. Tests will be performed per Spec 16050, Section 3.02.A and Section 3.02.B and Section 3.02.C. The following is a list of field test parameters and equipment that will be used:

- Length
- Insertion Loss
- NEXT, PSNEXT, ELFNEXT, PSELFEXT
- Return Loss
- Propagation Delay
- Delay Skew

Equipment for testing:

• Fluke DTX-1800, Cable Analyzer

### Phase 3


Documentation shall be provided showing tests performed are in compliance with TIA-568-C.1, C.2 and C.3  $\,$ 

**Products** 

## Cable Runways & Accessories

## Redi-Rail™ Runway - 11/2"

- Lightweight design for ease of installation.
- Aluminum (unpainted) is UL Classified.
- Uses standard cable runway accessories.
- 6", 9", 12", 15", 18", 20", 24", 30" and 36" widths.
- 9" rung spacing.
- Rungs can be removed or repositioned to accommodate the specific project or buildings requirements.
- **■** Material: Aluminum.

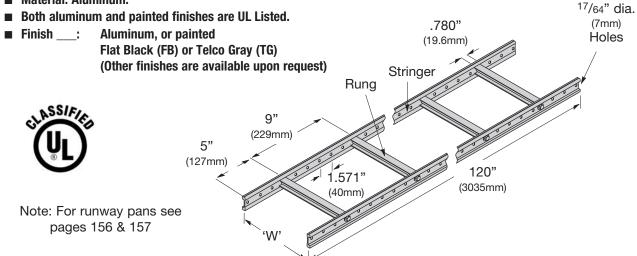

Series Number	Stringer Dimensions	Span		Load		Deflection Multiplier
		Ft.	(m)	Lbs./Ft.	(N/m)	
	3/8" (9 mm) 11/2"	4	(1.22)	81	(1182)	0.0033
		5	(1.52)	51	(744)	0.0080
SB13AL		6	(1.83)	35	(510)	0.0166
	(38 mm)	7	(2.13)	26	(379)	0.0308
		8	(2.44)	20	(292)	0.0526

UL Cross Sectional Area				
0.60 in <sup>2</sup> (3.87 cm <sup>2</sup> )				
Design Factors for (1) Rail				
Area = .318 in <sup>2</sup> (2.06 cm <sup>2</sup> )				
$Sx = .116 \text{ in}^3 (1.90 \text{ cm}^3)$				
Ix = .087 in <sup>4</sup> (3.65 cm <sup>4</sup> )				

### SB13AL C-Channel - 11/2" (38mm) Stringers

Part Number	'W' Width		Weight		
	ln.	(mm)	Lbs.	(kg)	
SB13AL06	6"	(152)	9.1	(4.1)	
SB13AL09	9"	(228)	9.8	(4.4)	
SB13AL12	12"	(305)	10.5	(4.7)	
SB13AL15	15"	(381)	11.2	(5.1)	
SB13AL18	18"	(457)	11.8	(5.4)	
SB13AL20	20"	(508)	12.3	(5.6)	
SB13AL24	24"	(609)	13.2	(6.0)	
SB13AL30	30"	(762)	14.6	(6.6)	
SB13AL36	36"	(914)	16.0	(7.2)	

#### **Rung Profile**



3/4" high x <sup>25</sup>/32" wide

## Cable Runways & Accessories

## End Caps SB21\_

(see page 155 for chart & information)



## Hanger Rod Bracket 9ZNR

(see page 121 for chart & information)



## Butt-Splice Clamp SB2107\_BZ

(see page 122 for chart & information)



## Cable Retaining Post SB126 FB

(see page 160 for chart & information)







Stand-Off Bracket SB227\_FB

(see page 138 for chart & information)



Drop Out SB13ALDO\_\_FB

(see page 154 for chart & information)



Outboard Rung 9A-SR0

(see page 121 for chart & information)



Mounting Bracket 9ZN-MB1-4

(see page 121 for chart & information)

## Cable Runways & Accessories

## **Hanger Rod Bracket**

- Wall Studded bracket bolts to Redi-Rail<sup>™</sup> holes.
- For <sup>3</sup>/8" ATR.
- Loading is 1,000 lbs. (4.45kN), per pair, safety factor 3.
- Finish: Zinc Plated

Support ATR Size	Part No.
3/8"	9ZN-R238
1/2"	9ZN-R250



## **Out Board Rungs**

- Formed akuminum rung with attachment screw.
- Field installs as required.
- Torque rung fasteners to 6 ft/lbs.
- Uniform load capacity on rung: 10 lbs.

Part	Fill De	Fill Depth 'H'		Fill Width 'W'		
No.	in	(mm)	in	(mm)		
9A-SR0406	4	(101)	6	(152)		
9A-SR0409	4	(101)	9	(226)		
9A-SR0506	5	(127)	6	(152)		
9A-SR0509	5	(127)	9	(226)		






## **Mounting Bracket**

- Furnished with 1/4" mounting hardware.
- EIA/TIA panel mounting holes both sides.
- Mounting holes with NEMA outlet/junction boxes.
- Zinc plated steel.

Part	'A'		
No.	in	(mm)	
9ZN-MB1-4	3 <sup>5</sup> /8"	(92)	







# HDJ series 48 port unloaded flat panel

OR-PHDHJU48



48 port unloaded flat panel for rear loading HDJ series of jacks and accessories. Includes rear management bar and straps. Occupies 1 rack unit of space, 1.75" x 19".

## features & benefits

- High density design: Maximizes use of rack/cabinet real estate.
- HDJ jacks and adapters mount quick, easily and securely: Speed of install and reliability.
- Rear management bar and straps included: Supports good cabling practices.

## specifications

#### **General Info**

Color: Black

Product Series: Clarity Type: Patch Panels

### **Listing Agencies/Third Party Information**

CUL Listing No: E131600 cUL Standard: Yes UL Listing No: E131600 UL Standard: Yes

#### **Construction Information**

Component2: Flat Patch Panel

Component3: Rear cable management bar

Finish Plating1: Powder coat black Material1: 14 gauge cold rolled steel

Material2: .125" x .320" round edge flat steel

### **Dimensions**

Depth Metric: 163.83 mm

Depth U S: 6.45"

Height Metric: 43.92 mm

Height U S: 1.73" Width Metric: 482.6 mm Width U S: 19.00" Rack Units: 1

Rack Units: 1 Height: 1.75"

### **Technical Information**

Category Rating: Cat 5e, Cat 6, Cat 6a

Performance Rating: Cat6

**Shop Drawings**