

EAR: Reference Manual

4.3

1 Introduction	1
1.1 License	1
1.2 Publications	2
2 User guide	3
2.1 Use cases	3
2.1.1 MPI applications	3
2.1.1.1 Hybrid MPI + (OpenMP, CUDA, MKL) applications	3
2.1.1.2 Python MPI applications	4
2.1.1.3 Running MPI applications on SLURM systems	4
2.1.2 Non-MPI applications	5
2.1.2.1 Python	5
2.1.2.2 OpenMP, CUDA and Intel MKL	5
2.1.3 Other application types or frameworks	5
2.1.4 Using EAR inside Singularity containers	5
2.2 Retrieving EAR data	6
2.3 EAR job submission flags	7
2.3.1 CPU frequency selection	7
2.3.2 GPU frequency selection	8
2.4 Examples	8
2.4.1 srun examples	8
2.4.2 sbatch + EARL + srun	9
2.4.3 EARL + mpirun	9
2.4.3.1 Intel MPI	9
2.4.3.2 OpenMPI	9
2.5 EAR job Accounting (eacct)	10
2.5.1 Usage examples	10
2.6 Job energy optimization: EARL policies	11
3 EAR commands	13
3.1 EAR job Accounting (eacct)	13
3.2 EAR system energy Report (ereport)	16
3.2.1 Examples	17
3.2.2 EAR Control (econtrol)	17
3.3 Database commands	18
3.3.1 edb_create	18
3.3.2 edb_clean_pm	18
3.3.3 edb_clean_apps	19
3.4 erun	19
3.5 ear-info	20
4 Environment variables	23
4.1 Loading EAR Library	23

4.1.1 EAR_LOADER_APPLICATION	23
4.1.2 EAR_LOAD_MPI_VERSION	24
4.2 Report plug-ins	24
4.2.1 EAR_REPORT_ADD	24
4.3 Verbosity	24
4.3.1 EARL_VERBOSE_PATH	24
4.4 Frequency management	25
4.4.1 EAR_GPU_DEF_FREQ	25
4.4.2 EAR_JOB_EXCLUSIVE_MODE	25
4.4.3 Controlling Uncore/Infinity Fabric frequency	25
4.4.3.1 EAR_SET_IMCFREQ	26
4.4.3.2 EAR_MAX_IMCFREQ and EAR_MIN_IMCFREQ	26
4.4.4 Load Balancing	26
4.4.4.1 EAR_LOAD_BALANCE	26
4.4.5 Support for Intel(R) Speed Select Technology	27
4.4.5.1 EAR_PRIO_TASKS	27
4.4.5.2 EAR_PRIO_CPUS	28
4.4.6 EAR_MIN_CPUFREQ	28
4.4.7 Disabling EAR's affinity masks usage	28
4.5 Data gathering	29
4.5.1 EAR_GET_MPI_STATS	29
4.5.2 EAR_TRACE_PLUGIN	30
4.5.3 EAR_TRACE_PATH	30
4.5.4 REPORT_EARL_EVENTS	31
4.5.4.1 Event types	31
5 Admin guide	33
5.1 EAR Components	33
5.2 Quick Installation Guide	34
5.2.1 EAR Requirements	34
5.2.2 Compiling and installing EAR	35
5.2.3 Deployment and validation	35
5.2.3.1 Monitoring: Compute node and DB	35
5.2.3.2 Monitoring: EAR plugin	37
5.2.4 EAR Library versions: MPI vs. Non-MPI	38
5.3 Installing from RPM	38
5.3.1 Installation content	39
5.3.2 RPM requirements	39
5.4 Starting Services	40
5.5 Updating EAR with a new installation	41
5.6 Next steps	41
6 Installation from source	43

6.1 Requirements	43
6.2 Compilation and installation guide summary	44
6.3 Configure options	44
6.4 Pre-installation fast tweaks	46
6.5 Library distributions/versions	46
6.6 Other useful flags	46
6.7 Installation content	46
6.8 Fine grain tuning of EAR options	47
6.9 Next step	47
7 Architecture	49
7.1 EAR Node Manager	49
7.1.1 Overview	49
7.1.2 Requirements	49
7.1.3 Configuration	49
7.1.4 Execution	50
7.1.5 Reconfiguration	50
7.2 EAR Database Manager	50
7.2.1 Configuration	50
7.2.2 Execution	51
7.3 EAR Global Manager	51
7.3.1 Power capping	51
7.3.2 Configuration	52
7.3.3 Execution	52
7.4 The EAR Library	52
7.4.1 Overview	52
7.4.2 Configuration	54
7.4.3 Usage	54
7.4.4 Policies	54
7.4.5 EAR API	55
7.5 EAR Loader	56
7.6 EAR SLURM plugin	57
7.6.1 Configuration	57
8 EAR configuration	59
8.1 Configuration requirements	59
8.1.1 EAR paths	59
8.1.2 DB creation and DB server	59
8.1.3 EAR SLURM plug-in	59
8.2 EAR configuration file	60
8.2.0.1 Database configuration	60
8.2.1 EARD configuration	60
8.2.2 EARDBD configuration	61

8.2.3 EARL configuration	61
8.2.4 EARGM configuration	61
8.2.4.1 Common configuration	62
8.2.4.2 EAR Authorized users/groups/accounts	62
8.2.4.3 Energy tags	62
8.2.5 Tags	62
8.2.5.1 Power policies plug-ins	63
8.2.6 Island description	64
8.3 SLURM SPANK plug-in configuration file	65
8.3.1 MySQL/PostgreSQL	65
8.3.2 MSR Safe	65
9 Learning phase	67
9.1 Tools	67
9.1.1 Examples	67
10 EAR plug-ins	69
10.1 Considerations	69
11 EAR Powercap	71
11.1 Node powercap	71
11.2 Cluster powercap	71
11.2.1 Soft cluster powercap	72
11.2.2 Hard cluster powercap	72
11.3 Possible powercap values	72
11.4 Example configurations	72
11.5 Valid configurations	74
12 Report plugins	77
12.1 Prometheus report plugin	77
12.1.1 Requirements	77
12.1.2 Installation	77
12.1.3 Configuration	78
12.2 Examon	78
12.2.1 Compilation and installation	78
12.3 DCDB	79
12.3.1 Compilation and configuration	79
12.4 Sysfs Report Plugin	79
12.4.1 Namespace Format	79
12.4.2 Metric File Naming Format	79
12.4.3 Metrics reported	80
13 EAR Database	81
13.1 Tables	81

13.1.1 Application information	81
13.1.2 System monitoring	81
13.1.3 Events	82
13.1.4 EARGM reports	82
13.1.5 Learning phase	82
13.2 Creation and maintenance	82
13.3 Database creation and ear.conf	82
13.4 Information reported and ear.conf	83
13.5 Updating from previous versions	84
13.5.1 From EAR 4.2 to 4.3	84
13.5.2 From EAR 4.1 to 4.2	84
13.5.3 From EAR 3.4 to 4.0	84
13.5.4 From EAR 3.3 to 3.4	84
13.6 Database tables description	85
13.6.1 Jobs	85
13.6.2 Applications	85
13.6.3 Signatures	86
13.6.4 Power_signatures	87
13.6.5 GPU_signatures	87
13.6.6 Loops	88
13.6.7 Events	88
13.6.8 Global_energy	89
13.6.9 Periodic_metrics	89
13.6.10 Periodic_aggregations	90
14 Supported systems	91
14.1 CPU Models	91
14.2 GPU models	91
14.3 Schedulers	91
15 Changelog	93
15.1 EAR 4.3	93
15.2 EAR 4.2	93
15.3 EAR4.1.1	94
15.4 EAR 4.1	94
15.5 EAR 4.0	95
15.6 EAR 3.4	95
15.7 EAR 3.3	95
15.8 EAR 3.2	95
16 FAQs	97
16.1 EAR general questions	97
16.2 Using EAR flags with SLURM plug-in	98

16.3 Using additional MPI profiling libraries/tools	99
16.4 Jobs executed without the EAR Library: Basic Job accounting	99
16.5 Troubleshooting	100
17 Known issues	101
Index	103

Chapter 1

Introduction

Energy Aware Runtime (EAR) is an energy management framework for super computers. EAR contains different components, all together provide three main services:

1. An **easy-to-use** and **lightweight** optimization service to automatically select the optimal CPU, memory and GPU frequency according to the application and the node characteristics. This service is provided by two components: the EAR Library (EARL) and the EAR Node Manager (EARD).

EARL is a smart component which is loaded next to the application and offers application metrics monitoring and it can select the frequencies based on the application behaviour on the fly. The Library is loaded automatically through the EAR Loader (EARLO) and it can be easily integrated with different system batch schedulers (e.g., SLURM).

2. A complete **energy and performance accounting and monitoring system** mainly based on relational SQL databases (MariaDB and PostgreSQL are currently supported). The energy accounting system is configurable in terms of application details and update frequency.

The EAR Database (EARDDB) is used to cache those metrics prior to DB insertions and optimize the connectivity with the DB server. Current EAR version already includes several report plugins for non-relational Databases such as EXAMON.

3. A **cluster energy manager** to monitor and control the energy consumed in the system through the EAR Global Manager (EARGMD). This control is configurable, it can dynamically adapt policy settings based on global energy limits or just offer global cluster monitoring.

Visit the [architecture page](#) for a detailed description of each of these components. The [user guide](#) contains information about how to use EAR as an end user in a production environment. The [admin guide](#) has all the information related to the installation and setting up, as well as all core components details.

1.1 License

EAR is a open source software and it is licensed under both the BSD-3 license and EPL-1.0 license. Full text of both licenses can be found in COPYING.BSD and COPYING.EPL files.

Contact: ear-support@bsc.es

1.2 Publications

J. Corbalan, L. Alonso, J. Aneas and L. Brochard, "Energy Optimization and Analysis with EAR," 2020 IEEE International Conference on Cluster Computing (CLUSTER), 2020, pp. 464–472, doi: 10.1109/CLUSTER49012.2020.00067.

J. Corbalan, O. Vidal, L. Alonso and J. Aneas, "Explicit uncore frequency scaling for energy optimisation policies with EAR in Intel architectures," 2021 IEEE International Conference on Cluster Computing (CLUSTER), 2021, pp. 572–581, doi: 10.1109/Cluster48925.2021.00089.

J. Corbalan, L. Alonso, C. Navarrete and C. Guillen, "Soft Cluster Powercap at SuperMUC-NG with EAR," 2022 IEEE 13th International Green and Sustainable Computing Conference (IGSC), Pittsburgh, PA, USA, 2022, pp. 1–8, doi: 10.1109/IGSC55832.2022.9969360

Chapter 2

User guide

EAR was first designed to be usable 100% transparently by users, which means that you can run your applications enabling/disabling/tuning EAR with the less effort for changing your workflow, e.g., submission scripts. This is achieved by providing integrations (e.g., plug-ins, hooks) with system batch schedulers, which do all the effort to set-up EAR on job submission. By now, **SLURM is the batch scheduler full compatible with EAR** thanks to EAR's SLURM SPANK plug-in.

With EAR's SLURM plug-in, running an application with EAR is as easy as submitting a job with either `srun`, `sbatch` or `mpirun`. The EAR Library (EARL) is automatically loaded with some applications when EAR is enabled by default.

Check with the [ear-info](#) command if EARL is `on/off` by default. If it's `off`, use `--ear=on` option offered by EAR SLURM plug-in to enable it. For other schedulers, a simple prolog/epilog command can be created to provide transparent job submission with EAR and default configuration. The EAR development team had worked also with OAR and PBSPro batch schedulers, but currently there is no any official stable nor supported feature.

2.1 Use cases

2.1.1 MPI applications

EARL is automatically loaded with MPI applications when EAR is enabled by default (check `ear-info`). EAR supports the utilization of both `mpirun/mpiexec` and `srun` commands.

When using `sbatch/srun` or `salloc`, [Intel MPI](#) and [OpenMPI](#) are fully supported. When using specific MPI flavour commands to start applications (e.g., `mpirun`, `mpiexec.hydra`), there are some keypoints which you must take account. See [next sections](#) for examples and more details.

2.1.1.1 Hybrid MPI + (OpenMP, CUDA, MKL) applications

EARL automatically supports this use case. `mpirun/mpiexec` and `srun` are supported in the same manner as explained above.

2.1.1.2 Python MPI applications

EARL cannot detect automatically MPI symbols when Python is used. On that case, an environment variable used to specify which MPI flavour is provided.

Export `SLURM_EAR_LOAD_MPI_VERSION` environment variable with either *intel* or *open mpi* values, e.g., `export SLURM_EAR_LOAD_MPI_VERSION="open mpi"`, whose are the two MPI implementations 100% supported by EAR.

2.1.1.3 Running MPI applications on SLURM systems

Using `srun` command

Running MPI applications with EARL on SLURM systems using `srun` command is the most straightforward way to start using EAR. All jobs are monitored by EAR and the Library is loaded by default depending on the cluster configuration. To run a job with `srun` and EARL **there is no need to load the EAR module**.

Even though it is automatic, there are few [flags](#) than can be selected at job submission. They are provided by EAR's SLURM SPANK plug-in. When using SLURM commands for job submission, both Intel and OpenMPI implementations are supported.

Using `mpirun`/`mpiexec` command

To provide an automatic loading of the EAR library, the only requirement from the MPI library is to be coordinated with the scheduler.

Intel MPI

Recent versions of Intel MPI offers two environment variables that can be used to guarantee the correct scheduler integrations:

- `I_MPI_HYDRA_BOOTSTRAP` sets the bootstrap server. It must be set to *slurm*.
- `I_MPI_HYDRA_BOOTSTRAP_EXEC_EXTRA_ARGS` sets additional arguments for the bootstrap server. These arguments are passed to SLURM, and they can be all the same as EAR's SPANK plug-in provides.

You can read [here](#) the Intel environment variables guide.

OpenMPI

For joining OpenMPI and EAR it is highly recommended to use SLURM's `srun` command. When using `mpirun`, as OpenMPI is not fully coordinated with the scheduler, EARL is not automatically loaded on all nodes. Therefore EARL will be disabled and only basic energy metrics will be reported. To provide support for this workflow, EAR provides `erun` command. Read the corresponding [examples section](#) for more information about how to use this command.

MPI4PY

To use MPI with Python applications, the EAR Loader cannot automatically detect symbols to classify the application as Intel or OpenMPI. In order to specify it, the user has to define the `SLURM_LOAD_MPI_VERSION` environment variable with the values *intel* or *open mpi*. It is recommended to add in Python modules to make it easy for final users.

2.1.2 Non-MPI applications

2.1.2.1 Python

Since version 4.1 EAR automatically executes the Library with Python applications, so no action is needed. You must run the application with `srun` command to pass through the EAR's SLURM SPANK plug-in in order to enable/disable/tuning EAR. See [EAR submission flags](#) provided by EAR SLURM integration.

2.1.2.2 OpenMP, CUDA and Intel MKL

To load EARL automatically with non-MPI applications it is required to have it compiled with dynamic symbols and also it must be executed with `srun` command. For example, for CUDA applications the `--cudart=shared` option must be used at compile time. EARL is loaded for OpenMP, MKL and CUDA programming models when symbols are dynamically detected.

2.1.3 Other application types or frameworks

For other programming models or sequential apps not supported by default, EARL can be forced to be loaded by setting `SLURM_EAR_LOADER_APPLICATION` environment variable, which must be defined with the application name. For example:

```
#!/bin/bash

export SLURM_EAR_LOADER_APPLICATION=my_app
srun my_app
```

2.1.4 Using EAR inside Singularity containers

Apptainer (formerly Singularity) is an open source technology for containerization. It is widely used in HPC contexts because the level of virtualization it offers enables the access to local services. It allows for greater reproducibility, making the programs less dependant on the environment they are being run on.

An example singularity command could look something like this:

```
singularity exec $IMAGE program
```

where `IMAGE` is an environment variable that contains the path of the Singularity container, and `program` is the executable to be run in the image.

In order to be able to use EAR inside the container two actions are needed:

- Binding EAR paths to make them visible in the container.
- Exporting some environment variables to the execution environment to make them available during the execution.

To bind folders there are two options: (1) using the environment variable `SINGULARITY_BIND/APPTAINER_BIND` or (2) using the `-B` flag when running the container. 1 is a comma separated string of pairs of paths `[path_1][[:path_2][:perms]]` such that `path_1` in local will be mapped into `path_2` in the image with the permissions set in `perms`, which can be `r` or `rw`. Specifying `path_2` and `perm` is optional. If they are not specified `path_1` will be bound in the same location.

To make EAR working the following paths could be added to the binding configuration:

- `$EAR_INSTALL_PATH, $EAR_INSTALL_PATH/bin, $EAR_INSTALL_PATH/lib, $EAR_TMP`

You should have an EAR module to have the above environment variables. Contact with your system administrator for more information.

Once paths are deployed, to execute (for example) an OpenMPI application inside a Singularity/Apptainer enabling the EAR Library just the following is needed:

```
module load ear
```

```
mpirun -np <# processes> singularity exec $IMAGE erun --ear=on --program="program args"
```

A more complete example would look something like this:

```
export IMAGE=[path_to_image]/ubuntu_ompi.sif
export BENCH_PATH=[path_to_benchmark]
export APPTAINER_BIND="$EAR_INSTALL_PATH:$EAR_INSTALL_PATH:ro,$EAR_TMP:$EAR_TMP:rw"
export APPTAINERENV_EAR_REPORT_ADD=sysfs.so
```

```
mpirun -np 64 singularity exec $IMAGE $EAR_INSTALL_PATH/bin/erun \
  --ear=on --ear-verbose=1 \
  --program=$BENCH_PATH/bt-mz.D.64
```

Note that the example exports `APPTAINERENV_EAR_REPORT_ADD` to set the environment variable `'EAR_REPORT_ADD'` to load `'sysfs'` report plug-in.

2.2 Retrieving EAR data

As a job accounting and monitoring tool, EARL collects some metrics that you can get to see or know your applications behaviour. The Library is doted with several modules and options to be able to provide different kind of information.

As a very simple hint of your application workload, you can enable EARL verbosity to get loop data at runtime. The information is shown at `stderr` by default. Read how to set up verbosity at [submission time](#) and [verbosity environment variables](#) provided for a more advanced tuning of this EAR feature.

To get offline job data EAR provides [eacct](#), a tool to provide the monitored job data stored in the Database. You can request information in different ways, so you can read aggregated job data, per-node or per-loop information among other things. See [eacct usage examples](#) for a better overview of which kind of data `eacct` provides.

There is another way to get runtime and aggregated data during runtime without the need of calling `eacct` after the job completion. EAR implements a reporting system mechanism which let developers to add new report plug-ins, so there is an infinit set of ways to report EAR collected data.

Therefore EAR releases come with a fully supported report plug-in (called `csv_ts`) which basically provides the same runtime and aggregated data reported to the Database in CSV files, directly while the job is running. You can load this plug-in in two ways:

1. By setting `--ear-user-db` flag at submission time.
2. [Loading directly the report plug-in](#) through an environment variable: `export SLURM_EAR_REPORT_ADD=csv_ts.so.`

Contact with ear-support@bsc.es for more information about report plug-ins.

You can also request EAR to report **events** to the [Database](#). They show more details about EARL internal state and can be provided with `eacct` command. See how to enable [EAR events reporting](#) and which kind of events EAR is reporting.

If your application applies, you can request EAR to report at the end of the execution a [summary about its MPI behaviour](#). The information is provided along two files and is the aggregated data of each process of the application.

Finally, EARL can provide runtime data in the [Paraver](#) trace format. Paraver is a flexible performance analysis tool maintained by the [Barcelona Supercomputing Center](#)'s tools team. This tool provides an easy way to visualize runtime data, computing derived metrics and to provide histograms for better of your application behaviour. See on the [environment variables page](#) how to generate Paraver traces.

Contact with ear-support@bsc.es if you want to get more details about how to deal with EAR data with Paraver.

2.3 EAR job submission flags

The following EAR options can be specified when running `srun` and/or `sbatch`, and are supported with `srun/sbatch/salloc`:

Option	Description
<code>--ear=[on off]</code>	Enables/disables EAR library loading with this job.
<code>--ear-user-db=<filename></code>	Asks the EAR Library to generate a set of CSV files with EARL metrics.
<code>--ear-verbose=[0 1]</code>	Specifies the level of verbosity; the default is 0.

When using `--ear-user-db` flag, one file per node is generated with the average node metrics (node signature) and one file with multiple lines per node is generated with runtime collected metrics (loops node signatures). Read [eacct's section](#) in the commands page to know which metrics are reported, as data generated by this flag is the same as the reported (and retrieved later by the command) to the Database.

Verbose messages are placed by default in `stderr`. For jobs with multiple nodes, `ear-verbose` option can result in lots of messages mixed at `stderr`. We recommend to split up SLURM's output (or error) file per-node. You can read SLURM's [filename pattern specification](#) for more information.

If you still need to have job output and EAR output separated, you can set `SLURM_EARL_VERBOSE_PATH` environment variable and one file per node will be generated only with EAR output. The environment variable must be set with the path (a directory) where you want the output files to be generated, it will be automatically created if needed.

You can always check the available EAR submission flags provided by EAR's SLURM SPANK plug-in by typing `srun --help`.

2.3.1 CPU frequency selection

The [EAR configuration file](#) supports the specification of *EAR authorized users*, who can ask for a more privileged submission options. The most relevant ones are the possibility to ask for a specific optimisation policy and a specific CPU frequency.

Contact with sysadmin or helpdesk team to become an authorized user.

- The `--ear-policy=policy_name` flag asks for *policy_name* policy. Type `srun --help` to see policies currently installed in your system.
- The `--ear-cpufreq=value` (*value* must be given in kHz) asks for a specific CPU frequency.

2.3.2 GPU frequency selection

EAR version 3.4 and upwards supports GPU monitoring for NVIDIA devices from the point of view of the application and node monitoring. GPU frequency optimization is not yet supported. **Authorized** users can ask for a specific GPU frequency by setting the `SLURM_EAR_GPU_DEF_FREQ` environment variable, giving the desired GPU frequency expressed in kHz. Only one frequency for all GPUs is now supported.

Contact with sysadmin or helpdesk team to become an authorized user.

To see the list of available frequencies of the GPU you will work on, you can type the following command:

```
nvidia-smi -q -d SUPPORTED_CLOCKS
```

2.4 Examples

2.4.1 srun examples

Having an MPI application asking for one node and 24 tasks, the following is a simple case of job submission. If EARL is turned on by default, no extra options are needed to load it. To check if it is on by default, load the EAR module and execute the `ear-info` command. EAR verbose is set to 0 by default, i.e., no EAR messages.

```
srun -J test -N 1 -n 24 --tasks-per-node=24 application
```

The following executes the application showing EAR messages, including EAR configuration and node signature in *stderr*.

```
srun --ear-verbose=1 -J test -N 1 -n 24 --tasks-per-node=24 application
```

EARL verbose messages are generated in the standard error. For jobs using more than 2 or 3 nodes messages can be overwritten. If the user wants to have EARL messages in a file the `SLURM_EARL_VERBOSE_PATH` environment variable must be set with a folder name. One file per node will be generated with EARL messages.

```
export SLURM_EARL_VERBOSE_PATH=logs
```

```
srun --ear-verbose=1 -J test -N 1 -n 24 --tasks-per-node=24 application
```

The following asks for EARL metrics to be stored in csv file after the application execution. Two files per node will be generated: one with the average/global signature and another with loop signatures. The format of output files is `<filename>.<nodename>.time.csv` for the global signature and `<filename>.<nodename>.time.loops.csv` for loop signatures.

```
srun -J test -N 1 -n 24 --tasks-per-node=24 --ear-user-db=filename application
```

For EAR *authorized users*, the following executes the application with a CPU frequency of 2.0GHz:

```
srun --ear-cpufreq=2000000 --ear-policy=monitoring --ear-verbose=1 -J test -N 1 -n 24 --tasks-per-node=24 application
```

For `--ear-cpufreq` to have any effect, you must specify the `--ear-policy` option even if you want to run your application with the default policy.

2.4.2 sbatch + EARL + srun

When using `sbatch` EAR options can be specified in the same way. If more than one `srun` is included in the job submission, EAR options can be inherited from `sbatch` to the different `srun` instances or they can be specifically modified on each individual `srun`.

The following example will execute twice the application. Both instances will have the verbosity set to 1. As the job is asking for 10 nodes, we have set the `SLURM_EARL_VERBOSE_PATH` environment variable set to the `ear_log` folder. Moreover, the second step will create a set of csv files placed in the `ear_metrics` folder. The nodename, Job Id and Step Id are part of the filename for a better identification.

```
#!/bin/bash
#SBATCH -N 1
#SBATCH -e test.%j.err
#SBATCH -o test.%j.out
#SBATCH --ntasks=24
#SBATCH --tasks-per-node=24
#SBATCH --cpus-per-task=1
#SBATCH --ear-verbose=1

export SLURM_EARL_VERBOSE_PATH=ear_logs

srun application

mkdir ear_metrics
srun --ear-user-db=ear_metrics/app_metrics application
```

2.4.3 EARL + mpirun

2.4.3.1 Intel MPI

When running EAR with `mpirun` rather than `srun`, we have to specify the utilization of `srun` as bootstrap. Version 2019 and newer offers two environment variables for bootstrap server specification and arguments.

```
export I_MPI_HYDRA_BOOTSTRAP=slurm
export I_MPI_HYDRA_BOOTSTRAP_EXEC_EXTRA_ARGS="--ear-policy=monitoring --ear-verbose=1"
mpiexec.hydra -n 10 application
```

2.4.3.2 OpenMPI

Bootstrap is an Intel(R) MPI option but not an OpenMPI option. For OpenMPI `srun` must be used for an automatic EAR support. In case OpenMPI with `mpirun` is needed, EAR offers the `erun` command, which is a program that simulates all the SLURM and EAR SLURM Plug-in pipeline. You can launch `erun` with the `--program` option to specify the application name and arguments.

```
mpirun -n 4 /path/to/erun --program="hostname --alias"
```

In this example, `mpirun` would run 4 `erun` processes. Then, `erun` will launch the application `hostname` with its alias parameter. You can use as many parameters as you want but the semicolons have to cover all of them in case there are more than just the program name.

`erun` will simulate on the remote node both the local and remote pipelines for all created processes. It has an internal system to avoid repeating functions that are executed just one time per job or node, like SLURM does with its plugins.

IMPORTANT NOTE If you are going to launch `n` applications with `erun` command through a `sbatch` job, you must set the environment variable `SLURM_STEP_ID` to values from 0 to `n-1` before each `mpirun` call. By this way `erun` will inform the EARD the correct step ID to be stored then to the Database.

2.5 EAR job Accounting (eacct)

The `eacct` command shows accounting information stored in the EAR DB for jobs (and steps) IDs. The command uses EAR's configuration file to determine if the user running it is privileged or not, as **non-privileged users can only access their information**. It provides the following options.

2.5.1 Usage examples

The basic usage of `eacct` retrieves the last 20 applications (by default) of the user executing it. If a user is **privileged**, they may see all users applications. The default behaviour shows data from each job-step, aggregating the values from each node in said job-step. If using SLURM as a job manager, a `sb` (sbatch) job-step is created with the data from the entire execution. A specific job may be specified with `-j` option.

```
[user@host EAR]$ eacct -j 175966
JOB-STEP USER APPLICATION POLICY NODES AVG/DEF/IMC (GHz) TIME (s) POWER (W) GBS CPI
ENERGY (J) GFLOPS/W IO (MBs) MPI% G-POW (T/U) G-FREQ G-UTIL (G/MEM)
175966-sb user afid NP 2 2.97/3.00/--- 3660.00 381.51 --- ---
2792619 --- --- --- ---
175966-2 user afid MO 2 2.97/3.00/2.39 1205.26 413.02 146.21 1.04
995590 0.1164 0.0 21.0 --- ---
175966-1 user afid MT 2 2.62/2.60/2.37 1234.41 369.90 142.63 1.02
913221 0.1265 0.0 19.7 --- ---
175966-0 user afid ME 2 2.71/3.00/2.19 1203.33 364.60 146.23 1.07
877479 0.1310 0.0 17.9 --- ---
```

The command shows a pre-selected set of columns, read `eacct`'s section on the [EAR commands page](#).

For node-specific information, the `-l` (i.e., long) option provides detailed accounting of each individual node↵: In addition, `eacct` shows an additional column: VPI (%) (See the example below). The VPI is meaning the percentage of AVX512 instructions over the total number of instructions.

```
[user@host EAR]$ eacct -j 175966 -l
JOB-STEP NODE ID USER ID APPLICATION AVG-F/IMC-F TIME (s) POWER (s) GBS CPI
ENERGY (J) IO (MBS) MPI% VPI (%) G-POW (T/U) G-FREQ G-UTIL (G/M)
175966-sb cmp2506 user afid 2.97/--- 3660.00 388.79 --- ---
1422970 --- --- --- ---
175966-sb cmp2507 user afid 2.97/--- 3660.00 374.22 --- ---
1369649 --- --- --- ---
175966-2 cmp2506 user afid 2.97/2.39 1205.27 423.81 146.06 1.03
510807 0.0 21.2 0.23 --- ---
175966-2 cmp2507 user afid 2.97/2.39 1205.26 402.22 146.35 1.05
484783 0.0 20.7 0.01 --- ---
175966-1 cmp2506 user afid 2.58/2.38 1234.46 374.14 142.51 1.02
461859 0.0 19.4 0.00 --- ---
175966-1 cmp2507 user afid 2.67/2.37 1234.35 365.67 142.75 1.03
451362 0.0 20.0 0.01 --- ---
175966-0 cmp2506 user afid 2.71/2.19 1203.32 371.76 146.25 1.08
447351 0.0 17.9 0.01 --- ---
175966-0 cmp2507 user afid 2.71/2.19 1203.35 357.44 146.21 1.05
430128 0.0 17.9 0.01 --- ---
```

If EARL was loaded during an application execution, runtime data (i.e., EAR loops) may be retrieved by using `-r` flag. You can still filter the output by Job (and Step) ID.

Finally, to easily transfer `eacct`'s output, `-c` option saves the requested data in CSV format. Both aggregated and detailed accountings are available, as well as filtering. When using along with `-l` or `-r` options, all metrics stored in the EAR Database are given. Please, read the [commands section page](#) to see which of them are available.

```
[user@host EAR]$ eacct -j 175966.1 -r
JOB-STEP NODE ID ITER. POWER (W) GBS CPI GFLOPS/W TIME (s) AVG_F IMC_F IO (MBS) MPI%
G-POWER (T/U) G-FREQ G-UTIL (G/MEM)
175966-1 cmp2506 21 360.6 115.8 0.838 0.086 1.001 2.58 2.30 0.0 11.6
0.0 / 0.0 0.00 0%/0%
175966-1 cmp2507 21 333.7 118.4 0.849 0.081 1.001 2.58 2.32 0.0 12.0
0.0 / 0.0 0.00 0%/0%
175966-1 cmp2506 31 388.6 142.3 1.010 0.121 1.113 2.58 2.38 0.0 19.7
0.0 / 0.0 0.00 0%/0%
175966-1 cmp2507 31 362.8 142.8 1.035 0.130 1.113 2.59 2.37 0.0 19.5
0.0 / 0.0 0.00 0%/0%
175966-1 cmp2506 41 383.3 143.2 1.034 0.124 1.114 2.58 2.38 0.0 19.6
0.0 / 0.0 0.00 0%/0%
```

[user@host EAR]\$ eacct -j 175966 -c test.csv
Successfully written applications to csv. Only applications with EARL will have its information properly written.

```
[user@host EAR]$ eacct -j 175966.1 -c -l test.csv
Successfully written applications to csv. Only applications with EARL will have its information properly written.
```

2.6 Job energy optimization: EARL policies

The core component of EAR at the user's job level is the EAR Library (EARL). The Library deals with job monitoring and is the component which implements and applies optimization policies based on monitored workload.

We highly recommend you to read [EARL](#) documentation and also how energy policies work in order to better understand what is doing the Library internally, so you will can explore easily all features (e.g., tuning variables, collecting data) EAR offers to the end-user so you will have more knowledge about how much resources your application consumes and how to correlate with its computational characteristics.

Chapter 3

EAR commands

EAR offers the following commands:

- Commands to analyze data stored in the DB: [eacct](#) and [ereport](#).
- Commands to control and temporally modify cluster settings: [econtrol](#).
- Commands to create/update/clean the DB: [edb_create](#), [edb_clean_pm](#) and [edb_clean_apps](#).
- A command to run OpenMPI applications with EAR on SLURM systems through `mpirun` command: [erun](#).
- A command to show current EAR installation information: [ear-info](#).

Commands belonging to the first three categories read the EAR configuration file (`ear.conf`) to determine whether the user is authorized, as some of them has some features (or the wall command) only available that set of users. Root is a special case, it doesn't need to be included in the list of authorized users. Some options are disabled when the user is not authorized.

NOTE EAR module must be loaded in your environment in order to use EAR commands.

3.1 EAR job Accounting (eacct)

The `eacct` command shows accounting information stored in the EAR DB for jobs (and step) IDs. The command uses EAR's configuration file to determine if the user running it is privileged or not, as **non-privileged users can only access their information**. It provides the following options.

```
Usage: eaacct [Optional parameters]
Optional parameters:
  -h displays this message
  -v displays current EAR version
  -b verbose mode for debugging purposes
  -u specifies the user whose applications will be retrieved. Only available to privileged users.
[default: all users]
  -j specifies the job id and step id to retrieve with the format [jobid.stepid] or the format
[jobid1,jobid2,...,jobid_n].
      A user can only retrieve its own jobs unless said user is privileged. [default: all jobs]
  -a specifies the application names that will be retrieved. [default: all app_ids]
  -c specifies the file where the output will be stored in CSV format. If the argument is "no_file"
the output will be printed to STDOUT [default: off]
  -t specifies the energy_tag of the jobs that will be retrieved. [default: all tags].
  -s specifies the minimum start time of the jobs that will be retrieved in YYYY-MM-DD. [default: no
filter].
  -e specifies the maximum end time of the jobs that will be retrieved in YYYY-MM-DD. [default: no
filter].
  -l shows the information for each node for each job instead of the global statistics for said job.
```

```

-x shows the last EAR events. Nodes, job ids, and step ids can be specified as if were showing job
information.
-m prints power signatures regardless of whether mpi signatures are available or not.
-r shows the EAR loop signatures. Nodes, job ids, and step ids can be specified as if were showing
job information.
-o modifies the -r option to also show the corresponding jobs. Should be used with -j.
-n specifies the number of jobs to be shown, starting from the most recent one. [default: 20][to
get all jobs use -n all]
-f specifies the file where the user-database can be found. If this option is used, the information
will be read from the file and not the database.

```

The basic usage of `eacct` retrieves the last 20 applications (by default) of the user executing it. If a user is **privileged**, they may see all users applications. The default behaviour shows data from each job-step, aggregating the values from each node in said job-step. If using SLURM as a job manager, a *sb* (sbatch) job-step is created with the data from the entire execution. A specific job may be specified with `-j` option.

Below table shows some examples of `eacct` usage.

Command line	Description
<code>eacct</code>	Shows last 20 jobs executed by the user.
<code>eacct -j <JobID></code>	Shows data of the job <JobID>, one row for each step of the job.
<code>eacct -j <JobID>.<StepID></code>	Shows data of the step <StepID> of job <JobID>.
<code>eacct -j <JobIDx>,<JobIDy>,<JobIDz></code>	Shows data of jobs (one row per step) <JobIDx>,<JobIDy> and <JobIDz>.

The command shows a pre-selected set of columns:

Column field	Description
JOB-STEP	JobID and StepID reported. JobID-*sb* is shown for the sbatch step in SLURM systems.
USER	The username of the user who executed the job.
APPLICATION	Job's name or executable name if job name is not provided.
POLICY	Energy optimization policy name. <i>MO</i> means for monitoring, <i>ME</i> for min_energy, <i>MT</i> for min_time and <i>NP</i> is the job ran without EARL.
NODES	Number of nodes involved in the job run.
AVG/DEF/IMC(GHz)	Average CPU frequency, default frequency and average uncore frequency. Includes all the nodes for the step. In GHz.
TIME(s)	Average step execution time along all nodes, in seconds.
POWER(W)	Average node power along all the nodes, in Watts.
GBS	CPU main memory bandwidth (GB/second). Hint for CPU/Memory bound classification.
CPI	CPU Cycles per Instruction. Hint for CPU/Memory bound classification.
ENERGY(J)	Accumulated node energy. Includes all the nodes. In Joules.
GFLOPS/W	CPU GFlops per Watt. Hint for energy efficiency. The metric uses the number of operations, not instructions.
IO(MBS)	I/O (read and write) Mega Bytes per second.
MPI%	Percentage of MPI time over the total execution time. It's the average including all the processes and nodes.

If EAR supports GPU monitoring/optimisation, the following columns are added:

Column field	Description
G-POW (T/U)	Average GPU power. Accumulated per node and average along involved nodes. <i>T</i> mean for total GPU power consumed (even the job is not using any or all of GPUs in one node). <i>U</i> means for only used GPUs on each node.
G-FREQ	Average GPU frequency. Per node and average of all the nodes.
G-UTIL(G/MEM)	GPU utilization and GPU memory utilization.

For node-specific information, the `-l` (i.e., long) option provides detailed accounting of each individual node. In addition, `eacct` shows an additional column: `VPI (%)`. The VPI is meaning the percentage of AVX512 instructions over the total number of instructions.

For runtime data (EAR loops) one may retrieve them with `-r`. Both Job and Step ID filtering works. To easily transfer command's output, `-c` option saves it in .csv format. Both aggregated and detailed accountings are available, as well as filtering:

Command line	Description
<code>eacct -j <JobID> -c test.csv</code>	Adds to the file <code>test.csv</code> all metrics shown above for each step if the job <code><JobID></code> .
<code>eacct -j <JobID>.<StepID> -l -c test.csv</code>	Appends to the file <code>test.csv</code> all metrics in the EAR DB for each node involved in step <code><StepID></code> of job <code><JobID></code> .
<code>eacct -j <JobID>.<StepID> -r -c test.csv</code>	Appends to the file <code>test.csv</code> all metrics in EAR DB for each loop of each node involved in step <code><StepID></code> of job <code><JobID></code> .

When requesting long format (i.e., `-l` option) or runtime metrics (i.e., `-r` option) to be stored in a CSV file (i.e., `-c` option), header names change from the output shown when you don't request CSV format. Below table shows header names of CSV file storing long information about jobs:

Field name	Description
NODENAME	The node name the row information belongs to.
JOBID	The JobID.
STEPID	The StepID. For the sbatch step, <code>SLURM_BATCH_SCRIPT</code> value is printed.
USERID	The username of the user who executed the job.
GROUPID	The group name of the user who executed the job.
JOBNAME	Job's name or executable name if job name is not provided.
USER_ACC	The account name of the user who executed the job.
ENERGY_TAG	The energy tag used if the user set one for its job step.
POLICY	Energy optimization policy name. <i>MO</i> means for monitoring, <i>ME</i> for min_energy, <i>MT</i> for min_time and <i>NP</i> is the job ran without EARL.
POLICY_TH	The policy threshold used by the optimization policy set with the job.
AVG_CPUFREQ_KHZ	Average CPU frequency of the job step executed in the node, expressed in kHz.
AVG_IMCFREQ_KHZ	Average uncore frequency of the job step executed in the node, expressed in kHz. Default data fabric frequency on AMD sockets.
DEF_FREQ_KHZ	default frequency of the job step executed in the node, expressed in kHz.
TIME_SEC	Execution time (in seconds) of the application in the node. As this is computed by EARL, <i>sbatch</i> step does not contain such info.
CPI	CPU Cycles per Instruction. Hint for CPU/Memory bound classification.
TPI	Memory transactions per Instruction. Hint for CPU/Memory bound classification.
MEM_GBS	CPU main memory bandwidth (GB/second). Hint for CPU/Memory bound classification.
IO_MBS	I/O (read and write) Mega Bytes per second.
PERC_MPI	Percentage of MPI time over the total execution time.
DC_NODE_POWER_W	Average node power, in Watts.
DRAM_POWER_W	Average DRAM power, in Watts. Not available on AMD sockets.
PCK_POWER_W	Average RAPL package power, in Watts.
CYCLES	Total number of cycles.
INSTRUCTIONS	Total number of instructions.
CPU-GFLOPS	CPU GFlops per Watt. Hint for energy efficiency. The metric uses the number of operations, not instructions.

Field name	Description
L1_MISSES	Total number of L1 cache misses.
L2_MISSES	Total number of L2 cache misses.
L3_MISSES	Total number of L3/LLC cache misses.
SPOPS_SINGLE	Total number of single precision 64 bit floating point operations.
SPOPS_128	Total number of single precision 128 bit floating point operations.
SPOPS_256	Total number of single precision 256 bit floating point operations.
SPOPS_512	Total number of single precision 512 bit floating point operations.
DPOPS_SINGLE	Total number of double precision 64 bit floating point operations.
DPOPS_128	Total number of double precision 128 bit floating point operations.
DPOPS_256	Total number of double precision 256 bit floating point operations.
DPOPS_512	Total number of double precision 512 floating point 512 operations.

If EAR supports GPU monitoring/optimisation, the following columns are added:

Field name	Description
GPU*x*_POWER_W	Average GPU*x* power, in Watts.
GPU*x*_FREQ_KHZ	Average GPU*x* frequency, in kHz.
GPU*x*_MEM_FREQ_KHZ	Average GPU*x* memory frequency, in kHz.
GPU*x*_UTIL_PERC	Average percentage of GPU*x* utilization.
GPU*x*_MEM_UTIL_PERC	Average percentage of GPU*x* memory utilization.

For runtime metrics (i.e., `-r` option), *USERID*, *GROUPID*, *JOBNAME*, *USER_ACC*, *ENERGY_TAG* (as energy tags disable EARL), *POLICY* and *POLICY_TH* are not stored at the CSV file. However, the iteration time (in seconds) is present on each loop as *ITER_TIME_SEC*, as well as a timestamp (i.e., *TIMESTAMP*) with the elapsed time in seconds since the EPOCH.

3.2 EAR system energy Report (ereport)

The ereport command creates reports from the energy accounting data from nodes stored in the EAR DB. It is intended to use for energy consumption analysis over a set period of time, with some additional (optional) criteria such as node name or username.

Usage: ereport [options]

Options are as follows:

```

-s start_time          indicates the start of the period from which the energy consumed will be
computed. Format: YYYY-MM-DD. Default: end_time minus insertion time*2.
-e end_time            indicates the end of the period from which the energy consumed will be
computed. Format: YYYY-MM-DD. Default: current time.
-n node_name |all      indicates from which node the energy will be computed. Default: none (all
nodes computed)
-u user_name |all      requests the energy consumed by a user in the selected period of time.
Default: none (all users computed).
-t energy_tag|all      requests the energy consumed by energy tag in the selected period of time.
Default: none (all tags computed).
-i eardbd_name|all     indicates from which eardbd (island) the energy will be computed. Default:
none (all islands computed)
-g                    shows the contents of EAR's database Global_energy table. The default
option will show the records for the two previous T2 periods of EARGM.
-x                    shows the daemon events from -s to -e. If no time frame is specified, it
shows the last 20 events.
-v                    shows current EAR version.
-h                    shows this message.

```


3.2.1 Examples

The following example uses the 'all' nodes option to display information for each node, as well as a start_time so it will give the accumulated energy from that moment until the current time.

```
[user@host EAR]$ ereport -n all -s 2018-09-18
Energy (J)      Node      Avg. Power (W)
20668697       node1      146
20305667       node2      144
20435720       node3      145
20050422       node4      142
20384664       node5      144
20432626       node6      145
18029624       node7      128
```

This example filters by EARDBD host (one per island typically) instead:

```
[user@host EAR]$ ereport -s 2019-05-19 -i all
Energy (J)      Node
9356791387     island1
30475201705     island2
37814151095     island3
28573716711     island4
29700149501     island5
26342209716     island6
```

And to see the state of the cluster's energy budget (set by the sysadmin) you can use the following:

```
[user@host EAR]$ ereport -g
Energy%  Warning lvl      Timestamp      INC th      p_state      ENERGY T1      ENERGY T2      TIME T1
TIME T2      LIMIT      POLICY
111.486      100  2019-05-22 10:31:34      0           100           893           1011400          907200
600          604800 EnergyBudget
111.492      100  2019-05-22 10:21:34      0           100           859           1011456          907200
600          604800 EnergyBudget
111.501      100  2019-05-22 10:11:34      0           100           862           1011533          907200
600          604800 EnergyBudget
111.514      100  2019-05-22 10:01:34      0           100           842           1011658          907200
600          604800 EnergyBudget
111.532      100  2019-05-22 09:51:34      0           100           828           1011817          907200
600          604800 EnergyBudget
111.554      0    2019-05-22 09:41:34      0           0            837           1012019          907200
600          604800 EnergyBudget
```

3.2.2 EAR Control (econtrol)

The `econtrol` command modifies cluster settings (temporally) related to power policy settings. These options are sent to all the nodes in the cluster.

NOTE Any changes done with `econtrol` will not be reflected in `ear.conf` and thus will be lost when reloading the system.

```
Usage: econtrol [options]
--status                                ->requests the current status for all nodes. The ones
responding show the current                                     power, IP address and policy configuration. A list
with the ones not                                              responding is provided with their hostnames and IP
address.                                                         --status=node_name retrieves the status of that node
individually.
--type [status_type]      ->specifies what type of status will be requested: hardware,
policy, full (hardware+policy), app_node,
app_master, eardbd, eargm or power. [default:hardware]
--power                    ->requests the current power for the cluster.
--power=node_name retrieves the current power of
that node individually.
--set-freq [newfreq]      ->sets the frequency of all nodes to the requested one
--set-def-freq [newfreq] [pol_name] ->sets the default frequency for the selected policy
--set-max-freq [newfreq] ->sets the maximum frequency
--set-powercap [new_cap] ->sets the powercap of all nodes to the given value. A node
can be specified after the value to only target said node.
--hosts [hostlist]       ->sends the command only to the specified hosts. Only works
with status, power_status, --power and --set-powercap
--restore-conf            ->restores the configuration for all nodes
```

```

--active-only          ->supresses inactive nodes from the output in hardware
status.
--health-check        ->checks all EARDs and EARDBDs for errors and prints all
that are unresponsive.
--mail [address]      ->sends the output of the program to address.
--ping                ->pings all nodes to check whether the nodes are up or not.
Additionally,
--ping=node_name      --ping=node_name pings that node individually.
--version             ->displays current EAR version.
--help                ->displays this message.

```

`econtrol`'s status is a useful tool to monitor the nodes in a cluster. The most basic usage is the hardware status (default type) which shows basic information of all the nodes.

```

[user@login]$ econtrol --status
hostname    power    temp    freq    job_id  stepid
node2       278     66C    2.59    6878    0
node3       274     57C    2.59    6878    0
node4       52      31C    1.69     0      0

```

```

INACTIVE NODES
node1 192.0.0.1

```

The application status type can be used to retrieve all currently running jobs in the cluster. `app_master` gives a summary of all the running applications while `app_node` gives detailed information of each node currently running a job.

```

[user@login]$ econtrol --status --type=app_master
Job-Step    Nodes    DC power    CPI    GBS    Gflops    Time Avg Freq
6878-0       2      280.13     0.37    24.39   137.57    54.00    2.59

[user@login]$ econtrol --status --type=app_node
Node id     Job-Step    M-Rank    DC power    CPI    GBS    Gflops    Time Avg Freq
node2       6878-0       0      280.13     0.37    24.39   137.57    56.00    2.59
node3       6878-0       1      245.44     0.37    24.29   136.40    56.00    2.59

```

3.3 Database commands

3.3.1 edb_create

Creates the EAR DB used for accounting and for the global energy control. Requires root access to the MySQL server. It reads the `ear.conf` to get connection details (server IP and port), DB name (which may or may not have been previously created) and EAR's default users (which will be created or altered to have the necessary privileges on EAR's database).

```

Usage:edb_create [options]
-p          Specify the password for MySQL's root user.
-o          Outputs the commands that would run.
-r          Runs the program. If '-o' this option will be override.
-h          Shows this message.

```

3.3.2 edb_clean_pm

Cleans periodic metrics from the database. Used to reduce the size of EAR's database, it will remove every `Periodic_metrics` entry older than `num_days`:

```

Usage:./src/commands/edb_clean_pm [options]
-d num_days    REQUIRED: Specify how many days will be kept in database. (default: 0 days).
-p            Specify the password for MySQL's root user.
-o            Print the query instead of running it (default: off).
-r            Execute the query (default: on).
-h            Display this message.
-v            Show current EAR version.

```

3.3.3 edb_clean_apps

Removes applications from the database. It is intended to remove old applications to speed up queries and free up space. It can also be used to remove specific applications from database. It removes ALL the information related to those jobs (the following tables will be modified for each job: Loops, if they exist; GPU_signatures, if they exist; Signatures, if they exist; Power signatures, Applications, and Jobs).

It is recommended to run the application with the `-o` option first to ensure that the queries that will be executed are correct.

```
Usage:edb_clean_apps [-j/-d] [options]
  -p      The program will request the database user's password.
  -u user  Database user to execute the operation (it needs DELETE privileges). [default: root]
  -j jobid.stepid Job id and step id to delete. If no step_id is introduced, every step within the job
           will be deleted
  -d ndays Days to preserve. It will delete any jobs older than ndays.
  -o      Prints out the queries that would be executed. Exclusive with -r. [default:on]
  -r      Runs the queries that would be executed. Exclusive with -o. [default:off]
  -l      Deletes Loops and its Signatures. [default:off]
  -a      Deletes Applications and related tables. [default:off]
  -h      Displays this message
```

3.4 erun

`erun` is a program that simulates all the SLURM and EAR SLURM Plug-in pipeline. It was designed to provide compatibility between MPI implementations not fully compatible with SLURM SPANK plug-in mechanism (e.g., OpenMPI), which is used to set up EAR at job submission. You can launch `erun` with the `--program` option to specify the application name and arguments. See the usage below:

```
> erun --help
```

This is the list of ERUN parameters:

```
Usage: ./erun [OPTIONS]
```

Options:

```
--job-id=<arg>  Set the JOB_ID.
--nodes=<arg>    Sets the number of nodes.
--program=<arg> Sets the program to run.
--clean         Removes the internal files.
```

SLURM options:

```
...
```

The syntax to run an MPI application with `erun` has the form `'mpirun -n <X> erun --program='my_app arg1 arg2 .. argN'`. Therefore, `mpirun` will run `*X*` `erun` processes. Then, `erun` will launch the application `my_app` with the arguments passed, if specified. You can use as many parameters as you want but the semicolons have to cover all of them in case there are more than just the program name.

`erun` will simulate on the remote node both the local and remote pipelines for all created processes. It has an internal system to avoid repeating functions that are executed just one time per job or node, like SLURM does with its plugins.

IMPORTANT NOTE If you are going to launch `n` applications with `erun` command through a sbatch job, you must set the environment variable `SLURM_STEP_ID` to values from 0 to `n-1` before each `mpirun` call. By this way `erun` will inform the EARD the correct step ID to be stored then to the Database.

The `--job-id` and `--nodes` parameters create the environment variables that SLURM would have created automatically, because it is possible that your application make use of them. The `--clean` option removes the temporal files created to synchronize all ERUN processes.

Also you have to load the EAR environment module or define its environment variables in your environment or script:

Variable	Parameter
EAR_INSTALL_PATH=<path>	prefix=<path>
EAR_TMP=<path>	localstatedir=<path>
EAR_ETC=<path>	sysconfdir=<path>
EAR_DEFAULT=<on/off>	default=<on/off>

3.5 ear-info

`ear-info` is a tool created to quickly view useful information about the current EAR installation of the system. It shows relevant details for both users and administrators, such as configuration defaults, installation paths, etc.

```
[user@hostname ~]$ ear-info -h
Usage: ear-info [options]
        --node-conf[=nodename]
        --help
```

The tool prints out information without giving it any argument. It shows a resume about EAR parameters set at compile time, as well as some installation dependent configuration:

- The current EAR version.
- The maximum number of CPUs/processors supported.
- The maximum number of sockets supported.
- Whether the current installation provides support for GPUs.
- The default optimization policy.
- Whether the EAR Library is enabled by default on job submission.
- Information about EAR's Uncore Frequency Scaling policy (eUFS) configuration.
- EAR's dynamic load balancing policy.
- EAR's application phase classification.
- EAR's MPI stats collection feature.
- EAR data reporting mechanism configuration.

Below there is an example of the output:

```
EAR version 4.3
Max CPUS supported set to 256
Max sockets supported set to 4
EAR installed with GPU support MAX_GPUS 8
Default cluster policy is monitoring
EAR optimization by default set to 0

Environment configuration section.....
        eUFS 1
        eUFS limit 0.02
        Load balanced enabled 1
        Load Balance th 0.80
        Use turbo for critical path 1
        Use turbo 0
        Exclusive mode 0
        Use EARL phases 1
        Use energy models 1
        Max IMC frequency (0 = not defined) 0
        Min IMC frequency (0 = not defined) 0
        GPU frequency/pstate (0 = max GPU freq) 0
        MPI optimization 0
        MPI statistics 0
        App. Tracer no trace
        App. Extra report plugins no extra plugins
        App. reporting loops to EARD 1
.....

HACK section.....
        Install path /hpc/base/ctt/packages/EAR/ear
        Energy optimization policy
        GPU power policy
        /hpc/base/ctt/packages/EAR/ear/lib/plugins/policies/gpu_monitoring.so
        CPU power model
        /hpc/base/ctt/packages/EAR/ear/lib/plugins/policies/gpu_monitoring.so
        CPU shared power model
        /hpc/base/ctt/packages/EAR/ear/lib/plugins/models/cpu_power_model_default.so
.....
```

EAR was designed to be installed on heterogeneous systems, so there are some configuration parameters that are applied to a set of nodes identified by different tags. The `--node-conf` flag can be used to request additional information about a specific node. Configuration related to EAR's power capping sub-system, default optimization policies configuration and other parameters associated with the node requested are retrieved. You can read the [EAR configuration section](#) for more details about how EAR uses tags to identify and configure different kind of nodes on a given heterogeneous system.

Contact with ear-support@bsc.es for more information about the nomenclature used by `ear-info`'s output.

Chapter 4

Environment variables

EAR offers some environment variables in order to provide users the opportunity to tune or request some of EAR features. They must be exported before the job submission, e.g., in the batch script.

The current EAR version has support for **SLURM**, **PBS** and **OAR** batch schedulers. In SLURM systems the scheduler may filter environment variables not prefixed with *SLURM_* character set (this happens when the batch script is submitted purging all environment variables to work in a clean environment). For that reason, the first design of EAR environment variables was to have variable names with the form *SLURM_<variable_name>*.

Now that EAR has support for other batch schedulers, and in order to maintain the coherency of environment variables names, below environment variables need the prefix of the scheduler used on the system the job is submitted on, plus an underscore. For example, in SLURM systems, the environment variable presented as *EAR_LOADER_APPLICATION* must be exported as *SLURM_EAR_LOADER_APPLICATION* in the submission batch script. In an OAR installed system, this variable would be exported as *OAR_EAR_LOADER_APPLICATION*. This design may only have a real effect on SLURM systems, but it makes it easier for the development team to provide support for multiple batch schedulers.

All examples showing the usage of below environment variables assume a system using SLURM.

4.1 Loading EAR Library

4.1.1 EAR_LOADER_APPLICATION

Rules the EAR Loader to load the EAR Library for a specific application that does not follow any of the current programming models (or maybe a sequential app) supported by EAR. Your system must have installed the non-MPI version of the Library (ask your system administrator).

The value of the environment variable must coincide with the job name of the application you want to launch with EAR. If you don't provide it, the EAR Loader will compare it against the executable name. For example:

```
#!/bin/bash
export SLURM_EAR_LOADER_APPLICATION=my_job_name
srun --ntasks 1 --job-name=my_job_name ./my_exec_file
```

See the [Use cases](#) section to read more information about how to run jobs with EAR.

4.1.2 EAR_LOAD_MPI_VERSION

Forces to load a specific MPI version of the EAR Library. This is needed, for example, when you want to load the EAR Library for Python + MPI applications, where the Loader is not able to detect the MPI implementation the application is going to use. Accepted values are either *intel* or *open mpi*. The following example runs Tensorflow 1 benchmarks for several convolutional neural networks with EAR. It can be downloaded from Tensorflow benchmarks repository.

```
#!/bin/bash

#SBATCH --job-name=TensorFlow
#SBATCH -N 8
#SBATCH --ntasks-per-node=4
#SBATCH --cpus-per-task=18

# Specific modules here
# ...

export SLURM_EAR_LOAD_MPI_VERSION="open mpi"

srun --ear-policy=min_time \
    python benchmarks/scripts/tf_cnn_benchmarks/tf_cnn_benchmarks.py \
    ... more application options
```

See the [Use cases](#) section to read more information about how to run jobs with EAR.

4.2 Report plug-ins

4.2.1 EAR_REPORT_ADD

Specify a report plug-in to be loaded. The value must be a shared object file, and it must be located at `$EAR_↵INSTALL_PATH/lib/plugins/report` or at the path from where the job was launched. Alternatively, you can provide the full path (absolute or relative) of the report plug-in.

```
#!/bin/bash

export SLURM_EAR_REPORT_ADD=my_report_plugin.so

srun -n 10 my_mpi_app
```

4.3 Verbosity

4.3.1 EARL_VERBOSE_PATH

Specify a path to create a file (one per node involved in a job) where to print messages from the EAR Library. This is useful when you run a job in multiple nodes, as EAR verbose information for each of them can result in lots of messages mixed at stderr (EAR messages default channel). Also, there are applications that print information in both stdout and stderr, so maybe a user wants to have information separated.

If the path does not exist, EAR will create it. The format of generated files names is `earl_log.<node_↵rank>.<local_rank>.<job_step>.<job_id>`, where the *node_rank* is an integer set by EAR from 0 to *n_nodes - 1* involved in the job, and it indicates to which node the information belongs to. The local rank is an arbitrary rank set by EAR of a process in the node (from 0 to *n_processes_in_node - 1*). It indicates which process is printing messages to the files, and it will be always the first one indexed, i.e., 0. Finally, the *job_step* and *job_id* are fields showing information about the job corresponding to the execution from where messages were generated.

```
#!/bin/bash

#SBATCH -j my_job_name
#SBATCH -N 2
#SBATCH -n 96

export SLURM_EARL_VERBOSE_PATH=ear_logs_dir_name
```



```
export I_MPI_HYDRA_BOOTSTRAP=slurm
export I_MPI_HYDRA_BOOTSTRAP_EXEC_EXTRA_ARGS="--ear-verbose=1"

mpirun -np 96 -ppn 48 my_app
```

After the above job example completion, in the same directory where the application was submitted, there will be a directory called *ear_logs_dir_name* with two files, i.e., one for each node, called *ear_logs.0.0.<job_step>.<job_id>* and *ear_logs.1.0.<job_step>.<job_id>*, respectively.

4.4 Frequency management

4.4.1 EAR_GPU_DEF_FREQ

Set a GPU frequency (in kHz) to be fixed while your job is running. The same frequency is set for all GPUs used by the job.

```
#!/bin/bash

#SBATCH -J gromacs-cuda
#SBATCH -N 1

export I_MPI_PIN=1
export I_MPI_PMI_LIBRARY=/usr/lib64/libpmi2.so

input_path=/hpc/appl/biology/GROMACS/examples
input_file=ion_channel.tpr
GROMACS_INPUT=$input_path/$input_file

export SLURM_EAR_GPU_DEF_FREQ=1440000

srun --cpu-bind=core --ear-policy=min_energy gmx_mpi mdrun \
    -s $GROMACS_INPUT -noconfout -ntomp 1
```

4.4.2 EAR_JOB_EXCLUSIVE_MODE

Indicate whether the job will run in a node exclusively (non-zero value). EAR will reduce the CPU frequency of those cores not used by the job. This feature explodes a very easy vector of power saving.

```
#!/bin/bash
#SBATCH -N 1
#SBATCH -n 64
#SBATCH --cpus-per-task=2
#SBATCH --exclusive

export SLURM_EAR_JOB_EXCLUSIVE_MODE=1

srun -n 10 --ear=on ./mpi_mpi_app
```

4.4.3 Controlling Uncore/Infinity Fabric frequency

EARL offers the possibility to control the Integrated Memory Controller (IMC) for Intel(R) architectures and Infinity Fabric (IF) for AMD architectures. On this page we will use the term *uncore* to refer both of them. Environment variables related to uncore control covers [policy specific settings](#) or the chance for a user to [fix it](#) during an entire job.

4.4.3.1 EAR_SET_IMCFREQ

Enables/disables EAR's [eUFS](publications) feature. Type `ear-info` to see whether eUFS is enabled by default.

You can control eUFS' maximum permitted time penalty by exporting `EAR_POLICY_IMC_TH`, which is a float indicating the threshold value that prevents the policy to reduce so much the uncore frequency, possibly leading to considerable performance penalty.

Below example enables eUFS with a penalty threshold of 3.5%:

```
#!/bin/bash
...

export SLURM_EAR_SET_IMCFREQ=1
export SLURM_EAR_POLICY_IMC_TH=0.035
...

srun [...] my_app
```

4.4.3.2 EAR_MAX_IMCFREQ and EAR_MIN_IMCFREQ

Set the maximum and minimum values (in kHz) at which *uncore* frequency should be. Two variables were designed because Intel(R) architectures let to set a range of frequencies that limits its internal UFS mechanism. If you set both variables with different values, the minimum one will be set.

Below example shows a job execution fixing the uncore frequency at 2.0GHz:

```
#!/bin/bash
...

export SLURM_EAR_MAX_IMCFREQ=2000000
export SLURM_EAR_MIN_IMCFREQ=2000000
...

srun [...] my_app
```

4.4.4 Load Balancing

By default, EAR policies try to set the best CPU (and uncore, if [enabled](#)) frequency according to node grain metrics. This behaviour can be changed telling EAR to detect and deal with unbalanced workloads, i.e., there is no equity between processes regarding their MPI/computational activity.

When EAR detects such behaviour, policies slightly modify its way of CPU frequency selection by setting a different frequency for each process' cores according how far it is from the critical path. Please, contact with ear-support@bsc.es if you want more details about how it works.

A correct CPU binding it's required to get the most benefit of this feature. Check the documentation of your application programming model/vendor/flavour or your system batch scheduler.

4.4.4.1 EAR_LOAD_BALANCE

Enables/Disables EAR's Load Balance strategy in energy policies. Type `ear-info` to see whether this feature is enabled by default.

Load unbalance detection algorithm is based on [POP-CoE](#)'s Load Balance Efficiency metric, which is computed as the ratio between average useful computation time (across all processes) and maximum useful computation time (also across all processes). By default (if `EAR_LOAD_BALANCE` is enabled), a node load balance efficiency below **0.8** will trigger EAR's Load Balancing algorithm. This threshold value can be modified by setting `EAR_LOAD_BALANCE_TH` environment variable. For example, if you want to be more permissive with the application load balance and prevent per-process CPU frequency selection, you can increase the load balance threshold:

```
#!/bin/bash
...

export SLURM_EAR_LOAD_BALANCE=1
export SLURM_EAR_LOAD_BALANCE_TH=0.89
...

srun [...] my_app
```

4.4.5 Support for Intel(R) Speed Select Technology

Since version 4.2, EAR supports the interaction with [Intel\(R\) Speed Select Technology \(Intel\(R\) SST\)](#) which lets the user to have more fine grained control over per-CPU Turbo frequency. This feature opens a door to users for getting more control over the performance (also power consumption) across CPUs running their applications and jobs. It is available on selected SKUs of Intel(R) Xeon(R) Scalable processors. For more information about Intel(R) SST, below are listed useful links to official documentation:

- [Intel\(R\) SST-CP](#)
- [Intel\(R\) SST-TF](#)
- [The Linux Kernel: Intel\(R\) Speed Select Technology User Guide](#)

EAR offers two environment variables that let to specify a list of priorities (CLOS) in two different ways. The [first one](#) will set a CLOS for each task involved in the job. On the other hand, the [second offered variable](#) will set a list of priorities per CPU involved in the job. Values must be within the range of available CLOS that Intel(R) SST provides you.

If some of the two supported environment variables are set, EAR will set-up all of its internals transparently if the architecture supports it. Also, it will restore configuration on the job ending. If Intel(R) SST is not supported, no effect will occur. If you enable [EARL verbosity](#) you will see the mapping of the CLOS set for each CPU in the node. Note that a -1 value means that no change was done on the specific CPU.

4.4.5.1 EAR_PRIO_TASKS

A list that specifies the CLOS that CPUs assigned to tasks must be set. This variable is useful because you can configure your application transparently without concerning about the affinity mask that the scheduler is assigning to your tasks. You can use this variable when you know (or guess) your application's tasks workload and you want to tune it by setting manually different Turbo priorities. Note that you still need to ensure that different tasks do not share CPUs.

For example, imagine you want to submit a job that runs a MPI application with 16 tasks, each one pinned on a single core, in a two-socket Intel(R) Xeon(R) Platinum 8352Y with 32 cores each, with Hyper-threading enabled, i.e., each task will run on two CPUs and 32 of the total 128 will be allocated by this application. Below could be a (simplified) batch script that submits this example:

```
#!/bin/bash

export SLURM_EAR_PRIO_TASKS=0,0,0,0,1,1,1,1,2,2,2,2,3,3,3,3

srun --ntasks=16 --cpu-bind=core,verbose --ear-policy=monitoring --ear-cpufreq=2201000 --ear-verbose=1
    bin/bt.C.x
```

The above script sets CLOS 0 to tasks 0 to 3, CLOS 1 to tasks 4 to 7, CLOS 2 to tasks 8 to 11 and CLOS 3 to tasks 12 to 15. The `srun` command binds each task to one core (through `--cpu-bind` flag), sets the turbo frequency and enables EAR verbosity. Below there is the output message shown by the batch scheduler (i.e., SLURM):

```
cpu-bind=MASK - ice2745, task 0 0 [23363]: mask 0x10000000000000001 set
cpu-bind=MASK - ice2745, task 1 1 [23364]: mask 0x1000000000000000100000000 set
cpu-bind=MASK - ice2745, task 2 2 [23365]: mask 0x200000000000000002 set
cpu-bind=MASK - ice2745, task 3 3 [23366]: mask 0x2000000000000000200000000 set
cpu-bind=MASK - ice2745, task 4 4 [23367]: mask 0x400000000000000004 set
cpu-bind=MASK - ice2745, task 5 5 [23368]: mask 0x4000000000000000400000000 set
cpu-bind=MASK - ice2745, task 6 6 [23369]: mask 0x800000000000000008 set
cpu-bind=MASK - ice2745, task 7 7 [23370]: mask 0x8000000000000000800000000 set
cpu-bind=MASK - ice2745, task 8 8 [23371]: mask 0x100000000000000010 set
cpu-bind=MASK - ice2745, task 9 9 [23372]: mask 0x10000000000000001000000000 set
cpu-bind=MASK - ice2745, task 10 10 [23373]: mask 0x200000000000000020 set
cpu-bind=MASK - ice2745, task 11 11 [23374]: mask 0x20000000000000002000000000 set
cpu-bind=MASK - ice2745, task 12 12 [23375]: mask 0x400000000000000040 set
cpu-bind=MASK - ice2745, task 13 13 [23376]: mask 0x40000000000000004000000000 set
cpu-bind=MASK - ice2745, task 14 14 [23377]: mask 0x800000000000000080 set
cpu-bind=MASK - ice2745, task 15 15 [23378]: mask 0x80000000000000008000000000 set
```

We can see here that SLURM spreaded out tasks accross the two sockets of the node, e.g., task 0 runs on CPUs 0 and 64, task 1 runs on CPUs 32 and 96. Below output shows how EAR sets and verboses CLOS list per CPU in the node. Following the same example, you can see that CPUs 0, 64, 32 and 96 have priority/CLOS 0. Note that those CPUs not involved in the job show a -1.

```
Setting user-provided CPU priorities...
PRIO0: MAX GHZ - 0.0 GHZ (high)
PRIO1: MAX GHZ - 0.0 GHZ (high)
PRIO2: MAX GHZ - 0.0 GHZ (low)
PRIO3: MAX GHZ - 0.0 GHZ (low)
[000, 0] [001, 0] [002, 1] [003, 1] [004, 2] [005, 2] [006, 3] [007, 3]
[008,-1] [009,-1] [010,-1] [011,-1] [012,-1] [013,-1] [014,-1] [015,-1]
[016,-1] [017,-1] [018,-1] [019,-1] [020,-1] [021,-1] [022,-1] [023,-1]
[024,-1] [025,-1] [026,-1] [027,-1] [028,-1] [029,-1] [030,-1] [031,-1]
[032, 0] [033, 0] [034, 1] [035, 1] [036, 2] [037, 2] [038, 3] [039, 3]
[040,-1] [041,-1] [042,-1] [043,-1] [044,-1] [045,-1] [046,-1] [047,-1]
[048,-1] [049,-1] [050,-1] [051,-1] [052,-1] [053,-1] [054,-1] [055,-1]
[056,-1] [057,-1] [058,-1] [059,-1] [060,-1] [061,-1] [062,-1] [063,-1]
[064, 0] [065, 0] [066, 1] [067, 1] [068, 2] [069, 2] [070, 3] [071, 3]
[072,-1] [073,-1] [074,-1] [075,-1] [076,-1] [077,-1] [078,-1] [079,-1]
[080,-1] [081,-1] [082,-1] [083,-1] [084,-1] [085,-1] [086,-1] [087,-1]
[088,-1] [089,-1] [090,-1] [091,-1] [092,-1] [093,-1] [094,-1] [095,-1]
[096, 0] [097, 0] [098, 1] [099, 1] [100, 2] [101, 2] [102, 3] [103, 3]
[104,-1] [105,-1] [106,-1] [107,-1] [108,-1] [109,-1] [110,-1] [111,-1]
[112,-1] [113,-1] [114,-1] [115,-1] [116,-1] [117,-1] [118,-1] [119,-1]
[120,-1] [121,-1] [122,-1] [123,-1] [124,-1] [125,-1] [126,-1] [127,-1]
```

4.4.5.2 EAR_PRIO_CPUS

A list of priorities that should have the same length as the number of CPUs your job is using. This configuration lets to set up CPUs CLOS in a more low level way: **the n -th priority value of the list will set the priority of the n -th CPU your job is using.**

This way of configuring priorities rules the user to know exactly the affinity of its job's tasks before launching the application, so it becomes harder to use if your goal is the same as the one you can get by setting the [above environment variable](#): task-focused CLOS setting. But it becomes more flexible when the user has more control over the affinity set to its application, because you can discriminate between different CPUs assigned to the same task. Moreover, this is the only way to set different priorities over different threads in no-MPI applications.

4.4.6 EAR_MIN_CPUFREQ

This variable can only be set by **authorized users**, and modifies the minimum CPU frequency the EAR Library can set. The [EAR configuration](Configuration) file has a field called `cpu_max_pstate` which sets this limits on the tag it is configured. Authorized users can modify this limit at submission time by using this environment to test, for example, the best value for the `ear.conf` field.

4.4.7 Disabling EAR's affinity masks usage

For both [Load Balancing](load-balancing) and [Intel\(R\) SST](#) support, EAR uses processes' affinity mask read at the beginning of the job. If you are working on an application that changes (or may change) the affinity mask of tasks, this can lead some miss configuration not detected by EAR. To avoid any unexpected problem, **we highly recommend you to export `EAR_NO_AFFINITY_MASK` environment variable even you are not planning to work with some of the mentioned features.**

4.5 Data gathering

4.5.1 EAR_GET_MPI_STATS

Use this variable to generate two files at the end of the job execution that will contain global, per process MPI information. You must specify the prefix (optionally with a path) of the filename. One file (*[path]/prefix.ear_mpi_stats.full_nodename.csv*) will contain a resume about MPI throughput (per-process), while the other one (*[path]/prefix.ear_mpi_calls_stats.full_nodename.csv*) will contain a more fine grained information about different MPI call types. Here is an example:

```
#!/bin/bash

#SBATCH -j mpi_job_name
#SBATCH -n 48

MPI_INFO_DST=$SLURM_JOBID-mpi_stats
mkdir $MPI_INFO_DST

export SLURM_EAR_GET_MPI_STATS=$MPI_INFO_DST/$SLURM_JOB_NAME

srun -n 48 --ear=on ./mpi_app
```

At the end of the job, two files will be created at the directory named `\<job_id\>-mpi_stats` located in the same directory where the application was submitted. They will be named *mpi_job_name.ear_mpi_stats.full_nodename.csv* and *mpi_job_name.ear_mpi_calls_stats.full_nodename.csv*. File pairs will be created for each node involved in the job.

Take into account that each process appends its own MPI statistics to files. This behavior does not guarantee that the header of files will be on the first line of them, as only one process writes it. You must move it at the top of each file manually before reading them with some tool you use to visualize and work with CSV files, e.g., spreadsheet, a R or Python package.

Below table shows fields available by **ear_mpi_stats** file:

Field	Description
mrnk	The EAR's internal node ID used to identify the node.
lrnk	The EAR's internal rank ID used to identify the process.
total_mpi_calls	The total number of MPI calls.
exec_time	The execution time, in microseconds.
mpi_time	The time spent in MPI calls, in microseconds.
perc_mpi_time	The percentage of total execution time (i.e., <i>exec_time</i>) spent in MPI calls.

Below table shows fields available by **ear_mpi_calls_stats** file:

Field	Description
Master	The EAR's internal node ID used to identify the node.
Rank	The EAR's internal rank ID used to identify the process.
Total MPI calls	The total number of MPI calls.
MPI_time/Exec_time	The ration between time spent in MPI calls and the total execution time.
Exec_time	The execution time, in microseconds.
Sync_time	Time spent (in microseconds) in blocking synchronization calls, i.e., MPI_Wait, MPI_Waitall, MPI_Waitany, MPI_Waitsome and MPI_Barrier.
Block_time	Time spent in blocking calls, i.e., MPI_Allgather, MPI_Allgatherv, MPI_Allreduce, MPI_Alltoall, MPI_Alltoallv, MPI_Barrier, MPI_Bcast, MPI_Bsend, MPI_Cart_create, MPI_Gather, MPI_Gatherv, MPI_Recv, MPI_Reduce, MPI_Reduce_scatter, MPI_Rsend, MPI_Scan, MPI_Scatter, MPI_Scatterv, MPI_Send, MPI_Sendrecv, MPI_Sendrecv_replace, MPI_Ssend and all <i>Wait</i> calls of Sync_time field.

Field	Description
Collec_time	Time spent in blocking collective calls, i.e., MPI_Allreduce, MPI_Reduce and MPI_↵ Reduce_scatter.
Total MPI sync calls	Total number of synchronization calls.
Total blocking calls	Total number of blocking calls.
Total collective calls	Total number of collective calls.
Gather	Total number of blocking Gather calls, i.e., MPI_Allgather, MPI_Allgatherv, MPI_Gather and MPI_Gatherv.
Reduce	Total number of blocking Reduce calls, i.e., MPI_Allreduce, MPI_Reduce and MPI_↵ Reduce_scatter.
All2all	Total number of blocking All2all calls, i.e., MPI_Alltoall and MPI_Alltoallv.
Barrier	Total number of blocking Barrier calls, i.e., MPI_Barrier.
Bcast	Total number of blocking Bcast calls, i.e., MPI_Bcast.
Send	Total number of blocking Send calls, i.e., MPI_Bsend, MPI_Rsend, MPI_Send and MPI_Ssend.
Comm	Total number of blocking Comm calls, i.e., MPI_Cart_create.
Receive	Total number of blocking Receive calls, i.e., MPI_Recv.
Scan	Total number of blocking Scan calls, i.e., MPI_Scan.
Scatter	Total number of blocking Scatter calls, i.e., MPI_Scatter and MPI_Scatterv.
SendRecv	Total number of blocking SendRecv calls, i.e., MPI_Sendrecv, MPI_Sendrecv_replace.
Wait	Total number of blocking Wait calls, i.e., all MPI_Wait calls.
t_Gather	Time (in microseconds) spent in blocking Gather calls.
t_Reduce	Time (in microseconds) spent in blocking Reduce calls.
t_All2all	Time (in microseconds) spent in blocking All2all calls.
t_Barrier	Time (in microseconds) spent in blocking Barrier calls.
t_Bcast	Time (in microseconds) spent in blocking Bcast calls.
t_Send	Time (in microseconds) spent in blocking Send calls.
t_Comm	Time (in microseconds) spent in blocking Comm calls.
t_Receive	Time (in microseconds) spent in blocking Receive calls.
t_Scan	Time (in microseconds) spent in blocking Scan calls.
t_Scatter	Time (in microseconds) spent in blocking Scatter calls.
t_SendRecv	Time (in microseconds) spent in blocking SendRecv calls.
t_Wait	Time (in microseconds) spent in blocking Wait calls.

4.5.2 EAR_TRACE_PLUGIN

EAR offers the chance to generate Paraver traces to visualize runtime metrics with the [Paraver tool](#). Paraver is a visualization tool developed by CEPBA-Tools team and currently maintained by the Barcelona Supercomputing Center's tools team.

The EAR trace generation mechanism was designed to support different trace generation plug-ins although the Paraver trace plug-in is the only supported by now. You must set the value of this variable to `tracer_paraver.so` to load the tracer. This shared object comes with the official EAR distribution and it is located at `$EAR_INSTALL_↵_PATH/lib/plugins/tracer`. Then you need to set the `EAR_TRACE_PATH` variable (see below) to specify the destination path of the generated Paraver traces.

4.5.3 EAR_TRACE_PATH

Specify the path where you want to store the trace files generated by the EAR Library. The path must be fully created. Otherwise, the Paraver tracer plug-in won't be loaded.

Here is an example of the usage of the above explained environment variables:

```
#!/bin/bash
...

export SLURM_EAR_TRACE_PLUGIN=tracer_paraver.so
export SLURM_EAR_TRACE_PATH=$(pwd)/traces
mkdir -p $SLURM_EAR_TRACE_PATH

srun -n 10 --ear=on ./mpi_app
```

4.5.4 REPORT_EARL_EVENTS

Use this variable (i.e., `export SLURM_REPORT_EARL_EVENTS=1`) to make EARL send internal events to the [Database](EAR-Database). These events are useful to have more information about Library's behaviour, like when DynAIS ****(REFERENCE DYN AIS)**** is turned off, the computational phase EAR is guessing the application is on or the status of the applied policy ****(REF POLICIES)****. You can query job-specific events through `eacct -j <JobID> -x`, and you will get a table of all reported events:

Field name	Description
Event_ID	Internal ID of the event stored at the Database.
Timestamp	yyyy-mm-dd hh:mm:ss.
Event_type	Which kind of event is it. Possible event types explained below.
Job_id	The JobID of the event.
Value	The value stored with the event. Categorical events explained below.
node_id	The node from where the event was reported.

4.5.4.1 Event types

Below are listed all kind of event types you can get when requesting job events. For categorical event values, the (value, category) mapping is explained.

- **policy_error** Reported when the policy couldn't select the optimal frequency.
- **dynais_off** Reported when DynAIS is turned off and the Library becomes in *periodic monitoring mode*.
- **earl_state** The internal EARL state. Possible values are:
 - **0** This is the initial state and stands for no iteration detected.
 - **1** EAR starts computing the signature
 - **2** EAR computes the local signature and executes the per-node policy.
 - **3** This state computes a new signature and evaluates the accuracy of the policy.
 - **4** Projection error.
 - **5** This is a transition state to recompute EARL timings just in case we need to adapt it because of the frequency selection.
 - **6** Signature has changed.
- **optim_accuracy** The internal optimization policy state. Possible values are:
 - **0** Policy not ready.
 - **1** Policy says all is ok.
 - **2** Policy says it's not ok.
 - **3** Policy wants to try again to optimize.

The above event types may be useful only for advanced users. Please, contact with ear-support@bsc.es if you want to know more about EARL internals.

- **energy_saving** Energy (in %) EAR is guessing the policy is saving.
- **power_saving** Power in (in %) EAR is guessing the policy is saving.
- **performance_penalty** Execution time (in %) EAR is guessing the policy is incrementing.

Chapter 5

Admin guide

5.1 EAR Components

EAR is composed of five main components:

- **Node Manager (EARD)**. The Node Manager must have root access to the node where it will be running.
- **Database Manager (EARDBD)**. The database manager requires access to the DB server (we support MariaDB and Postgress). Documentation for Postgress is still under development.
- **Global Manager (EARGM)**. The global manager needs access to all node managers in the cluster as well as access to database.
- **Library (EARL)**
- **SLURM plugin**

The following image shows the main interactions between components:

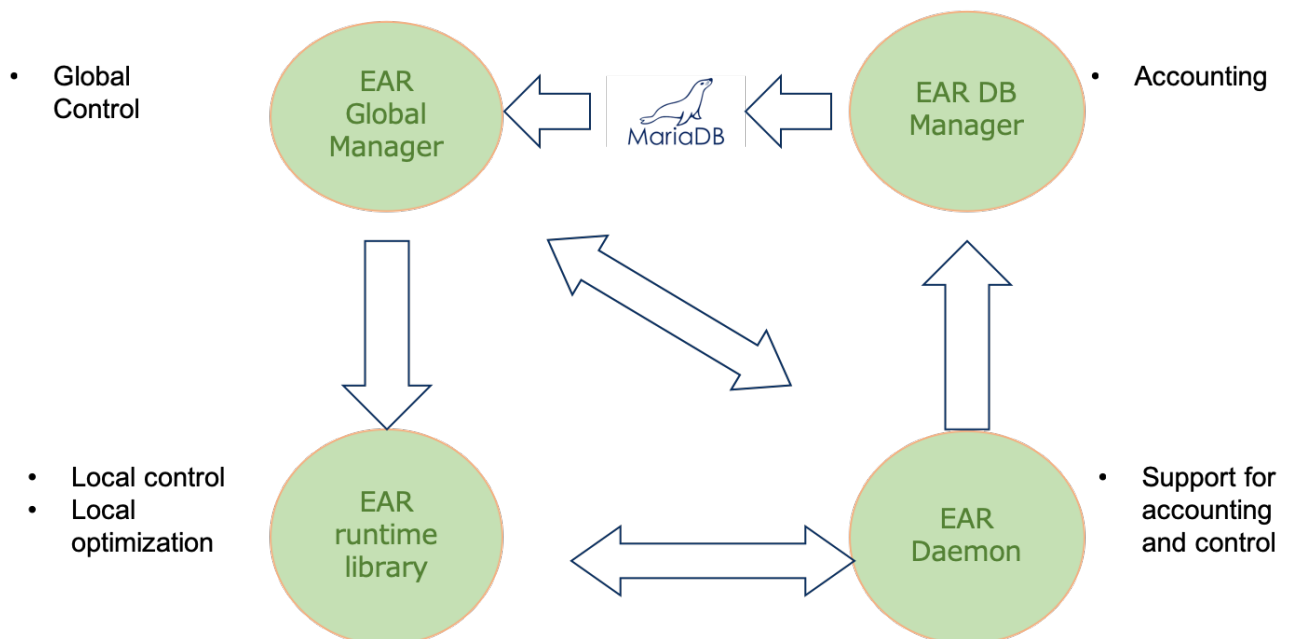


Figure 5.1 EAR components diagram

For a more detailed information about EAR components, visit the [Architecture](#) page.

5.2 Quick Installation Guide

This section provides a, summed up, step by step installation and execution guide for EAR. For a more in depth explanation of the necessary steps see the [Installation from source](#) page or the [Installing from RPM](#) section, following the [Configuration](#) guide, or contact us at ear-support@bsc.es

5.2.1 EAR Requirements

Requirements to compile EAR are:

- C compiler.
- MPI compiler.
- CUDA installation path if NVIDIA is used.
- Likwid path if Likwid is used.
- Freeipmi path if freeipmi is used.
- GSL is needed for coefficient computations.

To install EAR from **rpm** (only binaries) all these dependencies have been removed except *mysqlclient*. However, they are needed when running EAR.

SLURM must also be present if the SLURM plugin wants to be used. Since current EAR version only supports automatic execution of applications with EAR library using the SLURM plugin, it must be running when EAR library wants to be used (not needed for node monitoring).

Lastly, but not less important:

- The drivers for CPU frequency management (*acpi-cpufreq*) and Open IPMI must be present and loaded in compute nodes.
- *msr kernel* module must be loaded in compute nodes.
- mariaDB or postgres server must be up and running.
- Hardware counters must be accessible for normal users. Set **/proc/sys/kernel/perf_event_paranoid** to 2 (or less). Type `sudo sh -c "echo 2 > /proc/sys/kernel/perf_event_paranoid"` in compute nodes.

Run `./configure --help` to see all the flags and options.

5.2.2 Compiling and installing EAR

Once downloaded the code from repository, execute:

```
• autoreconf -i.

./configure --prefix=ear-install-path \
    EAR_TMP=ear-tmp-path \
    EAR_ETC=ear-etc-path \
    CC=c-compiler-path \
    MPICC=mpi-compiler-path \
    CC_FLAGS=c-flags-compiler \
    MPICC_FLAGS=mpi-flags \
    --with-cuda=path-to-cuda \
    MAKE_NAME=make_extension`
```

Additionally to the Makefile, `MAKE_NAME` forces to copy the generated Makefile with the name `Makefile._make_↵extension_`. It simplifies the fact of having multiple configurations (1 for each library version needed). More relevant options are:

- The option `--disable-mpi` must be set to generate a configuration for non-MPI version of the library.
- Use `MPI_VERSION=ompi` for OpenMPI compatible version.

Before running `make`, review the Makefile and the configuration log to validate all the requirements of your installation have been automatically detected. In particular, if you need to use some specific library such as `likwid`, `freeipmi` or `CUDA`. If `CUDA` path is specified, EAR will be compiled with GPU support. Check also that `MySQL` or `Postgre↵SQL` paths have been detected. You can use options `USER` and `GROUP` if you want to install EAR with a special `USER/GROUP`.

The following shows how to configure EAR to be compiled with Intel MPI:

```
autoreconf -i
./configure --prefix=/opt/ear CC=icc MPICC=mpiic MAKE_NAME=impi
make -f Makefile.impi
make -f Makefile.impi install
make -f Makefile.impi doc.install
make -f Makefile.impi etc.install
```

At this point the EAR binaries will be installed including one version of the EAR library for MPI (default), EAR documentation, EAR service files for EAR daemons and templates for `ear.conf` files and SLURM plugin. The configure tool tries to automatically detect paths to `mysql` and/or `postgres`, scheduler sources, etc. It is mandatory to detect the scheduler path, by default SLURM is assumed. After the configure, check in the Makefile all the options have been detected. After the `make install`, you should have the following folders in the `ear-install-path`: `bin`, `sbin`, etc, `lib`, `include`, `man`. The `bin` directory includes commands and tools, the `sbin` includes EAR services, the `lib` includes all the libraries and plugins, and `etc` includes templates and examples for EAR service files, `ear.conf` file, the EAR module, etc.

5.2.3 Deployment and validation

5.2.3.1 Monitoring: Compute node and DB

Prepare the configuration

Either installing from sources or rpm, EAR installs a template for `ear.conf` file in `$EAR_ETC/ear/ear.↵conf.template` and `$EAR_ETC/ear/ear.conf.full.template`. The full version includes all fields. Copy only one as `$EAR_ETC/ear/ear.conf` and update with the desired configuration. Go to the [configuration](#) section to see how to do it. The `ear.conf` is used by all the services. It is recommended to have in a shared folder to simplify the changes in the configuration.

EAR module

Install and load EAR module to enable commands. It can be found at `$EAR_ETC/module`. You can add ear module when it is not in standard path by doing `module use $EAR_ETC/module` and then `module load ear`.

EAR Database

Create EAR database with `edb_create`, installed at `$EAR_INSTALL_PATH/sbin`. The `edb_create -p` command will ask you for the DB root password. If you get any problem here, check first whether the node where you are running the command can connect to the DB server. In case problems persists, execute `edb_create -o` to report the specific SQL queries generated. In case of trouble, contact with ear-support@bsc.es or open in issue.

Energy models

EAR uses a power and performance model based on systems signatures. These system signatures are stored in coefficient files.

Before starting EARD, and just for testing, it is needed to create a dummy coefficient file and copy in the coefficients path, by default placed at `$EAR_ETC/coeffs`. Use the `coeffs_null` application from tools section.

EAR version 4.1 does not require null coefficients.

EAR services

Create soft links or copy EAR service files to start/stop services using system commands such as `systemctl` in the services folder. EAR service files are generated at `$EAR_ETC/systemd` and they can usually be placed in `$(ETC)/systemd`.

- EARD must be started on compute nodes.
- EARDBD must be started on service nodes (can be any node with DB access).

Enable and start EARDs and EARDBDs via services (e.g., `sudo systemctl start eard`, `sudo systemctl start eardbd`). EARDBD and EARD outputs can be found at `$EAR_TMP/eardbd.log` and `$EAR_TMP/eard.log` respectively when `DBDaemonUseLog` and `NodeUseLog` options are set to `1` in the `ear.conf` file, respectively. Otherwise, their outputs are generated at `stderr` and can be seen using the `journalctl` command (i.e., `journalctl -u eard`).

By default, a certain level of verbosity is set. It is not recommended to modify it but you can change it by modifying the value of constants in file `src/common/output/output_conf.h`.

Quick validation

Check that EARDs are up and running correctly with `econtrol --status` (note that daemons will take around a minute to correctly report energy and not show up as an error in `econtrol`). EARDs create a per-node text file with values reported to the EARDBD (local to compute nodes). In case there are problems when running `econtrol`, you can also find this file at `$EAR_TMP/nodename.pm_periodic_data.txt`.

Check that EARDs are reporting metrics to database with `ereport`. `ereport -n all` should report the total energy sent by each daemon since the setup.

5.2.3.2 Monitoring: EAR plugin

- Set up EAR's SLURM plugin (see the [configuration](#) section for more information).

It is recommended to create a soft link to the `$EAR_ETC/slurm/ear.pluginstack.conf` file in the `/etc/slurm/pluginstack.conf.d` directory to simplify the EAR plugin management.

For a first test it is recommended to set `default=off` in the `ear.pluginstack.conf`

(to disable the automatic loading of the EAR library).

EAR plugin validation

At this point you must be able to see EAR options when doing, for example, `srun --help`. You must see something like below as part of the output. The EAR plugin must be enabled at login and compute nodes.

```
[user@hostname ~]$ srun --help
Usage: srun [OPTIONS(0)... [executable(0) [args(0)...]]] [ : [OPTIONS(N)...] executable(N) [args(N)...]

Parallel run options:
...

Constraint options:
...

Consumable resources related options:
...

Affinity/Multi-core options: (when the task/affinity plugin is enabled)
...

Options provided by plugins:
  --ear=on|off           Enables/disables Energy Aware Runtime Library
  --ear-policy=type       Selects an energy policy for EAR
                        {type=default,gpu_monitoring,monitoring,min_energ-
                        y,min_time,gpu_min_energy,gpu_min_time}
  --ear-cpufreq=frequency Specifies the start frequency to be used by EAR
                        policy (in KHz)
  --ear-policy-th=value   Specifies the threshold to be used by EAR policy
                        (max 2 decimals) {value=[0..1]}
  --ear-user-db=file       Specifies the file to save the user applications
                        metrics summary 'file.nodename.csv' file will be
                        created per node. If not defined, these files
                        won't be generated.
  --ear-verbose=value     Specifies the level of the
                        verbosity{value=[0..1]}; default is 0
  --ear-learning=value     Enables the learning phase for a given P_STATE
                        {value=[1..n]}
  --ear-tag=tag           Sets an energy tag (max 32 chars)
...

Help options:
  -h, --help             show this help message
  --usage                 display brief usage message

Other options:
  -V, --version           output version information and exit
```

- Submit one application via SLURM and check that it is correctly reported to the database with `eacct` command.

Note that only privileged users can check other users' applications.

- Submit one MPI application (corresponding with the version you have compiled) with `--ear=on` and check that now the output of `eacct` includes the Library metrics.
- Set `default=on` to set the EAR Library loading by default at `ear.pluginstack.conf`. If default is turned off, EARL can be explicitly loaded by setting the flag `--ear=off` at job submission.

At this point, you can use EAR for monitoring and accounting purposes but it cannot use the power policies offered by EARL. To enable them, first perform a learning phase and compute node coefficients. See the [EAR learning phase](#) wiki page. For the coefficients to be active, restart daemons.

Important Reloading daemons will NOT make them load coefficients, restarting the service is the only way.

5.2.4 EAR Library versions: MPI vs. Non-MPI

As commented in the overview, the EAR Library is loaded next to the user MPI application by the EAR Loader. The Library uses MPI symbols, so it is compiled by using the includes provided by your MPI distribution. The selection of the library version is automatic at runtime, but it is not required during the compilation and installation steps. Each compiled library version has its own file name that has to be defined by the `MPI_VERSION` variable during the `./configure` or by editing the root Makefile.

The name list per distribution is exposed in the following table:

Distribution	Name	MPI_VERSION value
Intel MPI	libear.so (default)	not required
MVAPICH	libear.so (default)	not required
OpenMPI	libear.ompi.so	ompi

If different MPI distributions share the same library name, it means their symbols are compatible between them, so compiling and installing the library one time will be enough. However, if you provide different MPI distributions to users, you will have to compile and install the library multiple times.

EAR makefiles include a specific target for each [EAR component](#), supporting full or partial updates:

Command	Description
<code>make -f Makefile.make_extension install</code>	Reinstall all the files except <code>etc</code> and <code>doc</code> .
<code>make -f Makefile.make_extension earl.↵ install</code>	Reinstall only the EARL.
<code>make -f Makefile.make_extension eard.↵ install</code>	Reinstall only the EARD.
<code>make -f Makefile.make_extension earplug.↵ install</code>	Reinstall only the EAR SLURM plugin.
<code>make -f Makefile.make_extension eardbd.↵ install</code>	Reinstall only the EARDBD.
<code>make -f Makefile.make_extension eargmd.↵ install</code>	Reinstall only the EARGMD.
<code>make -f Makefile.make_extension reports.↵ install</code>	Reinstall only report plugins.

Before compiling new libraries you have to install by typing `make install`. Then you can run the `./configure` again, changing the `MPICC`, `MPICC_FLAGS` and `MPI_VERSION` variables, or just opening the root Makefile and edit the same variables and `MPI_BASE`, which just sets the MPI installation root path. Now type `make full` to perform a clean compilation and `make earl.install`, to install only the new version of the library.

If your MPI version is not fully compatible, please contact ear-support@bsc.es.

See the [User guide](#) to check the use cases supported and how to submit jobs with EAR.

5.3 Installing from RPM

EAR includes the specification files to create an rpm from an already existing installation. The spec file is placed at `etc/rpms`. To create the RPM it is needed a valid installation from source. The RPM can be part of the system image. Visit the [Requirements](#) page for a quick overview of the requirements.

Execute the `rpmbuild.sh` script to create the EAR rpm file. Once created, it can be included in the compute nodes images. It is recommended only when no more changes are expected on the installation. Once you have the rpm file, execute the following steps:

- Before the installation, make sure the installation path is accessible by all the computing nodes. Do the same in the folder where you want to set the temporary files (it will be called `$ (EAR_TMP)` in this guide for simplicity).
- Default paths are `/usr` and `/etc`.
- Run `rpm -ivh --relocate /usr=/new/install/path --relocate /etc=/new/etc/path ear.version.rpm`.

You can also use the `--nodeps` if your dependency test fails.

- During the installation the configuration files `*.in` are compiled to the ready to use version, replacing tags for correct paths. You will have more information of those files in the following pages. Check the [next section](#) for more information.
- Type `rpm -e ear.version` to uninstall.

5.3.1 Installation content

The `*.in` configuration files are compiled into `etc/ear/ear.conf.template` and `etc/ear/ear.full.conf.template`, `etc/module/ear`, `etc/slurm/ear.pluginstack.conf` and various `etc/systemd/ear*.service`. You can find more information in the [configuration](#) page. Below table describes the complete hierarchy of the EAR installation:

Directory	Content / description
<code>/usr/lib</code>	Libraries and the scheduler plugin.
<code>/usr/lib/plugins</code>	EAR plugins.
<code>/usr/bin</code>	EAR commands.
<code>/usr/bin/tools</code>	EAR tools for coefficients computation.
<code>/usr/sbin</code>	Privileged components: EARD, EARDBD, EARGMD.
<code>/etc/ear</code>	Configuration files templates.
<code>/etc/ear/coeffs</code>	Folder to store coefficient files.
<code>/etc/module</code>	EAR module.
<code>/etc/slurm</code>	EAR SLURM plugin configuration file.
<code>/etc/systemd</code>	EAR service files.

5.3.2 RPM requirements

EAR uses some third party libraries. EAR RPM will not ask for them when installing but they must be available in `LD_LIBRARY_PATH` when running an application and you want to use EAR. Depending on the RPM, different version must be required for these libraries:

Library	Minimum version	References
MPI	-	-
MySQL*	15.1	MySQL or MariaDB
PostgreSQL*	9.2	PostgreSQL

Library	Minimum version	References
Autoconf	2.69	Website
GSL	1.4	Website

- Just one of them required.

These libraries are not required, but can be used to get additional functionality or metrics:

Library	Minimum version	References
SLURM	17.02.6	Website
PBS**	2021	PBSPro or OpenPBS
CUDA/NVML	7.5	CUDA
CUPTI**	7.5	CUDA
Likwid	5.2.1	Likwid
FreeIPMI	1.6.8	FreeIPMI
OneAPI/LO**	1.7.9	OneAPI
LibRedFish**	1.3.6	LibRedFish

** These will be available in next release.

Also, some **drivers** has to be present and loaded in the system when starting EAR:

Driver	File	Kernel version	References
CPUFreq	kernel/drivers/cpufreq/acpi-cpufreq.ko	3.10	Information
Open IPMI	kernel/drivers/char/ipmi/*.ko	3.10	Information

5.4 Starting Services

The best way to execute all EAR daemon components (EARD, EARDBD, EARGM) is by the unit services method.

NOTE EAR uses a MariaDB/MySQL server. The server must be started before EAR services are executed.

The way to launch the EAR daemons is via unit services. The generated unit services for the EAR Daemon, EAR Global Manager Daemon and EAR Database Daemon are generated and installed in `$(EAR_ETC)/systemd`. You have to copy those unit service files to your `systemd` operating system folder and then use the `systemctl` command to run the daemons. Check the [EARD](#), [EARDBD](#), [EARGMD](#) pages to find the precise execution commands.

When using `systemctl` commands, you can check messages reported to `stderr` using `journalctl`. For instance: `journalctl -u eard -f`. Note that if `NodeUseLog` is set to 1 in `ear.conf`, the messages will not be printed to `stderr` but to `$EAR_TMP/eard.log` instead. `DBDaemonUseLog` and `GlobalmanagerUseLog` options in `ear.conf` specifies the output for `EARDBD` and `EARGM`, respectively.

Additionally, services can be started, stopped or reloaded on parallel using parallel commands such as `pdsh`. As an example: `sudo pdsh -w nodelist systemctl start eard`.

5.5 Updating EAR with a new installation

In some cases, it might be a good idea to create a new install instead of updating your current one, like trying new configurations or when a big update is released.

The steps to do so are:

- Install EAR in the new folder
- Replicate old etc (including `ear.conf` and coefficients) in the new one and update `ear.conf` with the new ETC path and whatever changes may be needed.
- Update EAR services in `/etc/systemd/system` folder (or equivalent, depending on your OS). Service files include ETC path and the absolute path for binaries.
- Update `/etc/slurm/pluginstack.conf` with the new paths.
- Create a new EAR module with the updated paths.

Once all that is done, one should have two complete EAR installs that can be switched by changing the binaries that are executed by the services and changing the path in `pluginstack.conf`.

5.6 Next steps

For a better overview of the installation process, return to the [installation guide](#). To continue the installation, visit the [configuration page](#) to set up properly the EAR configuration file and the EAR SLURM plugin stack file.

Chapter 6

Installation from source

6.1 Requirements

EAR requires some third party libraries and headers to compile and run, in addition to the basic requirements such as the compiler and Autoconf. This is a list of these **libraries**, minimum **tested** versions and its references:

Library	Minimum version	References
MPI	-	-
MySQL*	15.1	MySQL or MariaDB
PostgreSQL*	9.2	PostgreSQL
Autoconf	2.69	Website
GSL	1.4	Website

- Just one of them required.

These libraries are not required, but can be used to get additional functionality or metrics:

Library	Minimum version	References
SLURM	17.02.6	Website
PBS**	2021	PBSPro or OpenPBS
CUDA/NVML	7.5	CUDA
CUPTI**	7.5	CUDA
Likwid	5.2.1	Likwid
FreeIPMI	1.6.8	FreeIPMI
OneAPI/L0**	1.7.9	OneAPI
LibRedFish**	1.3.6	LibRedFish

** These will be available in next release.

Also, some **drivers** has to be present and loaded in the system:

Driver	File	Kernel version	References
CPUFreq	kernel/drivers/cpufreq/acpi-cpufreq.ko	3.10	Information
Open IPMI	kernel/drivers/char/ipmi/*.ko	3.10	Information

Lastly, the **compilers**: EAR uses C compilers. It has been tested with both Intel and GNU.

Compiler	Comment	Minimum version	References
GNU Compiler Collection (GCC)	For the library and daemon	4.8.5	Website
Intel C Compiler (ICC)	For the library and daemon	17.0.1	Website

6.2 Compilation and installation guide summary

1. Before the installation, make sure the installation path is accessible by all the computing nodes. Do the same in the folder where you want to set the configuration files (it will be called `$(EAR_ETC)` in this guide for simplicity).
2. Generate Autoconf's `configure` program by typing `autoreconf -i`.
3. Read sections below to understand how to properly set the `configure` parameters.
4. Compile EAR components by typing `./configure ...,make` and `make install` in the root directory.
5. Type `make etc.install` to install the content of `$(EAR_ETC)`. It is the configuration content, but that configuration will be expanded in the next section. You have a link at the bottom of this page.

6.3 Configure options

`configure` is based on shell variables which initial value could be given by setting variables in the command line, or in the environment. Take a look to the table with the most popular variables:

Variable	Description
MPICC	MPI compiler.
CC	C compiler command.
MPICC_FLAGS	MPI compiler flags.
CFLAGS	C compiler flags.
CC_FLAGS	Also C compiler flags.
LDFLAGS	Linker flags. E.g. <code>'-L<lib dir>'</code> if you have libraries in a nonstandard directory <code><lib dir></code> .
LIBS	Libraries to pass to the linker. E.g. <code>'-l<library>'</code> .
EAR_TMP	Defines the node local storage as 'var', 'tmp' or other tempfs file system (default: <code>/var/ear</code>) (you can also use <code>-localstatedir=DIR</code>).
EAR_ETC	Defines the read-only single-machine data as 'etc' (default: <code>EPREFIX/etc</code>) (you can also use <code>-sharedstatedir=DIR</code>).
MAN	Defines the manual directory (default: <code>PREFIX/man</code>) (you can use also <code>-mandir=DIR</code>).
DOC	Defines the documentation directory (default: <code>PREFIX/doc</code>) (you can use also <code>-docdir=DIR</code>).
MPI_VERSION	Adds a suffix to the compiled EAR library name. Read further down this page for more information.
USER	Owner user of the installed files.
GROUP	Owned group of the installed files
MAKE_NAME	It adds an additional Makefile with a suffix.

- This is an example of `CC`, `CFLAGS` and `DEBUG` variables overwriting:
`./configure CC=icc CFLAGS=-g EAR_ETC=/hpc/opt/etc`

You can choose the root folder by typing `./configure --PREFIX=<path>`. But there are other options in the following table:

Definition	Default directory	Content / description
<PREFIX>	/usr/local	Installation path
<EAR_ETC>	<PREFIX>/etc	Configuration files.
<EAR_TMP>	/var/ear	Pipes and temporal files.

You have more installation options information by typing `./configure --help`. If you want to change the value of any of this options after the configuration process, you can edit the root Makefile. All the options are at the top of the text and its names are self-explanatory.

Adding required libraries installed in custom locations

The `configure` script is capable to find libraries located in custom location if a module is loaded in the environment or its path is included in `LD_LIBRARY_PATH`. If not, you can help `configure` to find SLURM, or other required libraries in case you installed in a custom location. It is necessary to add its root path for the compiler to see include headers and libraries for the linker. You can do this by adding to it the following arguments:

Argument	Description
<code>--with-cuda=<path></code>	Specifies the path to CUDA installation.
<code>--with-freeipmi=<path></code>	Specify path to FREEIPMI installation.
<code>--with-gsl=<path></code>	Specifies the path to GSL installation.
<code>--with-likwid=<path></code>	Specifies the path to LIKWID installation.
<code>--with-mysql=<path></code>	Specify path to MySQL installation.
<code>--with-pgsql=<path></code>	Specify path to PostgreSQL installation.
<code>--with-pbs</code>	Enable PBS components.
<code>--with-slurm=<path></code>	Specifies the path to SLURM installation.

- This is an example of CC overwriting the CUDA path specification:

```
./configure --with-cuda=/path/to/CUDA
```

If unusual procedures must be done to compile the package, please try to figure out how `configure` could check whether to do them and contact the team to be considered for the next release. In the meantime, you can overwrite shell variables or export its paths to the environment (e.g. `LD_LIBRARY`).

Additional configure flags

Also, there are additional flags to help administrator increase the compatibility of EAR in nodes.

Argument	Description
<code>--disable-rpath</code>	Disables the RPATH included in binaries to specify some dependencies location.
<code>--disable-avx512</code>	Replaces the AVX-512 function calls by AVX-2.
<code>--disable-gpus</code>	The GPU monitoring data is not allocated nor inserted in the database.
<code>--disable-mpi</code>	Compiles the non-mpi version of the library.

6.4 Pre-installation fast tweaks

Some EAR characteristics can be modified by changing the value of the constants defined in `src/common/config/config_↵_def.h`. You can open it with an editor and modify those pre-processor variables to alter the EAR behaviour.

Also, you can quickly switch the user/group of your installation files by modifying the `CHOWN_USR/CHOWN_GRP` variables in the root Makefile.

6.5 Library distributions/versions

As commented in the overview, the EAR library is loaded next to the user MPI application by the EAR Loader. The library uses MPI symbols, so it is compiled by using the includes provided by your MPI distribution. The selection of the library version is automatic in runtime, but in the compiling and installation process is not required. Each compiled library has its own file name that has to be defined by the `MPI_VERSION` variable during `./configure` or by editing the root Makefile. The name list per distribution is exposed in the following table:

Distribution	Name	MPI_VERSION variable
Intel MPI	libear.so (default)	it is not required
MVAPICH	libear.so (default)	it is not required
OpenMPI	libear.ompi.so	ompi

If different MPI distributions shares the same library name, it means that its symbols are compatible between them, so compiling and installing the library one time will be enough. However, if you provide different MPI distributions to the users, you will have to compile and install the library multiple times.

Before compiling new libraries you have to install by typing `make install`. Then you can run the `./configure` again, changing the `MPICC`, `MPICC_FLAGS` and `MPI_VERSION` variables, or just opening the root Makefile and edit the same variables and `MPI_BASE`, which just sets the MPI installation root path. Now type `make full` to perform a clean compilation and `make earl.install`, to install only the new version of the library.

If your MPI version is not fully compatible, please contact ear-support@bsc.es. We will add compatibility to EAR and give you a solution in the meantime.

6.6 Other useful flags

You can install individual components by doing: `make eard.install` to install EAR Daemon, `make earl.↵install` to install EAR Library, `make eardbd.install` EAR Database Manager, `make eargmd.↵install` EAR Global Manager and `make commands.install` the EAR command binaries.

6.7 Installation content

This is the list of the inner installation folders and their content:

Root	Directory	Content / description
<PREFIX>	/lib	Libraries.
<PREFIX>	/lib/plugins	Plugins.

Root	Directory	Content / description
<PREFIX>	/bin	EAR commands.
<PREFIX>	/bin/tools	EAR tools for coefficients.
<PREFIX>	/sbin	Privileged components.
<PREFIX>	/man	Documentation.
<EAR_ETC>	/ear	Configuration file.
<EAR_ETC>	/ear/coeffs	Coefficient files store.
<EAR_ETC>	/module	EAR module.
<EAR_ETC>	/slurm	ear.pluginstack.conf.
<EAR_ETC>	/systemd	EAR service files.

6.8 Fine grain tuning of EAR options

Some options such as the maximum number of CPUs or GPUs supported are defined in `src/common/config` files. It is not recommended to modify these files but some options and default values can be set by modifying them.

6.9 Next step

For a better overview of the installation process, return to our [Quick installation guide](#). To continue the installation, visit the [configuration page](#) to set up properly the EAR configuration file and the SLURMs plugin stack file.

Chapter 7

Architecture

7.1 EAR Node Manager

The EAR Daemon (EARD) is a per-node process that provides privileged metrics of each node as well as a periodic power monitoring service. Said periodic power metrics can be sent to EAR's database directly, via the EAR Database Daemon (EARDBD) or by using some of the provided [report plug-ins](#).

See the [EARDBD](#) section and the [configuration page](#) for more information about the EAR Database Manager and how to configure the EARD to send its collected data to it.

7.1.1 Overview

The node Daemon is the component in charge of providing any kind of services that requires privileged capabilities. Current version is conceived as an external process executed with root privileges.

The EARD provides the following services, each one covered by one thread:

- Provides privileged metrics to EARL such as the average frequency, uncore integrated memory controller counters to compute the memory bandwidth, as well as energy metrics (DC node, DRAM and package energy).
- Implements a periodic power monitoring service. This service allows EAR package to control the total energy consumed in the system.
- Offers a remote API used by EARplug, EARGM and EAR commands. This API accepts requests such as get the system status, change policy settings or notify new job/end job events.

7.1.2 Requirements

If using the EAR Database as the storage target, EARD connects with [EARDBD](#) service, that has to be up before starting the node daemon, otherwise values reported by EARD to be stored in the database, will be lost.

7.1.3 Configuration

The EAR Daemon uses the `$(EAR_ETC)/ear/ear.conf` file to be configured. It can be dynamically configured by reloading the service.

Please visit the [EAR configuration file page](#) for more information about the options of EARD and other components.

7.1.4 Execution

To execute this component, these `systemctl` command examples are provided:

- `sudo systemctl start eard` to start the EARD service.
- `sudo systemctl stop eard` to stop the EARD service.
- `sudo systemctl reload eard` to force reloading the configuration of the EARD service.

Log messages are generated during the execution. Use `journalctl` command to see eard message:

- `sudo journalctl -u eard -f`

7.1.5 Reconfiguration

After executing a `systemctl reload eard` command, not all the EARD options will be dynamically updated. The list of updated variables are:

```
DefaultPstates
NodeDaemonMaxPstate
NodeDaemonVerbose
NodeDaemonPowermonFreq
SupportedPolicies
MinTimePerformanceAccuracy
```

To reconfigure other options such as EARD connection port, coefficients, etc., it must be stopped and restarted again. Visit the [EAR configuration file page](#) for more information about the options of EARD and other components.

7.2 EAR Database Manager

The EAR Database Daemon (EARDBD) acts as an intermediate layer between any EAR component that inserts data and the EAR's Database, in order to prevent the database server from collapsing due to getting overrun with connections and insert queries.

The Database Manager caches records generated by the [EAR Library](#) and the [EARD](#) in the system and reports it to the centralized database. It is recommended to run several EARDBDs if the cluster is big enough in order to reduce the number of inserts and connections to the database.

Also, the EARDBD accumulates data during a period of time to decrease the total insertions in the database, helping the performance of big queries. By now just the energy metrics are available to accumulate in the new metric called energy aggregation. EARDBD uses periodic power metrics sent by the EARD, the per-node daemon, including job identification details (Job Id and Step Id when executed in a SLURM system).

7.2.1 Configuration

The EAR Database Daemon uses the `$(EAR_ETC)/ear/ear.conf` file to be configured. It can be dynamically configured by reloading the service.

Please visit the [EAR configuration file page](#) for more information about the options of EARDBD and other components.

7.2.2 Execution

To execute this component, these `systemctl` command examples are provided:

- `sudo systemctl start earbdb` to start the EARDBD service.
- `sudo systemctl stop earbdb` to stop the EARDBD service.
- `sudo systemctl reload earbdb` to force reloading the configuration of the EARDBD service.

7.3 EAR Global Manager

The EAR Global Manager Daemon (EARGMD) is a cluster wide component offering cluster energy monitoring and capping. EARGM can work in two modes: manual and automatic. When running in manual mode, EARGM monitors the total energy consumption, evaluates the percentage of energy consumption over the energy limit set by the admin and reports the cluster status to the DB. When running in automatic mode, apart from evaluating the energy consumption percentage it sends the evaluation to computing nodes. EARDs passes these messages to EARL which re-applies the energy policy with the new settings.

Apart from sending messages and reporting the energy consumption to the DB, EARGM offers additional features to notify the energy consumption: automatic execution of commands is supported and mails can also automatically be sent. Both the command to be executed or the mail address can be defined in the `ear.conf`, where it can also be specified the energy limits, the monitoring period, etc.

EARGM uses periodic aggregated power metrics to efficiently compute the cluster energy consumption. Aggregated metrics are computed by [EARDBD](#) based on power metrics reported by [EARD](#), the per-node daemon.

Note: if you have multiple EARGMs running, only 1 should be used for Energy management. To turn off energy management for a certain EARGM simply set its energy value to 0.

7.3.1 Power capping

EARGM also includes an optional power capping system. Power capping can work in two different ways:

- Cluster power cap (unlimited): Each EARGM controls the power consumption of the nodes under them by ensuring the global power does not exceed a set value. While the global power is under a percentage of the global value, the nodes run without any cap. If it approaches said value, a message is sent to all nodes to set their powercap to a pre-set value (via `max_powercap` in the tags section of `ear.conf`). Should the power go back to a value under the cap, a message is sent again so the nodes run at their default value (unlimited power).
- Fine grained power cap control: Each EARGM controls the power consumption of the nodes under them and redistributes a certain budget between the nodes, allocating more to nodes who need it. It guarantees that any node has its default powercap allocation (defined by the `powercap` field in the tags section of `ear.conf`) if it is running an application.

Furthermore, when using fine grained power cap control it is possible to have multiple EARGMs, each controlling a part of the cluster, with (or without) meta-EARGMs redistributing the power allocation of each EARGM depending on the current needs of each part of the cluster. If no meta-EARGMs are specified, the power value each EARGM has will be static.

Meta-EARGMs are NOT compatible with the unlimited cluster powercap mode.

7.3.2 Configuration

The EAR Global Manager uses the `$(EAR_ETC)/ear/ear.conf` file to be configured. It can be dynamically configured by reloading the service.

Please visit the [EAR configuration file page](#) for more information about the options of EARGM and other components.

Additionally, 2 EARGMs can be used in the same host by declaring the environment variable `EARGMID` to specify which EARGM configuration each should use. If said variable is not declared, all EARGMs in the same host will read the first entry.

7.3.3 Execution

To execute this component, these `systemctl` command examples are provided:

- `sudo systemctl start eargmd` to start the EARGM service.
- `sudo systemctl stop eargmd` to stop the EARGM service.
- `sudo systemctl reload eargmd` to force reloading the configuration of the EARGM service.


7.4 The EAR Library

The EAR Library (EARL) is the core of the EAR package. The Library offers a lightweight and simple solution to select the optimal frequency for applications at runtime, with multiple power policies each with a different approach to find said frequency.

EARL uses the [Daemon](#) to read performance metrics and to send application data to EAR Database.

7.4.1 Overview

EARL is dynamically loaded next to the running applications by the [EAR Loader](#). The Loader detects whether the application is MPI or not. In case it is MPI, it also detects whether it is Intel or OpenMPI, and it intercepts the MPI symbols through the PMPI interface, and next symbols are saved in order to provide compatibility with MPI or other profiling tools. The Library is divided in several stages summarized in the following picture:

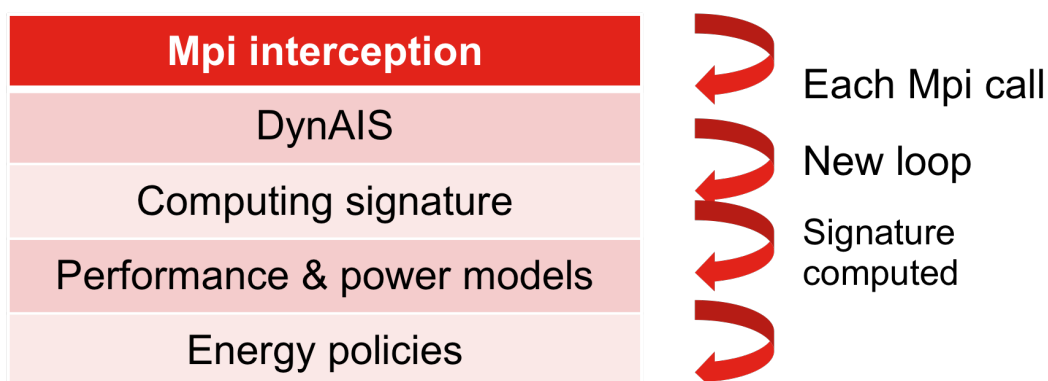

1. Automatic **detection** of application outer loops. This is done by intercepting MPI calls and invoking the Dynamic Application Iterative Structure detector algorithm. **DynAIS** is highly optimized for new Intel architectures, reporting low overhead. For non-MPI applications, EAR implements a time-guided approach.
2. Computation of the **application signature**. Once DynAIS starts reporting iterations for the outer loop, EAR starts to compute the application signature. This signature includes: iteration time, DC power consumption, bandwidth, cycles, instructions, etc. Since the DC power measurements error highly depends on the hardware, EAR automatically detects the hardware characteristics and sets a minimum time to compute the signature in order to minimize the average error.


$$\text{Power}(fn) = A(Rf,fn)*\text{Power}(Rf) + B(Rf,fn)*\text{TPI}(Rf) + C(Rf,fn)$$

$$\text{CPI}(fn) = D(Rf,fn)*\text{CPI}(Rf) + E(Rf)*\text{TPI}(Rf) + F(Rf,fn)$$

$$\text{TIME}(fn) = \text{TIME}(Rf) * \text{CPI}(Rf,fn)/\text{CPI}(Rf) * (Rf/fn)$$

The loop signature is used to **classify the application activity** in different phases. The current EAR version supports the following phases for: IO bound, CPU computation and GPU idle, CPU busy waiting and GPU computing, CPU-GPU computation, and CPU computation (for CPU only nodes). For phases including CPU computation, the optimization policy is applied. For other phases, the EAR library implements some predefined CPU/Memory/GPU frequency settings.

1. **Power and performance projection.** EAR has its own performance and power models which requires the application and the system signatures as an input. The system signature is a set of coefficients characterizing each node in the system. They are computed during the learning phase at the EAR configuration step. EAR projects the power used and computing time (performance) of the running application for all the available frequencies in the system. These models are applied to CPU metrics and projects CPU performance and power when varying the CPU frequency. Using these projections the optimization policy can select the optimal CPU memory.

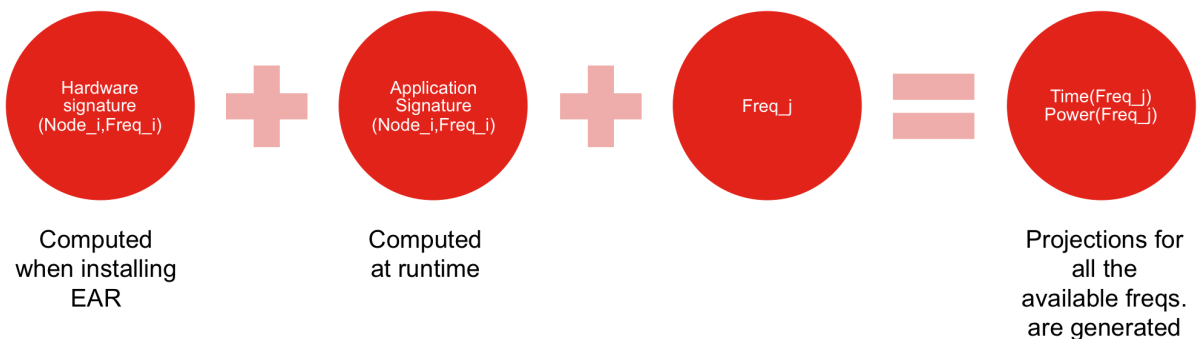

1. **Apply** the selected energy optimization policy. EAR includes two power policies to be selected at runtime: *minimize time to solution* and *minimize energy to solution*, if permitted by the system administrator. At this point, EAR executes the power policy, using the projections computed in the previous phase, and selects the optimal frequency for an application and its particular run. An additional policy, *monitoring only* can also be

used, but in this case no changes to the running frequency will be made but only the computation and storage of the application signature and metrics will be done. The short version of the names is used when submitting jobs (`min_energy`, `min_time`, `monitoring`). Current policies already includes memory frequency selection but in this case it is not based on models, it is a guided search. Check in your installation in the memory frequency optimization is enabled by default. In case the application is MPI, the policies already classifies the processes as balanced or unbalanced. In case they are unbalanced, a per-process CPU frequency is applied.

Some specific configurations are modified when jobs are executed sharing nodes with other jobs. For example the memory frequency optiization is disabled. See section [environment variables page](#) for more information on how to tune the EAR library optimization using environment variables.

7.4.2 Configuration

The Library uses the `$(EAR_ETC)/ear.conf` file to be configured. Please visit the [EAR configuration file page](#) for more information about the options of EARL and other components.

EARL receives its specific settings through a shared memory regions initialized by [EARD](#).

7.4.3 Usage

For information on how to run applications alongside with EARL read the [User guide](#). Next section contains more information regarding EAR's optimisation policies.

7.4.4 Policies

EAR offers three energy policies plugins: `min_energy`, `min_time` and `monitoring`. The last one is not a power policy, is used just for application monitoring where CPU frequency is not modified (neither memory or GPU frequency). For application analysis `monitoring` can be used with specific CPU, memory and/or GPU frequencies.

The energy policy is selected by setting the `--ear-policy=policy` option when submitting a SLURM job. A policy parameter, which is a particular value or threshold depending on the policy, can be set using the flag `--ear-policy-th=value`. Its default value is defined in the configuration file, for more information check the [configuration page](#) for more information.

Plugin `min_energy`

The goal of this policy is to minimise the energy consumed with a limit to the performance degradation. This limit is set in the SLURM `--ear-policy-th` option or the configuration file. The `min_energy` policy will select the optimal frequency that minimizes energy enforcing (performance degradation \leq parameter). When executing with this policy, applications starts at default frequency(specified at `ear.conf`).

```
PerfDegr = (CurrTime - PrevTime) / (PrevTime)
```

Plugin min_time


The goal of this policy is to improve the execution time while guaranteeing a minimum ratio between performance benefit and frequency increment that justifies the increased energy consumption from this frequency increment. The policy uses the SLURM parameter option mentioned above as a minimum efficiency threshold.

Example: if `--ear-policy-th=0.75`, EAR will prevent scaling to upper frequencies if the ratio between performance gain and frequency gain do not improve at least 75% ($\text{PerfGain} \geq (\text{FreqGain} * \text{threshold})$).

```
PerfGain=(PrevTime-CurrTime)/PrevTime
FreqGain=(CurFreq-PrevFreq)/PrevFreq
```

When launched with `min_time` policy, applications start at a default frequency (defined at `ear.conf`). Check the [configuration page](#) for more information.

Example: given a system with a nominal frequency of 2.3GHz and default `P_STATE` set to 3, an application executed with `min_time` will start with frequency $F_{i-1}=2.0\text{GHz}$ (3 `P_STATES` less than nominal). When application metrics are computed, the library will compute performance projection for F_{i+1} and will compute the performance_gain as shown in the Figure 1. If performance gain is greater or equal than threshold, the policy will check with the next performance projection F_{i+2} . If the performance gain computed is less than threshold, the policy will select the last frequency where the performance gain was enough, preventing the waste of energy.

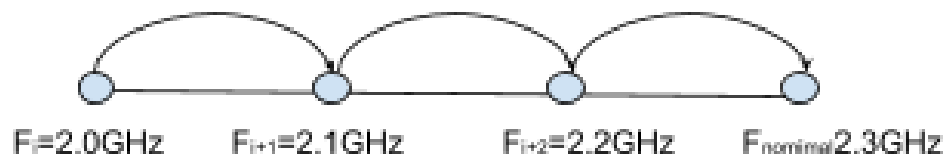

```
perf_gain= (T(f)-T(f_{i-1}))/T(f)
freq_gain= (f_{i+1}-f_i)/f_i
if (perf_gain>=freq_gain*ear_threshold) check with f_{i+1}
else stop and select f_i
```

Figure 1: `min_time` uses the threshold value as the minimum value for the performance gain between F_{i-1} and F_{i+1} .

7.4.5 EAR API

EAR offers a user API for applications. The current EAR version only offers two functions, one to read the accumulated energy and time and another to compute the difference between the two measurements.

- `int ear_connect()`
- `int ear_energy(unsigned long ***energy_mj, unsigned long ***time_ms)`
- `void ear_energy_diff(unsigned long ebegin, unsigned long eend, unsigned long ***ediff, unsigned long tbegin, unsigned long tend, unsigned long ***tdiff)`
- `int ear_set_cpufreq(cpu_set_t ***mask, unsigned long cpufreq);`
- `int ear_set_gpufreq(int gpu_id, unsigned long gpufreq)`
- `int ear_set_gpufreq_list(int num_gpus, unsigned long ***gpufreqlist)`

- `void ear_disconnect()`

EAR's header file and library can be found at `$EAR_INSTALL_PATH/include/ear.h` and `$EAR_INSTALL_PATH/lib/libEAR_api.so` respectively. The following example reports the energy, time, and average power during that time for a simple loop including a `sleep(5)`.

```
#define _GNU_SOURCE
#include <ear.h>

int main(int argc, char *argv[])
{
    unsigned long e_mj=0, t_ms=0, e_mj_init, t_ms_init, e_mj_end, t_ms_end=0;
    unsigned long ej, emj, ts, tms, os, oms;
    unsigned long ej_e, emj_e, ts_e, tms_e, os_e, oms_e;
    int i=0;
    struct tm *tstamp, *tstamp2, *tstamp3, *tstamp4;
    char s[128], s2[128], s3[128], s4[128];

    /* Connecting with ear */
    if (ear_connect() != EAR_SUCCESS)
    {
        printf("error connecting eard\n");
        exit(1);
    }

    /* Reading energy */
    if (ear_energy(&e_mj_init, &t_ms_init) != EAR_SUCCESS)
    {
        printf("Error in ear_energy\n");
    }
    while(i<5)
    {
        sleep(5);

        /* READING ENERGY */
        if (ear_energy(&e_mj_end, &t_ms_end) != EAR_SUCCESS)
        {
            printf("Error in ear_energy\n");
        }
        else
        {
            ts=t_ms_init/1000;
            ts_e=t_ms_end/1000;
            tstamp=localtime((time_t *)&ts);
            strftime(s, sizeof(s), "%c", tstamp);
            tstamp2=localtime((time_t *)&ts_e);
            strftime(s2, sizeof(s), "%c", tstamp2);

            printf("Start time %s End time %s\n", s, s2);
            ear_energy_diff(e_mj_init, e_mj_end, &e_mj, t_ms_init, t_ms_end, &t_ms);
            printf("Time consumed %lu (ms), energy consumed %lu (mJ),\n", t_ms, e_mj);
            printf("Avg power %lf (W)\n", t_ms, e_mj, (double)e_mj / (double)t_ms);
            e_mj_init=e_mj_end;
            t_ms_init=t_ms_end;
        }
        i++;
    }
    ear_disconnect();
}
```

7.5 EAR Loader

The EAR Loader is the responsible for loading the EAR Library. It is a small and lightweight library loaded by the [EAR SLURM Plugin](#) (through the `LD_PRELOAD` environment variable) that identifies the user application and loads its corresponding EAR Library distribution.

The Loader detects the underlying application, identifying the MPI version (if used) and other minor details. With this information, the loader opens the suitable EAR Library version.

As can be read in the [EARL](#) page, depending on the MPI vendor the MPI types can be different, preventing any compatibility between distributions. For example, if the MPI distribution is OpenMPI, the EAR Loader will load the EAR Library compiled with the OpenMPI includes.

You can read the [installation guide](#) for more information about compiling and installing different EARL versions.

7.6 EAR SLURM plugin

EAR SLURM plugin allows to dynamically load and configure the EAR library for the SLURM jobs (and steps), if the flag `--ear=on` is set or if it is enabled by default. Additionally, it reports any jobs that start or end to the nodes' EARDs for accounting and monitoring purposes.

7.6.1 Configuration

Visit the [SLURM SPANK plugin section](#) on the configuration page to set up properly the SLURM `/etc/slurm/plugstack.conf` file.

You can find the complete list of EAR SLURM plugin accepted parameters in the [user guide](#).

Chapter 8

EAR configuration

8.1 Configuration requirements

The following requirements must be met for EAR to work properly:

8.1.1 EAR paths

EAR folders EAR uses two paths for EAR configuration:

- **EAR_TMP:** *tmp_ear_path* must be a private folder per compute node. It must have read/write permissions for normal users. Communication files are created here. It must be created by the admin. For instance: `mkdir /var/ear; chmod ugo +rwx /var/ear`
- **EAR_ETC:** *etc_ear_path* must be readable for normal users in all compute nodes. It can be a shared folder in "GPFS" (simple to manage) or replicated data because it has very few data and it is modified at a very low frequency (**ear.conf** and coefficients). Coefficients can be installed in a different path specified at configure time with **COEFFS** flag. Both **ear.conf** and coefficients must be readable in all the nodes (compute and `_service_` nodes).

ear.conf **ear.conf** is an ascii file setting default values and cluster descriptions. An **ear.conf** is automatically generated based on a **ear.conf.in** template. However, the administrator must include installation details such as hostname details for EAR services, ports, default values, and the list of nodes. For more details, check [EAR configuration file](#) below.

8.1.2 DB creation and DB server

MySQL or PostgreSQL database: EAR saves data in a MySQL/PostgreSQL DB server. EAR DB can be created using `edb_create` command provided (MySQL/PostgreSQL server must be running and root access to the DB is needed).

8.1.3 EAR SLURM plug-in

EAR SLURM plug-in can be enabled by adding an additional line at the `/etc/slurm/plugstack.conf` file. You can copy from the `ear_etc_path/slurm/ear.plugstack.conf` file).

Another way to enable it is to create the directory `/etc/slurm/plugstack.conf.d` and copy there the `ear_etc_path/slurm/ear.plugstack.conf` file. On that case, the content of `/etc/slurm/plugstack.conf` must be include `/etc/slurm/plugstack.conf.d/*.`

8.2 EAR configuration file

The **ear.conf** is a text file describing the EAR package behaviour in the cluster. It must be readable by all compute nodes and by nodes where commands are executed. Two `ear.conf` templates are generated with default values and will be installed as reference when executing `make etc.install`.

Usually the first word in the configuration file expresses the component related with the option. Lines starting with `#` are comments. A test for `ear.conf` file can be found in the path `src/test/functionals/ear_conf`. It is recommended to test it since the `ear.conf` parser is very sensible to errors in the `ear.conf` syntax, spaces, newlines, etc.

8.2.0.1 Database configuration

```
# The IP of the node where the MariaDB (MySQL) or PostgreSQL server process is running. Current version uses
# same names for both DB servers.
DBIp=172.30.2.101
# Port in which the server accepts the connections.
DBPort=3306

# MariaDB user that services will use. Needs INSERT/SELECT privileges. Used by the EARDBD.
DBUser=eardbd_user
# Password for the previous user. If left blank or commented it will assume the user has no password.
DBPassw=eardbd_pass
# Database user that the commands (eacct, ereport) will use. Only uses SELECT privileges.
DBCommandsUser=ear_commands
# Password for the previous user. If left blank or commented it will assume the user has no password.
DBCommandsPassw=commandspass

# Name of EAR's database in the server.
DBDatabase=EAR

# Maximum number of connections of the commands user to prevent server
# saturation/malicious actuation. Applies to DBCommandsUser.
DBMaxConnections=20
# The following specify the granularity of data reported to database.
# Extended node information reported to database (added: temperature, avg_freq, DRAM and PCK energy in power
# monitoring).
DBReportNodeDetail=1
# Extended signature hardware counters reported to database.
DBReportSigDetail=1
# Set to 1 if you want Loop signatures to be reported to database.
DBReportLoops=1
```

8.2.1 EARD configuration

```
# The port where the EARD will be listening.
NodeDaemonPort=50001

# Frequency used by power monitoring service, in seconds.
NodeDaemonPowermonFreq=60
# Maximum supported frequency (1 means nominal, no turbo).
NodeDaemonMaxPstate=1
# Enable (1) or disable (0) the turbo frequency.
NodeDaemonTurbo=0

# Enables the use of the database.
NodeUseDB=1
# Inserts data to MySQL by sending that data to the EARDBD (1) or directly (0).
NodeUseEARDBD=1
# '1' means EAR is controlling frequencies at all times (targeted to production systems) and 0 means EAR
# will not change the frequencies when users are not using EAR library (targeted to benchmarking
# systems).
NodeDaemonForceFrequencies=1

# The verbosity level [0..4]
NodeDaemonVerbose=1
# When set to 1, the output is saved at '$EAR_TMP'/eard.log (common configuration) as a log file. Otherwise,
# stderr is used.
NodeUseLog=1

# Report plug-ins to be used by the EARD. Default= eardbd.so.
# Add extra plug-ins by separating with colons (e.g., eardbd.so:plugin1.so).
EARReportPlugins=eardbd.so
```

8.2.2 EARDBD configuration

```
# Port where the EARDBD server is listening.
DBDaemonPortTCP=50002
# Port where the EARDBD mirror is listening.
DBDaemonPortSecTCP=50003
# Port used to synchronize the server and mirror.
DBDaemonSyncPort=50004

# In seconds, interval of time of accumulating data to generate an energy aggregation.
DBDaemonAggregationTime=60
# In seconds, time between inserts of the buffered data.
DBDaemonInsertionTime=30
# Memory allocated per process. These allocations are used for buffering the data
# sent to the database by EARD or other components. If there is a server and a
# mirror in a node a double of that value will be allocated. It is expressed in MegaBytes.
DBDaemonMemorySize=120

# When set to 1, EARDBD uses a '$EAR_TMP'/eardbd.log file as a log file.
DBDaemonUseLog=1

# Report plug-ins to be used by the EARDBD. Default= mysql.so.
# Add extra plug-ins by separating with colons (e.g., mysql.so:plugin1.so).
EARDBDReportPlugins=mysql.so
```

8.2.3 EARL configuration

```
# Path where coefficients are installed, usually $EAR_ETC/ear/coeffs.
CoefficientsDir=/path/to/coeffs

# NOTE: It is not recommended to change the following
# attributes if you are not an expert user.
# Number of levels used by DynAIS algorithm.
DynAISLevels=10
# Windows size used by DynAIS, the higher the size the higher the overhead.
DynAISWindowSize=200
# Maximum time (in seconds) that EAR will wait until a signature is computed. After this value, if no
# signature is computed, EAR will go to periodic mode.
DynaisTimeout=15
# Time in seconds to compute every application signature when the EAR goes to periodic mode.
LibraryPeriod=10
# Number of MPI calls whether EAR must go to periodic mode or not.
CheckEARModeEvery=1000
# EARL default report plug-ins
EARLReportPlug-ins=eard.so
```

8.2.4 EARGM configuration

You can skip this section if EARGM is not used in your installation.

```
# Verbosity
EARGMVerbose=1
# When set to 1, the output is saved in 'TmpDir'/eargmd.log (common configuration) as a log file.
EARGMUseLog=1
EARGMPort=50000
# Email address to report the warning level (and the action taken in automatic mode).
EARGMMail=nomail
# Period T1 and T2 are specified in seconds (ex. T1 must be less than T2, ex. 10min and 1 month).
EARGMEnergyPeriodT1=90
EARGMEnergyPeriodT2=259200
# '-' are Joules, 'K' KiloJoules and 'M' MegaJoules.
EARGMEnergyUnits=K
# Energy limit applies to EARGMPeriodT2.
EARGMEnergyLimit=550000
# Use aggregated periodic metrics or periodic power metrics.
# Aggregated metrics are only available when EARDBD is running.
EARGMEnergyUseAggregated=1
# Two modes are supported '0=manual' and '1=automatic'.
EARGMEnergyMode=0
# Percentage of accumulated energy to start the warning DEFCON level L4, L3 and L2.
EARGMEnergyWarningsPerc=85,90,95
# T1 "grace" periods between DEFCON before re-evaluate.
EARGMEnergyGracePeriods=3
# Format for action is: command_name energy_T1 energy_T2 energy_limit T2 T1 units "
# This action is automatically executed at each warning level (only once per grace periods).
EARGMEnergyAction=no_action

# Period at which the powercap thread is activated.
EARGMPowerPeriod=120
# Powercap mode: 0 is monitoring, 1 is hard powercap, 2 is soft powercap.
```

```

EARGMPowerCapMode=1
# Admins can specify to automatically execute a command in
# EARGMPowerCapSuspendAction when total_power >= EARGMPowerLimit*EARGMPowerCapResumeLimit/100
EARGMPowerCapSuspendLimit=90
# Format for action is: command_name current_power current_limit total_idle_nodes total_idle_power
EARGMPowerCapSuspendAction=no_action
# Admins can specify to automatically execute a command in EARGMPowerCapResumeAction
# to undo EARGMPowerCapSuspendAction when total_power >= EARGMPowerLimit*EARGMPowerCapResumeLimit/100.
# Note that this will only be executed if a suspend action was executed previously.
EARGMPowerCapResumeLimit=40
# Format for action is: command_name current_power current_limit total_idle_nodes total_idle_power
EARGMPowerCapResumeAction=no_action

# EARGMs must be specified with a unique id, their node and the port that receives
# remote connections. An EARGM can also act as meta-eargm if the meta field is filled,
# and it will control the EARGMs whose ids are in said field. If two EARGMs are in the
# same node, setting the EARGMID environment variable overrides the node field and
# chooses the characteristics of the EARGM with the corresponding id.

# Only one EARGM can currently control the energy caps, so setting the rest to 0 is recommended.
# energy = 0 -> energy_cap disabled
# power = 0 -> powercap disabled
# power = N -> powercap budget for that EARGM (and the nodes it controls) is N
# power = -1 -> powercap budget is calculated by adding up the powercap set to each of the nodes under its
#               control.
#               This is incompatible with nodes that have their powercap unlimited (powercap = 1)
EARGMId=1 energy=1800 power=600 node=node1 port=50100 meta=1,2,3
EARGMId=2 energy=0 power=500 node=node1 port=50101
EARGMId=3 energy=0 power=500 node=node2 port=50100

```

8.2.4.1 Common configuration

```

# Default verbose level
Verbose=0
# Path used for communication files, shared memory, etc. It must be PRIVATE per
# compute node and with read/write permissions. $EAR_TMP
TmpDir=/tmp/ear
# Path where coefficients and configuration are stored. It must be readable in all compute nodes. $EAR_ETC
EtcDir=/path/to/etc
InstDir=/path/to/inst

# Network extension: To be used in case the DC has more than one
# network and a special extension needs to be used for global commands
#NetworkExtension=

```

8.2.4.2 EAR Authorized users/groups/accounts

Authorized users that are allowed to change policies, thresholds and frequencies are supposed to be administrators. A list of users, Linux groups, and/or SLURM accounts can be provided to allow normal users to perform that actions. Only normal Authorized users can execute the learning phase.

```

AuthorizedUsers=user1,user2
AuthorizedAccounts=acc1,acc2,acc3
AuthorizedGroups=xx,yy

```

8.2.4.3 Energy tags

Energy tags are pre-defined configurations for some applications (EAR Library is not loaded). This energy tags accept a user ids, groups and SLURM accounts of users allowed to use that tag.

```

# General energy tag
EnergyTag=cpu-intensive pstate=1
# Energy tag with limited users
EnergyTag=memory-intensive pstate=4 users=user1,user2 groups=group1,group2 accounts=acc1,acc2

```

8.2.5 Tags

Tags are used for architectural descriptions. Max. AVX frequencies are used in predictor models and are SKU-specific. At least a default tag is mandatory to be included for a cluster to properly work.

The **min_power**, **max_power** and **error_power** are threshold values that determine if the metrics read might be invalid, and a warning message to syslog will be reported if the values are outside of said thresholds. The **error_power** field is a more extreme value that if a metric surpasses it, said metric will not be reported to the DataBase.

A special energy plug-in or energy model can be specified in a tag that will override the global values previously defined in all nodes that have this tag associated with them.

Powercap set to 0 means powercap is disabled and cannot be enabled at runtime. Powercap set to 1 means no limits on power consumption but a powercap can be set without stopping eard. List of accepted options:

- max_avx512 (GHz)
- max_avx2 (GHz)
- max_power (W)
- min_power (W)
- error_power (W)
- coeffs (filename)
- powercap (W)
- powercap_plugin (filename)
- energy_plugin (filename)
- gpu_powercap_plugin (filename)
- max_powercap (W)
- gpu_def_freq (GHz)
- cpu_max_pstate (0..max_pstate)
- imc_max_pstate (0..max_imc_pstate)
- energy_model (filename)
- imc_max_freq (GHz)
- imc_min_freq (GHz)
- idle_governor (governor name)
- idle_pstate (0..max_pstate)

```
Tag=6148 default=yes max_avx512=2.2 max_avx2=2.6 max_power=500 powercap=1 max_powercap=600 gpu_def_freq=1.4
energy_model=avx512_model.so energy_plugin=energy_nm.so powercap_plugin=dvfs.so
gpu_powercap_plugin=gpu.so min_power=50 error_power=600 coeffs=coeffs.default
Tag=6126 max_avx512=2.3 max_avx2=2.9 coeffs=coeffs.6126.default max_power=600 error_power=700
idle_governor=ondemand
```

8.2.5.1 Power policies plug-ins

```
# Policy names must be exactly file names for policies installed in the system.
DefaultPowerPolicy=monitoring
Policy=monitoring Settings=0 DefaultFreq=2.4 Privileged=0
Policy=min_time Settings=0.7 DefaultFreq=2.0 Privileged=0
Policy=min_energy Settings=0.05 DefaultFreq=2.4 Privileged=1

# For homogeneous systems, default frequencies can be easily specified using freqs.
# For heterogeneous systems it is preferred to use pstates.

# Example with pstates (lower pstates corresponds with higher frequencies).
# Pstate=1 is nominal and 0 is turbo
#Policy=monitoring Settings=0 DefaultPstate=1 Privileged=0
#Policy=min_time Settings=0.7 DefaultPstate=4 Privileged=0
#Policy=min_energy Settings=0.05 DefaultPstate=1 Privileged=1

# Tags can be also used with policies for specific configurations
#Policy=monitoring Settings=0 DefaultFreq=2.6 Privileged=0 tag=6126
```

8.2.6 Island description

This section is mandatory since it is used for cluster description. Normally nodes are grouped in islands that share the same hardware characteristics as well as its database managers (EARDBDS). Each entry describes part of an island, and every node must be in an island.

There are two kinds of database daemons. One called **server** and other one called **mirror**. Both perform the metrics buffering process, but just one performs the insert. The mirror will do that insert in case the 'server' process crashes or the node fails.

It is recommended for all islands to maintain server-mirror symmetry. For example, if the island I0 and I1 have the server N0 and the mirror N1, the next island would have to point the same N0 and N1 or point to new ones N2 and N3, not point to N1 as server and N0 as mirror.

Multiple EARDBDs are supported in the same island, so more than one line per island is required, but the condition of symmetry have to be met.

It is recommended that for an island the server and the mirror to be running in different nodes. However, the EARDBD program could be both server and mirror at the same time. This means that the islands I0 and I1 could have the N0 server and the N2 mirror, and the islands I2 and I3 the N2 server and N0 mirror, fulfilling the symmetry requirements.

A tag can be specified that will apply to all the nodes in that line. If no tag is defined, the default one will be used as hardware definition.

Finally, if an EARGM is being used to cap power, the EARGMID field is necessary in at least one line, and will specify what EARGM controls the nodes declared in that line. If no EARGMID is found in a line, the first one found will be used (ie, the previous line EARGMID).

In the following example the nodes are clustered in two different islands,
but the Island 1 have two types of EARDBDs configurations.

```
Island=0 DBIP=node1081 DBSECIP=node1082 Nodes=node10[01-80] EARGMID=1

# These nodes are in island0 using different DB connections and with a different architecture

Island=0 DBIP=node1084 DBSECIP=node1085 Nodes=node11[01-80] DBSECIP=node1085 tag=6126

# These nodes are in island0 and will use default values for DB connection (line 0 for island0) and default
tag
#These nodes will use the same EARGMID as the previous ones
Island=0 Nodes=node12[01-80]

# Will use default tag
Island=1 DBIP=node1181 DBSECIP=node1182 Nodes=node11[01-80]
```

Detailed island accepted values:

- nodename_list accepts the following formats:
 - Nodes=node1,node2,node3
 - Nodes=node\\[1-3\\]
 - Nodes=node\\[1,2,3\\]
- Any combination of the two latter options will work, but if nodes have to be specified individually (the first format) as of now they have to be specified in their own line. As an example:
 - Valid formats:
 - * Island=1 Nodes=node1,node2,node3
 - * Island=1 Nodes=node\\[1-3\\],node\\[4,5\\]
 - Invalid formats:
 - * Island=1 Nodes=node\\[1,2\\],node3
 - * Island=1 Nodes=node\\[1-3\\],node4

8.3 SLURM SPANK plug-in configuration file

SLURM loads the plug-in through a file called `plugstack.conf`, which is composed by a list of a plug-ins. In the file `etc/slurm/ear.plugstack.conf`, there is an example entry with the paths already set to the plug-in, temporal and configuration paths.

Example:

```
required ear_install_path/lib/earplug.so prefix=ear_install_path sysconfdir=etc_ear_path
localstatedir=tmp_ear_path earlib_default=off
```

The argument `prefix` points to the EAR installation path and it is used to load the library using `LD_PRELOAD` mechanism. Also the `localstatedir` is used to contact with the EARD, which by default points the path you set during the `./configure` using `--localstatedir` or `EAR_TMP` arguments. Next to these fields, there is the field `earlib_default=off`, which means that by default EARL is not loaded. Finally there are `eargmd_host` and `eargmd_port` if you plan to connect with the EARGMD component (you can leave this empty).

Also, there are two additional arguments. The first one, `nodes_allowed=` followed by a comma separated list of nodes, enables the plug-in only in that nodes. The second, `nodes_excluded=`, also followed by a comma separated list of nodes, disables the plug-in only in nodes in the list. These are arguments for very specific configurations that must be used with caution, if they are not used it is better that they are not written.

Example:

```
required ear_install_path/lib/earplug.so prefix=ear_install_path sysconfdir=etc_ear_path
localstatedir=tmp_ear_path earlib_default=off nodes_excluded=node01,node02
```

8.3.1 MySQL/PostgreSQL

WARNING: If any EAR component is running in the same machine as the MySQL server some connection problems might occur. This will not happen with PostgreSQL. To solve those issues, input into MySQL's CLI client the `CREATE USER` and `GRANT PRIVILEGES` queries from `edb_create -o` changing the portion `"user_name'@"t"o'user_name'@'localhost"` so that EAR's users have access to the server from the local machine. There are two ways to configure a database server for EAR's usage.

- Run `edb_create -r` located in `$EAR_INSTALLATION_PATH/sbin` from a node with root access to the MySQL server. This requires MySQL/PostgreSQL's section of `ear.conf` to be correctly written. For more info run `edb_create -h`.
- Manually create the database and users specified in `ear.conf`, as well as the required tables. If `ear.conf` has been configured, running `edb_create -o` will output the queries that would be run with the program that contain all that is needed for EAR to properly function.

For more information about how each `ear.conf` flag changes the database creation, see our [Database section](EAR-Database). For further information about EAR's database management tools, see the [Commands section](#).

8.3.2 MSR Safe

MSR Safe is a kernel module that allows to read and write MSR without root permission. EAR opens MSR Safe files if the ordinary MSR files fail. MSR Safe requires a configuration file to allow read and write registers. You can find configuration files in `etc/msr_safe` for Intel Skylake and superior and AMD Zen and superior.

You can pass these configuration files to MSR Safe kernel mode like this:

```
cat intel63 > /dev/cpu/msr_allowlist
```

You can find more information in the [official repository](#)

Chapter 9

Learning phase

This is a necessary phase prior to the normal EAR utilization and is a kind of hardware characterization of the nodes. During the phase a matrix of coefficients are calculated and stored. These coefficients will be used to predict the energy consumption and performance of each application.

Please, visit the learning phase [wiki page](#) to read the manual and the [repository](#) to get the scripts and the kernels.

9.1 Tools

The following table lists tools provided with EAR package to work with coefficients computed during the learning phase.

Name	Description	Basic arguments
coeffs_compute	Computes the learning coefficients.	<save path> <min_freq> <nodename>
coeffs_default	Computes the default coefficients file.	
coeffs_null	Creates a dummy configuration file to be used by EARD.	<coeff_path>, <max_freq> <min_freq>
coeffs_show	Shows the computed coefficients file in text format.	<file_path>

Use the argument `--help` to expand the application information and list the admitted flags.

9.1.1 Examples

Compute the coefficients for the node `node1001` in which the minimum frequency set during the learning phase was 1900000 KHz

```
./coeffs_compute /etc/coeffs 1900000 node1001
```


Chapter 10

EAR plug-ins

Some of the core of EAR functionality can be dynamically loaded through a plug-in mechanism, making EAR more extensible and dynamic than previous versions since it is not needed to reinstall the system to add, for instance, a new policy or a new power model. It is only needed to copy the file in the `$EAR_INSTALL_PATH/lib/plugins` folder and restart some components. The following table lists the current EAR functionalities designed with a plu-in mechanism:

Plug-in	Description
Power model	Energy models used by energy policies.
Power policies	Energy policies themselves.
Energy readings	Node energy readings.
Tracing	Execution traces.
Report	[Data reporting](Report).
Powercap	Powercap management.

10.1 Considerations

- Plug-in **paths** is set by default to `$EAR_INSTALL_PATH/lib/plugins`.
- Default **power model** library is specified in `ear.conf` (*energy_model* option). By default EAR includes a `basic_model.so` and `avx512_model.so` plug-ins.
- The **node energy readings** library is specified at `ear.conf` in the *energy_plugin* option for each tag. Several plug-ins are included: `energy_nm.so` (uses Intel NodeManager IPMI commands), `energy_↵_rapl.so` (uses a node energy estimation based on DRAM and PACKAGE energy provided by RAPL), `energy_sd650.so` (uses the high frequency IPMI hardware included in Lenovo SD650 systems) and the `energy_inm_power_freeipmi.so`, which uses the Intel Node Manager power reading commands and requires the `freeipmi` library.
- **Power policies** included in EAR are: `monitoring.so`, `min_energy.so`, `min_time.so`, `min_↵energy_no_models.so` and `min_time_no_models.so`. The list of policies installed is automatically detected by the EAR plug-in. However, only policies included in `ear.conf` can be used.
- The **tracing** is an optional functionality. It is included to provide additional information or to generate runtime information.
- **Report** plug-ins include different options to report EAR data from the different components. By default it is included the `eard`, `eardbd`, `csv_ts`, `mysql/psql` (depending on the installation). Plug-ins to be loaded by default can be specified on the `ear.conf`. For more information, check the [report section](Report)

Note SLURM Plugin does not fit in this philosophy, it is a core component of EAR and can not be replaced by any third party development.

Chapter 11

EAR Powercap

EAR provides powercap at different levels:

- Node powercap, where a node cannot exceed their given power consumption.
- Cluster powercap, where the target power is for the entire cluster. It uses the node powercap to achieve its target.

11.1 Node powercap

Node powercap is enforced by the EARD. The initial values for each node's powercap are set in the tags section of the ear.conf (see [Tags](#) for more information), which include the power limit, the CPU/PKG powercap plugin and the GPU powercap plugin (if needed). The power limit can be changed at runtime via `econtrol` or by an active `EARGM` that has the node under its control.

The EARD enforces the powercap via its plugins, which in turn ensure that the domain they control (CPU/GPU) does not exceed their power allocation.

The main goals of the node powercap is, first and foremost, to enforce the power limit with the secondary goal to maximize performance while under said limit. The EARD will use its current power limit as a budget which it will, in turn, distribute among the domains (controlled by the plugins) according to the current node's needs.

Node powercap can be applied without cluster powercap by defining only the node powercap in the EAR configuration file.

11.2 Cluster powercap

Cluster powercap is managed by one or more `EARGMs` and enforced at a node level by the EARD. `EARGMs` have an individual power limit set in their definition (see [EARGM](#) for more details) and the monitoring frequency. Each `EARGM` will then ask the nodes under its control (as indicated in the [nodes' definition](#) for its power consumption and distribute the budget accordingly. There are two main ways in which the cluster powercap might be enforced; soft and hard cluster powercap.

11.2.1 Soft cluster powercap

This type of powercap is targeted to systems where exceeding the power limit is not a hardware constraint but a rule that needs enforcement for a different reason. In this scenario, the compute nodes will run as if no limit was applied until the total power consumption of the cluster reaches a percentage threshold (defined as the suspend threshold in `ear.conf`), at which point the EARGM will send a power limit to all the nodes to prevent the global power to go above the actual limit. Additionally, a script can be attached to the activation of the powercap in which the admin can set whichever actions they feel appropriate. Once the cluster power goes below another percentage threshold (defined as the resume threshold in `ear.conf`) the EARGM will send a message to all the nodes to go back to unlimited power usage, as well as call the deactivation script set by the admin (if any is specified).

In terms of configuration, `EARGMPowerCapMode` must be set to 2 (soft powercap) and all nodes need to have a `max_powercap` set in their tag. The value of `max_powercap` will be the power allocation of the nodes that have that tag. If a node has a `max_powercap` value of 1, 0 or -1 they will ignore powercap messages from an EARGM in soft cluster powercap mode.

11.2.2 Hard cluster powercap

Hard powercap is used when the system must not, under any circumstance, go above the power limit. This starts by always having a set powercap in the compute nodes. The job of the EARGM is to periodically monitor the state of the nodes, which will request more or less power depending on their current workload, and redistribute the power according to the needs of all nodes.

11.3 Possible powercap values

To set the powercap for an entire cluster one can do it two ways, specific values and calculated. With specific values, the `powercap` value in the EARGM definition must be a number > 0 , and that will be the power budget for the EARGM to distribute among the nodes it controls. On the other hand, if `powercap=-1` the total power budget will be calculated automatically as the sum of the powercap values set in the tags for the nodes it controls.

For an EARD, the valid values of `powercap` in its tag are 1 and $N > 1$. When set to 1, the daemon will run with no power limit until it receives one. On the other hand, if the powercap is a higher number that will be used as the power limit until a different value is set via `econtrol` or EARGM reallocations.

If either `powercap` or `EARGMPowercapMode` is set to 0 in the configuration file, the thread that controls the power limits will not be started and the feature will be disabled.

If the initial powercap value for a node is set to 0 the powercap will be disabled for that node and it will ignore any attempts to set it to a certain value. Set it to 1 if you ever want to set the powercap.

11.4 Example configurations

The following is an example for hard powercap on 4 nodes, with a starting powercap of 225W each and a total power budget of 1000W. For clarity a few fields in the tags section have been skipped.

```
# Wait period between power checks
EARGMPowerPeriod=120
# Activate powercap
EARGMPowercapMode=1
# Set up at least 1 EARGM
EARGMId=1 energy=XXX power=1000 node=node1

# Set up the nodes
```



```
Tag=tag1 default=yes max_power=500 min_power=50 error_power=600 powercap=225 powercap_plugin=dvfs.so
gpu_powercap_plugin=gpu.so

Island=1 nodes=node[1-4] EARGMId=1
```

This example is similar to the previous one, but the global powercap is calculated by the EARGM as the sum of the nodes. In this case, the nodes start with a default powercap of 250W and the total budget for the cluster remains 1000W.

```
# Wait period between power checks
EARGMPowerPeriod=120
# Activate powercap
EARGMPowercapMode=1
# Set up at least 1 EARGM
EARGMId=1 energy=XXX power=-1 node=node1

# Set up the nodes
Tag=tag1 default=yes max_power=500 min_power=50 error_power=600 powercap=250 powercap_plugin=dvfs.so
gpu_powercap_plugin=gpu.so

Island=1 nodes=node[1-4] EARGMId=1
```

The following is a soft powercap example with a power budget of 1000W. The nodes will start without a set powercap but will be ready to activate it.

```
# Wait period between power checks
EARGMPowerPeriod=120
# Activate powercap as soft powercap
EARGMPowercapMode=2
# Set up at least 1 EARGM
EARGMId=1 energy=XXX power=1000 node=node1

# Set up the nodes
Tag=tag1 default=yes max_power=500 min_power=50 error_power=600 powercap=1 powercap_plugin=dvfs.so
gpu_powercap_plugin=gpu.so

Island=1 nodes=node[1-4] EARGMId=1
```

Finally, this example has **ONLY** node powercap, with the nodes having a limit of 250W. There will be no reallocation:

```
# Wait period between power checks
EARGMPowerPeriod=120
# Activate powercap
EARGMPowercapMode=1
# Set up at least 1 EARGM
EARGMId=1 energy=XXX power=0 node=node1

# Set up the nodes
Tag=tag1 default=yes max_power=500 min_power=50 error_power=600 powercap=250 powercap_plugin=dvfs.so
gpu_powercap_plugin=gpu.so

Island=1 nodes=node[1-4] EARGMId=1
```

This is the same, but deactivating the powercap by setting the mode to 0:

```
# Wait period between power checks
EARGMPowerPeriod=120
# Activate powercap
EARGMPowercapMode=0
# Set up at least 1 EARGM
EARGMId=1 energy=XXX power=1000 node=node1

# Set up the nodes
Tag=tag1 default=yes max_power=500 min_power=50 error_power=600 powercap=250 powercap_plugin=dvfs.so
gpu_powercap_plugin=gpu.so

Island=1 nodes=node[1-4] EARGMId=1
```

This is an erroneous way to set it up, because the nodes' powercap capabilities will not be active:

```
# Wait period between power checks
EARGMPowerPeriod=120
# Activate powercap
EARGMPowercapMode=1
# Set up at least 1 EARGM
EARGMId=1 energy=XXX power=1000 node=node1

# Set up the nodes
Tag=tag1 default=yes max_power=500 min_power=50 error_power=600 powercap=0 powercap_plugin=dvfs.so
gpu_powercap_plugin=gpu.so

Island=1 nodes=node[1-4] EARGMId=1
```

Similarly, this following example does not work because the EARGM cannot calculate a valid powercap when the nodes are set to unlimited:

```
# Wait period between power checks
EARGMPowerPeriod=120
# Activate powercap
EARGMPowercapMode=1
# Set up at least 1 EARGM
EARGMId=1 energy=XXX power=-1 node=node1

# Set up the nodes
Tag=tag1 default=yes max_power=500 min_power=50 error_power=600 powercap=1 powercap_plugin=dvfs.so
    gpu_powercap_plugin=gpu.so

Island=1 nodes=node[1-4] EARGMId=1
```

11.5 Valid configurations

There are three special values for powercap configuration, 1 (unlimited, only for Tags/Node), 0 (disabled) and -1 (auto-configure).

Furthermore, there are three cluster powercap modes for EARGM: 0 (monitoring-only), 1 (hard cluster powercap) and 2 (soft cluster powercap).

EARGM powercap mode	EARGM powercap value	Tag powercap value	Result
ANY	0	1	Cluster powercap disabled, node powercap unlimited (but can be set with <code>econtrol</code>)
ANY	0	0	All powercap types disabled, and cannot be modified without restarting
ANY	0	N	Cluster powercap disabled, node powercap set to N
HARD	-1	N	Cluster powercap set to the sum of the nodes' powercap. Node powercap set to N
HARD	N	-1	Cluster powercap set to N. Node powercap set to N/number of nodes controlled by EARGM
HARD	N	M	Cluster powercap set to N. Node powercap set to N
SOFT	N	1	Cluster powercap set to N, node powercap unlimited. If triggered, node powercap will be set to their <code>max_powercap</code> value
SOFT	N	M	*ERROR *
HARD/SOFT	N	0	ERROR
HARD/SOFT	-1	-1	ERROR
HARD/SOFT	0	-1	*ERROR
HARD/SOFT	1	-1	*ERROR
HARD/SOFT	-1	1	ERROR

NOTE: When using soft cluster powercap, max_powercap value must be properly set for the powercap to work.

Chapter 12

Report plugins

EAR includes several report plugins that are used to send data to various services:

- EARD/EARDBD: this plugins are used internally by EAR to send data between services, which in turn will aggregate it and send it to the configured databases or other services.
- MySQL/PostgreSQL: both plugins implement full EAR job and system accounting, using both the official C bindings to send the data to the database. For more information on the database structure, see [the corresponding section](#)
- Prometheus: this plugin exposes system monitoring data in OpenMetrics format, which is fully compatible with Prometheus. For information about how to compile and set it up, check the [Prometheus section](#).
- csv_ts: reports loop and application data to a .csv file. The structure is the same as eacct's CSV option (see ``eacct``) with an added column for the timestamp.
- EXAMON: sends application accounting and system metrics to EXAMON. For more information, see its [dedicated section](#).
- DCDB: sends application accounting and system metrics to DCDB. For more information, see its [dedicated section](#).
- sysfs: exposes system monitoring data through the file system. For more information, see its [dedicated section](#).

12.1 Prometheus report plugin

12.1.1 Requirements

The Prometheus plugin has only one dependency, `microhttpd`. To be able to compile it make sure that it is in your `LD_LIBRARY_PATH`.

12.1.2 Installation

Currently, to compile and install the prometheus plugin one has to run the following command.

```
make FEAT_DB_PROMETHEUS=1
make FEAT_DB_PROMETHEUS=1 install
```

With that, the plugin will be correctly placed in the usual folder.

12.1.3 Configuration

Due to the way in which Prometheus works, this plugin is designed to be used by the EAR Daemons, although the EARDDBD should not have many issues running it too.

To have it running in the daemons, simply add it to the corresponding line in the [configuration file](Configuration).

```
EARDReportPlugins=eardbd.so;prometheus.so
```

This will expose the metrics on each node on a small HTTP server. You can access them normally through a browser at port 9011 (fixed for now).

In Prometheus, simply add the nodes you want to scrape in prometheus.yml with the port 9011. Make sure that the scrape interval is equal or shorter than the insertion time (NodeDaemonPowermonFreq in ear.conf) since metrics only stay in the page for that duration.

12.2 Examon

ExaMon (Exascale Monitoring) is a lightweight monitoring framework for supporting accurate monitoring of power/energy/thermal and architectural parameters in distributed and large-scale high-performance computing installations.

12.2.1 Compilation and installation

To compile the EXAMON plugin you need a functioning EXAMON installation.

Modify the main Makefile and set `FEAT_EXAMON=1`. In `src/report/Makefile`, update `EXAMON_BASE` with the path to the current EXAMON installation. Finally, set an `examon.conf` file somewhere on your installation, and modify `src/report/examon.c` (line 83, variable ``char* conffile = "/hpc/opt/ear/etc/ear/examon.conf"``) to point to the new `examon.conf` file.

The file should look like this:

```
[MQTT]
```

```
brokerHost = hostip
brokerPort = 1883

topic = org/bsc
qos = 0

data_topic_string = plugin/ear/chnl/data
cmd_topic_string = plugin/ear/chnl/cmd
```

Where `hostip` is the actual ip of the node.

Once that is set up, you can compile EAR normally and the plugin will be installed in the `lib/plugins/report` folder inside EAR's installation. To activate it, set it as one of the values in the `EARDReportPlugins` of `ear.conf` and restart the EARD.

The plugin is designed to be used locally in each node (EARD level) together with EXAMON's data broker.

12.3 DCDB

The Data Center Data Base (DCDB) is a modular, continuous, and holistic monitoring framework targeted at HPC environments.

This plugin implements the functions to report periodic metrics, report loops, and report events.

When the DCDB plugin is loaded the collected EAR data per report type are stored into a shared memory which is accessed by DCDB ear sensor (report plugin implemented on the DCDB side) to collect the data and push them into the database using MQTT messages.

12.3.1 Compilation and configuration

This plugin is automatically installed with the default EAR installation. To activate it, set it as one of the values in the `EARDReportPlugins` of `ear.conf` and restart the EARD.

The plugin is designed to be used locally in each node (EARD level) with the DCDB collect agent.

12.4 Sysfs Report Plugin

This is a new report plugin to write EAR collected data into a file. Single file is generated per metric per jobID & stepID per node per island per cluster. Only the last collected data metrics are stored into the files, means every time the report runs it saves the current collected values by overwriting the previous data.

12.4.1 Namespace Format

The below schema has been followed to create the metric files:

```
/root_directory/cluster/island/nodename/avg/metricFile
/root_directory/cluster/island/nodename/current/metricFile
/root_directory/cluster/island/jobs/jobID/stepID/nodename/avg/metricFile
/root_directory/cluster/island/jobs/jobID/stepID/nodename/current/metricFile
```

The `root_directory` is the default path where all the created metric files are generated.

The `cluster`, `island` and `nodename` will be replaced by the island number, cluster name, and node information.

`metricFile` will be replaced by the name of the metrics collected by EAR.

12.4.2 Metric File Naming Format

The naming format used to create the metric files is implementing the standard sysfs interface format. The current commonly used schema of file naming is:

```
<type>_<component>_<metric-name>_<unit>
```

Numbering is used with some metric files if the component has more than one instance like FLOPS counters or GPU data.

Examples of some generated metric files:

- `dc_power_watt`
- `app_sig_pck_power_watt`
- `app_sig_mem_gbs`
- `app_sig_flops_6`
- `avg_imc_freq_KHz`

12.4.3 Metrics reported

The following are the reported values for each type of metric recorded by ear:

- report_periodic_metrics
 - Average values
 - * The frequency and temperature values have been calculated by summing the values of all periods since the report loaded until the current period and divide it by the total number of periods.
 - * The energy value is accumulated value of all the periods since the report loaded until the current one.
 - * The path to those metric files built as: `/root_directory/cluster/island/nodename/avg/metricFile`
 - Current values
 - * Represent the current collected EAR metric per period.
 - * The path to those metric files built as: `/root_directory/cluster/island/nodename/current/metricFile`
- report_loops
 - Current values
 - * Represent the current collected EAR metric per loop.
 - * The path to those metric files built as: `/root_directory/cluster/island/jobs/jobID/stepID/nodename/current/metricFile`
- report_applications
 - Current values
 - * Represent the current collected EAR metric per application.
 - * The path to those metric files built as: `/root_directory/cluster/island/jobs/jobID/stepID/nodename/avg/metricFile`
- report_events
 - Current values
 - * Represent the current collected EAR metric per event.
 - * The path to those metric files built as: `/root_directory/cluster/island/jobs/jobID/stepID/nodename/current/metricFile`

``` Note: If the cluster contains GPUs, both report\_loops and report\_applications will generate new schema files per GPU which contain all the collected data for each GPU with the paths below:
 

- `/root_directory/cluster/island/jobs/jobID/stepID/nodename/current/GPU-ID/metricFile`
- `/root_directory/cluster/island/jobs/jobID/stepID/nodename/avg/GPU-ID/metricFile`



## Chapter 13

# EAR Database

### 13.1 Tables

#### 13.1.1 Application information

The following tables contain information directly related to applications executed on the system while EAR was monitoring. The main key is the JOBID.STEPID combination generated by the scheduler.

- **Jobs:** job information (app\_id, user\_id, job\_id, step\_id, etc). One record per JOBID.STEPID is created in the DB.
- **Applications:** this table's records serve as a link between Jobs and Signatures, providing an application signature (from EARL) for each node of a job. One record per JOBID.STEPID.NODENAME is created in the DB.
- **Loops:** similar to *Applications*, but stores a Signature for each application loop detected by EARL, instead of one per each application. This table provides internal details of running applications and could significantly increase the DB size.
- **Signatures:** EARL computed signature and metrics. One record per JOBID.STEPID.NODENAME is created in the DB when the application is executed with EARL.
- **GPU\_signatures:** EARL computed GPU signatures. This information belongs to a loop or application signature. If the signature is from a node with 4 GPUs there will be 4 records.
- **Power\_signatures:** Basic time and power metrics that can be obtained without EARL. Reported for all applications. One record per JOBID.STEPID.NODENAME is created in the DB.

#### 13.1.2 System monitoring

This tables contain periodic information gathered from the nodes. There is a single-node information table and an aggregated one to increase the speed of queries to get cluster-wide information.

- **Periodic\_metrics:** node metrics reported every N seconds (N is defined in `ear.conf`).
- **Periodic\_aggregations:** sum of all *Periodic\_metrics* in a time period to ease accounting in `ereport` command and EARGM, as well as reducing database size (*Periodic\_metrics* of older periods where precision at node level is not needed can be deleted and the aggregations can be used instead).

### 13.1.3 Events

- **Events:** EAR events report. There are several types of events, depending on their source: EARL, EARD-powercap, EARD-runtime and EARGM. For more information, see the [table's fields](#) and its header file (`src/common/types/event_type.h`). For EARL-specific events, also see [this](#).

### 13.1.4 EARGM reports

- **Global\_energy:** contains reports of cluster-wide energy accounting set by EARGM using the parameters in `ear.conf`. One record every T1 period (defined at `ear.conf`) is reported.

### 13.1.5 Learning phase

This tables are the same as their non-learning counterparts, but are specifically used to store the applications executed during a learning phase.

- **Learning\_applications:** same as *Applications*, restricted to learning phase applications.
- **Learning\_jobs:** same as *Jobs*, restricted to learning phase jobs.
- **Learning\_signatures:** same as *Signatures*, restricted to learning phase job metrics.

**NOTE** In order to have *GPU\_signatures* table created and *Periodic\_metrics* containing GPU data, the databasease must be created (if you follow the `edb_create` approach, see the section down below) with GPUs enabled at the compilation time. See [how to update from previous versions](#) if you are updating EAR from a release not having GPU metrics.

## 13.2 Creation and maintenance

To create the database a command (`edb_create`) is provided by EAR, which can either create the database directly or provide the queries for the database creation so the administrator can use them or modify them at their discretion (any changes may alter the correct function of EAR's accounting).

Since a lot of data is reported by EAR to the database, EAR provides two commands to remove old data and free up space. These are intended to be used with a `cron` job or a similar tool, but they can also be run manually without any issues. The two tools are `edb_clean_pm` to remove periodic data accounting from nodes, and `edb_clean_apps` to remove all the data related to old jobs.

For more information on this commands, check the [commands' page on the wiki](#).

## 13.3 Database creation and `ear.conf`

When running `edb_create` some tables might not be created, or may have some quirks, depending on some `ear.conf` settings. The settings and alterations are as follows:

- `DBReportNodeDetail`: if set to 1, `edb_create` will create two additional columns in the *Periodic\_metrics* table for Temperature (in Celsius) and Frequency (in Hz) accounting.
- `DBReportSigDetail`: if set to 1, *Signatures* will have additional fields for cycles, instructions, and FLOPS1-8 counters (number of instruction by type).
- `DBMaxConnections`: this will restrict the number of maximum simultaneous commands connections.

If any of the settings is set to 0, the table will have fewer details but the table's records will be smaller in stored size.

Any table with missing columns can be later altered by the admin to include said columns. For a full detail of each table's columns, run `edb_create -o` with the desired `ear.conf` settings.


## 13.4 Information reported and ear.conf

There are various settings in `ear.conf` that restrict data reported to the database and some errors might occur if the database configuration is different from EARDB's.

- `DBReportNodeDetail`: if set to 1, node managers will report temperature, average frequency, DRAM and PCK energy to the database manager, which will try to insert it to *Periodic\_metrics*. If *Periodic\_metrics* does not have the columns for both metrics, an error will occur and nothing will be inserted. To solve the error, set `ReportNodeDetail` to 0 or manually update *Periodic\_metrics* in order to have the necessary columns.
- `DBReportSigDetail`: similarly to `ReportNodeDetail`, an error will occur if the configuration differs from the one used when creating the database.
- `DBReportLoops`: if set to 1, EARL detected application loops will be reported to the database, each with its corresponding Signature. Set to 0 to disable this feature. Regardless of the setting, no error should occur.

If *Signatures* and/or *Periodic\_metrics* have additional columns but their respective settings are set to 0, a NULL will be set in those additional columns, which will make those rows smaller in size (but bigger than if the columns did not exist).

Additionally, if EAR was compiled in a system with GPUs (or with the GPU flag manually enabled), another table to store GPU data will be created.

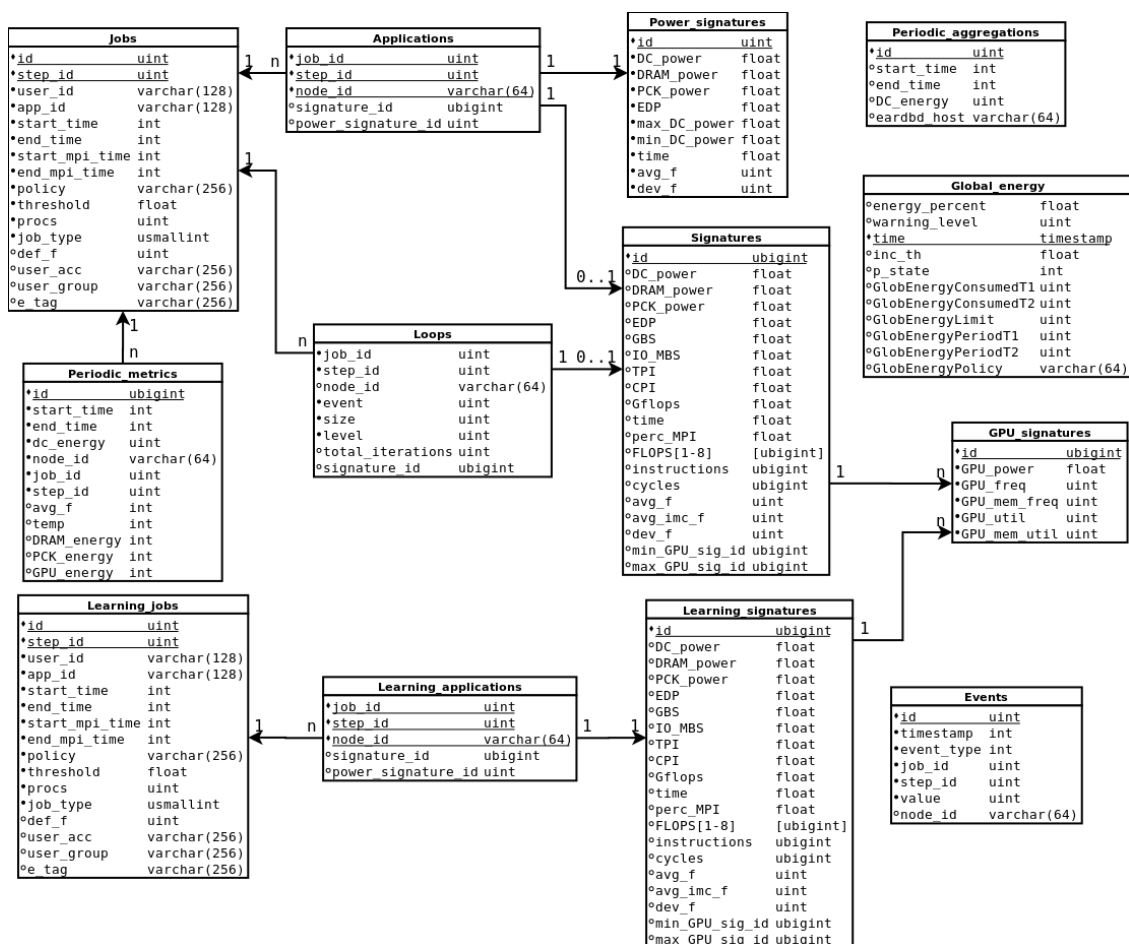

**NOTE** the nomenclature is modified from MySQL's type. Any type starting with u is unsigned. `bigint` corresponds to an integer of 64 bits, `int` is 32 and `smallint` is 16.

For a detailed description of each field in any of the database's tables, see [\[here\]](#)(EAR-database-table-descriptions).

## 13.5 Updating from previous versions

### 13.5.1 From EAR 4.2 to 4.3

Three new fields corresponding to L1, L2 and L3 cache misses have been added to the signatures.

**NOTE** This change only applies to the databases that have been created with the extended application signature (i.e. they have the FLOPS, instructions and cycles counters in their signatures).

```
ALTER TABLE Signatures
ADD COLUMN L1_misses BIGINT UNSIGNED AFTER perc_MPI,
ADD COLUMN L2_misses BIGINT UNSIGNED AFTER L1_misses,
ADD COLUMN L3_misses BIGINT UNSIGNED AFTER L2_misses;
ALTER TABLE Learning_signatures
ADD COLUMN L1_misses BIGINT UNSIGNED AFTER perc_MPI,
ADD COLUMN L2_misses BIGINT UNSIGNED AFTER L1_misses,
ADD COLUMN L3_misses BIGINT UNSIGNED AFTER L2_misses;
```

### 13.5.2 From EAR 4.1 to 4.2

A field in the Events table had its name changed to be more generic and its type changed to unsigned:

```
ALTER TABLE Events CHANGE freq value INT unsigned;
```

Furthermore, some errors on big servers have been found due to the ids of a few fields being too small. To correct this, please run the following commands:

```
ALTER TABLE Learning_signatures MODIFY COLUMN id BIGINT unsigned AUTO_INCREMENT;
ALTER TABLE Signatures MODIFY COLUMN id BIGINT unsigned AUTO_INCREMENT;
ALTER TABLE Applications MODIFY COLUMN signature_id BIGINT unsigned;
ALTER TABLE Loops MODIFY COLUMN signature_id BIGINT unsigned;
```

If GPUs are being used, also run:

```
ALTER TABLE GPU_signatures MODIFY COLUMN id BIGINT unsigned AUTO_INCREMENT;
ALTER TABLE Learning_signatures MODIFY COLUMN min_gpu_sig_id BIGINT unsigned;
ALTER TABLE Learning_signatures MODIFY COLUMN max_gpu_sig_id BIGINT unsigned;
ALTER TABLE Signatures MODIFY COLUMN min_gpu_sig_id BIGINT unsigned;
ALTER TABLE Signatures MODIFY COLUMN max_gpu_sig_id BIGINT unsigned;
```

### 13.5.3 From EAR 3.4 to 4.0

Several fields have to be added in this update. To do so, run the following commands to the database's CLI client:

```
ALTER TABLE Signatures ADD COLUMN avg_imc_f INT unsigned AFTER avg_f;
ALTER TABLE Signatures ADD COLUMN perc_MPI FLOAT AFTER time;
ALTER TABLE Signatures ADD COLUMN IO_MBS FLOAT AFTER GBS;

ALTER TABLE Learning_signatures ADD COLUMN avg_imc_f INT unsigned AFTER avg_f;
ALTER TABLE Learning_signatures ADD COLUMN perc_MPI FLOAT AFTER time;
ALTER TABLE Learning_signatures ADD COLUMN IO_MBS FLOAT AFTER GBS;
```

### 13.5.4 From EAR 3.3 to 3.4

If no GPUs were used and they will not be used there are no changes necessary.

If GPUs were being used, type the following commands to the database's CLI client:

```
ALTER TABLE Signatures ADD COLUMN min_GPU_sig_id BIGINT unsigned, ADD COLUMN max_GPU_sig_id BIGINT unsigned;

ALTER TABLE Learning_signatures ADD COLUMN min_GPU_sig_id BIGINT unsigned, ADD COLUMN max_GPU_sig_id BIGINT unsigned;

CREATE TABLE IF NOT EXISTS GPU_signatures (id BIGINT unsigned NOT NULL AUTO_INCREMENT, GPU_power FLOAT NOT NULL, GPU_freq INT unsigned NOT NULL, GPU_mem_freq INT unsigned NOT NULL, GPU_util INT unsigned NOT NULL, GPU_mem_util INT unsigned NOT NULL, PRIMARY KEY (id));
```

If no GPUs were being used but now are present, use the previous query plus the following one:

```
ALTER TABLE Periodic_metrics ADD COLUMN GPU_energy INT;
```

## 13.6 Database tables description

EAR's database contains several tables, as described [here](#). Each table contains different information, as described here:

### 13.6.1 Jobs

- `id`: Job id given by the scheduler (for example SLURM\_JOBID).
- `step_id`: step id given by the scheduler.
- `user_id`: the linux username that executed the job.
- `app_id`: the application/job name as given by the scheduler (not necessarily the executable's name)
- `start_time`: timestamp of the job's[.step] start
- `end_time`: timestamp of the job's[.step] end
- `start_mpi_time`: timestamp of the beginning of application region managed by the EARL. Named MPI for historical reasons. For MPI applications timestamp of the MPI\_Init execution.
- `end_mpi_time`: timestamp of the end of application region managed by the EARL. Named MPI for historical reasons. For MPI applications timestamp of the MPI\_Finalize execution.
- `policy`: EAR policy name in action for the job. Can be "No Policy" if the job runs without EAR.
- `threshold`: threshold used by the policy to configure it's behavior. For example, the maximum performance penalty in `min_energy`.
- `job_type`:
- `def_f`: default CPU frequency requested by the user/job manager.
- `user_acc`: the account the `user_id` belongs to.
- `user_group`: the linux group name the `user_id` belongs to.
- `e_tag`: energy tag. The user can specify an energy tag to apply pre-defined CPU frequency settings.

### 13.6.2 Applications

- `job_id`: job id given by the scheduler. Used as a foreign key for Jobs.
- `step_id`: step id given by the scheduler. Used as a foreign key for Jobs.
- `node_id`: the nodename in which the application ran. The names of the nodes are trimmed at any ".", i.e., `node1.at.cluster` becomes `node1`.
- `signature_id`: the id (index) of the computed signature for the job on this node. If the job runs without EAR library the field will be NULL.
- `power_signature_id`: the id (index) of the power signature for the job on this node.

### 13.6.3 Signatures

*All the metrics in this table refer to the period of time where the Signature is computed. Typically is 10 sec. Signatures are only reported when the application uses the EAR library.*

- id: unique id generated by the database engine to be used in JOIN queries.
- DC\_power: average DC node power (in Watts)
- DRAM\_power: average DRAM power, including the 2 sockets (in Watts)
- PCK\_power: Average CPU power, including the 2 sockets (in Watts)
- EDP: Energy Delay Product computed as (time x time x DC\_power)
- GBS: Main memory bandwidth (GB/sec)
- TPI: Main memory transactions per instruction
- CPI: Cycles per instructions.
- Gflops: Giga Floating point operations, per second, generated by the application processes in the node. GFlops/sec.
- time: total execution time (in seconds)
- perc\_MPI: average percentage of MPI time vs computational time in the node. Includes all the application processes in the node.
- L1\_misses: L1 cache misses counter.
- L2\_misses: L2 cache misses counter.
- L3\_misses: L3 cache misses counter.
- FLOPS1: Floating point operations Single precision 64 bits consumed by application processes in the node.
- FLOPS2: Floating point operations Single precision 128 bits consumed by application processes in the node.
- FLOPS3: Floating point operations Single precision 256 bits consumed by application processes in the node.
- FLOPS4: Floating point operations Single precision 512 bits consumed by application processes in the node.
- FLOPS5: Floating point operations Double precision 64 bits consumed by application processes in the node.
- FLOPS6: Floating point operations Double precision 128 bits consumed by application processes in the node.
- FLOPS7: Floating point operations Double precision 256 bits consumed by application processes in the node.
- FLOPS8: Floating point operations Double precision 512 bits consumed by application processes in the node.
- instructions: total instructions executed by the application processes in the node
- cycles: total cycles consumed by the application processes in the node
- avg\_f: average CPU frequency (includes all the cores used by the application on the node) in KHz
- avg\_imc\_f: average memory frequency (includes the two sockets) in KHz
- def\_f: default CPU frequency used at the beginning of the application in KHz
- min\_GPU\_sig\_id: start of the range containing the GPU\_signature's ids, used for JOIN queries. If an application doesn't have GPUs it will be NULL
- max\_GPU\_sig\_id: end of the range containing the GPU\_signature's ids, used for JOIN queries. If an application doesn't have GPUs it will be NULL

1. Each signature corresponds to either a Loop or an Application. When it's an application it is the average values for its entire runtime. For a loop, the values are the average of only the period comprised by the loop's start and end.

1. Signatures are only reported when an application is running with EARL.
2. The GPU signature values are inclusive, i.e. if a signature has a `min_id = 1` and `max_id = 3`, the GPU\_signatures with ids 1,2,3 will be from this application.

#### 13.6.4 Power\_signatures

*Power signatures are measured and reported by the EARD and reported for all the jobs/steps/nodes. It's independent of the EAR library utilization.*

- `id`: unique id generated by the database engine to be used in JOIN queries.
- `DC_power`: average DC node power (in Watts)
- `DRAM_power`: average DRAM power, including the 2 sockets (in Watts)
- `PCK_power`: Average CPU power, including the 2 sockets (in Watts)
- `EDP`: Energy Delay Product computed as (time x time x `DC_power`)
- `max_DC_power`: maximum DC node power registered by the EAR daemon during the application's execution (in Watts)
- `min_DC_power`: minimum DC node power registered by the EAR daemon during the application's execution (in Watts)
- `time`: total execution time (in seconds)
- `avg_f`: average CPU frequency (includes all the cores of the node) in KHz
- `def_f`: default CPU frequency used at the beginning of the application in KHz

#### 13.6.5 GPU\_signatures

- `id`: unique id generated by the database engine to be used in JOIN queries.
- `GPU_power`: average GPU power for a single GPU (in Watts)
- `GPU_freq`: average GPU frequency for a single GPU (in KHz)
- `GPU_mem_freq`: average GPU memory frequency for a single GPU (in KHz)
- `GPU_util`: average GPU utilisation for the reported period for a single GPU. (percentage)
- `GPU_mem_util`: average GPU memory utilisation for the reported period for a single GPU.(percentage)

If an application has more than 1 GPU there will be a signature for each of them.

### 13.6.6 Loops

*Loops are only reported when the EAR library is used.*

- event: loop type identificatory. It's for internal use of the EAR library. Together with size and level is used internally.
- size: loop's size as computed by DynAIS.
- level: loop's level of depth (indicative of loops inside of loops)
- job\_id: job id given by the job manager. Used as a foreign key for Jobs.
- step\_id: step id given by the job manager. Used as a foreign key for Jobs.
- node\_id: the node in which the application ran. The names of the nodes are trimmed at any ".", i.e., node1.at.cluster becomes node1.
- total\_iterations: timestamp at which the loop signature has been reported. It is named total\_iterations for historical reasons.
- signature\_id: the id of the computed signature for the job on this node.

1. the combination even-size-level forms the Primary Key for the table loops.

1. Loops will always have a signature because they are only reported when EAR is used
2. When a loop is inserted, the corresponding Job is probably not in the database yet, because Jobs are inserted only when an application finishes. JOIN queries with Jobs can only be done once an application has finished (only the current step id needs to finish, not the entire job).

### 13.6.7 Events

- id: unique id generated by the database engine to use as primary key.
- timestamp: registered timestamp of when the event happened (NOT when it was inserted)
- event\_type: a numerical id for the type of EAR event
- job\_id: job id given by the job manager. Used as a foreign key for Jobs.
- step\_id: step id given by the job manager. Used as a foreign key for Jobs.
- value: value for the event. The units and semantic depend on the type of event. node\_id: the node in which the application ran. The names of the nodes are trimmed at any ".", i.e., node1.at.cluster becomes node1.

The origins of an event are indicated by its cardinality:

1. EARL events' type is always  $< 100$
2. EARD init events' type is always  $\geq 100 \leq 200$
3. EARD runtime events' type is always  $\geq 300$  and  $\leq 400$
4. EARD powercap events' type is always  $\geq 500$  and  $\leq 600$
5. EARGM events' type is always  $\geq 600$  and  $\leq 700$

Certain events do not require a value, so it is set to 0 by default on those cases.



### 13.6.8 Global\_energy

*This table is used by the EARGM.*

- energy\_percent: percentage of consumed energy from the current budget.
- warning\_level: current level of closeness to the current energy budget. Higher level means closer to the current budget.
- time: timestamp of the energy event
- inc\_th: threshold increment sent to the EARDs to be applied to policies
- p\_state: p\_state variation sent to the EARDs
- GlobEnergyConsumedT1: current energy consumed within the last period T1
- GlobEnergyConsumedT2: current energy consumed within the last period T2
- GlobEnergyLimit: current energy budget/limit
- GlobEnergyPeriodT1: duration of the current period T1
- GlobEnergyPeriodT2: duration of the current period T2
- GlobEnergyPolicy: current energy policy used by the EARGM

The warning level also indicates which inc\_th and p\_states are being sent to the EARDs

### 13.6.9 Periodic\_metrics

- id: unique id generated by the database engine to use as primary key.
- start\_time: timestamp of the start of the period
- end\_time: timestamp of the end of the period
- DC\_energy: total energy consumed by the node during the period in Joules
- node\_id: the nodename in which the application period was registered. The names of the nodes are trimmed at any ".", i.e., node1.at.cluster becomes node1.
- job\_id: job id given by the scheduler. Used as a foreign key for Jobs. If no job is running in the node during the period it will be 0.
- step\_id: step id given by the scheduler. Used as a foreign key for Jobs. If no job is running in the node during the period it will be 0.
- avg\_f: average CPU frequency (includes all the cores of the node) in Khz during the period.
- temp: average temperature reported by the node during the period.
- DRAM\_energy: total energy consumed by the DRAM (includes 2 sockets) during the period, in Joules
- PCK\_energy: total energy consumed by the CPU (includes 2 sockets) during the period, in Joules
- GPU\_energy: total energy consumed by the GPU (includes all GPUs) during the period, in Joules

### 13.6.10 Periodic\_aggregations

- `id`: unique id generated by the database engine to use as primary key
- `start_time`: timestamp of the start of the period
- `end_time`: timestamp of the end of the period
- `DC_energy`: accumulated energy consumed by the period
- `eardbd_host`: hostname of the eardbd reporting the data to database. The hostnames of the nodes are trimmed at any ".", i.e., `service1.at.cluster` becomes `service1`.

# Chapter 14

## Supported systems

### 14.1 CPU Models

- Intel Haswell/Skylake/IceLake monitoring and optimization.
- AMD EPYC Rome/Milan monitoring and optimization.

### 14.2 GPU models

- NVIDIA: Node and application monitoring.

### 14.3 Schedulers

- EAR offers a SLURM SPANK plugin to be transparently used when using SLURM workload manager. This plug-in allows to be integrated as part of the SLURM submission options. [See the user guide](#).
- Using the EARD api **new\_job**/**\*\*end\_job\*\*** functions EAR can be also be transparently used with other schedulers such as LSF or PBS through the prolog/epilog mechanism.



## Chapter 15

# Changelog

### 15.1 EAR 4.3

- MPI stats collection now is guided by sampling to minimize the overhead.
- EARL-EARD communication optimized.
- EARL: Periodic actions optimization.
- EARL: Reduce time consumption of loop signature computation.
- erun: Provide support for multiple batch schedulers.
- eardbd: Verbosity quality improved.
- Improved metrics computation in AMD Zen2/Zen3.
- Improved robustness in metrics computation to support hardware failures.

### 15.2 EAR 4.2

- Improved support for node sharing : save/restore configurations
- AMD(Zen3) CPUs
- Intel(r) SST support ondemand
- Improved Phases classification
- GPU idle optimization in all the application phases
- MPI load balance for energy optimization integrated on EAR policies
- On demand COUNTDOWN support for MPI calls energy optimization
- Energy savings estimates reported to the DB (available with eacct)
- Application phases reported to the DB (available with eacct)
- MPI statistics reports: CSV file with MPI statistics
- New Intel Node Manager powercap node plugin
- Improvements in the Meta-EARGM and node powercap

- Improvements in the Soft cluster powercap
- New report plugins for non-relational DB: EXAMON, Cassandra, DCDB
- Improvements in the ear.conf parsing
- Improved metrics and management API
- Changes in the environment variables have been done for homogeneity

### 15.3 EAR4.1.1

- Select replaced by poll to support bigger nodes
- Minor changes in edb\_create and FP exceptions fixes

### 15.4 EAR 4.1

- Meta EARGM.
- Support for N jobs in a node.
- CPU power models for N jobs.
- Python apps loaded automatically.
- Support for MPI-Python through environment variable.
- Report plug-ins in EARL, EARD and EARDBD.
- PostgreSQL support.
- Soft cluster powercap.
- New AMD virtual P-states support using max frequency and different P-states.
- New RPC system in EARL-EARD communication (including locks).
- Partial support for different schedulers (PBS).
- New task messages between EARPlug and EARD.
- New DCMI and INM-Freeipmi based energy plug-ins.
- IceLake support.
- Likwid support for IceLake memory bandwidth computation.
- msr\_safe
- HEROES plug-in.

## 15.5 EAR 4.0

- AMD virtual p-states support and DF frequency management included
- AMD optimization based on min\_energy and min\_time
- GPU optimization in low GPU utilization phases
- Application phases IO/MPI/Computation detection included
- Node powercap and cluster powercap implemented: Intel CPU and NVIDIA GPUS tested. Meta EAR-GM not released
- IO, Percentage of MPI and Uncore frequency reported to DB and included in eacct
- econtrol extensions for EAR health-check

## 15.6 EAR 3.4

- Automatic loading of EAR library for MPI applications (already in 3.3), OpenMP, MKL and CUDA applications. Programming model detection is based on dynamic symbols so it could not work if symbols are statically included.
- AMD monitoring support.
- TAGS support included in policies.
- Request dynamic in eard\_rapi.
- GPU monitoring support in EAR library for NVIDIA devices.
- Node powercap and cluster power cap under development.
- papi dependency removed.

## 15.7 EAR 3.3

- eacct loop signature reported.
- EAR loader included.
- GPU support migrated to nvml API.
- GPU support in configure.
- TAGS supported in ear.conf.
- Heterogeneous clusters specification supported.
- EARGM energy capping management improved.
- Internal messaging protocol improved.
- Average CPU frequency and Average IMC frequency computation improved.

## 15.8 EAR 3.2

- GPU monitoring based on nvidia-smi command.
- GPU power reported to the DB using NVIDIA commands.
- Postgresql support.
- freeipmi dependence removed.





# Chapter 16

## FAQs

### 16.1 EAR general questions

**Q: What is EAR?**

**A:** EAR is a system software for energy and power optimization, accounting and management. EAR components interact with each other to perform system monitoring, job accounting and energy optimisation on HPC systems.

The main goals of EAR are to provide energy optimization and monitoring about power consumption about the system or jobs.

**Q: Must all EAR components be available to get EAR working?**

**A:** No. Each set of components was designed to provide different services.

The minimal functionality is the system power monitoring, provided by the EAR Daemon (EARD). In order to get the information collected by the EARD, another service is needed to store such, i.e., the EAR Database Daemon (EARDBD).

In addition, EARD can offer job accounting if EAR is integrated with the system batch scheduler (e.g., SLURM). Current release has support for SLURM, PBSPro, OpenPBS and OAR. These integrations can load the EAR Library (EARL) when an application is starting in order to get performance metrics and apply energy optimisation policies.

Finally, the EAR Global Manager Daemon (EARGMD) is a cluster wide component offering cluster energy monitoring and capping. Its main goal is to provide features to apply power capping policies for systems with power consumption restrictions.

**Q: Which programming models does EARL support?**

**A:** EARL can be loaded automatically on pure MPI, MPI+OpenMP, OpenMP, MKL, CUDA, and python applications. For other programming models it must be loaded on demand.

Depending on the programming model, EARL offers different features. Also, the approach to load it may differ depending on which kind of application is launched. See the [user guide](#) to read more detailed information on how to run jobs with the EAR.

**Q: Is EAR providing per-process metrics?**

**A:** The current version reports per jobid/stepid/nodeid metrics, that is, metrics reported are or the accumulated or the averages of the metrics for all the processes of the application in the node. However, the EAR library collects per core and per-process metrics so it will be available in next versions.

**Q: OK, so will I get per-thread metrics on Hybrid MPI+OpenMP apps?**

**A:** Unfortunately no, you won't.

EAR does not provide metrics at thread level at this moment. For hybrid applications, EAR will provide metrics for each MPI process. You can run OpenMP apps with EARL, but you'll get process metrics too.

## 16.2 Using EAR flags with SLURM plug-in

### Q: How to see EAR configuration and metrics at runtime?

**A:** Use `--ear-verbose=1` flag in your submission command (e.g., `srun`, `mpirun`) to enable verbosity.

Check the [user guide](#) to see how to tune EAR configuration at submission time.

### Q: Why EAR flags are not working?

**A:** The following list of EAR flags are only allowed to Authorized users (contact with your system administrator):

- `--ear-cpufreq`
- `--ear-tag`
- `--ear-learning`
- `--ear-policy-th`
- `--ear-policy *`
- It depends on the system administrator whether this flag is restricted to authorized users. Check next question.

Below there are `ear.conf` fields that specify the list of authorized users/accounts/groups:

```
AuthorizedUsers=user1,user2
AuthorizedAccounts=acc1,acc2,acc3
AuthorizedGroups=xx,yy
```

If a user is not authorized, non-working flags is the expected behaviour.

### Q: Why is a different energy policy other than the selected one being applied? I validated it with `--ear-verbose=1`.

**A:** The selected policy may not be enabled for all users.

Energy policies can be configured to be enabled to all users or not. Contact with your system administrator.

Check policy configuration (`ear.conf`) and user authorization (`ear.conf`).

```
#Enabled to all users
Policy=monitoring Settings=0 DefaultFreq=2.4 Privileged=0
#Enabled to authorized users
Policy=monitoring Settings=0 DefaultFreq=2.4 Privileged=1
```

If not enabled or not authorized therefore this is the expected behaviour.

### Q: How to disable the EAR library explicitly?

**A:** Use `-ear=off` flag at submission time.

### Q: Can I apply EAR settings to all runs (e.g., `srun`, `mpirun`) inside a batch script?

**A:** Yes, you can provide EAR flags to the batch scheduler integration by setting EAR options on the header of your batch script. For example, in SLURM systems:

```
#!/bin/bash
#SBATCH -N 1
#SBATCH -ear-policy=min_time # application 1 and 2 will run with min_time

srun application1

srun --ear-verbose=1 application2 # This step will show EAR messages.
```

**Q: How can I know which energy policies are installed?**

**A:** Type `srun --help`. The output will show which policies you can provide with the flag `--ear-policy`.

It is possible that non-authorized users are not allowed to select EAR policy. Contact with your system administrator.

**Q: How to set EAR flags with `mpirun` if I run my application with Intel MPI?**

**A:** Depending on the Intel MPI version. Check the user-guide.

Before version 2019, `mpirun` had 2 parameters to specify SLURM options.

```
mpirun -bootstrap=slurm -bootstrap-exec-args="--ear-verbose=1"
```

Since version 2019, SLURM options must be specified using environment variables:

```
export I_MPI_HYDRA_BOOTSTRAP=slurm
export I_MPI_HYDRA_BOOTSTRAP_EXEC_EXTRA_ARGS="--ear-verbose=1"
```

**Q: How to set EAR flags with `mpirun` if I run my application with OpenMPI?**

**A:** OpenMPI needs an extra support when `srun` is not used. EAR's `erun` command must be used.

```
mpirun erun -ear-policy=min_energy --program=application
```

**Q: How to collect paraver traces?**

**A:** Use the environment variables to enable the trace collection and to specify the path.

```
SLURM_EAR_TRACE_PLUGIN=$EAR_INSTALL_PATH/lib/plugins/tracer/tracer_paraver.so
SLURM_EAR_TRACE_PATH=TRACES_PARAVER/
```

## 16.3 Using additional MPI profiling libraries/tools

EAR uses the `LD_PRELOAD` mechanism to be loaded and the PMPI API for a transparent loading. In order to be compatible with other profiling libraries EAR is not replacing the MPI symbols, it just calls the next symbol in the list. So it is compatible with other tools or profiling libraries. In case of conflict, the EARL can be disabled by setting `--ear=off` flag at submission time.

## 16.4 Jobs executed without the EAR Library: Basic Job accounting

For applications not executed with the EARL loaded (e.g., `srun` is not used or programming models or applications not loaded by default with EARL), EAR provides a default monitoring. In this case a subset of metrics will be reported to the Database:

| Metric                         | Unit                 |
|--------------------------------|----------------------|
| Accumulated DC energy          | Joules               |
| Accumulated DRAM energy        | Joules               |
| Accumulated CPU package energy | Joules               |
| EDP                            | Energy-Delay Product |
| Maximum DC node power detected | Watts                |
| Minimum DC node power detected | Watts                |
| Execution time                 | Seconds              |
| CPU average frequency          | kHz*                 |
| CPU default frequency          | kHz*                 |

- The unit showed by `eacct` output is GHz.

DC node energy includes the CPU and GPU energy if there are. These metrics are reported per node, Job and Step IDs, so they can be seen per job and job and step when using `eacct` command.

## 16.5 Troubleshooting

**User asks for application metrics with `eacct` command and no information appears in some of the columns in the output.**

This means EARL was not loaded with the application or the application fails before the `MPI_Finalize` call, nor reporting application data.

**After some time, user asks for an application metrics with `eacct` and application is not reported.**

Try again after some minutes (applications are not reported immediately).

## Chapter 17

### Known issues

- The execution of Python+MPI+EAR is not 100% automatic. Given Python is not a compiled language, the EAR loader cannot detect the MPI version automatically. Check in the uUser guide how to deal with this use case.



# Index

Admin guide, [33](#)

Architecture, [49](#)

Changelog, [93](#)

EAR commands, [13](#)

EAR configuration, [59](#)

EAR Database, [81](#)

EAR plug-ins, [69](#)

EAR Powercap, [71](#)

Environment variables, [23](#)

FAQs, [97](#)

Installation from source, [43](#)

Introduction, [1](#)

Known issues, [101](#)

Learning phase, [67](#)

Report plugins, [77](#)

Supported systems, [91](#)

User guide, [3](#)