

Configuration of the WiFi connection


1. Make sure that your KORROSTOP4.0® is connected to the WLAN. (1) Check on the About screen, WLAN connection OK" and tick GREEN.



If your WiFi connection is ok, go straight to point 5 and skip point 2, 3 and 4 in this manual.


If you do not have a WiFi connection, connect your Korrostop 4.0® as follows:

2. Login - Please log in (2). Either with user: "korro" and password: "stop" or your personal access data.

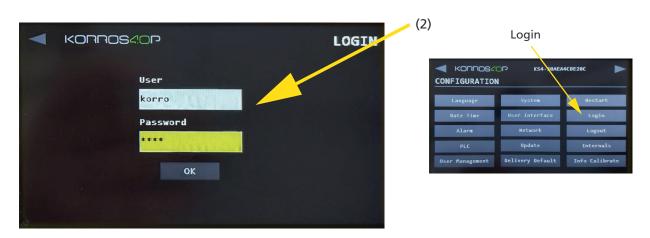




3. Configuration screen: Network - Click WiFi configuration (3).

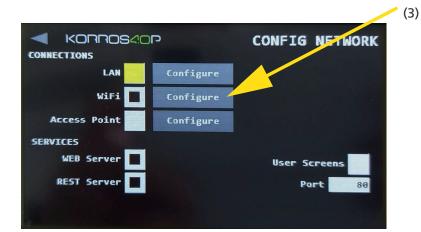



You can display all accessible addresses via "Wifi Scan" (4). Select the corresponding WiFi with ok or enter the name of your WiFi directly under "SSID" (5)

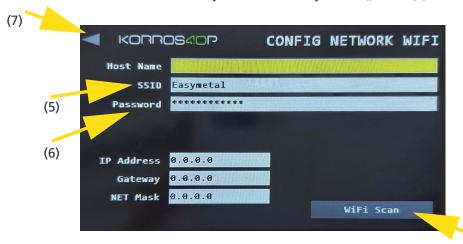

Under "Password" enter the password of your WiFi (6).

Use the arrow at the top left (7) to get out of the figuration and save the changes.

The KORROSTOP4.0® must now be restarted.

(4)

Query of the measurement data

4. Go to the "About screen". A green tick (8) and "OK" (9) must now be displayed nest to "WiFi connection".





5. Now click in the gray field with "Connect via QR "(10). A QR code (11) and an IP address (12) appear on the screen.



Now set up the connection to your mobile device either with a QR code scanner or by entering the IP address in your browser.

Your WiFi connection is now set up and the query can be made on your mobile phone or tablet.

Download KORROSTOP4.0® Documents

The entire Manual for the KORROSTOP 4.0® as well as further information can be found under the following links:

https://github.com/easymetal

Korrostop 4.0[®] Manual:

https://github.com/easymetal/Korrostop4.0-EN/wiki

About the About screen:

https://github.com/easymetal/Korrostop4.0-EN/wiki/Manual-About

Informationen and update files: https://github.com/easymetal/Korrostop4.0-EN