
MATERIAL:
Aluminum Alloy

SPECIFICATION:
D Tolerance:
10 to 40 grooves is +0.05/0 (+.002/-.000)



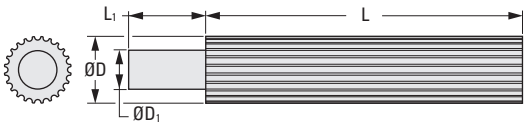

METRIC COMPONENT

Catalog Number	No. of Grooves	Metric		Inch		D_1** Shank Dia.	L_1 Shank Length. (Ref.)	L Min. Usable Length
		P.D.	D Dia.	P.D.	D Dia.			
A 6A50M010GT05	10	6.4	5.9	.251	.231	7.9 (5/16)	25 (1")	50 (2")
A 6A50M011GT05	11	7	6.5	.276	.256			
A 6A50M012GT05	12	7.6	7.1	.301	.281			
A 6A50M013GT05	13	8.3	7.8	.326	.306	9.5 (3/8)		75 (3")
A 6A50M014GT08	14	8.9	8.4	.351	.331			
A 6A50M015GT08	15	9.6	9	.376	.356			
A 6A50M016GT08	16	10.2	9.7	.401	.381			
A 6A50M017GT08	17	10.8	10.3	.426	.406			
A 6A50M018GT08	18	11.5	11	.451	.431			
A 6A50M019GT08	19	12.1	11.6	.476	.456			
A 6A50M020GT10	20	12.7	12.2	.501	.481		22 (7/8)	100 (4")
A 6A50M021GT10	21	13.4	12.9	.526	.506			
A 6A50M022GT10	22	14	13.5	.551	.531			
A 6A50M023GT10	23	14.6	14.1	.576	.556			
A 6A50M024GT13	24	15.3	14.8	.602	.582	12.7 (1/2)	25 (1") [19 (3/4)]Δ	125 (5")
A 6A50M025GT13	25	15.9	15.4	.627	.607			
A 6A50M026GT13	26	16.5	16	.652	.632			
A 6A50M027GT13	27	17.2	16.7	.677	.657			
A 6A50M028GT13	28	17.8	17.6	.702	.682			
A 6A50M029GT13	29	18.5	18	.727	.707			
A 6A50M030GT15	30	19.1	18.6	.752	.732			150 (6")
A 6A50M031GT15	31	19.7	19.2	.777	.757			
A 6A50M032GT15	32	20.4	19.9	.802	.782			
A 6A50M033GT15	33	21	20.5	.827	.807			
A 6A50M034GT15	34	21.6	21.1	.852	.832			
A 6A50M035GT15	35	22.3	21.8	.877	.857			
A 6A50M036GT15	36	22.9	22.4	.902	.882			
A 6A50M037GT15	37	23.5	23	.927	.907			
A 6A50M038GT15	38	24.2	23.7	.952	.932			
A 6A50M039GT15	39	24.8	24.3	.977	.957			
A 6A50M040GT15	40	25.5	25	1.003	.983			

NOTE: Dimensions in ( ) are inch.

Continued on the next page

Δ Dimensions in [ ] may be substituted at SDP option.

** Shank Diameter of 4.7 mm (3/16") or 5.5 mm (7/32") for pulleys with 10 to 12 grooves may be substituted at SDP option.
Shank Diameter of 6.3 mm (1/4") for pulleys with 13 & 14 grooves may be substituted at SDP option.
Shank Diameter of 7.9 mm (5/16") for pulleys with 15 & 17 grooves may be substituted at SDP option.

SDP/SI

TRUE METRIC® PROFILE

PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM

Metric


0 10

MATERIAL:
Aluminum Alloy

SPECIFICATIONS:
D Tolerance:
42 to 80 grooves is +0.08/0 (+.003/-.000)
82 to 150 grooves is +0.10/0 (+.004/-.000)

Δ Dimensions in [ ] may be substituted at SDP option.



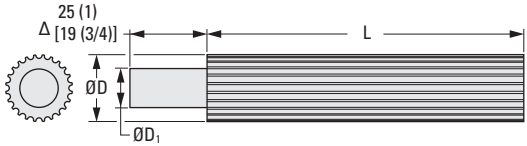

METRIC COMPONENT

Catalog Number	No. of Grooves	Metric		Inch		D1 Shank Dia.	L Min. Usable Length
		P.D.	D Dia.	P.D.	D Dia.		
A 6A50M042GT18	42	26.7	26.2	1.053	1.033	12.7 (1/2)	175 (7)
A 6A50M044GT18	44	28	27.5	1.103	1.083		
A 6A50M045GT18	45	28.7	28.1	1.128	1.108		
A 6A50M048GT18	48	30.6	30.1	1.203	1.183		
A 6A50M049GT18	49	31.2	30.7	1.228	1.208		
A 6A50M050GT18	50	31.8	31.3	1.253	1.233		
A 6A50M051GT18	51	32.5	32	1.278	1.258		
A 6A50M052GT18	52	33.1	32.6	1.303	1.283		
A 6A50M054GT18	54	34.4	33.9	1.353	1.333		
A 6A50M055GT18	55	35	34.5	1.379	1.359		
A 6A50M056GT18	56	35.7	35.1	1.404	1.384		
A 6A50M057GT18	57	36.3	35.8	1.429	1.409		
A 6A50M060GT20	60	38.2	37.7	1.504	1.484		200 (8)
A 6A50M064GT20	64	40.7	40.2	1.604	1.584		
A 6A50M065GT20	65	41.4	40.9	1.629	1.609		
A 6A50M066GT20	66	42	41.5	1.654	1.634		
A 6A50M070GT20	70	44.6	44.1	1.754	1.734		
A 6A50M072GT20	72	45.8	45.3	1.805	1.785		
A 6A50M075GT20	75	47.8	47.2	1.880	1.860		
A 6A50M080GT20	80	50.9	50.4	2.005	1.985	19.1 (3/4)	
A 6A50M082GT20	82	52.2	51.7	2.055	2.035		
A 6A50M084GT20	84	53.5	53	2.105	2.085		
A 6A50M088GT20	88	56	55.5	2.206	2.186		
A 6A50M090GT20	90	57.3	56.8	2.256	2.236		
A 6A50M096GT20	96	61.1	60.6	2.406	2.386		
A 6A50M098GT20	98	62.4	61.9	2.456	2.436		
A 6A50M100GT20	100	63.7	63.2	2.506	2.486		
A 6A50M102GT20	102	64.9	64.4	2.557	2.537		
A 6A50M108GT20	108	68.8	68.3	2.707	2.687		
A 6A50M110GT20	110	70	69.5	2.757	2.737		
A 6A50M120GT20	120	76.4	75.9	3.008	2.988		
A 6A50M130GT20	130	82.8	82.3	3.258	3.238		
A 6A50M140GT20	140	89.1	88.6	3.509	3.489		
A 6A50M150GT20	150	95.5	95	3.760	3.740		

NOTE: Dimensions in ( ) are inch.

Continued from the previous page