Use a pair of tweezers or razor blade to carefully remove the cover of the Microdriver

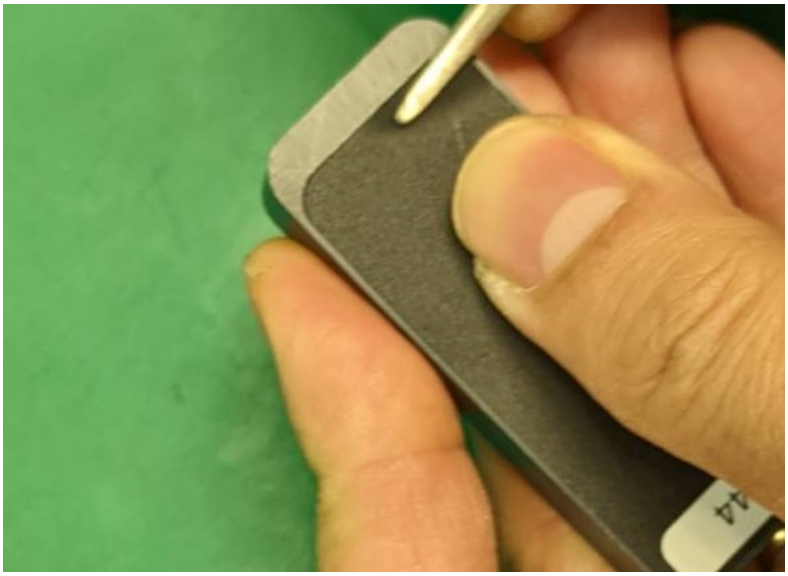

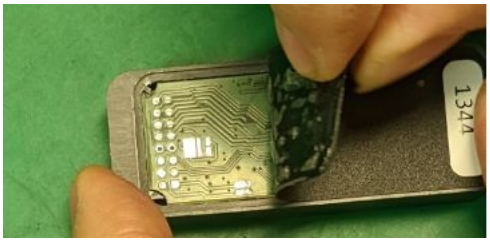

Use tweezers or equivalent to remove the Microdriver board from the case, being careful with regards to the Microdriver buttons (white and red buttons)

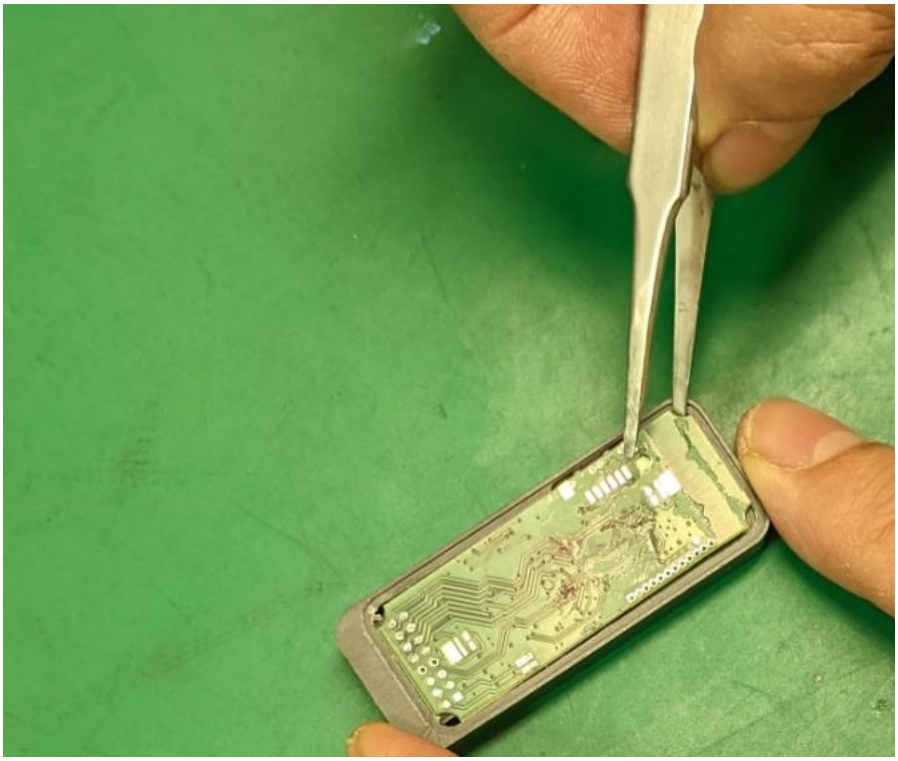

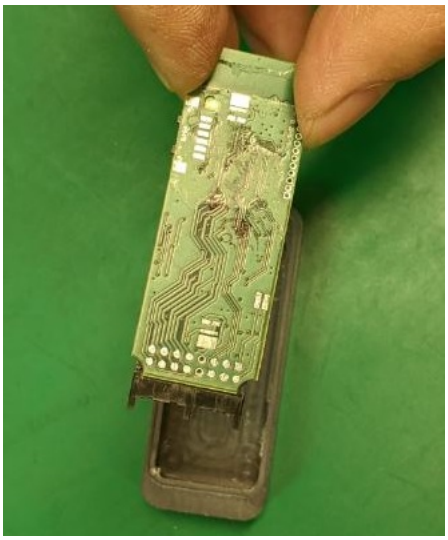

Flip over the board to find the Microdriver battery. This can be replaced with an equivalent 3.7 V LiPo battery. A larger battery can be used if needed. The Microdriver cover is not reusable, so once it is removed one can use the Microdriver either without the case or just without the cover. If one uses it without the case (or with a custom case), then using a larger battery is possible.