

1. SERVO POWER / TRANSIENT PROTECTION

One Miuzei MZ996 only. Pico powered separately via USB. All grounds common.

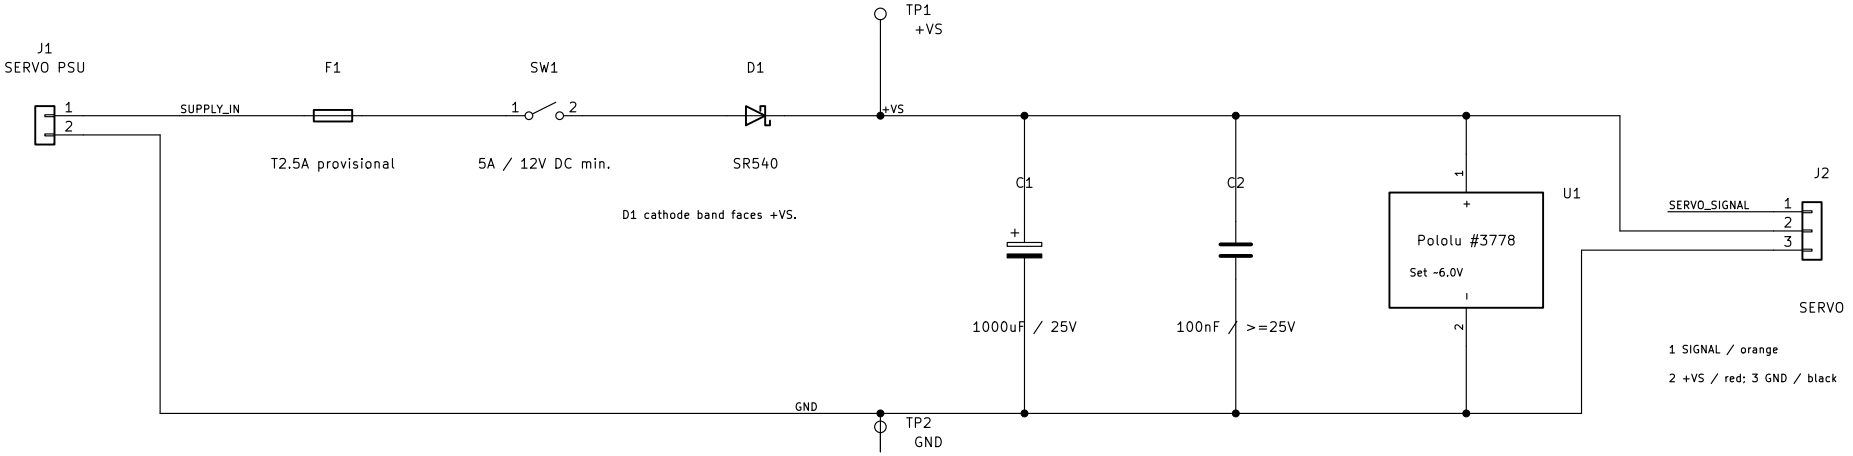

PSU: ~5.5V before D1; measure actual servo voltage after D1.

2. NON-INVERTING 3.3V TO SERVO-RAIL SIGNAL BUFFER

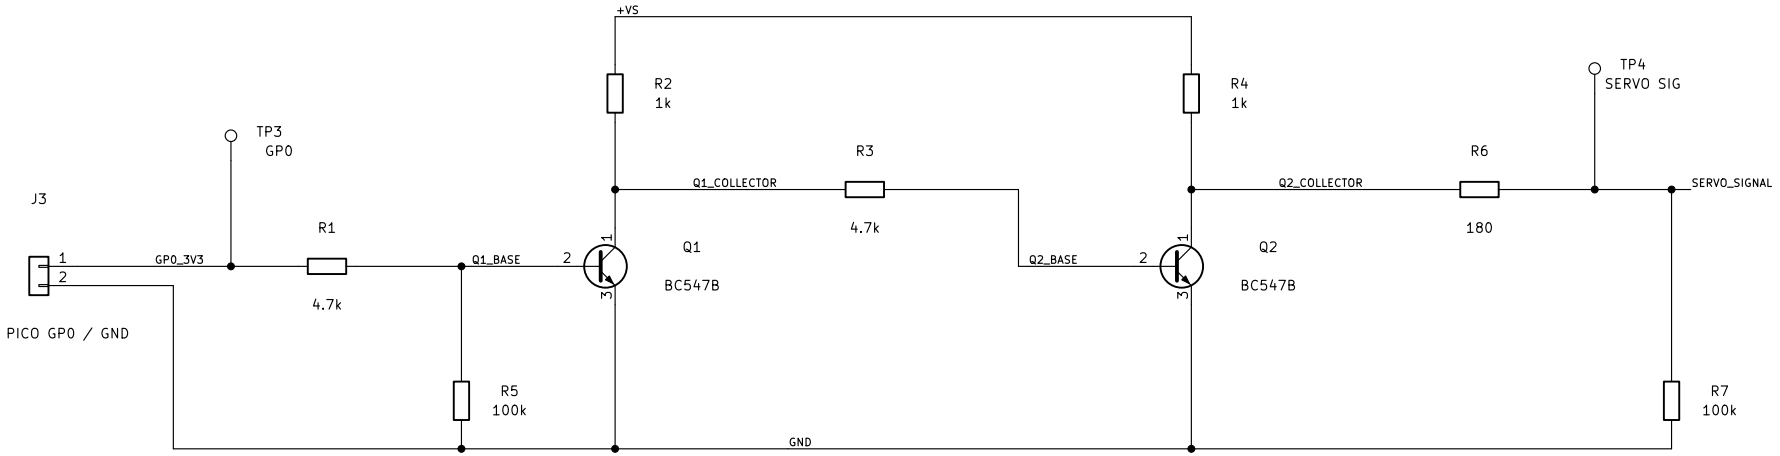

PROPOSAL A — not assembled or bench verified. Check transistor C/B/E and capacitor polarity.

Clamp: short transients only. Adjust separately through 1k resistor before connecting servo.

Use reinforced power wiring and common ground. Start with fixed 1500us, unloaded servo.

No PCB layout included. Connector pin numbers are schematic assignments; verify cable orientation.

Miuzei MZ996 / one-servo prototype; no PCB layout

HexaRoam

Sheet: /

File: single-servo-test-board.kicad_sch

Title: HexaRoam — Single-servo bench board

Size: A4	Date: 2026-10-27	**Rev: A — PROPOSAL**
KiCad E.D.A. 10.0.7		Id: 1/1