DELTA WRAPS® Color PPF

Premium Colour Paint Protection Film

Description

Multi-layer colour paint protection film made from premium thermoplastic polyurethane (TPU) based on polycaprolactone. TPU is naturally characterised by exceptional tear resistance, high ageing resistance and impact strength. The colour is built into two co-extruded TPU layers rather than printed, and a self-healing, brightening top coat gives a deep, clear finish. Colour PPF changes the look of the vehicle and protects the original paint in one film. Available in more than 350 colours and designs in gloss, matte, satin, metallic, colour-shift and carbon-pattern finishes.

Release Liner

Matt PET, 90 µm.

Protective Layer


PET, removed after installation.

Adhesive

Ashland 25 µm solvent polyacrylate, self-crosslinking, pressure-activated.

Film Construction

Layer build-up of DELTA WRAPS® Color PPF. The release liner and the protective layer are removed during installation.

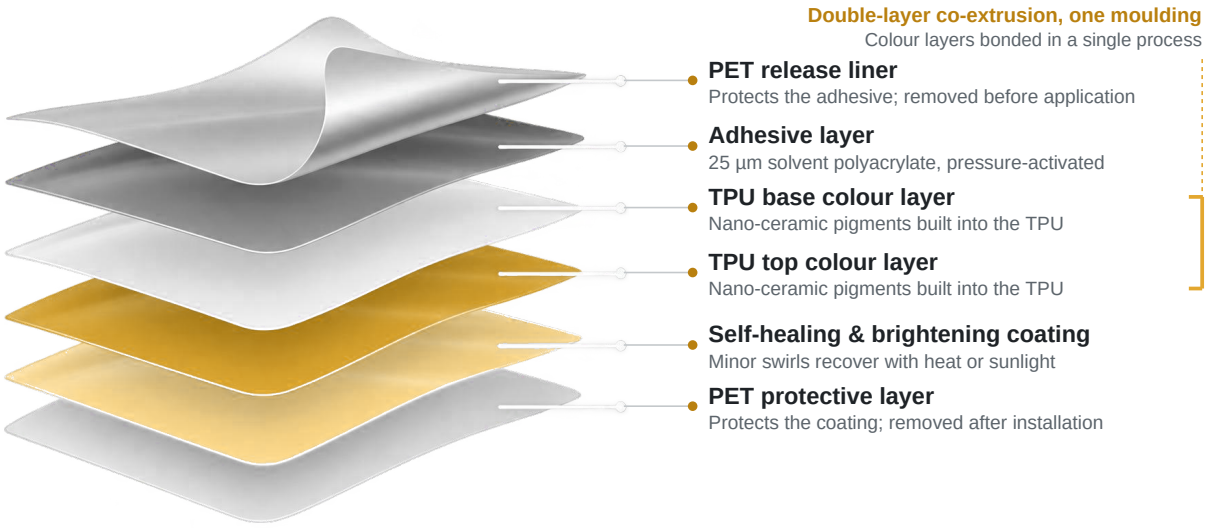

Installation & Care

- Professional wet installation is recommended, at a processing temperature of 18–23 °C.
- Apply only to clean, decontaminated original paint; remove wax, sealant and polishing residue first.
- Wash by hand with a pH-neutral car shampoo. Avoid abrasive polishes and aiming high-pressure water at film edges.

DELTA WRAPS® is a registered trademark of EBS Trading LLC.

DELTA WRAPS® Color PPF

Premium Colour Paint Protection Film

Technical Data*

Film thickness without release liner and protective layer	175–190 µm: plain gloss colours thinner, metallic-shine finishes thicker
Gloss glossy versions only; reference 100 GU = high-gloss polished black glass	> 90 GU
Adhesive strength sample on Mylar (PET)	Initial: 6 N/25 mm (processing temp. 18–23 °C) After 15 minutes: 13.7 N/25 mm After 24 hours: 17.9 N/25 mm
Dimensional stability steel plate, (23 ± 2) °C, (50 ± 5)% RH, 72 h	0.1% shrinkage
Tear resistance	23.7 MPa until breakage
Elongation at break	300% (coating crack 190–260%)
Low temperature −20 °C, 24 h	No change
Acid resistance 5% hydrochloric acid, immersion, room temperature, 20 min	No change
Alkali resistance 5% sodium hydroxide, immersion, room temperature, 20 min	No change
Humidity & heat constant 85 °C / 85% RH, 168 h	No change
Abrasion resistance 500 cycles, 60 rpm	No change
Neutral salt spray 48 h exposure	No change
Solvent resistance steel plate, immersion, room temp., 30 min each: methylated spirits, gasoline, 100% synthetic engine oil SM 5W-40	No change
Light fastness / weathering grey scale rating (5 = no change)	300 h: 4–5, barely perceptible change 2,800 h: 4–5, barely perceptible change 2,900 h: 4, barely perceptible change
Shelf life** 20 ± 2 °C, 40–60% RH, original packaging, stored horizontally	2 years
Roll size	1.52 m × 15 m
Applies to	All colours and carbon-fibre patterns (chrome series excluded)
Country of origin	Manufactured in China
Warranty***	Up to 5 years

* Test values from the manufacturer's factory laboratory. ** in original packaging. *** subject to professional installation, proper care and the applicable DELTA WRAPS® warranty terms.
Actual service life depends on climate, sun exposure, substrate preparation and regular maintenance. Slight changes due to ageing are possible during the service life.

Important Note

The information in this datasheet is a guideline and not a guarantee of specific properties. Before use, the user should check the suitability of the product for the intended application and assumes all associated risks. Colours on screen and in print are indicative; please check a physical swatch before ordering.

DELTA WRAPS® is a registered trademark of EBS Trading LLC.