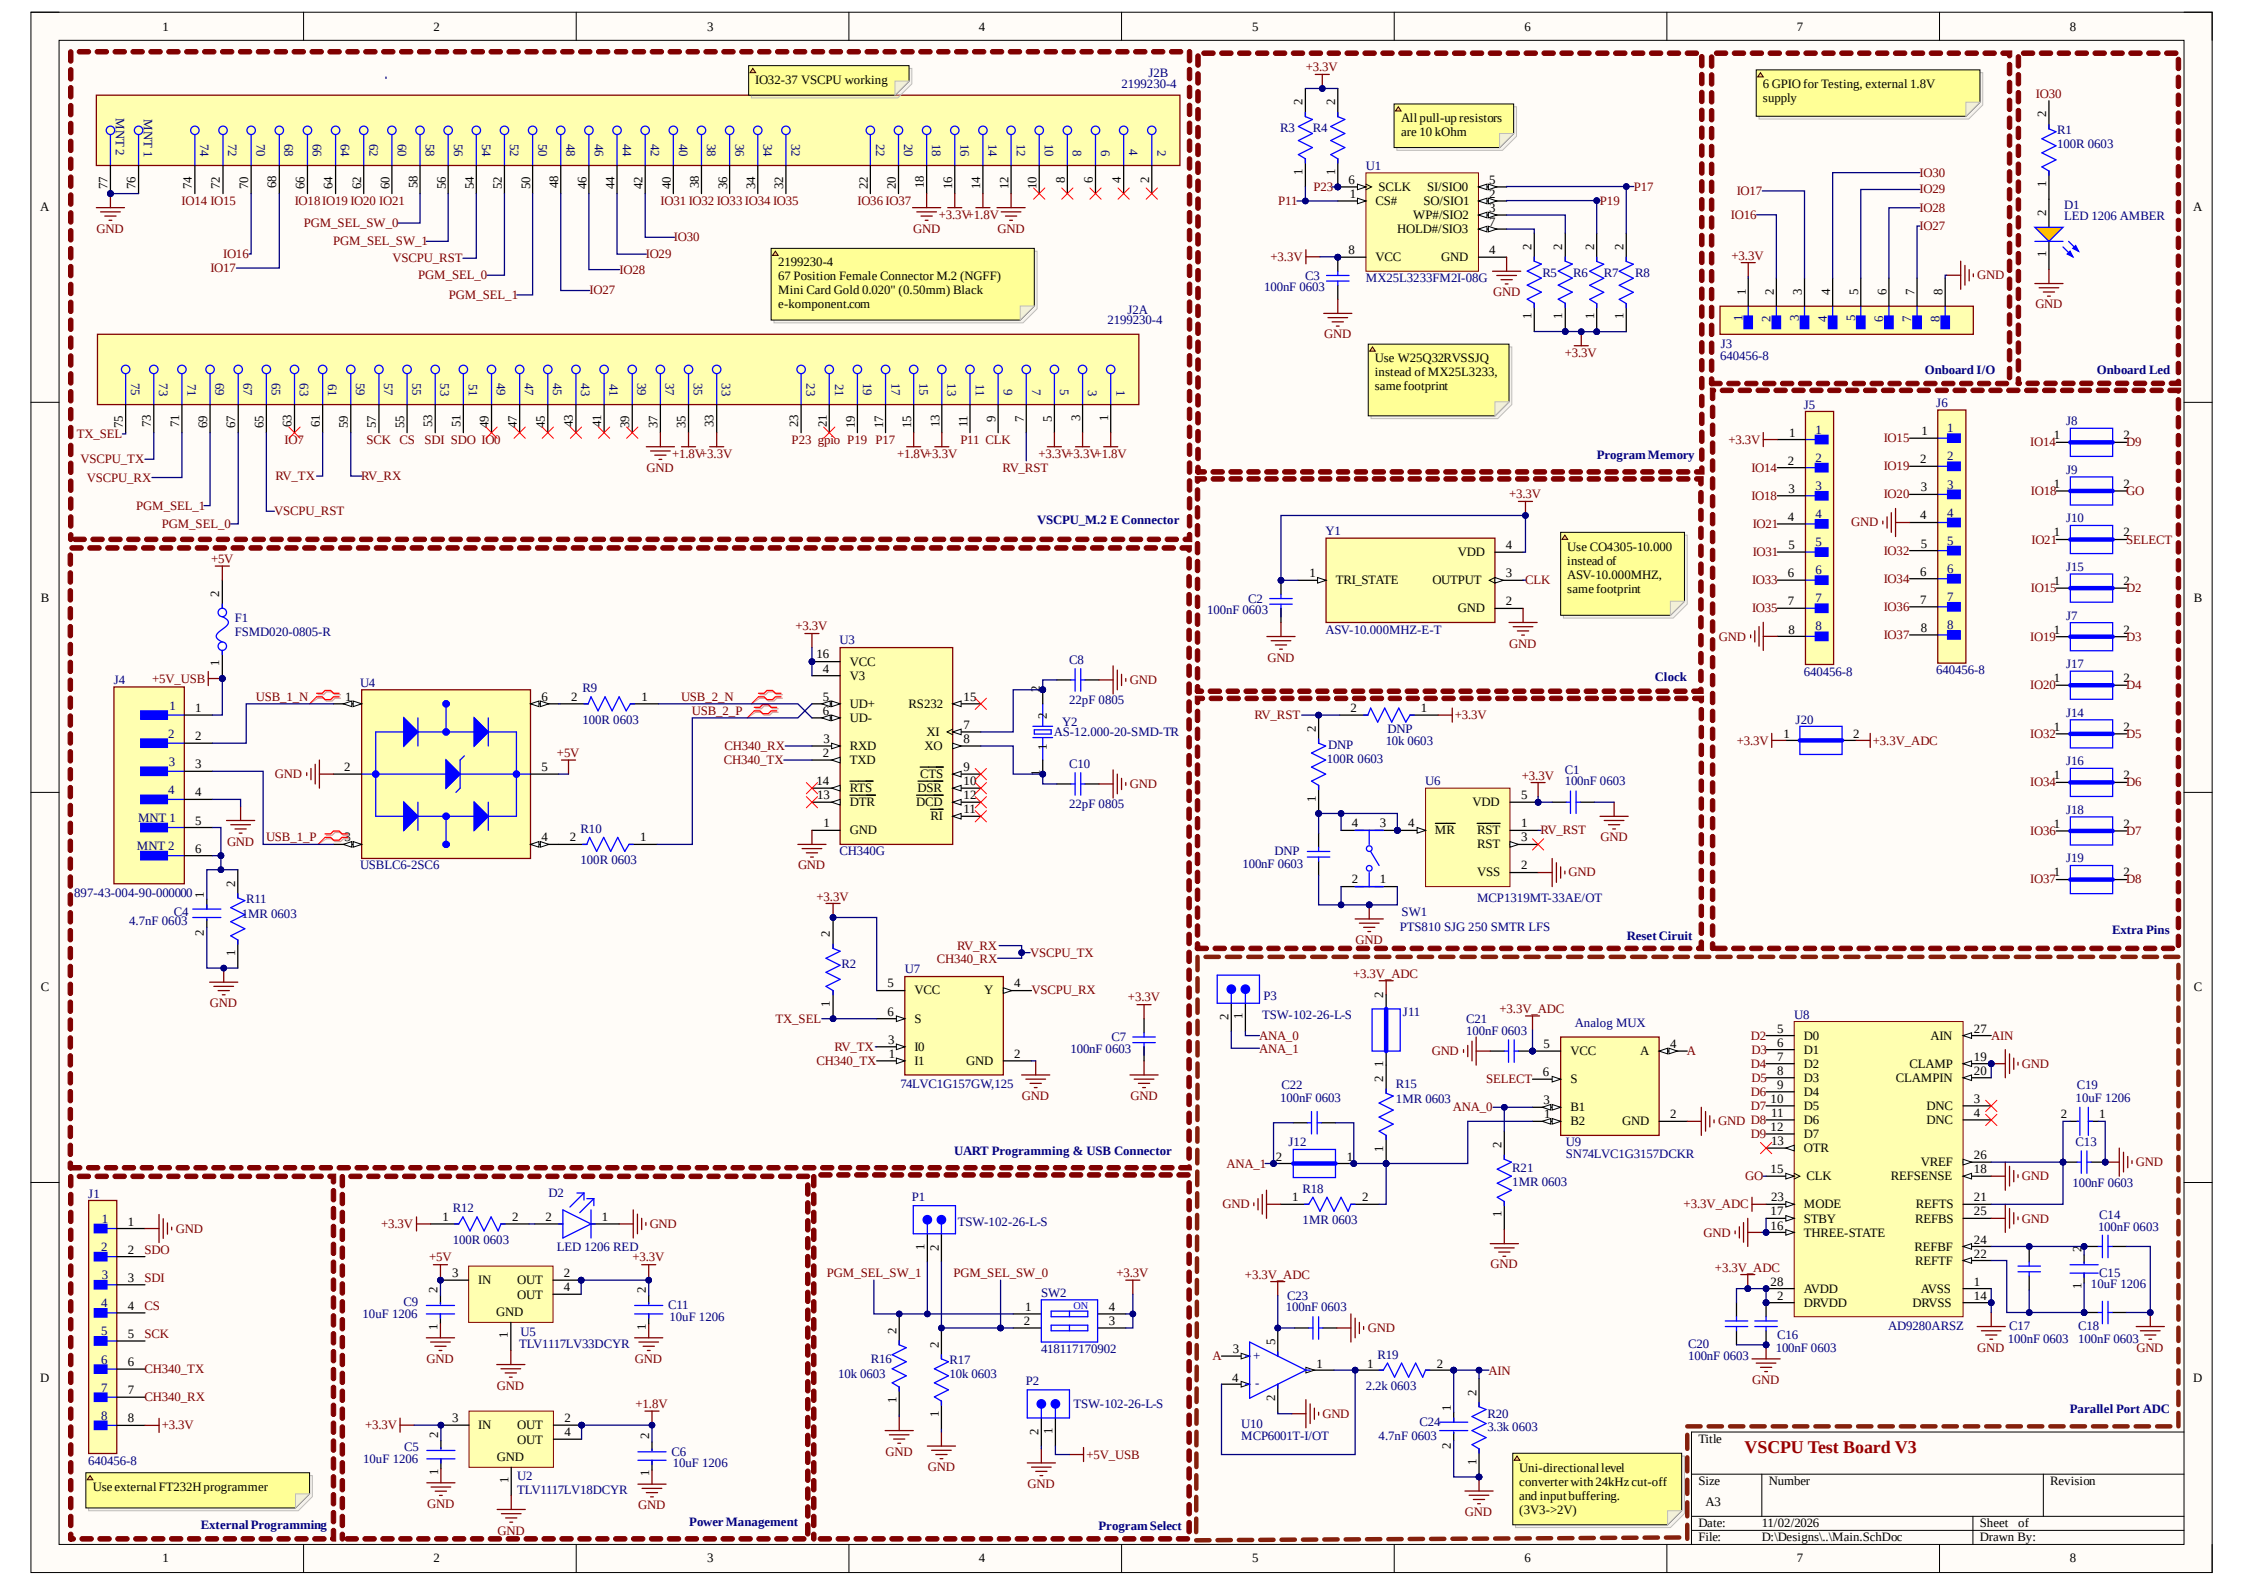

IO32-37 VSCPU working
J2B
2199230-4
J2A
2199230-4
2199230-4
67 Position Female Connector M.2 (NGFF)
Mini Card Gold 0.020" (0.50mm) Black
e-komponent.com
VSCPU_M.2 E Connector
All pull-up resistors are 10 kOhm
U1
MX25L3233FM2I-08G
Use W25Q32RVSSJQ instead of MX25L3233, same footprint
Program Memory
6 GPIO for Testing, external 1.8V supply
J3
640456-8
Onboard I/O
D1
LED 1206 AMBER
Onboard Led
Y1
ASV-10.000MHZ-E-T
Use CO4305-10.000 instead of ASV-10.000MHZ, same footprint
Clock
J5
J6
640456-8
J20
Extra Pins
F1
FSMD020-0805-R
J4
897-43-004-90-000000
USBLC6-2SC6
U3
CH340G
Y2
AS-12.000-20-SMD-TR
U7
74LVC1G157GW,125
UART Programming & USB Connector
U6
MCP1319MT-33AE/OT
SW1
PTS810 SJG 250 SMTR LFS
Reset Ciruit
P3
TSW-102-26-L-S
U8
AD9280ARSZ
U9
SN74LVC1G3157DCKR
U10
MCP6001T-I/OT
Parallel Port ADC
J1
640456-8
Use external FT232H programmer
External Programming
U5
TLV1117LV33DCYR
U2
TLV1117LV18DCYR
Power Management
P1
TSW-102-26-L-S
SW2
418117170902
P2
TSW-102-26-L-S
Program Select
Uni-directional level converter with 24kHz cut-off and input buffering. (3V3->2V)
Title
VSCPU Test Board V3
Size
A3
Number
Revision
Date: 11/02/2026
File: D:\Designs\..\Main.SchDoc
Sheet of
Drawn By: