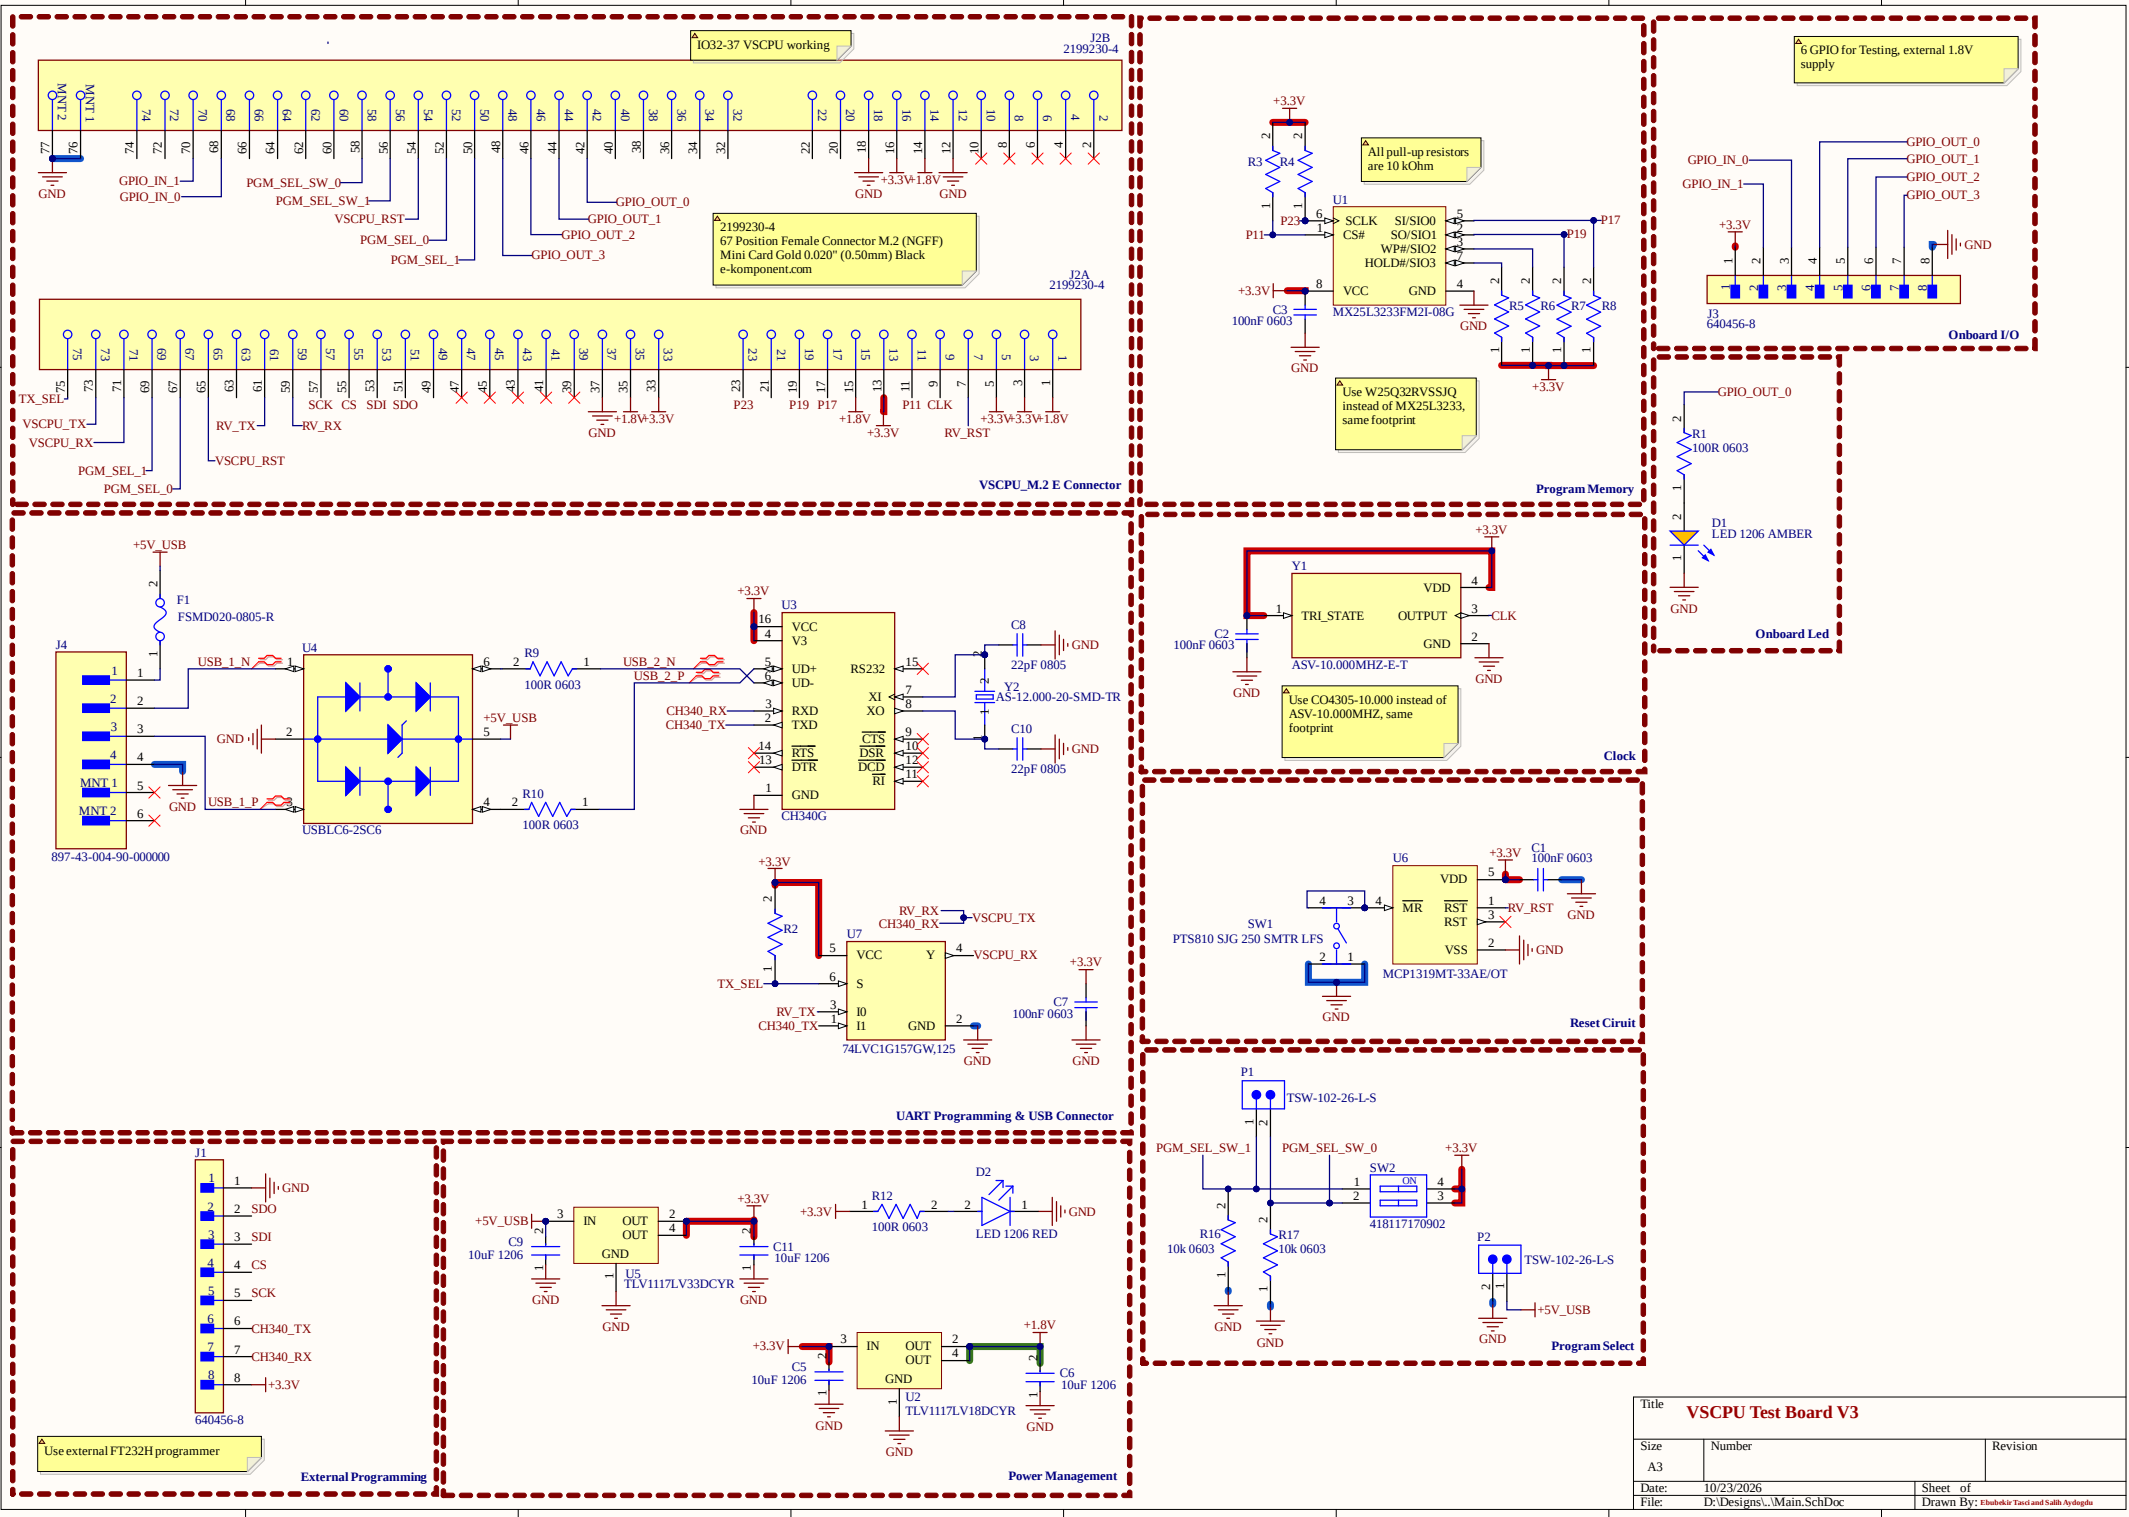

IO32-37 VSCPU working
J2B
2199230-4
J2A
2199230-4
2199230-4
67 Position Female Connector M.2 (NGFF)
Mini Card Gold 0.020" (0.50mm) Black
e-komponent.com
GPIO_IN_1
GPIO_IN_0
PGM_SEL_SW_0
PGM_SEL_SW_1
VSCPU_RST
PGM_SEL_0
PGM_SEL_1
GPIO_OUT_0
GPIO_OUT_1
GPIO_OUT_2
GPIO_OUT_3
TX_SEL
VSCPU_TX
VSCPU_RX
RV_TX
RV_RX
SCK
CS
SDI
SDO
P23
P19
P17
P11
CLK
RV_RST
VSCPU_M.2 E Connector
All pull-up resistors are 10 kOhm
U1
MX25L3233FM2I-08G
Use W25Q32RVSSJQ instead of MX25L3233, same footprint
Program Memory
6 GPIO for Testing, external 1.8V supply
J3
640456-8
Onboard I/O
D1
LED 1206 AMBER
Onboard Led
Y1
ASV-10.000MHZ-E-T
Use CO4305-10.000 instead of ASV-10.000MHZ, same footprint
Clock
SW1
PTS810 SJG 250 SMTR LFS
U6
MCP1319MT-33AE/OT
Reset Ciruit
P1
TSW-102-26-L-S
SW2
418117170902
P2
Program Select
+5V_USB
F1
FSMD020-0805-R
J4
897-43-004-90-000000
USBLC6-2SC6
U3
CH340G
U7
74LVC1G157GW,125
UART Programming & USB Connector
J1
640456-8
Use external FT232H programmer
External Programming
U5
TLV1117LV33DCYR
U2
TLV1117LV18DCYR
LED 1206 RED
Power Management
Title
VSCPU Test Board V3
Size
A3
Number
Revision
Date: 10/23/2026
File: D:\Designs\..\Main.SchDoc
Sheet of
Drawn By: Ebubekir Tasci and Salih Aydogdu