




Anhui Moon Technology Co., Ltd.

Room 449, Building 3, Industrial Park, 1151 Yanan South Road, Bengshan, Anhui China

POST CODE: 233030

TEL,FAX: +86-552-2079969

Technical Data Sheet

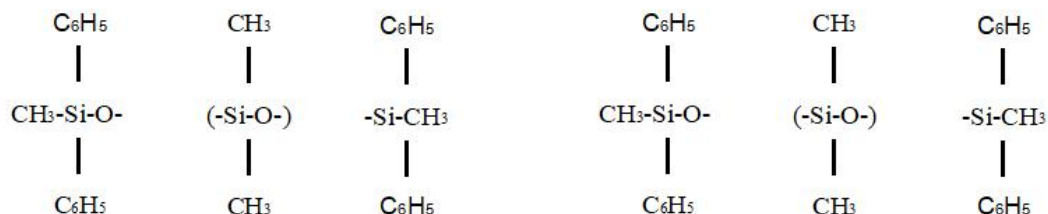

274 (Replace DC-704、HIVAC F-4)

275 (Replace DC-705、HIVAC F-5)

Product Name	274Ultra high vacuum diffusion pump silicone oil	275Ultra high vacuum diffusion pump silicone oil
Appearance	No mechanical impurities, colorless transparent liquid	
Viscosity mm ² /s 25 °C	38 ± 2	165-185
Refractive index 25 °C	1.5530-1.5590	1.5765-1.5785
Relative density	1.060*1.070	1.090-1.100
Flash point (Open Cup) °C	A 210	>243
Freezing Point °C	-35	-14-18
Ultimate vacuum (Pa)	< 3.99x10 ⁻⁷	<6.65x10 ⁻⁸
Saturated vapor pressure	< 6.65x10 ⁻⁸	v 6.65x10 ⁻⁹
Main Content	60%	98%
Features and Application	Silicone diffusion pump oil has a wide range of applications, low saturated vapor pressure, good thermal stability and superior oxidation resistance, applied to high vacuum smelting industry, vacuum tube industry, light bulbs, high vacuum coating (film), atomic accelerator and electron microscope, display and other aspects. This product is similar to DC-704, DC-705 of Dow Corning; Hivacf-4, F-5 of ShinEtsu. Operating temperature: 175°C~210°C.Operating temperature: 180°C~230°C.	