



Product information

D-130 (SI40) TEOS

Tetraethoxysilane-40

Technical data

Product description

Empirical formula: N.A
Average molecular weight: 750
CAS No.: 11099-06-2
Chemical name: Tetraethoxysilane-40

Properties

D-130 (SI40) is a hydrolyzed and oligomerized form of ethyl silicate. It is a mixture of monomers, dimmers, trimers and cyclic polysiloxanes. The average degree of polymerization is five siloxane, or $-\text{Si}-\text{O}-\text{Si}-$ units, D-130 (SI40) is a ethyl silicate with a silicon dioxide content of approximately 40 - 42 % upon complete hydrolysis, and the average molecular weight is 750.
Inorganic binder, UV stable.

Reactivity

D-130(SI40) will react with moisture to form a silica-gel like binder and ethanol byproduct which evaporates.

Typical characteristics	Value
Appearance	Colorless transparent liquid
SiO ₂ content	40~42%
Density at 20°C	1.05g/ml
Boiling point at 760mmHg	N.A
Flash point	≥62°C
Refractive index (25°C)	N.A

Note: the above data are for reference only, can not be used as a technical specification

Application and performance

D-130 (SI40) Silane that can be applied neat, diluted or as part of a formulated product. Applied to natural stones or other construction materials, it forms a silica-gel like binder (SiO₂) that increases the substrate strength. Polymerization of silicone resins for use in paints and other surface modification applications intermediate for sol-gel process. For the manufacture of sealant material RTV-2, D-130 (SI40) can be used as a cross-linking agent. On glass and plastic lens materials, D-130 (SI40) silane provides a scratch-resistant, hard-coat to the finish.



Anhui Moon Technology Co., Ltd.

Room 449, Building 3, Industrial Park, 1151 Yanan South Road, Bengshan District,

POST CODE: 233030

Email: echo@ahmoontech.com

TEL, FAX: +86-


552-2079969

Product safety, handling and storage

Customers considering the use of this product should review the latest Material Safety Data Sheet and label for product safety information, handling instructions, personal protective equipment if necessary, and any special storage condition required. The “Best use before end” date of each batch is shown on the product label. Storage beyond the date specified on the label does not necessarily mean that the product is no longer usable. In this case however, the properties required for the intended use must be checked for quality assurance reasons.

Packaging

25KG foreign trade plastic drum, 180KG internal coated iron drum.

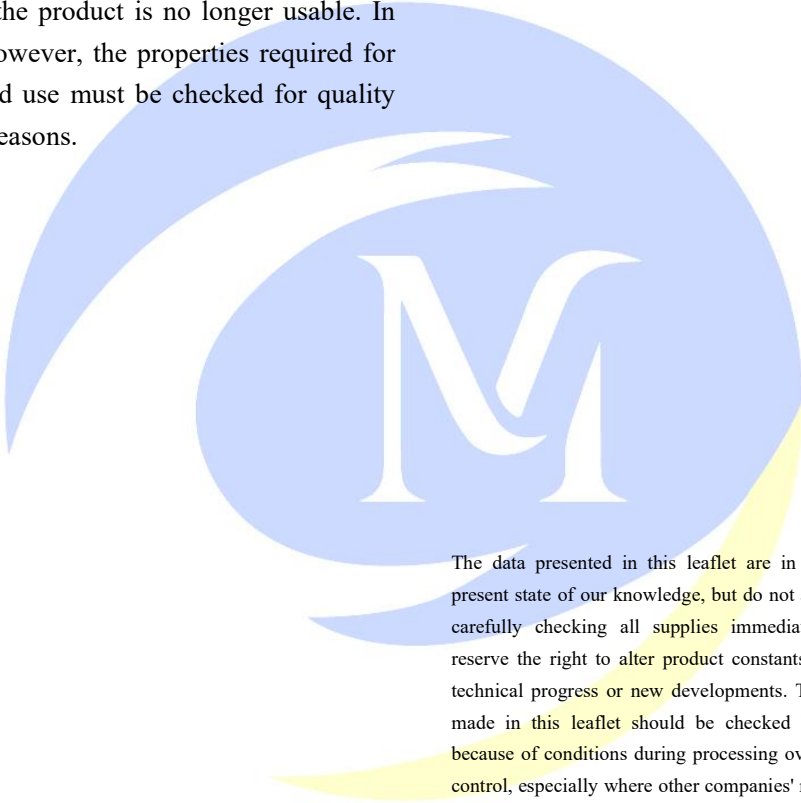

The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this leaflet should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The recommendations do not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the products for a particular purpose.