



Anhui MOON Technology Co., Ltd.

Room 449, Building 3, Industrial Park, 1151 Yanan South Road, Bengbu City, Anhui Province, China
TEL, FAX: +86-552-2079969 POST CODE: 233000


Product information

D-80

Dibutyltindilaurate

Product description

Structural formula:

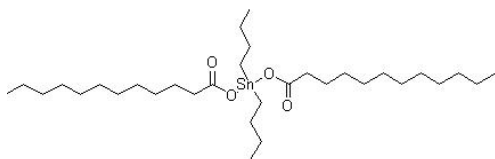

Empirical formula: $C_{32}H_{64}O_4Sn$

Molecular weight: 631.56

CAS No.: 77-58-7

Chemical name: Dibutyltindilaurate

Properties

D-80 is a colorless to yellow liquid, low-temperature white crystals. D-80 soluble in the most common, such as benzene, toluene, ethanol, acetone, ethyl acetate, chloroform, carbon tetrachloride, benzene, ethanol, petroleum ether and other solvents and various industrial plasticizers, D-80 is insoluble in water.

Promotes rapid gelation and tack-free times.

Improves mechanical properties in molded and slabstock foams.

Technical data

Typical characteristics	Value
Appearance	Yellow transparent liquid
Tin content	17.0~19.0%
Density at 25°C	1.07g/ml
Boiling point at 12mmHg	204°C
Flash point, Tag closed cup	113°C
Refractive index (20°C)	1.470

Reactivity

D-80 is very stable in aqueous solution, but in alkaline solution at room temperature, hydrolysis.

Application and performance

Catalyst for RTV

D-80 used as a catalyst in the vulcanizing cure of silicones at room temperatures.

Polyurethane

D-80 catalyst finds greatest use in the manufacture of rigid polyurethane foams. In demanding applications where amine catalysis alone is inadequate, the extra activity obtained by the synergistic combination of organometallics like D-80 catalyst with an amine catalyst permits the required rapid catalysis. Examples include high-density structural foam, sprayup wall insulation and rigid boardstock run at high line speeds. Even when used at levels as low as 0.1 phr based on polyol, D-80 catalyst is especially effective in promoting rapid gel and tack-free times.

Tetravalent diorganotin like D-80 catalyst are known throughout the industry as promoters of the reaction of isocyanates with polyols to form polyurethanes, and of the secondary crosslinking reactions to form allophanate and biuret linkages.

Thermoplastics

The grafted polyethylene can then be immediately crosslinked in the presence of a tin catalyst.

Other applications

Polyamide and phenolic resins, light and heat stabilizers.

Product safety, handling and storage


Customers considering the use of this product should review the latest Material Safety Data Sheet and label for product safety information, handling instructions,



Anhui MOON Technology Co., Ltd.

Room 449, Building 3, Industrial Park, 1151 Yanan South Road, Bengbu City, Anhui Province, China
TEL, FAX: +86-552-2079969 POST CODE: 233000

personal protective equipment if necessary, and any special storage condition required. The “Best use before end” date of each batch is shown on the product label. Storage beyond the date specified on the label does not necessarily mean that the product is no longer usable. In this case however, the properties required for the intended use must be checked for quality assurance reasons.

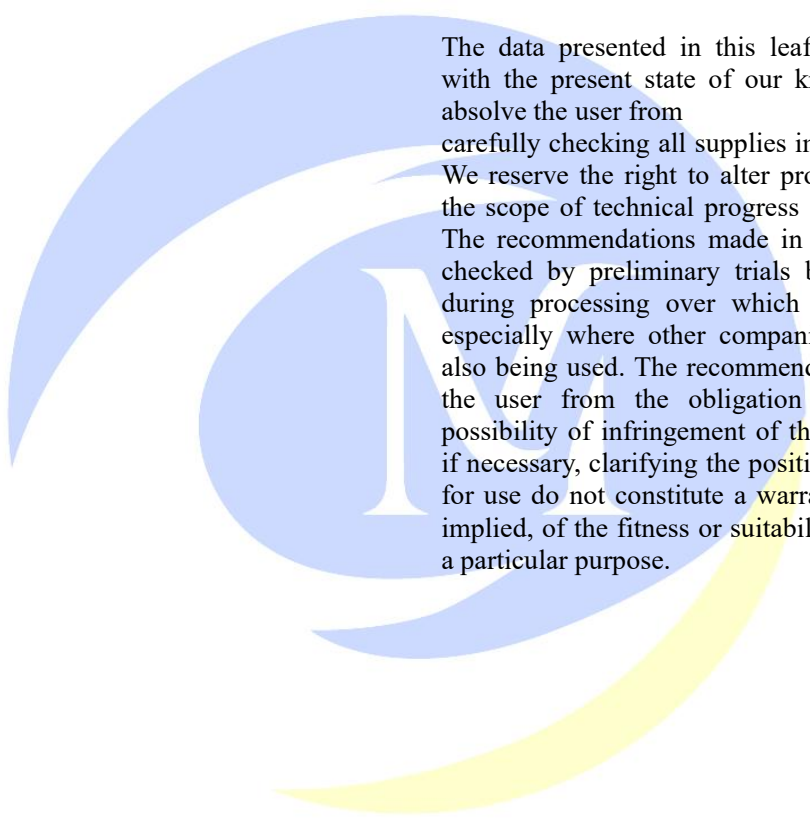

The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this leaflet should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The recommendations do not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the products for a particular purpose.

Packaging

Information on available container sizes is obtainable from **MOON TECH** supplier.