



Anhui MOON Technology Co., Ltd.


Room 449, Building 3, Industrial Park, 1151 Yanan South Road, Bengbu City, Anhui Province, China

TEL, FAX: +86-552-2079969 POST CODE: 233000

Technical data sheet

KH550 3-Aminopropyltriethoxysilane

Structural formula :

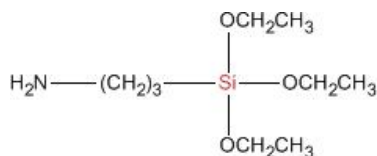

Foreign corresponding models :

GE	Dow Corning	ShinEtsu	Degussa	Chisso
A-1100	Z-6011	KBM-903	AMEO	S330

Technical index

Item No.:	MOON-KH550
Chemical name:	3-Aminopropyltriethoxysilane
CAS No.:	919-30-2
EINECS号:	213-048-4
Molecular formula:	$\text{C}_9\text{H}_{23}\text{NO}_3\text{Si}$
Appearance:	Colorless clear liquid
Density(ρ_{20} , g/cm ³):	0.9510 ± 0.005
Refractive index(n_{25D}):	1.4225 ± 0.0050
Content:	98%

Application :

1. Amino and ethoxy groups are used to couple organic polymer and inorganic fillers, to enhance their adhesiveness, and to improve the mechanical, electrical, water resistance, aging resistance and other properties of the product. Thermoplastic and thermosetting resins such as phenolic, polyester, epoxy, PBT, polyamide, carbonate, etc., used for mineral filling, can greatly improve the physical and mechanical properties such as bending strength, compressive strength, shear strength and wet electrical properties of the reinforced plastics, and improve the wettability and dispersion of the fillers in the polymer. In resin sand casting, strengthen the adhesion of resin silica sand, improve the strength and moisture resistance of molding sand. In the production of fiberglass and mineral cotton, adding it to phenolic binder can improve moisture resistance and compression resilience.
2. Excellent bond promoter for polyurethane, epoxy, nitrile, phenolic adhesives and sealing materials to improve dispersion of pigments and adhesion to glass, aluminum and iron metals, as well as polyurethane, epoxy and acrylic latex coatings.
3. Used for synthesis of amino silicone oil and its emulsion.

Package :

210L Iron drum: 190kg/Drum
1000L IBC Drum: 950kg/Drum