

DynEarthSol3D (DES3D) [Choi et al., 2013; Tan et al., 2013; Ta et al., 2015; Logan et al., 2017] is an explicit dynamic finite element code providing quasi-static solutions to the momentum balance equation via the dynamic relaxation [Cundall, 1989] and mass scaling [e.g. Chung et al., 1998]. The explicit formulation makes it easy to implement complex rheologies. The limit on time step size is a drawback associated with an explicit time integration but the mass scaling technique can mitigate it to some degree.

In this project, we are going to use the Mohr-Coulomb elasto-plastic rheology. This rheology is ideal for describing elastic and brittle behaviors of rocks as in `fdfault` without complications from rate-dependent creep as in viscoelastic or elasto-visco-plastic rheologies. Excluding viscous behaviors from consideration [to be completed.]

Recent extension of the Mohr-Coulomb rheology in DES3D to rate-and-state friction [Tong and Lavier, *in prep*] demonstrates the feasibility of seamlessly coupling `fdfault` and DES3D. In Tong and Lavier’s approach, velocity magnitude is evaluated, the state variable is updated based on it and the rate-and-state friction coefficient (μ_{RS}) is computed based on the updated velocity and state variable at each quadrature point of an element. μ_{RS} is then used in the Mohr-Coulomb failure criterion as well as in the return mapping for stress update. The explicit formulation of DES3D enables us to implement the rate-and-state friction law without invoking iterative non-linear solution schemes, which are necessary in the usual quasi-static formulation.

In an example shown in Fig. 1, a 10 km-thick layer of elastic crust is sheared to initiate and maintain earthquake cycles. A 2 km-thick pre-existing shear zone is in contact with the crustal layer and composed of the Mohr-Coulomb plastic materials with rate-and-state friction. Due to the shear loading, shear stress elastically accumulates in both layers. When plastic yielding occurs in the shear zone, the coseismic slip and release of elastic stress occurs and the rate-and-state friction governs this stress-releasing process. As evident in the right panel of Fig. 1, the implemented rate-and-state friction law successfully reproduces the behaviors expected during earthquake cycles.

Bibliography

- E. Choi, E. Tan, L. L. Lavier, and V. M. Calo. DynEarthSol2D: An efficient unstructured finite element method to study long-term tectonic deformation. *Journal of Geophysical Research: Solid Earth*, 118(5):2429–2444, may 2013. ISSN 21699313. doi: 10.1002/jgrb.50148. URL <http://doi.wiley.com/10.1002/jgrb.50148>.
- W. J. Chung, J. W. Cho, and T. Belytschko. On the dynamic effects of explicit FEM in sheet metal forming analysis. *Engineering Computations*, 15(6-7):750–776, 1998.

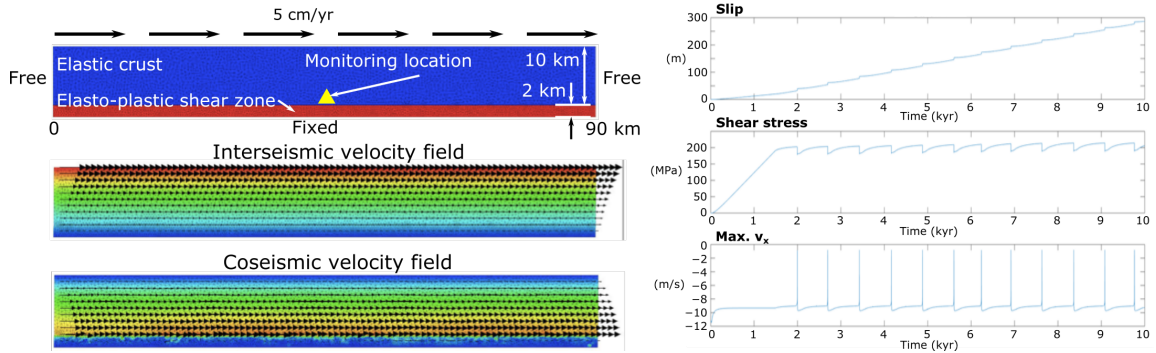


Figure 1: (left) Top: Model setup. Middle and bottom: Snapshots of velocity field during interseismic loading and coseismic slip, respectively. (right) Time history of slip, shear stress and maximum velocity magnitude, all of which consistently and clearly exhibit the main characteristics of earthquake cycles.

P A Cundall. Numerical experiments on localization in frictional materials. *Ingenieur Archiv.*, 58:148–159, 1989.

Liz C. Logan, Luc L. Lavier, Eunseo Choi, Eh Tan, and Ginny A. Catania. Semi-brittle rheology and ice dynamics in DynEarthSol3D. *Cryosphere*, 11(1):117–132, 2017. ISSN 19940424. doi: 10.5194/tc-11-117-2017.

Tuan Ta, Kyoshin Choo, Eh Tan, Byunghyun Jang, and Eunseo Choi. Accelerating DynEarthSol3D on tightly coupled CPU–GPU heterogeneous processors. *Computers & Geosciences*, 79:27–37, 2015. ISSN 00983004. doi: 10.1016/j.cageo.2015.03.003. URL <http://linkinghub.elsevier.com/retrieve/pii/S0098300415000527>.

Eh Tan, Eunseo Choi, Luc Lavier, and Victor Calo. DynEarthSol3D: An Efficient and Flexible Unstructured Finite Element Method to Study Long-Term Tectonic Deformation,. *Abstract DI31A-2197 presented at 2013 Fall Meeting, AGU, San Francisco, Calif., 9-13 Dec.*, 2013.