


VENTILATED THERMOWOOD® FAÇADE SYSTEM

VENTILATED TIMBER CLADDING WITH PIR INSULATION

EN

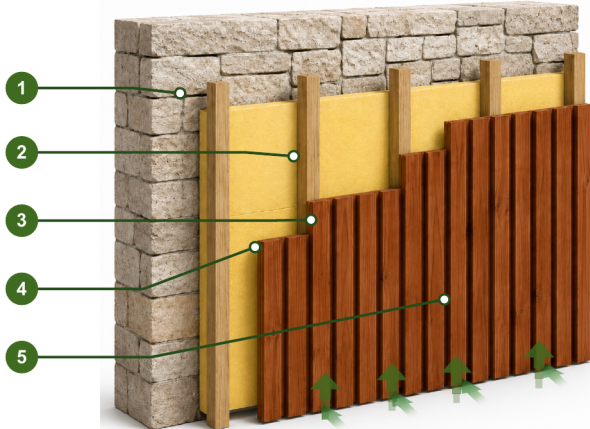

SYSTEM OVERVIEW

The ventilated ThermoWood® façade combines high-performance external insulation with a ventilated timber substructure and durable thermally modified wood cladding. The open cavity supports airflow, helps drain incidental moisture and protects the external wall while creating a warm architectural finish for Mallorca's climate.

Final design must be verified for the substrate, façade height, wind exposure, fire requirements, ventilation openings, fixing method and project-specific conditions.

WHY ECOVIVA

- Independent renovation guidance
- Local Mallorca expertise
- Project-specific technical verification
- One point of contact from concept to completion

FIVE-PART VENTILATED TIMBER FAÇADE BUILD-UP

- 1 Structural wall substrate**
Prepared masonry or concrete wall supporting the complete façade system.
- 2 PIR façade insulation**
High-performance rigid insulation reducing heat transfer through the external wall.
- 3 Timber battens**
Durable timber substructure creating the ventilated cavity and supporting the cladding.
- 4 Ventilated cavity**
Continuous drainage and airflow space behind the external timber finish.
- 5 ThermoWood® cladding**
Thermally modified timber finish providing stability and natural architectural character.

KEY TECHNICAL PRINCIPLES

- ✓ VENTILATION AND DRAINAGE**
Keep the base-to-top cavity open for continuous airflow and drainage.
- ✓ DURABLE SUBSTRUCTURE AND FIXINGS**
Select exterior-grade battens and corrosion-resistant fixings for façade loads and coastal exposure.
- ✓ MOISTURE MANAGEMENT**
Use a suitable vapour-open breather membrane and correctly detailed openings.
- ✓ MOVEMENT AND DETAILING**
Allow for timber movement; coordinate openings, corners, interfaces, base and top closures.

ASSEMBLY COMPONENTS

 ThermoWood® cladding profile Thermally modified exterior timber profile.	 Timber batten Substructure forming the ventilation and drainage cavity.	 Stainless-steel screw Corrosion-resistant exterior façade fixing.	 Breather membrane Water-resistant and vapour-open protective layer.	 Ventilation insect mesh Protects cavity openings while maintaining airflow.	 PIR insulation High-performance rigid thermal insulation.
--	---	---	---	---	---

FAÇADE DESIGN OPTIONS

 Classic Horizontal Calm horizontal timber appearance.	 Vertical Shadow Gap Modern vertical rhythm with dark joints.	 Mixed Width Varied board widths for a dynamic façade.	 Triple Profile 3D Narrow ribs creating depth and shadow.	 Block Profile 3D Deeper relief and stronger expression.	 Silver Grey Weathered Natural ageing to a soft grey patina.
---	--	---	--	---	---

KEY BENEFITS

- Durable, dimensionally stable timber
- Ventilated moisture-management strategy
- Improved external thermal performance
- Warm natural architectural appearance
- Low-maintenance untreated ageing option
- Renewable wood-based façade material

TYPICAL APPLICATIONS

- Residential façades
- Villas and holiday homes
- Entrance features
- Garden and boundary walls
- Pool houses
- Selected commercial buildings

NATURAL COLOUR EVOLUTION

			
Newly installed	Early weathering	Developing grey	Silver-grey patina
Untreated ThermoWood® naturally develops a silver-grey surface. Appearance varies with exposure, detailing and maintenance.			

IMPORTANT TECHNICAL REQUIREMENTS

Use compatible façade components selected for the substrate, insulation, cavity depth, cladding profile, fixing method, façade height, wind exposure and coastal environment. Ventilation openings, insect protection, drainage, fire performance, movement joints and all interfaces must be project-verified. Final design and execution must comply with the CTE, applicable product documentation and project-specific requirements.