


NATURAL STONE FAÇADE SYSTEM

MALLORCA NATURAL STONE VENEERS AND INSULATED FAÇADE FINISH

EN

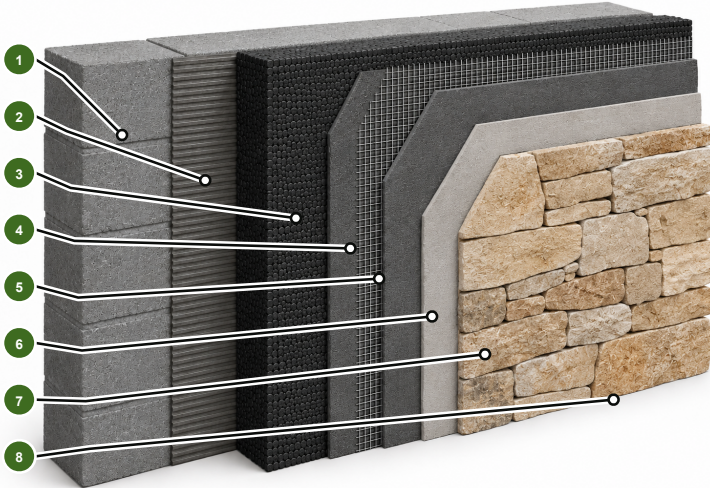

SYSTEM OVERVIEW

This façade build-up combines external thermal insulation with a premium Mallorca natural stone veneer finish. Correct substrate preparation, compatible insulation and reinforcement layers, suitable stone adhesive, mechanical support where required, and carefully detailed joints and connections help create a durable, thermally improved façade that respects Mallorca's architectural character. Final system design must always be verified for the specific substrate, stone weight, exposure and project conditions.

WHY ECOVIVA

- Independent renovation guidance
- Project-specific technical verification
- Local Mallorca expertise
- One point of contact from concept to completion

EIGHT-LAYER NATURAL STONE FAÇADE BUILD-UP

- 1 Structural wall substrate**
Assessed and prepared masonry or mineral wall supporting the complete façade system.
- 2 Adhesive mortar**
Compatible mineral adhesive securely bonding the insulation to the substrate.
- 3 Graphite EPS façade insulation**
High-performance external insulation helping reduce heat transfer in a compact build-up.
- 4 First reinforcement / base-coat layer**
Compatible mortar forming the base for the embedded reinforcement mesh.
- 5 Alkali-resistant reinforcement mesh**
Glass-fibre mesh fully embedded with correct overlaps and continuous connections.
- 6 Second levelling / finishing base coat**
Levelling layer creating a stable and even substrate for the stone finish.
- 7 Stone adhesive**
Flexible, compatible adhesive selected for stone type, weight and exposure.
- 8 Mallorca natural stone veneer**
Selected natural stone veneer creating a durable finish with authentic local character.

KEY TECHNICAL PRINCIPLES

SUBSTRATE PREPARATION

The structural wall must be stable, clean, sufficiently even and suitable for the complete bonded façade build-up.

REINFORCEMENT AND LOAD TRANSFER

Reinforcement, stone adhesive, starter rails, anchors and supports must be designed for stone weight and façade conditions.

THERMAL CONTINUITY

Continuous external insulation reduces winter heat losses, limits summer heat gain and supports more stable internal surface temperatures.

COMPLETE SYSTEM COMPATIBILITY

Adhesives, insulation, reinforcement, profiles, waterproofing, fixings and stone must form a compatible, verified system.

EXAMPLES OF COMPONENTS USED IN THE SYSTEM




KEY BENEFITS

- LOWER HEATING AND COOLING DEMAND**
Continuous external insulation reduces winter heat loss and limits summer heat gain.
- REDUCED THERMAL BRIDGES**
A continuous insulation envelope helps limit local weak points around the wall.
- AUTHENTIC MALLORCA APPEARANCE**
Natural stone veneers preserve the character of traditional Mallorcan architecture.
- PROTECTED BUILDING FABRIC**
The external system helps protect the wall from temperature fluctuations and weather.
- DURABLE PREMIUM FINISH**
Correctly selected and detailed stone creates a robust, long-lasting, low-maintenance finish.

IMPORTANT / COMPLIANCE

Use complete, mutually compatible components selected for the substrate, insulation, stone type and weight, façade height, exposure and project conditions. Mechanical support, waterproofing, movement joints, drainage, fire performance and connections must be verified where applicable. Final execution must follow the Spanish Building Code and project-specific technical requirements.

SELECTED MALLORCA NATURAL STONE VENEERS



Indicative selection only. Final colour, texture, joint appearance and availability must be confirmed using physical samples.