TECHNICAL PACK: DOUGH BOSS CATERING DOZEN BOX

Document no. DB-TP-CAT-001, revision A (draft for RFQ). **Date** 3 October 2026. **Status: DRAFT FOR RFQ AND SAMPLES. NOT RELEASED FOR PRODUCTION. Product** Printed corrugated catering box, one dozen (FEFCO 0427), with greaseproof liner sheet and seal label. **Pack ID on artwork** DB-CAT-DOZEN-v1. **Companion documents** Packaging data sheet DB-PDS-CAT-001 rev A (the PDS); separated dieline DoughBoss-DozenBox-Dieline-v2.pdf (rev B draft, appended to this pack) and die file DoughBoss-DozenBox-Die-v2.dxf; artwork flats (section 7). **Language** English governs. The glossary in Annex B is for reference only. **Currency** Quote in the currency you invoice in and state it. Dough Boss compares in AUD at the RBA rate on the quote date [CONFIRM: currency].

0. HOW TO READ THIS PACK

Tag	Meaning
PINNED	A fixed requirement. Do not change it without written approval from Dough Boss.
[CONFIRM]	A Dough Boss decision or test still open. A recommended default is given. It is a working value, not a release.
[SUPPLIER TO PROPOSE]	Depends on your machines, materials or standard practice. Please state your value in the RFQ form (Annex A).
[QUOTE]	A cost or lead time. None is stated by Dough Boss. You supply it in Annex A.
RECOMMENDED	A standard industry value offered as a starting point. It is from general industry practice, not a Dough Boss test result. Verify it. If you have a better standard value, propose it.
VERIFIED / verify	In section 19 each standard is marked as read on 3 October 2026 or as "from general industry practice, verify".

No price, test result, MOQ or lead time appears in this pack. Where the factory's CAD (ArtiosCAD or equivalent) and this pack differ on a structural allowance, the factory's CAD is proposed first and Dough Boss approves it by signed sample.

1. PRODUCT AND SCOPE

Item	Description
Box	One-piece folder, hinged lid, rolled double front and side walls, tuck front. No glue, no tape (locks only) [CONFIRM: factory does not require spot glue; propose if it does]. Supplied flat, die-cut, unfolded.
Use	Hot baked goods, 12 bakes (4 x 3, about 9 cm each) on a greaseproof sheet. Catering orders of 2, 3 or 5 boxes, stacked. Hand-erected at the shop.
Food contact	The box inside face does not touch food directly: the greaseproof liner sheet is between the bakes and the board. The board, inks and adhesives must still carry food-packaging declarations (section 14).
Component 1	Printed corrugated box (this pack, sections 3 to 7).
Component 2	Greaseproof liner sheet (section 8). Quote separately. May come from another supplier.
Component 3	Round kraft seal label, 70 mm (section 8). Quote separately. May come from another supplier.
Customer	Dough Boss, Sydney, Australia. Legal entity, ABN, importer of record [CONFIRM].

2. PINNED SPECIFICATION SUMMARY

Parameter	Value	Status
Internal size L x B x H	385 x 290 x 50 mm	PINNED (fit test open: [CONFIRM])
Style	FEFCO 0427	PINNED
Flute	E-flute, single wall	PINNED (B-flute only as a quoted fallback)
Outer face	Black	PINNED
Inner face	Natural kraft	PINNED

Parameter	Value	Status
Print	2 spot colours: WHITE OPAQUE and EMBER (PANTONE 485 C), EMBER over a white underlay choked 0.3 mm	PINNED
Vents	4 x Ø10 mm on the side walls at 20 % and 80 % of the wall length	PINNED
Tuck flap	45 mm	PINNED
Flat blank (working die)	593.8 x 781.0 mm	PINNED (working die; factory CAD confirms)
Liner sheet	Greaseproof, 40 to 50 gsm, KIT 6 or above	PINNED
Seal label	70 mm round	PINNED

3. STRUCTURE, DIMENSIONS AND TOLERANCES

3.1 Dimension basis

- Sizes follow the FEFCO convention: **internal** dimensions, L x B x H, measured on the erected box (FEFCO Code of Designs, read 3 October 2026 for the PDS).
- L = 385 mm runs along the front and back walls. B = 290 mm runs along the side walls. The 290 mm walls carry the vents.
- The dieline file is drawn **viewed from the printed (outside) face**. The FEFCO catalogue draws layouts from the inside. Check orientation before cutting any tool.
- Board caliper used in the working die: t = 1.6 mm (E-flute) [SUPPLIER TO PROPOSE: your measured caliper].

3.2 Dimension table

Dimension	Nominal	Tolerance (RECOMMENDED, verify)	Status
Internal L (erected)	385 mm	±2.0 mm	[CONFIRM: fit test with 12 real bakes]
Internal B (erected)	290 mm	±2.0 mm	[CONFIRM]
Internal H (erected)	50 mm	±1.5 mm	[CONFIRM]
Outside L x B x H (erected)	about 391 x 295 x 53 mm	±3 mm (information only; internal governs)	INFERRED from t = 1.6 mm (about +4t on L, +3t on B, +2t on H). Factory CAD sets the allowances. [SUPPLIER TO PROPOSE]
Flat blank, die-cut outline	593.8 x 781.0 mm	±2.0 mm	PINNED working die; area of the bounding rectangle 0.4638 m^2
Minimum printed sheet including 3 mm bleed	599.8 x 787.0 mm	n/a	Computed. Your sheet size, gripper and trim allowance [SUPPLIER TO PROPOSE]
Tuck flap depth	45.0 mm	±1.5 mm	PINNED depth
Tuck flap side relief / corner radius	3 mm / 6 mm	±0.5 mm	[CONFIRM: structural engineer]
Lock tabs	22 mm wide x 6 mm deep	±0.5 mm	Working
Lock slots	24 mm x 2.5 mm	+0.5 / -0.0 mm	Working
Vent holes	Ø10 mm	+0.5 / -0.0 mm	PINNED diameter
Vent position	20 % and 80 % of the 290 mm wall length (58 mm and 232 mm from the base corner crease), mid-height	±1.5 mm	PINNED position
Vent alignment, outer ply to inner ply once rolled	Centres coincident	Centre offset not more than 2.0 mm, which leaves at least 8 mm clear opening (computed from two Ø10 holes)	See note 1 below
Crease position	per dieline	±1.0 mm	RECOMMENDED
Print to die-cut position	per artwork	±2.0 mm	RECOMMENDED. Must be consistent with the registration rule in section 6.5.
Warp / bow of the flat blank	n/a	[SUPPLIER TO PROPOSE]	

Note 1. In dieline v1 the inner-ply vent centres sat 24.2 mm from the roll fold against 25.0 mm for the outer ply, an offset of about 0.8 mm once rolled. Dieline v2 places both at 25.0 mm, so the computed offset is 0.0 mm (geometry only; your CAD caliper allowance may move it, and the white sample proves it).

3.3 Features in the working die (all mm, origin at the base panel's lower-left corner, viewed from the printed face)

Feature	Size	Count	Position or note
Base	385.0 x 290.0	1	Origin at (0, 0)
Front wall, outer ply	385.0 x 50.0	1	Below the base
Front wall, rolled inner ply	381.8 x 48.4	1	Carries 2 lock tabs
Back wall	385.0 x 50.0	1	Above the base
Lid	388.2 x 291.6	1	Hinged on the back wall
Lid tuck flap	382.2 x 45.0	1	3 mm side relief, 6 mm corner radii
Side walls, outer ply	50.0 x 290.0 each	2	Left and right of the base
Side walls, rolled inner ply	48.4 x 286.8 each	2	Carry 2 lock tabs each
Lock tabs	22 x 6	6	Front inner ply 2; each side inner ply 2 (at 30 % and 70 % of the 290 mm length)
Lock slots in the base	24 x 2.5	6	Front 2 (centres at x 128.9 and 256.1 mm); each side 2 (centres at y 87 and 203 mm)
Vent holes, finished box	Ø10	**4**	2 per side wall
Vent holes, punched on the flat	Ø10	**8**	Outer ply and inner ply of each side wall, so they align when rolled. Quote the die for 8 punches.
Thumb notch	None	0	Decision: removed because it weakened the front wall
Perforation	None	0	Not used on this design
Glue areas	None	0	Locks only [CONFIRM]

The die extents on the flat are x -104.4 to 489.4 mm and y -104.4 to 676.6 mm, giving the 593.8 x 781.0 mm blank.

3.4 Flute and grain direction

Item	Requirement
Flute direction	[SUPPLIER TO PROPOSE]. RECOMMENDED: flutes run top to bottom in the wall panels where they can, for compression strength. On a one-piece folder only one pair of walls can have this, so state which. The direction must be drawn as an arrow on the dieline (section 4).
Visible flute	Flutes are visible only on the vertical ends of the side walls and at the lid corner relief cuts. Every lid-perimeter and wall-top edge is a fold (design rule). Reject any design that exposes flute along the lid front edge.
Crease tool	Rule and matrix type, depth and width [SUPPLIER TO PROPOSE]. Folds on the black outer must not crack through to white fibre beyond the golden sample standard (section 10).

4. DIELINE FILE REQUIREMENTS AND LINE LEGEND

4.1 The files issued

File	What it is
DoughBoss-DozenBox-Dieline-v2.pdf	4 pages, vector, 1:1. Page 1 outside print with the die; page 2 die only with dimensions, line legend and title block (DB-CAT-DOZEN rev B draft); page 3 inside print viewed from inside; page 4 separations proof (each plate alone). TrimBox = the 593.8 x 781.0 mm blank; BleedBox = trim plus 3 mm. Every painted object is a spot colour (no RGB, no CMYK). Fonts are embedded; outline them before plate making if your workflow requires it.
DoughBoss-DozenBox-Die-v2.dxf	The same die in millimetres: layers CUT, CREASE and VENT, from the same geometry.
DoughBoss-DozenBox-Dieline-v1.pdf	Superseded. Do not use.

The v2 die is Dough Boss's working die. Draw your production CAD from it, apply your own caliper allowances, and return the CAD drawing for approval at stage S1 [SUPPLIER TO PROPOSE].

4.2 Target format for dieline v2 and for your tooling drawing

Requirement	Value
Format	Editable vector PDF, PDF/X-4 or your stated standard [SUPPLIER TO PROPOSE]; also DXF or ArtiosCAD file from you
Scale	1:1, millimetres

Requirement	Value
Views	Outside print view (as the print side faces). Separate labelled inside view if inside print is ordered
Fonts	Outlined
Boxes	TrimBox = die-cut outline; BleedBox = outline plus 3 mm
Layers	`Dieline`, `Guides`, `Art_White`, `Art_Ember`, `Notes` (non-printing)
Orientation marks	Flute direction arrow, "OUTSIDE / PRINT SIDE" label, panel names
Title block	Pack ID, PDS and tech pack revision, file name, date, scale, board code, "NOT FOR PRINT" on review copies

4.3 Plates and line legend (as named in dieline v2)

Spot name in the file	Prints?	Function
`WHITE OPAQUE`	**Yes**	White artwork and the white underlay under every EMBER area (underlay choked 0.3 mm)
`EMBER PMS 485 C`	**Yes**	Full stop, hinge band, seal ring; set to overprint the underlay
`INSIDE DARK`	Only if the inside-lid print is ordered	Placeholder name for the optional one-colour inside-lid print [CONFIRM: colour and whether it is ordered]
`DIE CUT`	No (tooling)	Cut lines: outline, slots, tab edges; solid, overprint
`DIE CREASE`	No (tooling)	Crease and fold lines; dashed, overprint
`DIMENSIONS`	No	Dimensions, legend, title block, notes; overprint
`PREVIEW BLACK KRAFT`, `PREVIEW NATURAL KRAFT`	**No, never**	Board colour simulation for viewing only, on a non-printing layer. Do not make plates for these
`All`	No	Crop and registration marks

Vents are cut by the die and appear on the CUT path (VENT layer in the DXF). Perforation and glue: not used on this design.

Dieline and guides never print. Dieline spots must be set to overprint so they cannot knock out artwork.

5. BOARD BUILD

5.1 Construction

Ply	Function	RECOMMENDED starting point (verify; not tested by Dough Boss)	Dough Boss requirement	Status
Outer liner	Black printed face	Black through-dyed kraft liner, about 150 to 200 gsm	Black. Dye must not rub off or bleed (section 14.5). Option B below if no dyed liner is available	[SUPPLIER TO PROPOSE: brand, gsm, source]
Fluting (medium)	E-flute	About 90 to 120 gsm fluting medium	E-flute, caliper about 1.5 to 1.6 mm board total	[SUPPLIER TO PROPOSE: gsm, virgin or recycled]
Inner liner	Natural brown kraft, faces the liner sheet	About 150 to 180 gsm virgin kraft liner	Natural kraft. Virgin fibre preferred. Recycled content only with a mineral-oil migration statement (section 14.6)	[SUPPLIER TO PROPOSE: gsm, source]
Adhesive	Corrugating adhesive	Starch-based	Declaration that it is suitable for food-packaging use	[SUPPLIER TO PROPOSE]
Coating	None	None	No wax, no PE film, no fluorochemical treatment on any ply	PINNED

Report the **total board grammage** and the **board code** you propose. Do not copy the RECOMMENDED gsm figures as a promise of performance: they are typical ranges for E-flute folders, and the ECT below decides whether a build is acceptable.

Option A (preferred): dyed black kraft outer liner, natural kraft inner liner, 2 spot print inks (WHITE OPAQUE, EMBER). **Option B (alternative quote):** natural kraft outer liner flood-printed black, 3 print passes (BLACK flood, WHITE OPAQUE, EMBER). Black flood on natural kraft is a third ink; a reverse-out shape in it shows kraft brown, not white. Quote both. **Information-only quote:** the same Option A construction in B-flute (caliper about 3.0 to 3.2 mm), which is the fallback if the lid sags or the stack test fails.

5.2 Strength targets

Property	Target	Method	Status
ECT (edge crush)	about 32 ECT = about 5.6 kN/m or higher	ISO 3037	[CONFIRM: reachable with a dyed black liner in E-flute. If not, propose the highest E-flute value you can certify and report it. The stack test governs.]
Burst	about 1,380 kPa or your nearest food-mailer grade	ISO 2759	[CONFIRM]
Caliper	about 1.5 to 1.6 mm	ISO 3034	[SUPPLIER TO PROPOSE]
BCT (box compression)	Not yet set. Required BCT = (number of boxes above) x (filled box mass) x 9.81 x (safety factor). For a 5-high stack the bottom box carries 4 boxes.	ISO 12048	[CONFIRM: filled mass of 12 bakes; safety factor RECOMMENDED not less than 3 for a stack held for hours, verify]
Moisture at despatch	Within your board specification, typically about 8 to 12 %	ISO 287	[SUPPLIER TO PROPOSE]
Cobb (outer liner water absorption)	Report	ISO 535	[SUPPLIER TO PROPOSE]

Note: a McKee-type estimate for this box gave about 1.5 kN dry. That figure is an order-of-magnitude estimate by Dough Boss, not a test result, and a 50 mm folder with doubled walls is outside the formula's usual range. Lid sag and steam softening are more likely to govern than crush. Please test BCT on your white sample and report it.

Test at conditioned atmosphere (ISO 187: 23 °C, 50 % RH, from general industry practice, verify). Report ECT and BCT on the proposed board for both the first sample and production lots.

6. PRINT SPECIFICATION

6.1 Process

Water-based **flexo post-print** on the board, outside face, for production. Digital print is for prototypes and fit tests only, unless you show a white-capable digital press that holds opaque white on black board. Printing the **inside lid** (one colour, optional) is a second face: say whether it is a second pass, a separate run or not offered, and quote the difference as a separate line [CONFIRM: drop it if the quote is high].

6.2 Spot colour list

#	Name	Reference	Where	Notes
1	WHITE OPAQUE	High-opacity flexo white for corrugated post-print (ink maker's reference) [SUPPLIER TO PROPOSE]	White art and the underlay beneath EMBER	One hit is the design. On black kraft one hit usually reads warm cream with fibre showing, which is the intended look. Quote single hit and double hit (two stations or heavy anilox) as options.
2	EMBER	**PANTONE 485 C** reference (sRGB simulation about #DA291C; the brand screen value is #e2231a, a screen value only, never a print instruction)	Wordmark full stop, hinge band, seal ring	Printed **over the white underlay**. Corrugated is uncoated, so match the 485 U look on a drawdown on the real board.
3 (Option B only)	BLACK flood	Ink maker's black	Whole outer face	Only on natural kraft
4 (optional)	Inside lid ink	One dark colour on natural kraft	Inside lid	[CONFIRM: black or EMBER; never white]. Does not touch food.

Pantone numbers are references. Approval is by drawdown and signed sample, not by number.

6.3 Ink order, underlay and trapping

Item	Requirement
Ink order (Option A)	Station 1 WHITE OPAQUE (white art plus underlay). Optional second white hit [SUPPLIER TO PROPOSE]. Last station EMBER.
White underlay	Under every EMBER area. **Choked 0.3 mm** inside the EMBER edge on every side so no white halo shows. PINNED.
Trapping	EMBER overprints the underlay. The 0.3 mm choke is the trap. Never butt white art directly against EMBER art; keep them apart, or overlap EMBER on the underlay. Your trap value for any other join [SUPPLIER TO PROPOSE].

Item	Requirement
Registration	Design target ±1.5 mm. Assume up to ±3 mm on press. Design must still hold. Your press tolerance [SUPPLIER TO PROPOSE].
Screens	**Solids only.** No tints, no halftones.
Plates	One plate per spot colour per design. Plate material, thickness and mounting [SUPPLIER TO PROPOSE].
Anilox	White and EMBER anilox volumes [SUPPLIER TO PROPOSE]

6.4 Ink coverage (indicative)

Measured from the v1 concept artwork, rasterised at about 50 dpi, outside faces only, as a share of the flat blank area (about 0.39 m^2 of board in the die outline):

Ink	Approximate coverage
WHITE OPAQUE (art)	about 6 %
EMBER (and so its white underlay)	about 1 %

These are rough figures (anti-aliased edges included) from concept artwork, to size your anilox and ink usage. Recalculate from the final separated artwork. Low coverage means the board and the dye carry the look, so the black liner quality matters more than the ink.

6.5 Minimums (solid ink on uncoated board)

Rule	Value
Wordmark	Bebas Neue, 11 mm or larger on board
White type, positive	10 pt minimum, 12 pt preferred
EMBER type on white underlay	12 pt minimum
Reversed type	Not under 10 pt (PDS wording says 8 pt; the stricter value is used here [CONFIRM])
Lines	White rules 1.0 mm (about 2.8 pt) or heavier (PDS rule); EMBER lines and knockouts 4 pt (about 1.4 mm) minimum
Bleed	3 mm minimum beyond the cut [SUPPLIER TO PROPOSE if you need more]
Safe zone	5 mm inside every cut and crease; print 6 mm clear of every cut-out and vent
Folds	No critical copy across a lid or wall crease

6.6 Finish or varnish options

Option	Position
None (default)	Natural uncoated matte surface. The brand look is ink sitting in the card.
Water-based overprint varnish, matte, outside face only	Only if the rub test fails (section 11). Needs a food-packaging statement. [CONFIRM]
UV varnish, film lamination, PE or wax coating, hot-foil	Not wanted. State if any is added as a surcharge.

6.7 Colour approval

1. Press drawdown on the **production board**: white opacity, and EMBER over white underlay.
2. Printed pre-production sample (section 9) on the production board and ink.
3. Dough Boss retains one signed standard, you retain one (and one for the inspector). Viewing light D50 (ISO 3664, from general industry practice, verify). Instrument readings (spectrophotometer, illuminant and observer stated) are recorded for the file. The signed standard governs. dE limits [SUPPLIER TO PROPOSE].

Never approve colour from a screen proof.

6.8 Inks and migration

Water-based inks only. The ink maker supplies a food-packaging statement for the outer face (conformity with the Swiss Ordinance SR 817.023.21 Annex 10 and the EuPIA Exclusion Policy, or equivalent [SUPPLIER TO PROPOSE]). No print on any food-contact surface. The inside-lid print does not touch food.

7. ARTWORK FILE LIST AND VERSIONING

7.1 Files Dough Boss supplies

File	Contents	Status
DoughBoss-DozenBox-Dieline-v2.pdf	Separated 1:1 dieline and print plates (section 4)	Issued, rev B draft
DoughBoss-DozenBox-Die-v2.dxf	Die geometry, CUT / CREASE / VENT layers	Issued, rev B draft
DoughBoss-DozenBox-Dieline-v1.pdf	Earlier layout	Superseded
flats/lid, front, side, back (vector PDFs)	Per-panel outside artwork	Issued, concept
flats/inside-lid (vector PDF)	Inside lid mono print	Issued, optional
flats/liner (vector PDF)	Liner print (plain is the default)	Issued, [CONFIRM: printed or plain]
flats/seal (vector PDF)	70 mm seal label	Issued
Fonts	Bebas Neue (display), Barlow (body)	Outlined in print files. Font licence for print [CONFIRM]
Colour target sheet	Drawdown targets for WHITE OPAQUE and EMBER	To be produced at drawdown stage

7.2 Naming and version rules

File name: `DB_[ITEM]_[COMPONENT]_[SIZE]_v[NN]_[STATUS]_[YYYY-MM-DD].[ext]`, for example `DB_CATBOX-DZ_ART_385x290x50_v03_PROOF_2026-10-03.pdf`. Never reuse a version number. Status values are WIP, REVIEW, PROOF, APPROVED, SUPERSEDED. Only Dough Boss applies APPROVED.

- The tech pack, the PDS, the dieline and the artwork move together. If one changes, all four carry the new version.
- Any change to an approved file, even 1 mm or one word, gets a new version and a new proof cycle.
- Your purchase order and your proof must quote the exact file names and versions.
- You return the signed proof PDF with your own job number.

7.3 What you supply

Your CAD dieline (DXF or native), a PDF proof with separations (one plate per spot plus the die), plate artwork, and a colour drawdown set. Dough Boss artwork is not altered by you without written approval, including "small" fixes.

8. LINER SHEET AND SEAL LABEL

8.1 Greaseproof liner sheet (PINNED values)

Parameter	Requirement	Status
Material	Greaseproof or glassine-type paper	PINNED
Weight	40 to 50 gsm	PINNED
Grease resistance	KIT 6 or above, target 7 to 8 (TAPPI T 559)	PINNED floor; target [CONFIRM by strike-through test]
Heat stability	Stable at serving temperature, hot fill [SUPPLIER TO PROPOSE: TDS temperature]	[CONFIRM]
PFAS	No intentionally added PFAS. Total fluorine below 100 ppm, with a test report	PINNED
Size	380 x 285 mm flat, or about 480 x 385 mm to cup up the walls	[CONFIRM: fit sample]
Print	Plain is safest. If printed, non-food face only, with an ink food-packaging statement	[CONFIRM: printed or plain]
Declaration	DoC for fatty food at hot fill	Required

8.2 Seal label

Parameter	Requirement	Status
Shape and size	Round, 70 mm	PINNED
Face	Natural kraft, writable with a permanent marker (no smear or bead)	
Adhesive	Permanent, suitable for corrugated and for black kraft board	[CONFIRM: permanent or removable, marker type]
Position	Across the lid front and front wall, centre at x = 322 mm ±11 mm	Working

Parameter	Requirement	Status
Print	Fields FOR, DATE, tick list (CHEESE, ZA'ATAR, MEAT, SPINACH), BOX __ OF __, completed by hand	Concept artwork
Format	Sheets or rolls [SUPPLIER TO PROPOSE]	
Declaration	Adhesive and ink statements	Required

9. SAMPLES AND APPROVAL STAGES

No stage may be skipped for a new item, supplier, board or ink. A supplier's own "looks fine" never replaces a Dough Boss signature.

Stage	Deliverable	Checked	Signed by	Time
S0. Quote and technical review	RFQ (Annex A) returned; board code, CAD and structural comments	Spec compliance, structural comments, documents list	Dough Boss owner	[SUPPLIER TO PROPOSE]
S1. Digital proof	Separated PDF proof with the die and specs, dimensions, flute arrow	Copy, layout, separations (one plate per spot plus die), bleed, safe zone, dieline not printing, file name and version	Brand custodian; second reader for copy	[SUPPLIER TO PROPOSE]
S2. White (structural) sample	Unprinted or plain-printed, die-cut, final board, final size. [CONFIRM: 10 units, RECOMMENDED from the existing RFQ template]	Fit with 12 real bakes (4 x 3), lid closure, tuck, locks, vent alignment (4 visible), liner fit, stack test, odour, fold cracking	Brand custodian, shop lead; food-safety lead for food-contact surfaces	[SUPPLIER TO PROPOSE]
S3. Printed pre-production sample (PPS)	Printed on production board with production inks and tooling	Colour against the signed drawdown, white opacity, EMBER over underlay (halo?), registration, rub, crease quality, dimensions	Brand custodian; owner	[SUPPLIER TO PROPOSE]
S4. Golden sample	Signed PPS set, three sets (you, Dough Boss, the inspector)	Becomes the visual standard for colour, opacity, folds and cosmetic defects	Owner and your QC manager	
S5. Pre-shipment inspection	Per section 10	AQL result, tests, packing, marks	Dough Boss or the third-party inspector	
S6. Incoming goods	At Dough Boss	Incoming-goods QA checklist	Brand custodian	

Release to production follows S4. A new supplier's first order also needs the owner's signature. Quantities of samples, courier and who bears the cost are [QUOTE].

10. QC AND AQL PLAN

10.1 Stages

Stage	Who	What
Incoming materials	Your QC	Board against the specified code, ink lot, adhesive. Keep records.
First article	Your QC at press and die-cutter	First good piece against the golden sample before the run. Keep it with the lot.
In-process	Your QC	Colour, registration and dimensions at agreed intervals [SUPPLIER TO PROPOSE].
Final random inspection	Dough Boss or a third-party inspector [CONFIRM: appointed; cost is a [QUOTE]]	Before shipping. Per the plan below.

10.2 Sampling plan (RECOMMENDED, from ISO 2859-1 single sampling, normal inspection, general level II; table read 3 October 2026)

Defect class	AQL (RECOMMENDED)
Critical	Not allowed (0 accepted)
Major	2.5
Minor	4.0

A lot is one production lot per design and board. Accept and reject numbers (Ac / Re):

Lot size	Code	Sample	Major AQL 2.5	Minor AQL 4.0
501 to 1,200	J	80	5 / 6	7 / 8
1,201 to 3,200	K	125	7 / 8	10 / 11
3,201 to 10,000	L	200	10 / 11	14 / 15
10,001 to 35,000	M	315	14 / 15	21 / 22

For the three quote tiers: 1,000 pieces = code J (80); 5,000 and 10,000 pieces = code L (200). If the AQL level or inspection level differs in your standard practice, propose it [SUPPLIER TO PROPOSE]. Any critical defect in the sample rejects the lot.

10.3 Defect classification

Defect	Class
Foreign matter, insects, oil, dirt in the box interior	Critical
Odour or taint (solvent, ink, musty, chemical), mould, damp	Critical
Contamination or wrong material on a food-contact face; a missing or failed compliance report for the lot	Critical
Wrong item, wrong artwork version, wrong board or flute	Critical
Dimension outside tolerance (section 3.2); lid will not close square	Major
Tuck, lock tab or slot will not engage, tears, or is cut wrongly	Major
Vent missing, blocked, with hanging chads, or misaligned beyond 2.0 mm	Major
Crease cracks through, liner splits, board delaminates, warp that prevents erection	Major
Colour outside the golden sample, white too thin or patchy, EMBER visible without underlay or with a white halo	Major
Registration off beyond the agreed tolerance; art cut off at an edge	Major
Ink transfers on rub or to the hands	Major
Water marks, stains, crushed flute, heavy dye bleed	Major
Light fibre showing at folds within the golden standard	Minor (acceptable)
Small ink specks, scuffs, dirt spots on the outer face within the defect-photo standard	Minor
Slight misregistration within tolerance, small variations in white opacity within the golden standard	Minor

Size limits for cosmetic defects are set by the golden sample and the defect-photo standard agreed at S3 [CONFIRM].

10.4 Lot tests (per lot, at your cost unless the quote says otherwise)

Test	Method	Frequency
ECT, burst, caliper, moisture, grammage	ISO 3037, 2759, 3034, 287, 536	[SUPPLIER TO PROPOSE]
BCT on erected boxes	ISO 12048	[SUPPLIER TO PROPOSE]
Ink rub (dry)	Rub tester; cycles and load [SUPPLIER TO PROPOSE]	Each lot
Colour against the golden sample	Visual under D50, with instrument record	Each lot
Fit and function	12-bake fit gauge or sample; lid, tuck, locks, vents	Each inspection sample
Odour	Open a sealed carton and smell the inside surface	Each lot

10.5 Failure handling

A rejected lot is held. Sort or rework at your cost, then re-inspect with a larger sample. Send a written corrective action report (root cause, containment, fix) within [SUPPLIER TO PROPOSE] days. Replacement or credit terms and the claim window [SUPPLIER TO PROPOSE]. Keep retained samples of every lot for [SUPPLIER TO PROPOSE] months.

11. PERFORMANCE TESTS (TO SIGN OFF REVISION B)

These are Dough Boss tests on the white sample and the PPS. You are asked to run them where you can and report the results.

Test	Method	Pass criterion
Fit	12 real bakes, 4 x 3, on the liner	Closes without touching the lid; no bake crushed [CONFIRM]
Vent hold	Filled hot, 30 minutes at serving temperature	Bases stay crisp; no pooling on the lid; board not softened [CONFIRM]

Test	Method	Pass criterion
Liner strike-through	Oiliest bake (meat or cheese), 30 minutes hot	No grease through to the board [CONFIRM]
Stack	Filled hot, 5 high, 60 minutes at ambient; then a car-boot ride	No lid sag that touches food, no wall bulge, tuck holds [CONFIRM]
Print	Rub and scuff of the outer face; white opacity against the drawdown	No transfer to hands or bakes; opacity within the approved standard [CONFIRM]
Seal	Applied across the fold, 30 minutes hot	Stays down, no lift at the fold [CONFIRM]

Filled weight of 12 bakes and serving temperature are [CONFIRM]. Dough Boss sets them before the stack and hold tests.

12. PACKING

Item	Requirement	Status
Form supplied	Flat, die-cut, unfolded blanks	PINNED
Pieces per bundle	[SUPPLIER TO PROPOSE]. RECOMMENDED: a round number whose stacked height is easy to handle. As a guide, 25 blanks at 1.6 mm caliper stack to about 40 mm before die-cut compression (computed).	
Bundle wrap	Strapped or PE-wrapped, with a counting slip and lot label	RECOMMENDED
Export carton	Inner size not less than about 600 x 790 mm to take the 593.8 x 781.0 mm blank flat (computed with about 6 mm clearance). Pieces per carton, carton board grade and gross weight [SUPPLIER TO PROPOSE]. RECOMMENDED gross weight a single person can lift [CONFIRM: limit with the receiving site].	
Carton marks	See below	RECOMMENDED
Pallet	Size, pieces per pallet, tier pattern, pallet height [SUPPLIER TO PROPOSE]. Pallets of ISPM 15 treated and stamped timber, or plastic or reconstituted-wood pallets (see 13.4). Stretch-wrap, corner protection and a top sheet.	
Moisture	Pack at board moisture within your specification. Wrap pallets in PE film. For sea freight add container desiccant (container rain and mould risk on a long voyage) [SUPPLIER TO PROPOSE: desiccant amount]. Never pack damp stock.	
Traceability	Lot number and production date on each bundle label and carton label. [CONFIRM: a discreet inkjet lot code on the inside face of the back wall is acceptable]	

Carton marks (RECOMMENDED): consignee (Dough Boss, importer legal name [CONFIRM]), purchase order number, item "DB-CAT-DOZEN-v1 dozen box, flat", artwork and tech pack version, lot number, carton number "X of Y", quantity, gross and net weight, carton size, "MADE IN CHINA" (section 15), handling pictograms: keep dry, this way up (ISO 780 symbols, from general industry practice, verify). No Dough Boss brand on the shipping carton unless Dough Boss asks.

13. SHIPPING AND CUSTOMS

13.1 Incoterms 2020 options

Quote all three so Dough Boss can compare. Incoterms 2020 is the current edition (verified 3 October 2026).

Option	What you do	What Dough Boss does	Notes
FOB [named port]	Deliver loaded on the vessel, export clearance	Freight, insurance, import clearance, duty, GST, delivery in Australia	FOB is for sea freight. RECOMMENDED primary option: Dough Boss books its own forwarder. Port: nearest to the plant [SUPPLIER TO PROPOSE: for example Shenzhen for Guangdong, Ningbo for Zhejiang]
CIF Sydney (Port Botany)	Freight and minimum insurance to Sydney. Risk passes on loading, not at destination	Unloading, import clearance, duty, GST, delivery	CIF is for sea freight. [CONFIRM: discharge port]
DDP Sydney [delivery address]	Everything, including import clearance, duty and taxes, to the door	Receive goods	DDP puts import clearance on you as the seller. State how you handle Australian import clearance and GST, and who is the importer of record [SUPPLIER TO PROPOSE]. Not the default.

For sample parcels by courier, quote delivery by DAP or DDP by express courier, state the carrier and tracking.

Dough Boss will compare landed cost in AUD. Freight, insurance, duty and GST are [QUOTE].

13.2 Delivery

Delivery address, consignee, receiving hours and whether to split to the three shops (Revesby, Bankstown, Roselands) are [CONFIRM]. Default: one delivery to a single receiving point, then Dough Boss splits.

13.3 HS code candidates (confirm with a licensed customs broker)

Item	Candidate code	Note
Printed corrugated box	HS 4819.10 (cartons, boxes and cases, of corrugated paper or paperboard). Verified as the heading on 3 October 2026.	Your 8 or 10 digit national code [SUPPLIER TO PROPOSE]; the Australian tariff code [CONFIRM: broker]
Greaseproof liner sheet	HS 4806 (greaseproof or glassine papers). Sub-code from general industry practice, verify.	Broker to confirm; may be classified with the set
Printed paper label	HS 4821 (paper labels). Sub-code from general industry practice, verify.	Broker to confirm

If the three are shipped as one set the broker decides classification. Duty rate, whether the China-Australia Free Trade Agreement applies, and the preferential origin certificate are [CONFIRM: broker; from general industry practice, verify].

13.4 Australian import notes

- Wood packaging (pallets, dunnage) must meet ISPM 15 (heat treated or fumigated and stamped) for Australia; reconstituted wood (such as particleboard, MDF) does not need treatment. Declared as non-commodity timber in containerised cargo. Verified 3 October 2026 at the Department of Agriculture page. Non-compliant timber is treated, re-exported or destroyed at the importer's cost.
- Import GST and customs value are handled by the importer or its broker [CONFIRM].

13.5 Shipping documents

Commercial invoice, packing list (cartons, pallets, weights, dimensions, pieces), bill of lading or air waybill, certificate of origin if applicable, compliance documents for the lot (section 14), fumigation or ISPM 15 evidence for any wood. Lead times and transit times are [QUOTE].

14. COMPLIANCE AND FOOD-CONTACT DOCUMENTS

14.1 Principle

Do not accept "food grade" as a bare claim. For each food-contact or food-packaging component, supply a written **declaration of compliance (DoC)** naming the regulation set, the food type (fatty, hot) and contact temperature, and a test report from an ISO/IEC 17025 accredited laboratory (CNAS in China or equivalent), tied to the board, ink and adhesive supplied. Report dates not older than 12 months [CONFIRM] and a certificate of analysis per production lot where listed.

14.2 Documents requested

#	Document	Applies to	Regime
1	DoC for the board (both liners, fluting, adhesive)	Box	See table 14.3
2	DoC for the inks and any varnish (outer face)	Box, seal label	Swiss Annex 10 and EuPIA statement or equivalent; GB 9685 where applicable
3	DoC for the greaseproof liner	Liner	Fatty food at hot fill
4	DoC for the label adhesive and face	Seal label	Same
5	PFAS statement and total fluorine test report	Liner (required); board and label (requested)	No intentionally added PFAS; total fluorine below 100 ppm
6	Heavy metals report	Board and print	Section 14.4
7	Mineral oil statement (MOSH and MOAH)	Any recycled fibre in the build	Section 14.6
8	Sensory (odour and taste) test	Board and liner	Section 14.7
9	Dye colour-fastness of the black liner	Outer liner	Section 14.5
10	Business licence; quality and food-packaging hygiene certificates	Factory	Section 16
11	Safety Data Sheets for inks and adhesives	Factory	

14.3 Regimes and how this pack uses them

Regime	Content	How used	Verification status
Australia: Food Standards Code, Standard 3.2.2 clause 9	A food business must use packaging fit for its intended use and not likely to cause contamination	The Dough Boss obligation. Your DoC is its evidence.	Read in the PDS research on 3 October 2026
Australia: Standard 1.1.1, Schedule 19	Packaging must not be swallowable or harmful; limits on some migrants	As above	As above
Australia: IChEMS Schedule 7 (from 1 July 2025)	Bans manufacture, import, export and use of PFOS, PFOA, PFHxS including in packaging	PFAS statement covers it	As above
Australia: APCO PFAS action plan v3	Fibre-based direct food-contact packaging phased out of PFAS using a total fluorine threshold of 100 ppm	Source of the 100 ppm limit in this pack	As above
AS 2070	Covers **plastics** for food contact. AS 2070-1999 was withdrawn on 22 March 2021	**Do not cite for paper or board.** Relevant only if a plastic component is added. Dough Boss accepts the other regimes in this table in its place.	Verified 3 October 2026
China: GB 4806.1-2016	General safety requirements for food-contact materials; DoC and traceability	Required for the box and liner	Verified (published 18 November 2016, in force 19 October 2017)
China: GB 4806.8-2022	Food contact paper and paperboard materials and articles. Issued 30 June 2022, in force 30 June 2023. Requires compliance with GB 4806.1, additives per GB 9685, fibre raw materials mainly plant fibre	Report the test results against this standard. Dough Boss has not verified its numeric limits in the standard text (the excerpt read covers only raw-material clauses). Verify the limits with your lab.	Existence and dates verified; numeric limits not read
China: GB 9685	Additives allowed in food-contact materials, with limits	Additives and inks	Verified (published 2016); check the current amendment
China: GB 31604 series	Test methods for migration and residues	Test methods cited by your lab	From general industry practice, verify
USA: FDA 21 CFR 176.170	Paper and paperboard in contact with aqueous and fatty foods (176.180 for dry food)	Supplier DoCs commonly cite it. Accepted as supporting evidence for the board and liner	Seen on supplier DoC examples; verify against the current eCFR
EU: Regulation (EC) 1935/2004 and 2023/2006 (GMP); BfR Recommendation XXXVI (paper and board)	Framework, good manufacturing practice, paper and board recommendation	Accepted as supporting evidence. Trade DoCs for paper commonly cite them.	Seen on a supplier DoC example; verify
EU: Regulation (EU) 2025/40 (PPWR)	From 12 August 2026 limits PFAS in food-contact packaging placed on the EU market: 25 ppb any one PFAS, 250 ppb sum of PFAS, 50 ppm total fluorine	Not an Australian requirement. A useful benchmark: state whether the liner's total fluorine is at or under 50 ppm [CONFIRM: tighten the Dough Boss limit]	Read in search summaries on 3 October 2026; read the primary text before relying

14.4 Heavy metals

Report lead, cadmium, mercury and hexavalent chromium for the board and the print. RECOMMENDED: the sum of the four not above 100 mg/kg in the packaging (from general industry practice; the EU packaging directive and US state laws use this level; verify). Extractable metals in a water extract per your national paper and board standard, with limits stated [SUPPLIER TO PROPOSE].

14.5 Black dyed liner

The outer face is touched by hands and by other boxes. Report colour-fastness of the dyed liner to rub, water and fat (EN 646 is the usual European reference, from general industry practice, verify) [SUPPLIER TO PROPOSE]. Any fluorescent whitening agent in the inner liner must be declared.

14.6 Mineral oil (MOSH and MOAH), recycled board

Mineral oil hydrocarbons relate mainly to recycled fibre (FSANZ survey, read in the PDS research). The inner liner is virgin kraft and the greaseproof sheet is the functional barrier. If the fluting or any ply contains recycled fibre, supply a MOSH and MOAH test and a statement of the barrier. A CEN technical specification covers the MOSH and MOAH transfer test for food-contact paper and board containing recycled pulp (verify the current reference number). No pass limit is set here [CONFIRM: with the food-safety adviser].

14.7 Sensory

Odour and off-flavour test on the board and the liner (the EN 1230 series is the usual European reference, from general industry practice, verify) [SUPPLIER TO PROPOSE].

15. COUNTRY-OF-ORIGIN AND MARKING

Item	Position
Export cartons and pallets	Mark "MADE IN CHINA" (or the actual country of manufacture). RECOMMENDED.
The box itself	No origin statement is printed on the brand artwork. [CONFIRM: if the customs broker advises that marking on the goods is needed, a small "MADE IN CHINA" on the inside face of the back wall is the proposal.]
Australian law	Customs administers the Commerce (Trade Descriptions) Act 1905 and the Commerce (Imports) Regulations 1940, which set origin-marking requirements for certain imported goods (found 3 October 2026). Whether plain, printed packaging imported for the importer's own use falls in is [CONFIRM: customs broker].
Claims	Do not print "Made in Australia" or any recyclable, compostable, FSC or ARL claim anywhere. Do not mark Dough Boss approvals on the carton.

16. FACTORY QUALIFICATION, IP AND CONFIDENTIALITY

16.1 Factory information requested

Company name and address, business licence, years in operation, corrugated and flexo equipment list with maximum sheet and die-cut size, black liner sources, monthly capacity, and certificates held (RECOMMENDED minimum: ISO 9001 quality management, plus a food-packaging hygiene scheme such as BRCGS Packaging Materials, FSSC 22000 or ISO 22000; from general industry practice, verify) [SUPPLIER TO PROPOSE]. Ethical and social audit status (for example SMETA or BSCI, or an equivalent) [SUPPLIER TO PROPOSE]. Subcontracting (print, die-making, laminating) must be declared and needs Dough Boss's written consent. A reference customer exporting corrugated food packaging to Australia or a similar market is welcome.

16.2 Intellectual property and confidentiality

- Before artwork and dieline leave Dough Boss, an NDA is signed. RECOMMENDED: a non-disclosure, non-use and non-circumvention agreement in English and Chinese under PRC law, reviewed by a lawyer [CONFIRM: owner and lawyer; this pack is not legal advice].
- All artwork, the DOUGH BOSS. wordmark, structural drawings and colour standards remain Dough Boss's property. Use is for the Dough Boss order only. No sale, gifting or reuse of overruns, plates, dies, samples or waste printed material. Rejects and overruns are destroyed or returned.
- **Cutting dies and plates:** ownership [CONFIRM: RECOMMENDED default is that Dough Boss owns them on payment]. They are marked with the Dough Boss name, stored at your cost for [SUPPLIER TO PROPOSE], used only for Dough Boss, and released or shipped on request without new tooling charges so a second source can be added. Quote the tooling price and the storage terms separately.
- You do not apply for any trade mark, design registration or domain for the Dough Boss name or artwork in any country.
- Trade mark ownership and registration of "DOUGH BOSS." is an open Dough Boss item. No volume order is placed until it is closed [CONFIRM].
- Governing law and dispute resolution venue for any supply agreement [CONFIRM: lawyer].

17. CONTACTS AND APPROVAL SIGN-OFF

17.1 Contacts

Role	Dough Boss	Supplier
Commercial and quotes	catering@doughboss.com.au [CONFIRM: named person and direct line; no phone number is printed on any product]	[SUPPLIER TO PROPOSE]
Artwork and prepress	Brand custodian [CONFIRM: name]	[SUPPLIER TO PROPOSE]
Quality and food safety	Food-safety lead [CONFIRM: name]	[SUPPLIER TO PROPOSE]

Role	Dough Boss	Supplier
Shipping and customs	[CONFIRM: forwarder and customs broker]	[SUPPLIER TO PROPOSE]
Samples address	[CONFIRM: delivery address]	

All changes are agreed in writing by email. Chat messages are informal and not an approval.

17.2 Approval sign-off (one block per tech pack revision)

Role	Name	Title	Signature	Date
Owner, final release to production (Elie Dagher)				
Brand custodian (every stage)	[CONFIRM: name]			
Food-safety lead (food-contact items)	[CONFIRM: name]			
Supplier authorised signatory				
Supplier QC manager				

Signing confirms that the supplier has read this pack and will manufacture to it, subject to the open [CONFIRM] items being closed in writing.

18. REVISION CONTROL

Rev	Date	Change	By
A	3 Oct 2026	First draft for RFQ and samples. Built on PDS rev A and dieline v2 (rev B draft): separated spot plates, vent alignment corrected, page boxes set.	Dough Boss

Rules: every revision carries a new letter or number and a change list. The tech pack, the PDS, the dieline file and the artwork share one revision label. The supplier works only from the latest approved revision, and confirms receipt in writing.

19. STANDARDS REGISTER (VERIFICATION STATUS)

Standard or source	Used for	Status
FEFCO Code of Designs, 0427	Style and the internal-size convention	Read 3 October 2026 (PDS research)
ISO 2859-1	AQL sampling	**Verified** against a published table (sample sizes and Ac/Re numbers, 3 October 2026)
ISO 3037	ECT (edgewise crush, non-waxed edge)	**Verified** exists (2022 edition seen)
ISO 2759	Burst strength of board	**Verified** exists
ISO 12048, 3034, 187, 287, 535, 536, 3664, 780	BCT, caliper, conditioning, moisture, Cobb, grammage, colour viewing, handling symbols	From general industry practice, verify
TAPPI T 559	KIT grease resistance	Read in the PDS research
GB 4806.1-2016, GB 9685-2016	China general safety and additives	**Verified** by publication and in-force dates
GB 4806.8-2022	China paper and board food contact	**Verified** title, dates and raw-material clauses; numeric limits not read
GB 31604 series, GB 5009.156	China test methods and migration pretreatment	GB 5009.156 seen in a search summary; series from general industry practice, verify
21 CFR 176.170, 176.180	USA paper and board	Seen on supplier DoCs; verify at eCFR
Reg (EC) 1935/2004, 2023/2006; BfR XXXVI	EU framework	Seen on a supplier DoC; verify
Reg (EU) 2025/40, PFAS limits from 12 August 2026	Benchmark	Verified in search summaries; read primary text
AS 2070-1999	Plastics only	**Verified**: plastics, withdrawn 22 March 2021. Not used for board
FSANZ Standards 3.2.2 cl 9, 1.1.1; IChEMS Schedule 7; APCO v3	Australian food-contact basis, PFAS	Read in the PDS research
Incoterms 2020 (FOB, CIF sea only; DDP any mode)	Shipping	**Verified**
ISPM 15 and BICON timber packaging	Pallets	**Verified** (Department of Agriculture page)
HS 4819.10	Corrugated boxes	**Verified** heading; 4806, 4821 from general industry practice, verify

Standard or source	Used for	Status
Commerce (Trade Descriptions) Act 1905	Origin marking	Existence verified; applicability to this goods type not decided
EN 646, EN 1230, MOSH/MOAH CEN technical specification	Dye fastness, sensory, mineral oil transfer	From general industry practice, verify the current numbers
Swiss Ordinance SR 817.023.21 Annex 10; EuPIA Exclusion Policy	Inks	Read in the PDS research (search summary), verify

ANNEX A. RFQ FORM (2 PAGES)

Supplier to complete and return with the quote. Reply to catering@doughboss.com.au [CONFIRM: sender mailbox]. Do not leave blanks: write "not offered" where that is the case. Costs are [QUOTE]; Dough Boss states none.

RFQ no. DB-RFQ-CAT-001 | **Tech pack** DB-TP-CAT-001 rev A | **Date issued** 3 Oct 2026 | **Reply by** [CONFIRM: date]

PAGE 1 OF 2: COMMERCIAL

A1. Supplier

Field	Entry
Company, address, province	
Contact, email, WeChat or phone	
Plant type (own corrugator, own print, own die-cutting)	
Certificates held and expiry	
Quote currency and validity (days)	

A2. Unit price, per piece, flat blank, Incoterm as stated

Item	1,000	5,000	10,000
Option A: E-flute, black dyed outer, natural kraft inner, 2 spot colours (FOB ____)			
Option A, with a second white hit			
Option B: E-flute, natural kraft outer, black flood plus 2 spot colours (FOB ____)			
Information only: Option A in B-flute			
Add: inside-lid print, 1 colour (difference)			
Liner sheet 380 x 285 mm, plain (price, per sheet)			
Liner sheet 480 x 385 mm, plain (price, per sheet)			
Seal label 70 mm round, kraft (price, per label)			

A3. Incoterm price check (Option A, 5,000 pieces)

Incoterm	Unit price	Port or place	Freight, insurance, duty and GST included?
FOB [port]			
CIF Sydney (Port Botany)			
DDP [Sydney delivery address]			

A4. One-off costs (list each separately)

Item	Cost	Is it kept for reorders? For how long? Who owns it?
Cutting die (forme), including the 8 vent punches		
Printing plate, WHITE OPAQUE		
Printing plate, EMBER		
Printing plate, BLACK flood (Option B)		
Structural drawing and digital proof		
White (structural) sample, qty ____		
Printed pre-production sample, qty ____		
Sample courier (to Sydney)		
Colour drawdowns		
Die and plate storage fee		

A5. Terms

Item	Your answer
Minimum order quantity (MOQ)	

Item	Your answer
Over-run and under-run tolerance (%); Dough Boss asks that the shipped quantity is not below the order quantity [CONFIRM]	
Lead time: white sample, from drawing approval	
Lead time: printed pre-production sample, from artwork approval	
Lead time: first production run, from golden sample approval	
Lead time: repeat run (existing tooling)	
Payment terms (deposit, balance, method)	
Minimum reorder quantity; price break on reorder	
Quote validity	
Port of loading and transit time (sea)	

PAGE 2 OF 2: TECHNICAL CONFIRMATIONS

A6. Board and structure (tick: Y = comply, N = do not comply, A = alternative, state it)

#	Item	Y / N / A	Your detail
1	Board code, liner gsm (outer / inner), fluting gsm, total gsm		
2	Black outer liner source (dyed liner brand), or flood-black alternative		
3	ECT (kN/m, ISO 3037) and burst (kPa, ISO 2759) of the proposed board		
4	Caliper and flute direction (state the direction relative to the 385 mm and 290 mm sides)		
5	Inner liner virgin kraft? Any recycled fibre in the fluting?		
6	Internal 385 x 290 x 50 mm achievable; your board allowances proposed		
7	Die cut size 593.8 x 781.0 mm fits your machine (maximum sheet, nesting)		
8	8 punched vent holes, aligned within 2.0 mm when rolled		
9	No glue or tape required (locks only)		
10	Tolerances in section 3.2 accepted, or your standard		

A7. Print

#	Item	Y / N / A	Your detail
11	Water-based flexo, 2 spot colours, solids only		
12	WHITE OPAQUE ink product, single hit and double hit options		
13	EMBER matched to PANTONE 485 C on a drawdown over the white underlay on the real board		
14	White underlay choked 0.3 mm accepted; your trap value; press registration		
15	Number of print stations and maximum sheet size		
16	Inside-lid print: second pass offered?		
17	Drawdowns and signed press proof before the run		
18	Varnish or finish (none by default)		

A8. Compliance documents (confirm you will supply each)

#	Document	Y / N	Date of latest report
19	DoC for board and adhesive (food type, temperature)		
20	DoC for inks and any varnish		
21	DoC for liner sheet (hot, fatty) and for the label		
22	PFAS statement; total fluorine test (liner), result in ppm		
23	Heavy metals report		
24	Mineral oil (MOSH and MOAH) statement if recycled fibre		
25	GB 4806.8-2022 and GB 4806.1-2016 test report		
26	Sensory test and dye colour-fastness		

A9. QC, packing and shipping

#	Item	Y / N / A	Your detail
27	AQL critical 0 / major 2.5 / minor 4.0, ISO 2859-1 level II accepted		
28	Pre-shipment inspection by Dough Boss or a third party allowed in your plant		
29	Golden sample: three sets retained		
30	Pieces per bundle, per carton, per pallet; carton size and gross weight		
31	Pallet type and ISPM 15 stamp or plastic pallet		
32	Desiccant and PE wrap for sea freight		
33	HS code your side (8 or 10 digit); country of origin		
34	Tooling owned by Dough Boss, marked, stored, released on request		
35	NDA (non-disclosure, non-use, non-circumvention) signed before artwork is sent		
36	Subcontracting declared (print, dies, lamination)		

Declaration. We have read DB-TP-CAT-001 rev A and quote to it. Differences are listed above.

Name _____ Title _____ Signature _____ Date _____ Company stamp _____

ANNEX B. GLOSSARY (ENGLISH / 简体中文)

Glossary for reference; the English text governs. The Chinese terms are general trade usage, offered to avoid misunderstandings. Please tell us if your plant uses a different term. [SUPPLIER TO CONFIRM]

#	English	简体中文	Group
1	Corrugated board	瓦楞纸板	Material
2	Flute	楞型 / 瓦楞	Material
3	E-flute	E楞	Material
4	B-flute	B楞	Material
5	Outer liner (face paper)	面纸	Material
6	Inner liner	里纸	Material
7	Fluting medium	瓦楞芯纸	Material
8	Kraft paper	牛皮纸	Material
9	Black kraft (dyed)	黑色牛皮纸	Material
10	Greaseproof paper	防油纸	Material
11	Grammage (gsm)	克重	Material
12	Flute direction	瓦楞方向 / 楞向	Material
13	Hinged lid	翻盖	Box part
14	Tuck flap	插舌	Box part
15	Locking tab	锁扣 / 插片	Box part
16	Lock slot	锁孔 / 插槽	Box part
17	Vent hole	透气孔	Box part
18	Seal label	封口贴	Box part
19	Dieline	刀线图 / 刀模图	Die and file
20	Cutting die	刀模	Die and file
21	Crease (score) line	压痕线 / 压线	Die and file
22	Flat blank	展开图 / 平板坯	Die and file
23	Bleed	出血	Print
24	Spot colour	专色	Print
25	Opaque white	不透明白 / 高遮盖白	Print
26	White underlay	垫白 / 白色底墨	Print
27	Choke	内缩	Print
28	Trapping	补漏白 / 叠印补偿	Print
29	Registration	套印 / 套准	Print
30	Flexo printing	柔版印刷	Print
31	Water-based ink	水性油墨	Print
32	Digital proof	数码样 / 打样稿	Samples
33	White (structural) sample	白样	Samples
34	Pre-production sample	产前样	Samples
35	Golden sample	封样 / 签样	Samples
36	AQL (acceptable quality limit)	可接受质量水平	QC
37	Critical / major / minor defect	致命缺陷 / 严重缺陷 / 轻微缺陷	QC
38	Edge crush test (ECT)	边压强度	QC
39	Box compression test (BCT)	抗压强度	QC
40	Export carton	出口外箱	Packing
41	Shipping mark	唛头	Packing
42	MOQ (minimum order quantity)	最小起订量	Commercial

#	English	简体中文	Group
43	FOB / CIF / DDP	离岸价 / 到岸价 / 完税后交货	Commercial
44	Declaration of compliance	符合性声明	Compliance
45	Migration test	迁移测试	Compliance
46	Total fluorine (PFAS)	总氟	Compliance
47	Heavy metals	重金属	Compliance
48	Mineral oil (MOSH / MOAH)	矿物油 (MOSH / MOAH)	Compliance

Glossary for reference; the English text governs.

ARTWORK REFERENCE

Flat artwork as designed. The vector print files and the separated dieline (appended after this page) govern; these previews are for orientation only.

Outside: lid, front, sides (WHITE OPAQUE and EMBER on black kraft).

Back wall.

Inside lid, optional one-colour print on natural kraft.

Greaseproof liner (plain is the default).

Seal label, 70 mm round kraft.

LINE AND PLATE LEGEND

DIE CUT	spot 'DIE CUT', solid 0.25 pt, overprint. Outline, tab edges, slots, vents.
DIE CREASE	spot 'DIE CREASE', dashed (3 mm dash, 2 mm gap) 0.25 pt, overprint. Folds, roll folds, hinge, tuck fold.
DIMENSIONS	spot 'DIMENSIONS', non-printing information layer, overprint. Dimensions, panel names, notes, this block.
PRINT-FREE RING	dotted ring, 6 mm beyond every vent and slot (on DIMENSIONS). No print inside it.
WHITE OPAQUE	spot, 100 % only, knockout. White artwork plus the white underlay under every ember element, choked 0.3 mm.
EMBER PMS 485 C	spot, 100 % only, overprint. Prints over its own white underlay. Alternate CMYK is a screen simulation only [CONFIRM: Pantone drawdown].
INSIDE DARK	placeholder spot for the optional inside-lid print (page 3). Colour not decided [CONFIRM].
CROP / REGISTRATION	colourant 'All': prints on every plate. Marks sit 5 mm clear of trim.
BOARD PREVIEW	non-printing layer. Black kraft (outside), natural kraft (inside). Not a plate; never print it.

BLEED 3 mm. SAFE ZONE 5 mm inside every cut and crease.
KEEP ALL PRINT 6 mm CLEAR OF CUT-OUTS AND VENTS.
FONTS EMBEDDED; OUTLINE BEFORE PLATE MAKING IF REQUIRED.

NOTES

- View: from the OUTSIDE (print side). FEFCO catalogues draw from the inside: check orientation before cutting any tool.
- TrimBox = blank 593.8 x 781.0 mm. BleedBox = trim + 3 mm each side. MediaBox adds marks and this block.
- Registration: crop marks and targets are colourant All. Converter to confirm sheet layout, gripper edge, colour bar and mark positions.
- All dimensions are INTERNAL (erected box). CONVERTER TO CONFIRM ALLOWANCES IN CAD (caliper, fold, roll and bend allowances).
- Structure values are working values [CONFIRM with the converter's structural engineer before tooling].
- Hinge bands (ember, 5 mm either side of the hinge crease) run to the crease by design; the 5 mm safe zone does not apply to them.
- Flute direction: [CONFIRM: converter to propose]. No flute arrow is drawn.
- Vent alignment (rolled): outer centre 25.0 from base crease; inner centre 25.0 from roll fold; centre offset 0.000 mm (v1 was 0.8 mm).

TITLE BLOCK

PART NO.	DB-CAT-DOZEN
REV.	B (draft)
DATE	3 Oct 2026
UNITS	mm SCALE 1:1
TITLE	Dough Boss catering box, dozen (12 bakes, 4 x 3)
STYLE	FEFCO 0427 type [CONFIRM style with converter]
SIZE	INTERNAL DIMENSIONS 385 x 290 x 50 mm
BOARD	E-flute 1.6 mm [CONFIRM board build and caliper]
VIEW	OUTSIDE (print side), all plates + die
PAGE	1 of 4 Outside print
TECH PACK	DB-TP-CAT-001 rev A

STATUS: DRAFT. Not for press until sample, board and Pantone are approved.
CONVERTER TO CONFIRM ALLOWANCES IN CAD

SIGN-OFF

DOUGH BOSS APPROVAL

name _____ signature _____ date _____

CONVERTER ACKNOWLEDGEMENT

name _____ signature _____ date _____

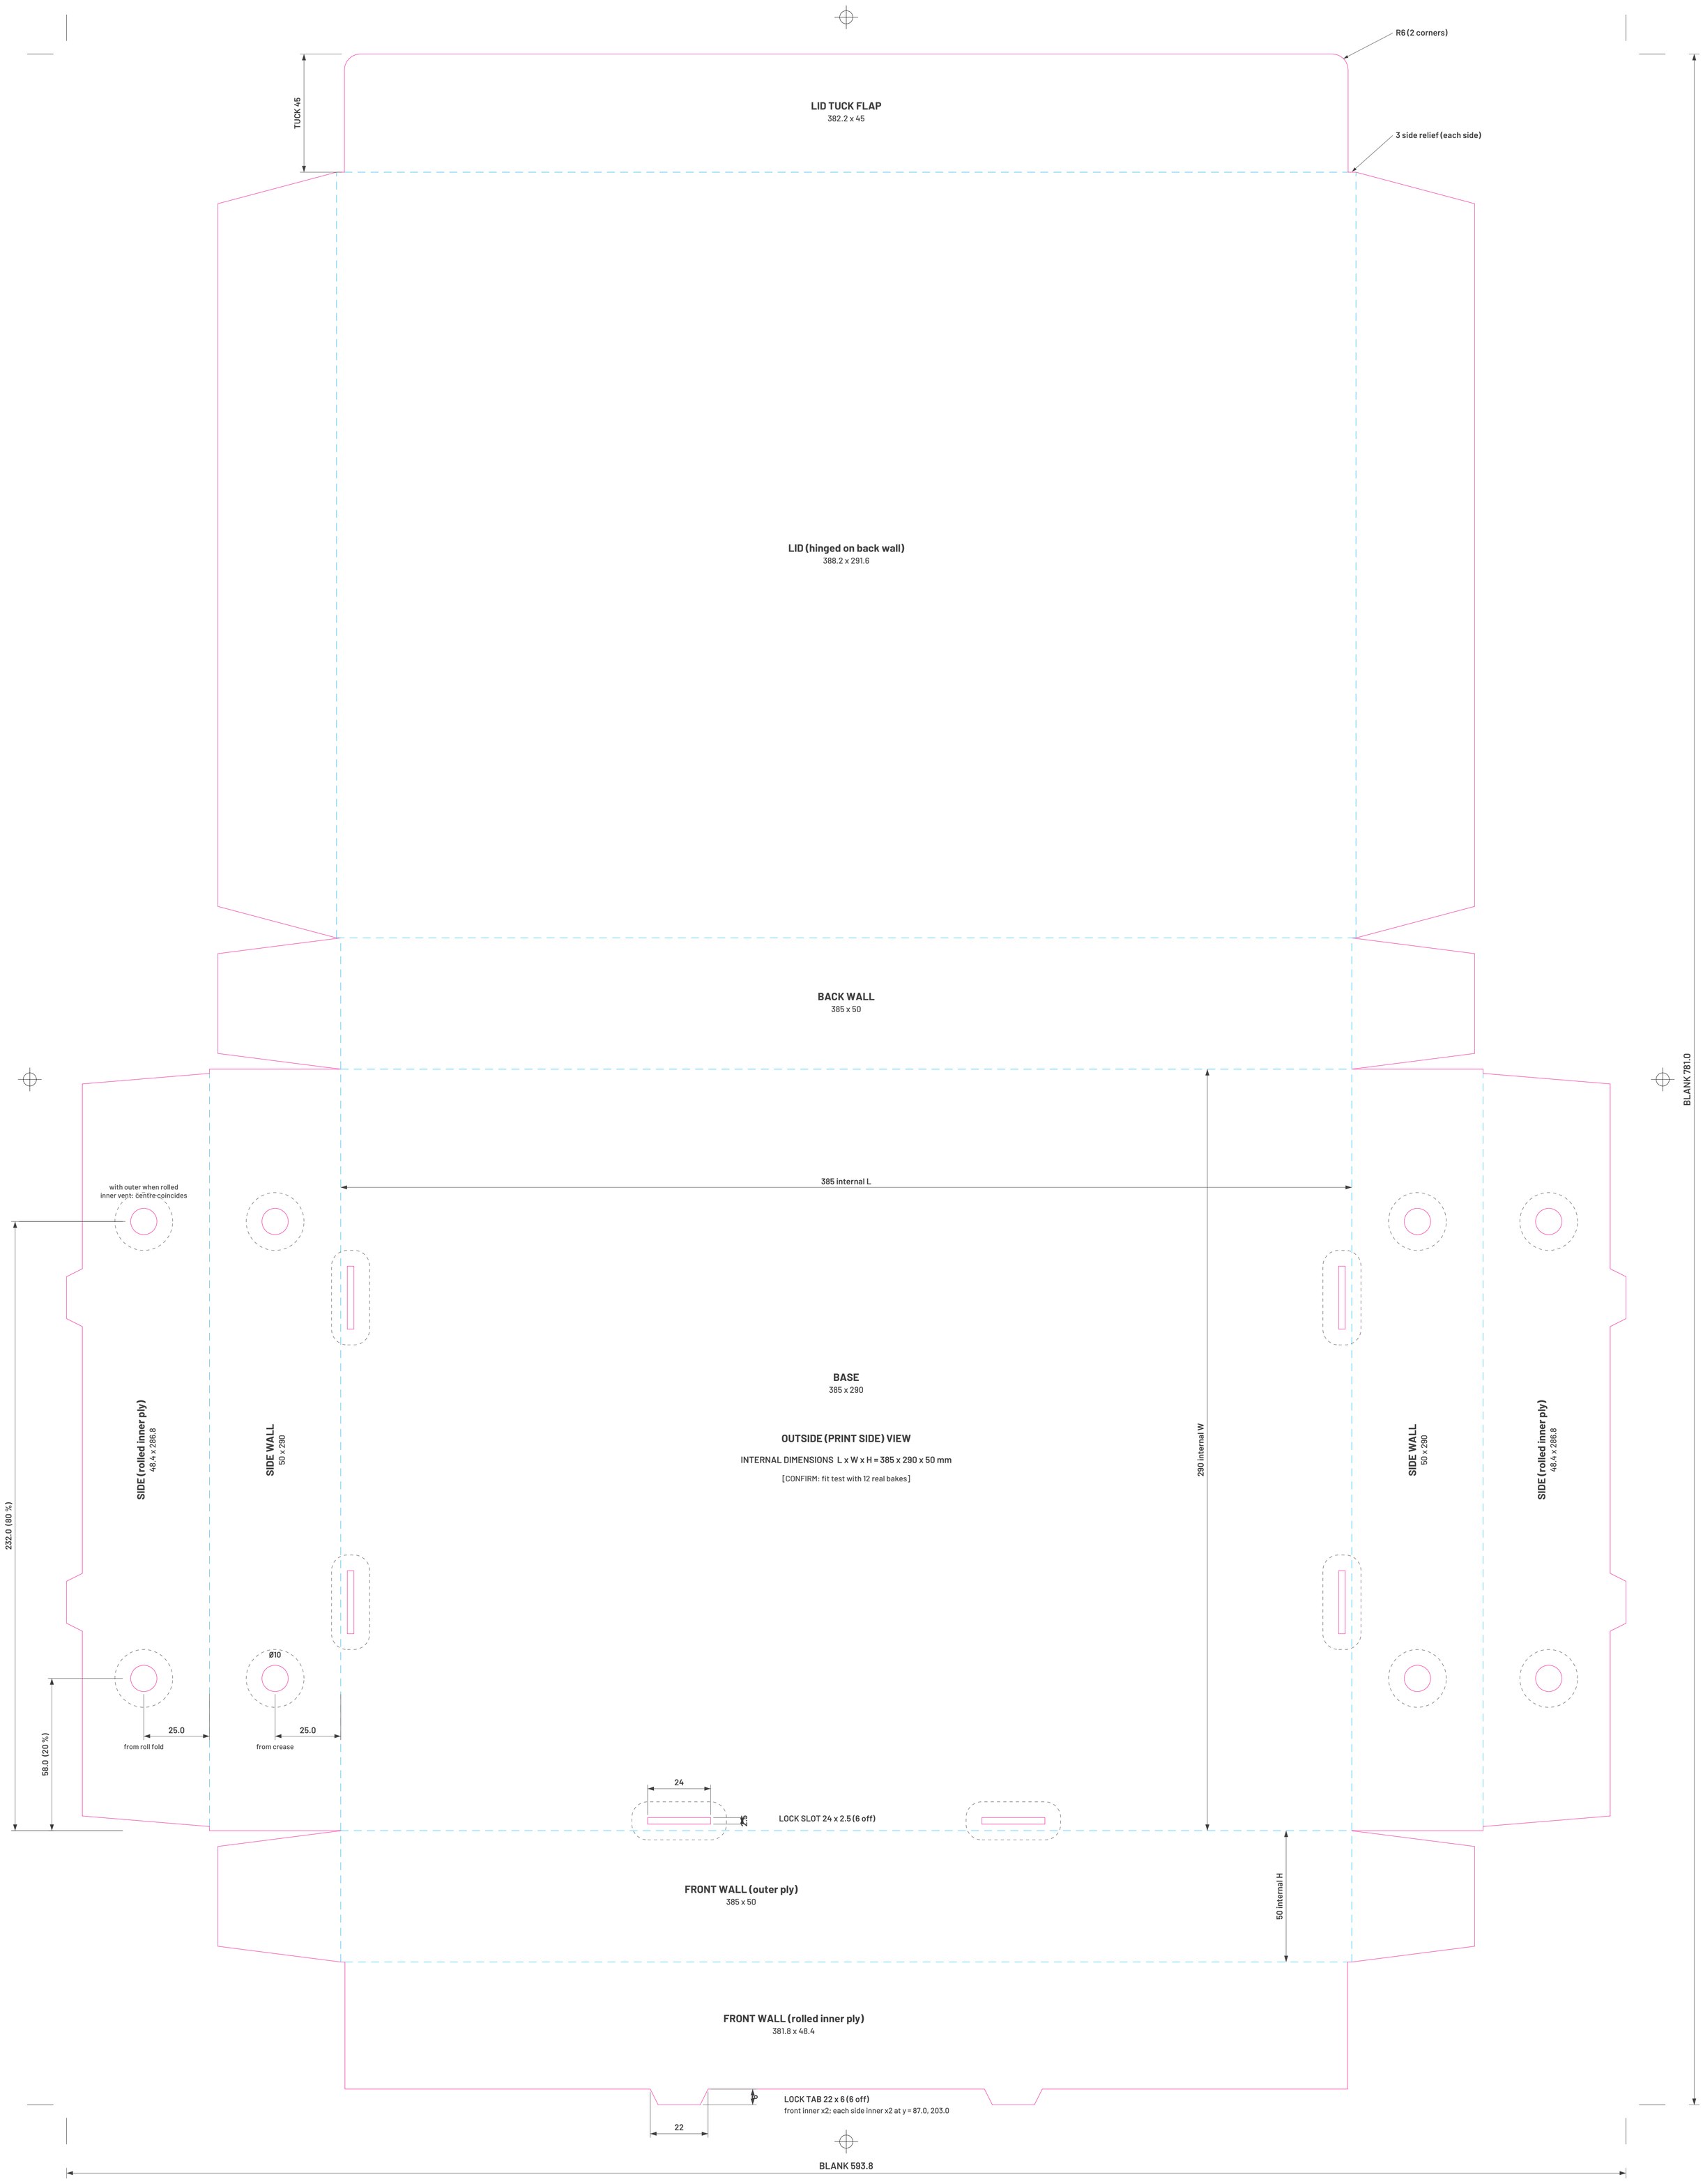

LINE AND PLATE LEGEND

———	**DIE CUT**	spot 'DIE CUT', solid 0.25 pt, overprint. Outline, tab edges, slots, vents.
– – –	**DIE CREASE**	spot 'DIE CREASE', dashed (3 mm dash, 2 mm gap) 0.25 pt, overprint. Folds, roll folds, hinge, tuck fold.
———	**DIMENSIONS**	spot 'DIMENSIONS', non-printing information layer, overprint. Dimensions, panel names, notes, this block.
· · · · ·	**PRINT-FREE RING**	dotted ring, 6 mm beyond every vent and slot (on DIMENSIONS). No print inside it.
▭	**WHITE OPAQUE**	spot, 100 % only, knockout. White artwork plus the white underlay under every ember element, choked 0.3 mm.
▭	**EMBER PMS 485 C**	spot, 100 % only, overprint. Prints over its own white underlay. Alternate CMYK is a screen simulation only [CONFIRM: Pantone drawdown].
▭	**INSIDE DARK**	placeholder spot for the optional inside-lid print (page 3). Colour not decided [CONFIRM].
———	**CROP / REGISTRATION**	colourant 'All': prints on every plate. Marks sit 5 mm clear of trim.
▭	**BOARD PREVIEW**	non-printing layer. Black kraft (outside), natural kraft (inside). Not a plate; never print it.

BLEED 3 mm. SAFE ZONE 5 mm inside every cut and crease.
KEEP ALL PRINT 6 mm CLEAR OF CUT-OUTS AND VENTS.
FONTS EMBEDDED; OUTLINE BEFORE PLATE MAKING IF REQUIRED.

NOTES

- View: from the OUTSIDE (print side). FEFCO catalogues draw from the inside: check orientation before cutting any tool.
- TrimBox = blank 593.8 x 781.0 mm. BleedBox = trim + 3 mm each side. MediaBox adds marks and this block.
- Registration: crop marks and targets are colourant All. Converter to confirm sheet layout, gripper edge, colour bar and mark positions.
- All dimensions are INTERNAL (erected box). CONVERTER TO CONFIRM ALLOWANCES IN CAD (caliper, fold, roll and bend allowances).
- Structure values are working values [CONFIRM with the converter's structural engineer before tooling].
- Hinge bands (ember, 5 mm either side of the hinge crease) run to the crease by design; the 5 mm safe zone does not apply to them.
- Flute direction: [CONFIRM: converter to propose]. No flute arrow is drawn.
- Vent alignment (rolled): outer centre 25.0 from base crease; inner centre 25.0 from roll fold; centre offset 0.000 mm (v1 was 0.8 mm).
- FEATURE SCHEDULE (flat, mm from the base panel lower-left corner, outside view):
- Blank 593.8 x 781.0 (x -104.4 to 489.4, y -104.4 to 676.6). Tuck 45; tab 22 x 6 (6 off); slot 24 x 2.5 (6 off).
- Vents, 8 punches on the flat (4 on the box), all D10, mid-height, at 20 % / 80 % of the 290 wall:
- outer ply (x, y): (-25.0, 58.0); (-25.0, 232.0); (410.0, 58.0); (410.0, 232.0)
- inner ply (x, y): (-75.0, 58.0); (-75.0, 232.0); (460.0, 58.0); (460.0, 232.0)
- Base slots (centres): front x = 128.9, 256.1 at y = 3.75; sides y = 87.0, 203.0 at x = 3.75 and 381.25.

TITLE BLOCK

PART NO.	DB-CAT-DOZEN
REV.	B (draft)
DATE	3 Oct 2026
UNITS	mm SCALE 1:1
TITLE	Dough Boss catering box, dozen (12 bakes, 4 x 3)
STYLE	FEFCO 0427 type [CONFIRM style with converter]
SIZE	INTERNAL DIMENSIONS 385 x 290 x 50 mm
BOARD	E-flute 1.6 mm [CONFIRM board build and caliper]
VIEW	OUTSIDE (print side), die only
PAGE	2 of 4 Die and dimensions
TECH PACK	DB-TP-CAT-001 rev A

STATUS: DRAFT. Not for press until sample, board and Pantone are approved.
CONVERTER TO CONFIRM ALLOWANCES IN CAD

SIGN-OFF

DOUGH BOSS APPROVAL

name _____ signature _____ date _____

CONVERTER ACKNOWLEDGEMENT

name _____ signature _____ date _____

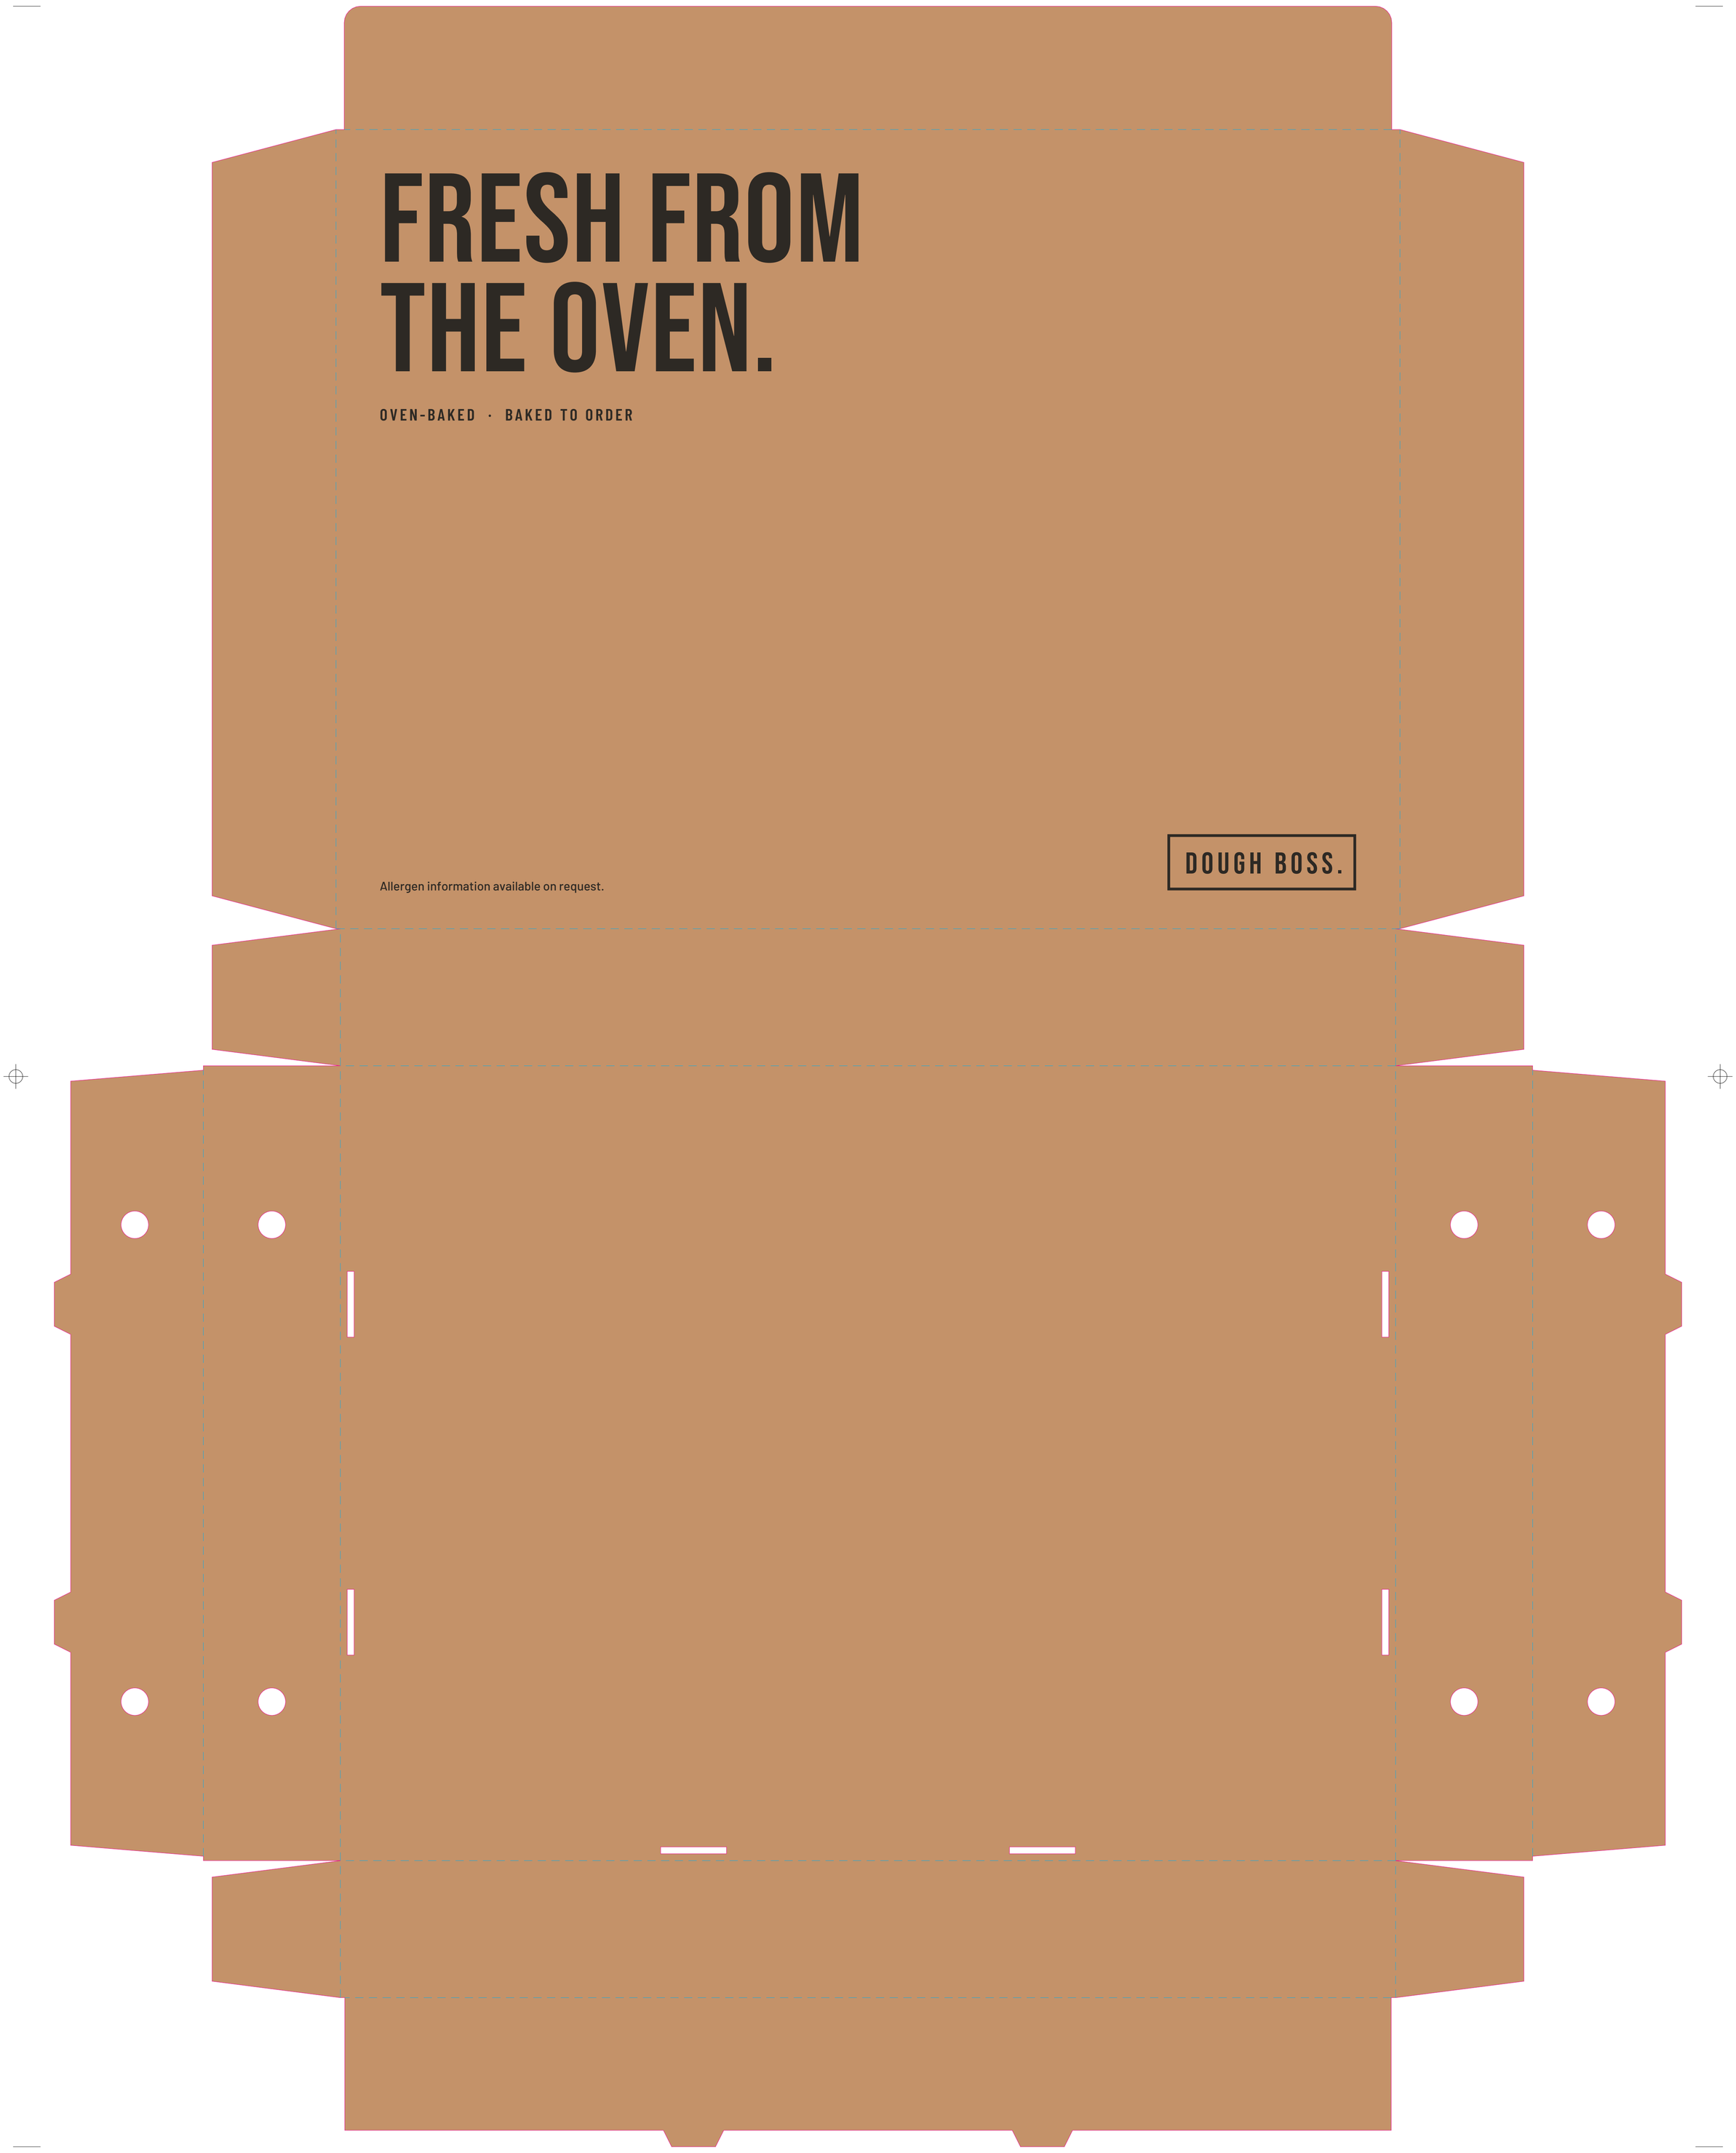

LINE AND PLATE LEGEND

DIE CUT	spot 'DIE CUT', solid 0.25 pt, overprint. Outline, tab edges, slots, vents.
DIE CREASE	spot 'DIE CREASE', dashed (3 mm dash, 2 mm gap) 0.25 pt, overprint. Folds, roll folds, hinge, tuck fold.
DIMENSIONS	spot 'DIMENSIONS', non-printing information layer, overprint. Dimensions, panel names, notes, this block.
PRINT-FREE RING	dotted ring, 6 mm beyond every vent and slot (on DIMENSIONS). No print inside it.
WHITE OPAQUE	spot, 100 % only, knockout. White artwork plus the white underlay under every ember element, choked 0.3 mm.
EMBER PMS 485 C	spot, 100 % only, overprint. Prints over its own white underlay. Alternate CMYK is a screen simulation only [CONFIRM: Pantone drawdown].
INSIDE DARK	placeholder spot for the optional inside-lid print (page 3). Colour not decided [CONFIRM].
CROP / REGISTRATION	colourant 'All': prints on every plate. Marks sit 5 mm clear of trim.
BOARD PREVIEW	non-printing layer. Black kraft (outside), natural kraft (inside). Not a plate; never print it.

BLEED 3 mm. SAFE ZONE 5 mm inside every cut and crease.
KEEP ALL PRINT 6 mm CLEAR OF CUT-OUTS AND VENTS.
FONTS EMBEDDED; OUTLINE BEFORE PLATE MAKING IF REQUIRED.

NOTES

- View: from the OUTSIDE (print side). FEFCO catalogues draw from the inside: check orientation before cutting any tool.
- TrimBox = blank 593.8 x 781.0 mm. BleedBox = trim + 3 mm each side. MediaBox adds marks and this block.
- Registration: crop marks and targets are colourant All. Converter to confirm sheet layout, gripper edge, colour bar and mark positions.
- All dimensions are INTERNAL (erected box). CONVERTER TO CONFIRM ALLOWANCES IN CAD (caliper, fold, roll and bend allowances).
- Structure values are working values [CONFIRM with the converter's structural engineer before tooling].
- Hinge bands (ember, 5 mm either side of the hinge crease) run to the crease by design; the 5 mm safe zone does not apply to them.
- Flute direction: [CONFIRM: converter to propose]. No flute arrow is drawn.
- Vent alignment (rolled): outer centre 25.0 from base crease; inner centre 25.0 from roll fold; centre offset 0.000 mm (v1 was 0.8 mm).

TITLE BLOCK

PART NO.	DB-CAT-DOZEN
REV.	B (draft)
DATE	3 Oct 2026
UNITS	mm SCALE 1:1
TITLE	Dough Boss catering box, dozen (12 bakes, 4 x 3)
STYLE	FEFCO 0427 type [CONFIRM style with converter]
SIZE	INTERNAL DIMENSIONS 385 x 290 x 50 mm
BOARD	E-flute 1.6 mm [CONFIRM board build and caliper]
VIEW	INSIDE, viewed from inside (mirrored left-right)
PAGE	3 of 4 Inside print, optional 1 colour [CONFIRM]
TECH PACK	DB-TP-CAT-001 rev A

STATUS: DRAFT. Not for press until sample, board and Pantone are approved.
CONVERTER TO CONFIRM ALLOWANCES IN CAD

SIGN-OFF

DOUGH BOSS APPROVAL

name _____ signature _____ date _____

CONVERTER ACKNOWLEDGEMENT

name _____ signature _____ date _____

PLATE: WHITE OPAQUE
white artwork + white underlay (carries the choked underlay under ember)

PLATE: EMBER PMS 485 C
ember foil stops and hinge bands (overprints the white underlay)

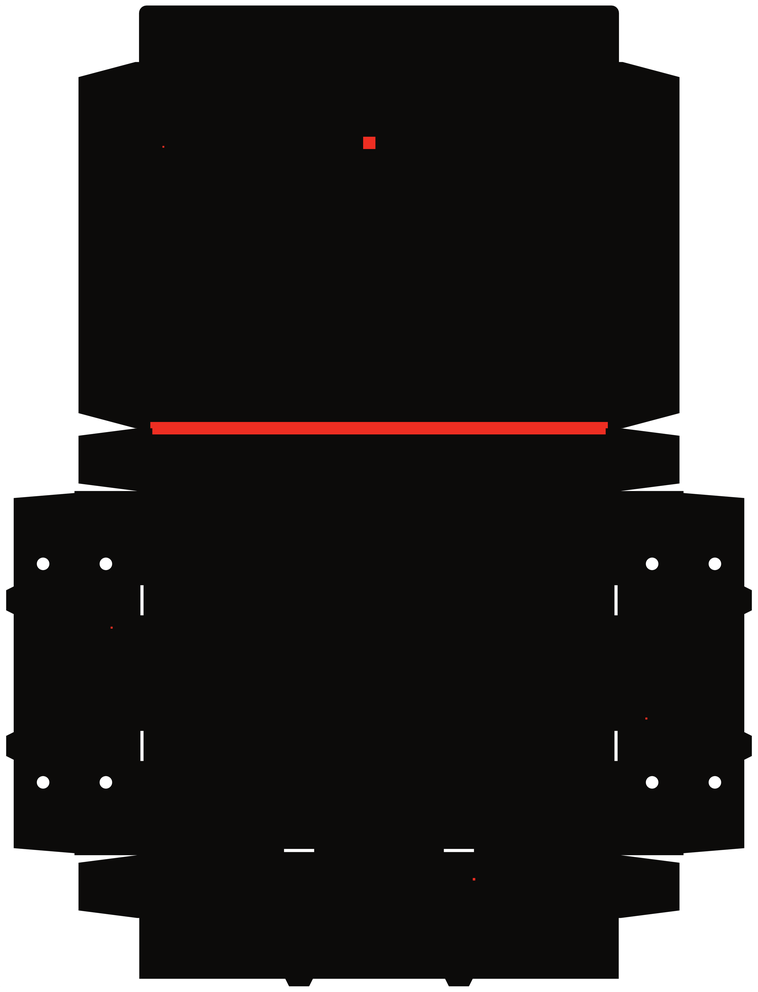

PLATE: INSIDE DARK (page 3 inside print)
optional inside-lid print, viewed from inside; colour [CONFIRM]

PLATE: DIE CUT
outline, tab edges, slots, vents

PLATE: DIE CREASE
folds, roll folds, hinge, tuck fold

PLATE: DIMENSIONS
non-printing information plate

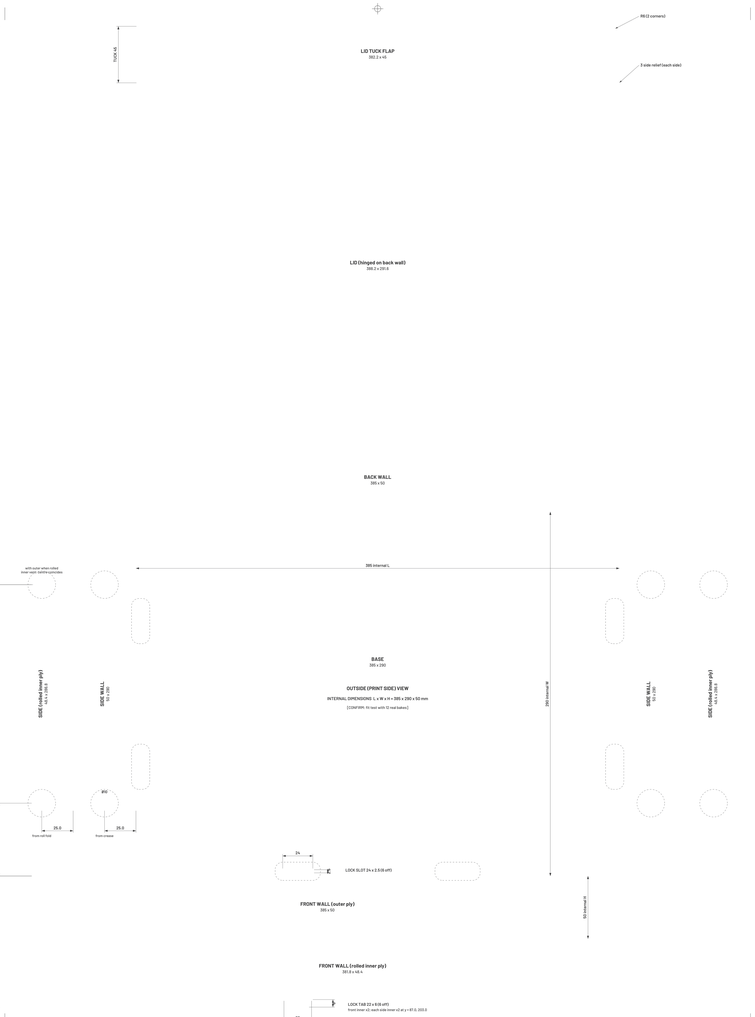

LINE AND PLATE LEGEND

	DIE CUT	spot 'DIE CUT', solid 0.25 pt, overprint. Outline, tab edges, slots, vents.
	DIE CREASE	spot 'DIE CREASE', dashed 0.5 mm dash, 3 mm gap 0.25 pt, overprint. Folds, roll folds, hinge, tuck fold.
	DIMENSIONS	spot 'DIMENSIONS', non-printing information layer, overprint. Dimensions, panel names, notes, this block.
	PRINT-FREE RING	40 mm ring, 6 mm beyond every vent and slot (no DIMENSIONS). No print inside it.
	WHITE UNDLAY	spot, 100 % only, knockout. White artwork plus the white underlay under every ember element, choked 0.3 mm.
	EMBER PMS 485 C	spot, 100 % only, overprint. Prints over its own white underlay. Alternate CMYK is a screen simulation only [CONFIRM: Pantone simulation].
	INSIDE DARK	placeholder spot for the optional inside-lid print (page 3). Colour not decided [CONFIRM].
	CROP + REGISTRATION	coloured 'All' prints on every plate. Prints at 6 mm clear of trim.
	BOARD PREVIEW	non-printing layer. Black kraft (outside), natural kraft (inside). Not a plate; never print it.

BLEED 3 mm. SAFE ZONE 5 mm inside every cut and crease.
ALL DIMENSIONS IN MILLIMETRES. 1 : 1 AT 100 % SCALE.
FONTS EMBEDDED; OUTLINE BEFORE PLATE MAKING IF REQUIRED.

NOTES

- Vinyl. Print the OUTSIDE (print side). FSTO catalogue draw from the inside; check orientation before cutting any roll.
- 1 media = blank 585.8 x 780.0 mm. BleedBox = trim + 3 mm each side. PlateBox adds marks and this block.
- Registration: crop marks and targets are coloured All. Converter to confirm sheet layout, gripper edge, colour bar and mark positions.
- All dimensions are INTERNAL (unrolled box). CONVERTER TO CONFIRM ALLOWANCES IN CAD (caliper, fold, roll and bend allowances).
- Structure values are working values [CONFIRM with the converter's structural engineer before tooling].
- Hinge bands (section 3 mm either side of the hinge creases) run to the crease lay design; the 5 mm safe zone does not apply to them.
- Roll-fold tolerance: 0.5 mm on the roll-fold centre and on the 26.0 mm offset.
- Vent alignment (cobalt): outer vents 35.0 from base crease. Inner vents at 35.0 from roll fold; centre offset 0.200 mm (1 was 0.8 mm).
- Each roll shows one plate on a non-printing backing (black kraft, natural kraft or pale grey). Captions and this block are on the DIMENSIONS layer.
- Plate rolls carry the registration marks (coloured All) so alignment can be checked on every plate.

TITLE BLOCK

PART NO.	SB-CAT-150DN
REV.	B (was A)
DATE	14 Oct 2026
UNITS	mm SCALE 0.1
TITLE	Dough Boss catering box, dozen (12 bake), 4 x 3
STYLE	FEFCO 0427 type [CONFIRM style with converter]
SIZE	INTERNAL DIMENSIONS 395 x 250 x 50 mm
BOARD	E-flute 1.8 mm [CONFIRM board build and caliper]
VIEW	DEFAULT/DIE/PRINT/PROOF; each plate alone (outside view; inside plate viewed from inside)
PAGE	4 of 4 Separations proof, 1:1
TECH PACK	SB-TP-CAT-001 rev A

STATUS: DRAFT. Not for press until names, board and Pantone are approved.
CONVERTER TO CONFIRM ALL ALLOWANCES IN CAD

SIGN-OFF

DOUGH BOSS APPROVAL

name _____ signature _____ date _____

CONVERTER ACKNOWLEDGEMENT

name _____ signature _____ date _____