

PACKAGING DATA SHEET: CATERING DOZEN BOX

Document: DB-PDS-CAT-001, revision A (draft), 3 October 2026. **Status:** DRAFT FOR RFQ. It is not a released specification. Every value marked [CONFIRM] is a working value until the converter's structural sample and the tests in section 7 sign it off. Sources and reasoning are in the pack, Section 4 (Technical data).

1. PRODUCT IDENTIFICATION

Field	Value
Product	Catering dozen box with liner sheet and seal label
Brand	Dough Boss (wordmark per Brand identity, Section 2 of the pack)
Use	Hot baked goods: 12 bakes, 4 x 3, about 9 cm each, for catering orders of 2, 3 or 5 boxes, stacked
Contents per box	12 bakes on one greaseproof sheet [CONFIRM: filled weight]
Pack ID on artwork	DB-CAT-DOZEN-v1

2. STRUCTURE

Parameter	Value	Tolerance or status
Style	FEFCO 0427 one-piece folder, hinged lid, rolled double front and side walls, tuck front	Fixed
Internal size L x B x H	385 x 290 x 50 mm	[CONFIRM: fit test]
Outside size (E-flute)	about 391 x 295 x 53 mm	Converter's CAD
Flat blank	593.8 x 781.0 mm (working die)	Converter's CAD
Lid tuck flap	45 mm deep, 3 mm side relief, 6 mm corner radii	[CONFIRM: structural engineer]
Locks	Tabs 22 x 6 mm into slots 24 x 2.5 mm; 2 on the front wall, 2 per side wall	Working
Vents	4 x Ø10 mm, 2 per side wall (290 mm ends) at 20 % and 80 % of the length, mid-height; 8 punches on the flat (outer and inner ply), aligned when rolled	[CONFIRM: hold test]
Thumb notch	None	Decision
Flutes visible	Only on the vertical ends of the side walls and at the lid corner relief cuts; every lid-perimeter and wall-top edge is a fold	Design rule

3. MATERIAL

Parameter	Value	Evidence required
Board	Single-wall E-flute, caliper about 1.6 mm, about 32 ECT (about 5.6 kN/m), burst about 1,380 kPa or the converter's nearest food-mailer grade	Converter board code with ECT (kN/m) and burst (kPa)
Fallback	B-flute, caliper about 3.0 to 3.2 mm, if the lid sags or the stack test fails	Test result
Outer liner	Black: dyed black kraft liner, or natural kraft flood-printed black (third ink)	[CONFIRM: availability]
Inner liner	Natural brown kraft, food contact	Declaration of compliance (DoC) for fatty food at hot fill
Recycled content	Only with a mineral-oil migration statement from the converter	[CONFIRM]

4. PRINT

Parameter	Value
Process	Water-based flexo post-print. Digital for prototypes only
Colours, outside	2 spot: WHITE OPAQUE (single hit), EMBER (PANTONE 485 C reference) over a white underlay choked 0.3 mm
Colour, inside lid	1 colour on natural kraft [CONFIRM: drop if the quote is high]

Parameter	Value
Inks	Food-packaging inks, low-migration statement for the outer face; no print on the food-contact face except the inside lid, which does not touch food
Artwork	Vector PDF (DoughBoss-DozenBox-Dieline-v2.pdf): spot plates WHITE OPAQUE and EMBER PMS 485 C; die on DIE CUT and DIE CREASE (overprint, not printed); fonts embedded, outline before plate making if required
Bleed / safe	3 mm / 5 mm; print kept 6 mm clear of cut-outs and vents
Minimums	Wordmark Bebas 11 mm or larger; white rules 1.0 mm or heavier; EMBER lines 4 pt or heavier; no reversed type under 10 pt
Approval	Press drawdown on the production board: white opacity, 485 over white. Retained colour standard kept at each shop

5. LINER SHEET

Parameter	Value
Material	Greaseproof (or glassine-type) paper, 40 to 50 gsm
Grease resistance	KIT 6 or above, target 7 to 8 (TAPPI T 559)
PFAS	No intentionally added PFAS; total fluorine below 100 ppm (test report)
Size	380 x 285 mm flat, or about 480 x 385 mm to cup up the walls [CONFIRM: fit sample]
Print	Unprinted is safest. If printed, the non-food face only, with a food-packaging ink statement [CONFIRM: printed or plain]

6. SEAL LABEL AND LABELLING

Parameter	Value
Seal	70 mm round, natural kraft face, permanent adhesive suitable for corrugated, placed across the lid front and front wall at x = 322 mm ±11 mm
Seal fields	FOR, DATE, tick list (CHEESE, ZA'ATAR, MEAT, SPINACH), BOX ___ OF ___, completed in marker
Box print line	"Allergen information available on request." and catering@doughboss.com.au
Per-order label (recommended)	Contents and counts, "Contains:" with FSANZ required names from the shop's allergen matrix, packed date and time, storage wording from the food safety program [CONFIRM: matrix and wording]
Not printed	Fixed allergen lists, "may contain", "gluten free", "halal", prices, phone numbers, recyclable or compostable claims, ARL, FSC or recycling symbols
Regulator points	REGULATOR-CHECK: NSW Food Authority on delivered catering; Std 1.2.6–2(c); Division 3 of Std 1.2.1 if sold to a caterer

7. PERFORMANCE TESTS (TO SIGN OFF REVISION B)

Test	Method	Pass criterion
Fit	12 real bakes, 4 x 3, on the liner	Closes without touching the lid; no bake crushed [CONFIRM]
Vent hold	Filled hot, 30 minutes at serving temperature	Bases stay crisp; no pooling on the lid; board not softened [CONFIRM]
Liner strike-through	Oillest bake (meat or cheese), 30 minutes hot	No grease through to the board [CONFIRM]
Stack	Filled hot, 5 high, 60 minutes at ambient; then a car-boot ride	No lid sag that touches food, no wall bulge, tuck holds [CONFIRM]
Print	Rub and scuff on the outer face; white opacity against the drawdown	No transfer to hands or bakes; opacity within the approved standard [CONFIRM]
Seal	Applied across the fold, 30 minutes hot	Stays down, no lift at the fold [CONFIRM]

8. SUPPLY, STORAGE AND HANDLING

Parameter	Value
Supplied	Flat, bundled, in cartons; quantity per carton [QUOTE]
Storage	Dry, off the floor, away from the oven and wash area; FIFO; batch label kept until the stock is used
Incoming QA	Per the pack's checklist (Section 9, A5): size, colour against the retained standard, print defects, odour, DoC on file
Shelf life	[CONFIRM with the converter]


9. DOCUMENTS THE CONVERTER SUPPLIES

- Structural CAD drawing and a white sample at the final size.
- Board specification sheet (ECT, burst, caliper, liners).
- Declarations of compliance for the board, inks, liner sheet and label adhesive.
- Liner test report (KIT, total fluorine).
- Press drawdowns, then a signed press proof.

REVISION HISTORY

Rev	Date	Change
A	3 Oct 2026	First draft for RFQ

APPENDIX: DIELINE AND ARTWORK

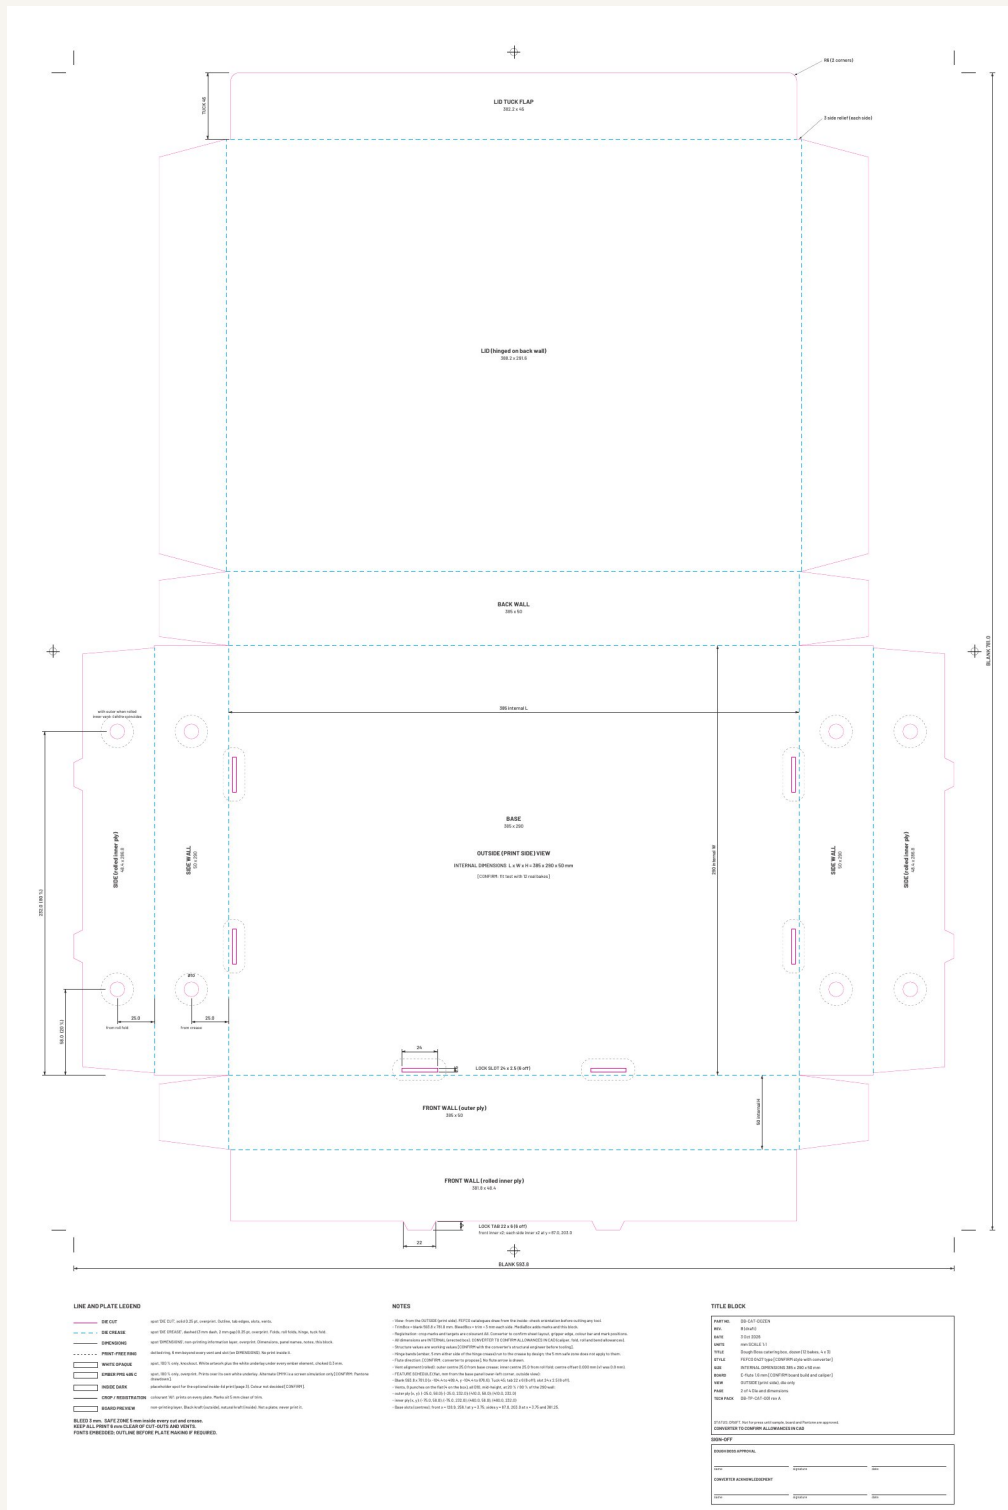

Working dieline with dimensions (DoughBoss-DozenBox-Dieline-v2.pdf, page 2). The converter draws production CAD from it.



Outside print plates with the die overlaid (v2, page 1).