

Extended Low Pro Bucket

- 0.2" steel reinforcement plate on entire bottom
- 3/4" x 8" wide weld-on edge
- Available widths: 62", 68", 74", 80" & 84"
- Strong bucket mounting bracket

Back View



SPECIFICATIONS


Model + Size (in.)	62EXT	68EXT	74EXT	80EXT	84EXT
Height (in.)	21.5				
Depth (in.)	34.5				
Bucket Weight (lbs.)	514	545	578	609	631
Capacity (cu. ft.)	17.7	19.4	21	22.8	24.5
Bolt-on Edge Weight (lbs.)	97	107	116	125	134
Recommended Loader Capacity (lbs.)	Less than 2400 lbs.				
Total Weight with Bolt-on Edge (lbs.)	611	652	694	734	765

Bottom View



OPTIONAL FEATURES

Bolt-on Teeth




Bolt-on Edge



Bolt-on Side Edge




For customized cutting edge, please provide the dimensions for **C, D, E**.

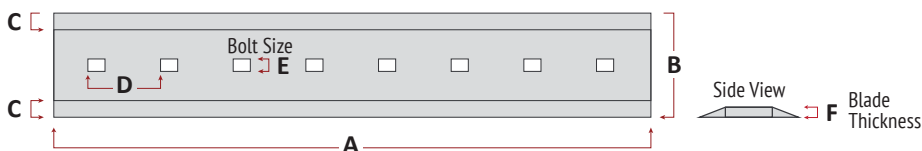

Standard Low Pro Bucket


- Bucket bottom includes a reinforced 54" dimple plate
- 3/16" thickness steel body
- 3/4" x 6" heavy-duty weld-on cutting edge
- 3/4" bolt on edge and teeth are available



Back View

SPECIFICATIONS

Size (in.) / Model	62STD	68STD	74STD	80STD	84STD
(A) Height (in.)	21.5				
(B) Depth (in.)	30.7				
Bucket Weight (lbs.)	438	467	510	541	585
Capacity (cu. ft.)	15.7	17.2	18.7	20.2	21.7
Bolt-on Edge Weight (lbs.)	97	107	116	125	134
Recommended Loader Capacity (lbs.)	Less than 2400 lbs.				
Total Weight with Bolt on Edge (lbs.)	535	574	626	666	719




Bottom View

OPTIONAL FEATURES

Bolt-on Teeth



Bolt-on Edge



Bolt-on Side Edge



For customized cutting edge, please provide the dimensions for **C**, **D**, **E**.

