


Overview

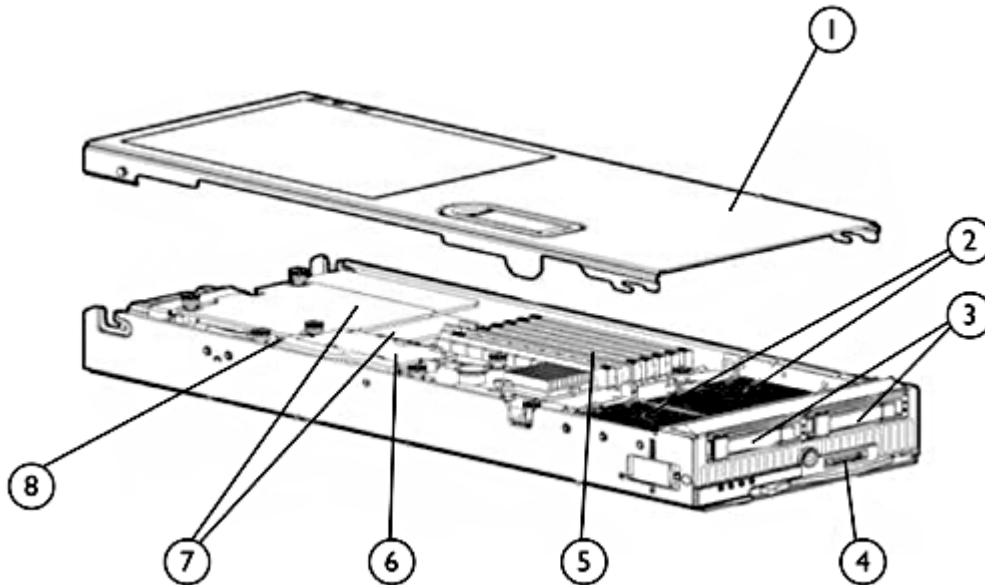

HP ProLiant BL460c Server Blade

- | | |
|---|---|
| 1. Access Panel | 6. Smart Array E200i Controller (optional battery-backed write cache) |
| 2. Up to two Dual-Core Intel® Xeon® processors | 7. Two Mezzanine slots |
| 3. Small form factor (SFF) hot-plug drive bays | 8. Internal USB Connector |
| 4. Local I/O connector | |
| 5. Eight (8) PC2-5300, Fully Buffered DIMMs (DDR2-667) Memory Slots | |

What's New

The BL460c offers dual core processors including the following:

- Dual-Core Intel® Xeon® Processor 5110 (1.6 GHz, 4M L2 Cache)
- Dual-Core Intel® Xeon® Processor 5140 (2.33 GHz, 4M L2 Cache)
- Dual-Core Intel® Xeon® Processor 5150 (2.66 GHz, 4M L2 Cache)
- Dual-Core Intel® Xeon® Processor 5160 (3.0 GHz, 4M L2 Cache)

The BL460c supports up to 32 GB of memory with the new 8 GB FBD PC2-5300 1x4GB Memory Kit.

At A Glance

This document covers the HP ProLiant BL460c server blade only. For more information on HP BladeSystem c-Class Infrastructure and HP BladeSystem c-Class Interconnect Components, please see the following QuickSpecs:

HP BladeSystem c-Class Infrastructure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12517_div/12517_div.HTML

and HP BladeSystem c-Class Interconnect Components QuickSpecs:



Overview

http://h18000.www1.hp.com/products/quickspecs/12524_div/12524_div.HTML

The HP ProLiant BL460c provides greater 2P x86 server blade density without compromise and maximum power-efficiency with flexibility and choice.

HP ProLiant BL460c server blade includes:

- Processor:
 - Up to two Intel® Xeon® 5000 and 5100 series Dual-Core processors
 - Supports up to 3.0 GHz 1333 MHz or 1066 MHz FSB; 4MB Level 2 cache memory
 - Intel 5000P chipset supporting up to a 1333 MHz Front Side Bus
- Memory:
 - Up to 32 GB of memory, supported by (8) slots of PC2-5300 Fully Buffered DIMMs at 667 MHz
 - Supporting memory interleaving (2x1); memory mirroring and online spare capacity.
- Storage Controller:
 - Integrated Smart Array E200i RAID controller with 64 MB cache (with optional battery-backed write-cache with an upgrade to 128MB cache (BBWC)). Supports RAID 0,1.
- Internal Drive Support:
 - Up to 2 small form factor (SFF) SAS or SATA hot plug hard disk drives
- Network Controller:
 - Two (2) Embedded Dual NC373i Multifunction Gigabit Network Adapters
 - One (1) additional 10/100 NIC dedicated to iLO 2 Management
- Mezzanine Support:
 - Two (2) additional I/O expansion slots via mezzanine card.
 - Supports up to (2) mezzanine cards
 - Dual-Port Fibre Channel Mezzanine (4-Gb) options for SAN connectivity (Choice of Emulex or QLogic).
 - Ethernet NIC Mezzanine options for additional network ports
 - HP NC373m PCI Express Dual Port Multifunction Gigabit Server Adapter
 - HP NC326m PCI Express Dual Port 1Gb Server Adapter for c-Class BladeSystem
 - Infiniband (IB) and 10GbE planned for future support
- Internal USB Support:
 - One (1) internal USB 2.0 connector for security key devices and USB drive keys
- Form Factor:
 - HP ProLiant BL460c server blade plugs vertically into the BladeSystem c7000 enclosure
- Management:
 - Integrated Lights-Out 2 (iLO 2) Standard Blade Edition (includes virtual KVM and graphical remote console at no additional cost)
- Operating Systems:
 - Supports Windows, Linux, and Netware Operating Systems
- Enclosures:
 - HP ProLiant BL460c server blade plugs vertically into the BladeSystem c7000 enclosure
- Warranty:
 - Protected by HP Services and a worldwide network of resellers and service providers. Three-year parts, 3 Year Labor and 3 Year on-site limited global warranty. Certain restrictions and exclusions apply. Pre-Failure Notification on processors, memory, and SAS hard drives. SATA hard drives have a one year warranty.

Standard Features (Server Blade)

| | | |
|--|--|---|
| Processor | Dual-Core Intel Xeon Processor 5160 (3.00 GHz, 1333 MHz FSB) | |
| | Dual-Core Intel Xeon Processor 5150 (2.66 GHz, 1333 MHz FSB) | |
| | Dual-Core Intel Xeon Processor 5140 (2.33 GHz, 1333 MHz FSB) | |
| | Dual-core Intel Xeon Processor 5130 (2.00 GHz, 1333 MHz FSB)* | |
| | Dual-core Intel Xeon Processor 5120 (1.86 GHz, 1066 MHz FSB)* | |
| | Dual-Core Intel Xeon Processor 5110 (1.6 GHz, 1066 MHz FSB) | |
| | Dual-core Intel Xeon Processor 5063 (3.2 GHz, 1066 MHz FSB) Mid-Voltage | |
| | Dual-core Intel Xeon Processor 5050 (3.0 GHz, 667 MHz FSB)* | |
| NOTE: Intel 5100 series processors are 64-bit, Dual-core, support Hyper Threading, and Intel VT. | | |
| NOTE: *Offered through CTO only. | | |
| <hr/> | | |
| Upgradeability | Upgradeable to 2 processors | |
| <hr/> | | |
| Cache Memory | 2x2MB Level 2 cache memory (5000 Series) 1x4MB Level 2 cache memory (5100 Series) | |
| <hr/> | | |
| Chipset | Intel® 5000P Chipset | |
| <hr/> | | |
| Memory | Type | PC2-5300 Fully Buffered DIMMs at 677 MHz |
| | Standard | 1 GB (2 x 512 MB) 2 GB (2 x 1 GB) |
| | | Maximum |
| | <hr/> | |
| Network Adapter | (2) Embedded NC373i Multifunction Gigabit Network Adapters with TCP/IP Offload Engine One (1) additional 10/100 NIC dedicated to iLO 2 Management | |
| <hr/> | | |
| Expansion Slots | Two Mezzanine slots | |
| <hr/> | | |
| Integrated Manageability | Integrated Lights-Out 2 (iLO 2) Standard Blade Edition (integrated on motherboard) | |
| <hr/> | | |
| Storage Controller | Smart Array E200i Controller | 64MB memory module supports RAID 0,1 Available upgrades: 128MB with Battery-backed write cache |
| | | |
| <hr/> | | |

Standard Features (Server Blade)

| | | | |
|--|--|---|----------------------|
| Maximum Internal Storage | Hot Plug Serial Attach SCSI (SAS) | 144GB SAS | 2 x 72GB Serial SCSI |
| | Hot Plug Serial ATA (SATA) | 120GB SATA | 2 x 60GB Serial ATA |
| <hr/> | | | |
| Graphics | Integrated ATI RN-50 1280 x 1024 x 16M color (32 MB DDR1 memory) | | |
| <hr/> | | | |
| Graphics Resolution Supported | Resolution Color Depths | Depths 1280 x 1024, 16.7M, 64k, 256.16 1024 x 768, 16.7M, 64k, 256, 16 800 x 600, 16,7M, 64k, 256, 16 640 x 480, 16,7M, 64k, 256, 16 | |
| <hr/> | | | |
| Fibre Channel on the HP ProLiant BL460c server blade | <p>Two optional Fibre Channel HBAs are supported by the HP ProLiant BL460c. Both mezzanine circuit boards connect directly to the server blade system board. These Fibre Channel HBAs are available via option kits and must be ordered separately.</p> <p>Two option kits</p> <p>Emulex LPe1105-HP 4Gb FC HBA for HP c-Class BladeSystem (403621-B21)</p> <ul style="list-style-type: none">Based on the same field-proven ASIC, firmware, and driver technology as Emulex's renowned LPe1150 HBA, the Emulex LPe1105-HP is fully driver compatible with all Emulex HBAs <p>QLogic QMH2462 4Gb FC HBA for HP c-Class BladeSystem (403619-B21)</p> <ul style="list-style-type: none">Uses common drivers which means that customers can standardize on one QLogic driver whether they are using the QMH2462 or other 4Gb and 2Gb HBAs powered by QLogic <p>Emulex and QLogic Fibre Channel HBAs feature:</p> <ul style="list-style-type: none">Optimal performance utilizing PCI Express4/2/1Gb/s auto negotiating speedsDual-ports for redundant path connectionsUp to two FC HBAs per server blade providing redundant FC HBA supportOptimized for HP StorageWorks and supported by third party SAN vendorsSupport for Microsoft® Windows® and Linux operating systems environments | | |
| <hr/> | | | |
| Compatible SAN | <p>HP ProLiant BL460c server blades are optimized for HP StorageWorks MSA, EVA and XP</p> <p>HP ProLiant 460c server blades are compatible with select 3rd party SANs (please see blade storage page for more details: http://h18000.www1.hp.com/products/servers/proliant-bl/c-Class/storage.html)</p> | | |

Standard Features

Insight Control Data Center Edition

Insight Control Data Center Edition delivers foundation management for HP BladeSystem lifecycles, including hardware resource deployment, health monitoring, software version control, performance monitoring, and vulnerability scanning and patch management.

Installs the following components by default using the wizard-based integrated installer:

- HP Systems Insight Manager
- Rapid Deployment Pack
- Performance Management Pack
- Vulnerability and Patch Management Pack

Additional ProLiant Essentials software and management tools included on the Insight Control Data Center Edition DVD can be installed manually.

- Virtualization Management Suite
- Workload Management Pack
- HP Open Service Event Manager
- HP Instant Support Enterprise Edition

NOTE: For Licensing and Packaging Options please see the options section of this QuickSpecs.

NOTE: Insight Control Data Center Edition is delivered with HP BladeSystem c-Class enclosures with either 16-server licenses or 8-server evaluation licenses (30-days). For additional information on HP c-Class Infrastructure please visit: HP BladeSystem c-Class Infrastructure QuickSpecs: http://h18000.www1.hp.com/products/quickspecs/12517_div/12517_div.HTML

NOTE: For additional product and licensing information about Insight Control Data Center Edition, HP Systems Insight Manager and Essentials software refer to <http://www.hp.com/servers/proliantessentials>.

| | | |
|---|---|--|
| Unified Foundation Management and Essentials Software Plugins | HP Systems Insight Manager | HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible standards-based environment to centrally manage servers, storage and other infrastructure devices, (both HP and non-HP) across multiple operating system platforms. |
| | ProLiant Essentials Rapid Deployment Pack | Rapid Deployment Pack (RDP) extends HP Systems Insight Manager with a complete deployment solution for HP ProLiant blade servers. RDP provides a central location to configure server hardware, deploy Windows, Linux and VMware ESX operating environments and install HP ProLiant Support Pack drivers using images and scripted profiles. |
| | ProLiant Essentials Performance Management Pack | ProLiant Essentials Performance Management Pack detects, analyzes, and explains hardware bottlenecks on HP ProLiant servers, HP Integrity servers and shared storage. |
| | The Vulnerability and Patch Management Pack | The Vulnerability and Patch Management Pack integrates and simplifies the assessment and remediation of operating system vulnerabilities into HP Systems Insight Manager for Windows and Linux platforms. |
| | Insight Management Agents | The Insight Management Agents should be installed on all HP servers to present system instrumentation, health and configuration information into HP Systems Insight Manager and the HP System Management Homepage. The |

Standard Features

HP System Management Homepage aggregates systems data from Insight Management Agents and other HP management tools, providing a consolidated browser-based interface for managing individual servers.

Insight Management Agents and The HP System Management Homepage are included on ProLiant Support Packs, and can also be installed using the server profiles provided with the ProLiant Essentials Rapid Deployment Pack

For additional information about the Management Agents and the HP System Management Homepage please visit the management Web site at <http://www.hp.com/servers/manage>.

Subscriber's Choice

Subscriber's Choice Driver and Support Alerts/Notifications is a web-based email subscription service that provides software and driver change notifications for ProLiant products. Sign up at <http://www.hp.com/go/subscriberschoice> and customize your profile to receive various new alerts as they become available, on a weekly or monthly basis.

ProLiant Support Packs and ROMPaq, software

The latest software, drivers, and firmware fully optimized and tested for your ProLiant server and options, available through ProLiant Support Packs the ProLiant Essentials Rapid Deployment Pack, SmartStart or downloaded from Software and Drivers download pages website at <http://www.hp.com/go/support>.

Optional ProLiant

Essentials Value Packs

Optional software offerings that selectively extend the functionality of an Adaptive Infrastructure to address specific business problems and needs:

- Accelerated iSCSI Pack - enables the embedded Multifunction network controller to serve as both a NIC and an iSCSI HBA providing access to SAN storage over the same connection used for networking. Processing of the protocol stack is offloaded to the NIC reducing CPU utilization and greatly improving the speed with which the requests are processed and sent to the network.
- Integrated Lights-Out Select Pack - upgrades the Integrated Lights-Out processor with scripted and command line virtual media, Power Regulator reporting and enterprise security
- Intelligent Networking Pack - detects and analyzes network bottlenecks or broken network linkages and steers traffic to the optimum route based on network conditions, plus it provides an extra layer of protection. The virus throttle feature of the solution slows the propagation of fast spreading virus.
- Server Migration Pack - P2P Edition: Upgrading or replacing your existing server? Effortlessly transition to new servers with automated, accurate and affordable migration of OS, application and data.
- Virtualization Management Software - Get the most out of server virtualization by unifying the management of physical and virtual servers in HP Systems Insight Manager. The Virtual Machine Management Pack plug-in provides central management and control of VMware and Microsoft virtual machines and provides physical host to virtual machine association. The Server Migration Pack plug-in automates the manual task of migrating servers between physical or virtual platforms.
- Workload Management Pack - provides easier management of complex environments, improving overall server utilization and enabling Windows® 2000 customers for the first time to confidently deploy multiple applications on a single multiprocessor ProLiant Server.

Standard Features

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

SmartStart

SmartStart is a tool that simplifies single server setup, providing a rapid way to deploy reliable and consistent server configurations. SmartStart 7.50 and later can now deploy the HP ProLiant BL460c using the I/O port with an attached USB CD-ROM device. To obtain a copy of SmartStart for your blade server order or download your copy from the SmartStart web site. For more information, please visit the SmartStart Web site at <http://www.hp.com/servers/smartstart>.

OS Support

Microsoft Windows 2000 Server
Microsoft Windows 2000 Advanced Server
Microsoft Windows Server 2003, Standard Edition
Microsoft Windows Server 2003 R2, Standard Edition
Microsoft Windows Server 2003, Standard x64 Edition
Microsoft Windows Server 2003 R2, Standard x64 Edition
Microsoft Windows Server 2003, Web Edition
Microsoft Windows Server 2003 R2, Web Edition
Microsoft Windows Server 2003, Enterprise Edition
Microsoft Windows Server 2003 R2, Enterprise Edition
Microsoft Windows Server 2003, Enterprise x64 Edition
Microsoft Windows Server 2003 R2, Enterprise x64 Edition
Red Hat Enterprise Linux 3
Red Hat Enterprise Linux 4
SUSE LINUX Enterprise Server 9
SUSE LINUX Enterprise Server 10
Netware 6.5

NOTE: For a more complete and up-to-date listing of supported OSs and versions, please visit our OS Support Matrix at: <http://www.hp.com/go/supportos>.

NOTE: For an up-to-date listing of the latest drivers available for the ProLiant BL c-Class, please see: <http://www.compaq.com/support/files/server/us/index.html>.

NOTE: For a more complete and up-to-date information on Linux support, please visit HP Linux website at: <http://h18000.www1.hp.com/products/servers/linux/hpLinuxcert.html>.

Supported Software Options

VMware Virtualization Software

Red Hat Enterprise Linux and management bundle for HP BladeSystems

NOTE: For more information on HP's Certified and Supported HP ProLiant Servers, please visit the VMware Server Support Matrix at:

<http://h18004.www1.hp.com/products/servers/software/vmware/hpvmwarecert.html>

NOTE: For a more complete and up-to-date information on Linux for HP BladeSystems support, please visit HP Linux website at:

http://h18000.www1.hp.com/products/quickspecs/12321_div/12321_div.HTML

Standard Features

Intelligent Manageability Integrated Lights-Out 2 Standard Blade Edition (iLO 2)

Virtual KVM (Text and Graphical modes)

Virtual Media (CD ROM, floppy and USB flash drive) Virtual Power Button Control Integrated Remote Console Embedded system health Blade power consumption reading Browser, command line and scripted access

Dedicated LAN Connectivity

Automatic IP Configuration via DHCP/DNS/WINS

Industry Standard RC4, 128-bit Secure Sockets Layer (SSL) and Secure Shell (SSH) Security

IML and iLO Event Logging

Support for 12 user accounts with customizable access

Upgrade to HP ProLiant Essentials Integrated Lights-Out Select Pack

NOTE: Advanced features such as Graphical Remote Console and browser accessible Virtual Floppy/CD-ROM are included with the BL c-Class server.

Availability

Dual-Port Fibre Channel Mezzanine Card for redundant SAN connection

Two hot-plug SAS/SATA hard drive bays and integrated RAID (Smart Array E200i) controller on every server blade (Battery-backed write cache is optional.)

Redundant ROM on each server blade

ECC Memory

Network adapter teaming (network fault tolerance, transmit load balancing, switch-assisted load balancing)

Security

Power-on password

Administrator's password

Integrated Lights-Out 2 has 12 customizable user accounts and SSL encryption

Integrated Lights-Out 2 can be disabled via a Global Setting

Factory Express Portfolio HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSA1000, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services on your specific server model please contact your sales representative or go to <http://www.hp.com/go/factory-express>.

Standard Features

RoHS Compliant

For Resellers in countries/regions with RoHS legislation (see NOTE) (e.g. EU, China, etc.)
The use of the noted material in a solution and subsequent resale of that solution will result in the solution no longer meeting the requirements of RoHS legislation.

NOTE: Directive 2002/95/EC restricts the use of lead, mercury, cadmium, hexavalent chromium, PBBs and PBDEs in electronic products. Countries/regions outside the EU, eg. China, are introducing similar legislation. References to 'RoHS legislation' means requirements of Directive 2002/95/EC or to similar substance restriction legislation enacted by any country/region outside the EU.

Service and Support

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of resellers and service providers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements.

NOTE: Server Blade Limited Warranty includes 3 year Parts, 3 year Labor, 3-year on-site support. This warranty supports the HP ProLiant BL460c and BL480c Server Blades.

NOTE: Server Blade Enclosure Limited Warranty includes 3 year Parts, 3 year Labor, 3-year on-site support.

NOTE: Server Blade Interconnect Limited Warranty includes 1 year Parts, 1 year Labor, 1-year on-site support.

Care Pack services provide a range of life cycle support options that let you choose the service levels that meet your business requirements, from basic to mission-critical.

A full range of HP Care Pack hardware and software services are available including:

- Installation and start up
- Education courses
- Extended onsite hardware coverage hours from same business day 13 hours, 5 day to 24 hours, 7 days call window with options including 4-hour response or 6-hour Call To Repair
- Comprehensive range of software technical support for Microsoft, Linux, ProLiant Essentials and VMware-based IT solutions helping to deliver high level of application availability. Response times range from 30 mins for critical problems to 2 hours.
- System Management, Performance Services and Mission Critical Support Solution

HP has introduced a new building block approach which allows customers to purchase the right coverage at the right time whether purchasing an initial server blade plus enclosure or purchasing additional ProLiant server blades over time. HP will offer two sets of Care Pack services, one designed to support the server blade and one designed to support the enclosure.

HP Care Pack services for HP ProLiant Server Blades cover the server blade and all HP branded hardware options qualified for the server, purchased at the same time or afterwards, internal to the server.

NOTE: HP Care Pack services for the c7000 Enclosure cover the enclosure, power supplies and fans. HP qualified rack options are covered by these services when installed within the same rack. HP Supported Ethernet devices covered include the Ethernet Pass-Through Module, Fibre Channel Pass-Through Module, Cisco Catalyst 3020 Blade Switch and GbE2c Ethernet Blade Switch.

Standard Features

NOTE: For more information regarding the Blade service portfolio visit our worldwide web site on the internet at: <http://h20219.www2.hp.com/services/cache/81725-0-0-225-121.html>

NOTE: For more information on HP Care Pack services, contact any of our worldwide sales offices or resellers or visit our worldwide Web site on the internet at: <http://www.hp.com/hps/carepack>

NOTE: For more complete information on HP Services offerings, customers and resellers, please visit us at: <http://www.hp.com/hps>

NOTE: Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

Dual-core Model

| | | |
|-------------------------|--|---|
| HP ProLiant BL460c 5160 | Processor(s) | (1) Dual-core Intel Xeon 5160 Processor (3.00 GHz, 1333 FSB) |
| DC 2G (1P) | One of the following depending on model | (1) Dual-core Intel Xeon 5150 Processor (2.66 GHz, 1333 FSB) |
| 416656-B21 | | (1) Dual-core Intel Xeon 5140 Processor (2.33 GHz, 1333 FSB) |
| HP ProLiant BL460c 5150 | Cache Memory | (1) Dual-core Intel Xeon 5110 Processor (1.6 GHz, 1066 FSB) |
| DC 2G (1P) | | (1) Dual-core Intel Xeon 5063 Processor (3.2 GHz, MV, 1066 FSB) |
| 416655-B21 | Memory | 2x2MB Level 2 cache memory (5000 Series) |
| HP ProLiant BL460c 5140 | | 1x4MB Level 2 cache memory (5100 Series) |
| DC 2GB (1P) | One of the following depending on model | 8 GB (1 X 4 GB) PC2-5300, FBD DDR2-667 |
| 416654-B21 | | 4 GB (2 X 2 GB) PC2-5300, FBD DDR2-667 |
| HP ProLiant BL460c 5110 | Network Adapter | 2 GB (2 x 1 GB) PC2-5300, FBD DDR2-667 |
| DC 1GB (1P) | | 1 GB (2x512 MB) PC2-5300, FBD DDR2-667 |
| 416653-B21 | Storage Controller | (2) Embedded Dual NC373i Multifunction Gigabit NICs plus (1) additional 10/100 NIC dedicated to iLO 2 Management |
| HP ProLiant BL460c 5063 | | Smart Array E200i Controller with 64MB (optional battery-backed write cache) |
| DC, 2GB (1P) | Hard Drives | No drives included; (2) SFF SAS/SATA drive bays |
| 404664-B21 | Internal Storage | 144GB SAS |
| | | 120GB SATA |
| | Optical Drive | None |
| | Form Factor | Up to 16 half-height blades supported in HP BladeSystem c7000 Enclosure |

Configuration Information - Factory Integrated Models (North America only)

NOTE: For Configure to Order requirements within EMEA region, please consult local Sales Contact.

NOTE: HP does not allow factory integration of options into standard models listed above.

Configure-to-order server blades must start with a CTO Blade.

NOTE: This product offering does not support HP Factory Express Server Configuration Level 1.

NOTE: FIO indicates that this option is a Factory Installable Option.

Step 1: Base Server Blade Configuration (Select a configurable Blade)

| | | |
|--------|---|------------|
| Models | HP ProLiant BL460c CTO Blade (North America) | 404667-B21 |
| | Configurable Model ships with: | |
| | (2) Embedded NC373i Multifunction Gigabit NICs plus (1) additional 10/100 NIC dedicated to iLO 2 Management | |
| | Integrated Smart Array E200i RAID controller | |
| | NOTE: Controller cache module selection is required. Select either the standard 64 MB module or the optional 128 MB module in step 2 below. | |
| | Two small form factor (SFF) SAS/SATA hot plug hard drive bays | |
| | Integrated Lights-Out 2 Standard Blade Edition | |

Step 2: Choose Required Options (one of the following from each list unless otherwise noted):

| | | |
|------------|---|------------|
| Processors | For single processor configuration choose: | |
| | Dual-Core Intel Xeon 5160 (3.0 GHz, 1333FSB) Processor Option Kit, FIO Base | 416660-L21 |
| | NOTE: If 2 processors are desired, select one 416660-L21 and one 416660-B21. | |
| | Dual-Core Intel Xeon 5150 (2.66 GHz 1333 FSB) Processor Option Kit, FIO Base | 416659-L21 |
| | NOTE: If 2 processors are desired, select one 416659-L21 and one 416659-B21. | |
| | Dual-Core Intel Xeon 5140 (2.33 GHz 1333 FSB) Processor Option Kit, FIO Base | 416658-L21 |
| | NOTE: If 2 processors are desired, select one 416658-L21 and one 416658-B21. | |
| | Dual-Core Intel Xeon Processor 5130 (2.00 GHz, 1333 MHz FSB) Processor Option Kit, FIO Base | 419735-L21 |
| | NOTE: If 2 processors are desired, select one 419735-L21 and one 419735-B21. | |
| | Dual-Core Intel Xeon Processor 5120 (1.86 GHz, 1066 MHz FSB) Processor Option Kit, FIO Base | 419734-L21 |
| | NOTE: If 2 processors are desired, select one 419734-L21 and one 419734-B21. | |
| | Dual-Core Intel Xeon 5110 (1.6 GHz, 1066 FSB) Processor Option Kit, FIO Base | 416657-L21 |
| | NOTE: If 2 processors are desired, select one 416657-L21 and one 416657-B21. | |
| | Dual-Core Intel Xeon 5063 (3.2 GHz MV, 1066 FSB) (Mid-Voltage) Processor Option Kit, FIO Base | 409598-L21 |
| | NOTE: If 2 processors are desired, select one 409598-L21 and one 409598-B21. | |
| | Dual-Core Intel Xeon 5050 (3.0 GHz, 667 FSB) Processor Option Kit, FIO Base | 409597-L21 |
| | NOTE: If 2 processors are desired, select one 409597-L21 and one 409597-B21. | |
| Memory | 1 GB FBD PC2-5300 2 x 512 MB Kit | 397409-B21 |

Configuration Information - Factory Integrated Models (North America only)

| | | |
|------------------|--|------------|
| | 2 GB FBD PC2-5300 2 x 1 GB Kit | 397411-B21 |
| | 4 GB FBD PC2-5300 2 x 2 GB Kit | 397413-B21 |
| | 8 GB FBD PC2-5300 2 x 4 GB Kit | 397415-B21 |
| | NOTE: Must be installed in pairs | |
| Controller Cache | 64 MB Cache - FIO Only | 405102-B21 |
| | 128 MB Battery-Backed Cache Enabler | 351580-B21 |
| | NOTE: Supports the Smart Array E200i Controller, Smart Array 641 Controller, and Smart Array 642 Controller. | |

Step 3: Choose Additional Factory Integratable Options

| | | |
|-----------------------|--|------------|
| Fibre Channel Options | Emulex LPe1105 FC Dual Channel 4Gb, PCI-E-to-Fibre Channel Host Bus Adapter | 403621-B21 |
| | Qlogic QMH2462 4Gb FC HBA for HP c-Class BladeSystem | 403619-B21 |
| Communications | HP NC373m PCI Express Dual Port Multifunction Gigabit Server Adapter for c-Class BladeSystem | 406770-B21 |
| | HP NC326m PCI Express Dual Port 1Gb Server Adapter for c-Class BladeSystem | 406771-B21 |
| | NOTE: Supports HP c-Class BladeSystems. | |

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, including server blade enclosures interconnect options and power subsystem options; please see the following QuickSpecs:

HP BladeSystem c-Class Infrastructure QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12517_div/12517_div.HTML

and HP BladeSystem c-Class Interconnect Components QuickSpecs:

http://h18000.www1.hp.com/products/quickspecs/12524_div/12524_div.HTML.

Options

| | | |
|---|--|------------|
| ProLiant Essentials Value Pack Software | ProLiant Essentials Accelerated iSCSI Pack for Embedded Multifunction Gigabit Server Adapters | |
| | ProLiant Essentials Accelerated iSCSI Pack, Single Server License | 407484-B21 |
| | NOTE: For additional ProLiant Accelerated iSCSI Pack License Kits- please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12466_div/12466_div.HTML | |
| | ProLiant Essentials Integrated Lights-Out Select Pack | |
| | ProLiant Essentials Integrated Lights-Out Select Pack, 1 server License | 413119-B21 |
| | ProLiant Essentials Integrated Lights-Out Select Pack 8-server License | 413122-B21 |
| | Featuring: sophisticated remote control and security features for HP BladeSystem servers and ProLiant ML/DL servers in text console environments. NOTE: For additional ProLiant Essentials Integrated Lights-Out Packs please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12362_div/12362_div.HTML | |
| | ProLiant Essentials Intelligent Networking Pack Windows Edition and Linux Edition | |
| | ProLiant Essentials Intelligent Networking Pack - Windows Edition, Single Server License | 372906-B21 |
| | NOTE: For use with a single server. Contains one license with a unique license activation key and documentation. | |
| | ProLiant Essentials Intelligent Networking Pack Linux Edition, Single Server License | 397004-B21 |
| | NOTE: For use with a single server. Contains one license with a unique license activation key and documentation. NOTE: For additional ProLiant Intelligent Networking Pack License Kits-Windows Edition please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12062_div/12062_div.HTML NOTE: For additional ProLiant Intelligent Networking Pack License Kits-Linux Edition please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12327_div/12327_div.HTML | |
| | ProLiant Essentials Server Migration Pack | |
| | ProLiant Essentials Server Migration Pack, Single-Migration License | 375345-B21 |
| | NOTE: Contains one license, enabling 1 server migration, with a unique license activation key and documentation. NOTE: This license allows 1 server to be migrated from a physical server to a virtual machine. Or this license can be used to migrate a virtual machine from one virtualization layer i.e. VMware GSX to a different virtualization layer such as VMware ESX or Microsoft Virtual Server 2005. NOTE: For additional ProLiant Server Migration Pack License Kits please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12328_div/12328_div.HTML | |
| | ProLiant Essentials Server Migration Pack - Physical to ProLiant Edition | |
| | ProLiant Essentials Server Migration Pack - Physical to ProLiant Edition, Single-Migration License | 412978-B21 |

Options

NOTE: For additional ProLiant Server Migration Pack License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12467_div/12467_div.HTML

ProLiant Essentials Workload Management Pack

ProLiant Essentials Workload Management Pack, Single Server License 303284-B21

NOTE: For additional ProLiant Workload Management Pack License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11452_div/11452_div.HTML

ProLiant Essentials Virtual Machine Management Pack

ProLiant Essentials Virtual Machine Management Pack, Single-Server License 372214-B21

NOTE: For use with a single server. Contains one license with a unique license activation key and documentation.

NOTE: For additional ProLiant Virtual Machine Management Pack License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12328_div/12328_div.HTML

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

NOTE: For more information regarding ProLiant Essentials Software, please see the following URL: <http://www.hp.com/servers/proliantessentials>.

| | | |
|------------|---|------------|
| Processors | Dual-Core Intel Xeon 5160 (3.0 GHz MV, 1333 FSB) Processor Option Kit | 416660-B21 |
| | Dual-Core Intel Xeon 5150 (2.66GHz, 1333 FSB) Processor Option Kit | 416659-B21 |
| | Dual-Core Intel Xeon 5140 (2.33 GHz, 1333 FSB) Processor Option Kit | 416658-B21 |
| | Dual-Core Intel Xeon Processor 5130 (2.00 GHz, 1333 FSB) Processor Option Kit | 419735-B21 |
| | Dual-Core Intel Xeon Processor 5120 (1.86 GHz, 1066 FSB) Processor Option Kit | 419734-B21 |
| | Dual-Core Intel Xeon 5110 (1.6 GHz, 1066 FSB) Processor Option Kit | 416657-B21 |
| | Dual-Core Intel Xeon Processor 5063 (3.2 GHz MV, 1066 FSB) (Mid-Voltage) | 409598-B21 |
| | Dual-Core Intel Xeon Processor 5050 (3.0 GHz, 667 FSB) Processor Option Kit | 409597-B21 |

| | | |
|--------|-----------------------------------|------------|
| Memory | 1 GB FBD PC2-5300 2 x 512 MB Kit | 397409-B21 |
| | 2 GB FBD PC2-5300 2 x 1 GB Kit | 397411-B21 |
| | 4 GB FBD PC2-5300 2 x 2 GB Kit | 397413-B21 |
| | 8 GB FBD PC2-5300 2 x 4 GB Kit | 397415-B21 |
| | NOTE: Must be installed in pairs. | |

Options

| | | |
|---|---|------------|
| Hard Drives | Serial Attached SCSI (SAS) SFF Hot Plug | |
| | HP 36GB 3G SAS 10K SFF HDD | 375859-B21 |
| | HP 72GB 3G SAS 10K SFF HDD | 375861-B21 |
| | NOTE: SAS drives have a 3 year warranty. | |
| | NOTE: Please see the SAS Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.HTML (Worldwide) | |
| | SFF SATA Hot Plug | |
| | HP 60GB 1.5G SATA 5.4K SFF HDD | 379306-B21 |
| | NOTE: SATA drives have a 1 year warranty. Please see the SATA Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: http://h18000.www1.hp.com/products/quickspecs/12091_div/12091_div.HTML (Worldwide) | |
| Communications | HP NC373m PCI Express Dual Port Multifunction Gigabit Server Adapter for c-Class BladeSystem | 406770-B21 |
| | HP NC326m PCI Express Dual Port 1Gb Server Adapter for c-Class BladeSystem | 406771-B21 |
| HP ProLiant BL460c - Fibre Channel Adapter | Emulex LPe1105 FC Dual Channel 4Gb, PCI-E-to-Fibre Channel Host Bus Adapter | 403621-B21 |
| | QLogic QMH2462 4Gb FC HBA for HP c-Class BladeSystem | 403619-B21 |
| | NOTE: Supports HP c-Class BladeSystems | |
| Tape Libraries | HP StorageWorks MSL2024 Tape Library | |
| | HP StorageWorks MSL2024 1 Ultrium 960 Drive Library | AG115A |
| | HP StorageWorks MSL2024 1 Ultrium 960 FC Drive Library | AG326A |
| | HP StorageWorks MSL2024 1 Ultrium 448 Drive Library | AG116A |
| | HP StorageWorks MSL2024 2 Ultrium 448 Drive Library | AG117A |
| | HP StorageWorks MSL4048 Tape Library | |
| | HP StorageWorks MSL4048 1 Ultrium 448 Drive Library | AG320A |
| | HP StorageWorks MSL4048 2 Ultrium 448 Drive Library | AG321A |
| | HP StorageWorks MSL4048 1 Ultrium 960 Drive Library | AG322A |
| | HP StorageWorks MSL4048 1 Ultrium 960 FC Drive Library | AG324A |
| | HP StorageWorks MSL4048 2 Ultrium 960 Drive Library | AG323A |
| | HP StorageWorks MSL4048 2 Ultrium 960 FC Drive Library | AG325A |
| | HP StorageWorks MSL6000 Tape Library | |
| | Ultrium 960 technology | |
| | HP StorageWorks MSL6030 1 Ultrium 960 Dr LVDS Library | AD606B |

Options

| | |
|---|--------|
| HP StorageWorks MSL6030 1 Ultrium 960 Dr FC Library | AD608B |
| HP StorageWorks MSL6030 2 Ultrium 960 Dr LVDS Library | AD607B |
| HP StorageWorks MSL6030 2 Ultrium 960 Dr FC Library | AD609B |
| HP StorageWorks MSL6060 2 Ultrium 960 Dr LVDS Library | AD610B |
| HP StorageWorks MSL6060 2 Ultrium 960 Dr FC Library | AD611B |
| Ultrium 460 technology | |
| HP StorageWorks MSL6030 1 Ultrium 460 Dr LVDS Library | AD598B |
| HP StorageWorks MSL6030 1 Ultrium 460 Dr FC Library | AD600B |
| HP StorageWorks MSL6030 2 Ultrium 460 Dr LVDS Library | AD599B |
| HP StorageWorks MSL6030 2 Ultrium 460 Dr FC Library | AD601B |
| HP StorageWorks MSL6060 2 Ultrium 460 Dr LVDS Library | AD603B |
| HP StorageWorks MSL6060 2 Ultrium 460 Dr FC Library | AD604B |

NOTE: Please reference the MSL2024, MSL4048 and MSL6000 Tape Library QuickSpecs at <http://www.hp.com/go/automation> for additional information needed to create a complete solution; reference current compatibility information at <http://www.hp.com/go/ebs>

| | |
|---|--------|
| HP StorageWorks Virtual Library Systems | |
| HP StorageWorks 6105 Virtual Library System | AF728A |
| HP StorageWorks 6109 Virtual Library System | AG167A |
| HP StorageWorks 6510 Virtual Library System | AF729A |
| HP StorageWorks 6518 Virtual Library System | AG168A |
| HP StorageWorks 6840 Virtual Library System | AG051A |
| HP StorageWorks 6870 Virtual Library System | AG169A |

NOTE: Please reference the VLS Tape Libraries QuickSpecs at <http://www.hp.com/go/automation> for additional information needed to create a complete solution. Reference current compatibility information at <http://www.hp.com/go/ebs>

| | | |
|--|--|------------|
| HP StorageWorks Modular Smart Array 1000 | HP StorageWorks Modular Smart Array 1000 | 201723-B22 |
| | NOTE: Please see the Modular Smart Array 1000 QuickSpecs for additional options and configuration information at http://h18000.www1.hp.com/products/quickspecs/11033_div/11033_div.HTML (Worldwide) | |

Options

Cluster Options

NOTE: For configuration/certification options for the HP Parallel Database Cluster for Oracle RAC please go to: <http://www.hp.com/solutions/highavailability/oracle>

NOTE: For additional information regarding the HP ProLiant Cluster for HA/F500 please see the following QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/10232_div/10232_div.html (Worldwide)

ProLiant Cluster Starter Kit 364023-B21

NOTE: For additional information regarding the ProLiant Cluster Starter Kit please see the following QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11935_div/11935_div.html (Worldwide)

HP HA/F200 for Entry SAN Cluster 364026-B22

HP HA/F200 for Entry SAN Cluster (Japan) 364026-292

NOTE: For additional information regarding the ProLiant Cluster for Entry Level SAN please see the following QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11932_div/11932_div.html (Worldwide)

ProLiant Cluster HA/F500 for the Enterprise SAN 364024-B21

NOTE: For additional information regarding the ProLiant Cluster HA/F500 for Enterprise SAN please see the following QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11933_div/11933_div.html (Worldwide)

HP Serviceguard for Linux, A.11.16 (single license version- Red Hat EL 3&4, SUSE SLES9) 307754-B26

HP Serviceguard for Linux ProLiant Cluster, A.11.16 (2 license version - Red Hat EL 3&4, SUSE SLES9) 305199-B26

HP Serviceguard for Linux and Red Hat Global File System - 1 year subscription T2798AA#001

HP Serviceguard for Linux and Red Hat Global File System - 3 years subscription T2798AA#003

NOTE: For additional information regarding the HP Serviceguard for Linux license, please see the following QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11518_div/11518_div.html (Worldwide)

USB Options

HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver) DC172B

USB 1.44-MB External Diskette Drive (Carbonite) DC141B

512MB HP DriveKey II ED516AA

USB 2.0 4-port Hub DG954A

2004 Standard Keyboard USB DT528A#xxx

Options

| | | |
|--|--|--------|
| Rack Options for Rack 10000 G2 Series | HP 10642 G2 Front Door ALL | AF009A |
| | HP 10636 G2 Front Door ALL | AF019A |
| | 10642 G2 (42U) Side Panels (set of two) (Graphite Metallic) | AF054A |
| | 10636 G2 (36U) Side Panels (set of two) (Graphite Metallic) | AF056A |
| | 10636 G2 Rear Extension Kit | AF060A |
| | 600mm G2 Stabilizer Option Kit (Graphite) | AF062A |
| | 600mm G2, Heavy Duty Stabilizer Option Kit (Graphite) | AF064A |
| | 800mm G2 Stabilizer Option Kit (Graphite) | AF066A |
| | 800mm G2, Heavy Duty Stabilizer Option Kit (Graphite) | AF068A |
| | NOTE: Supports 10000 G2 Series only. | |
| | HP 10000 G2 Rack Grounding Kit | AF074A |
| | 600W 10K G2 Rack Tie Down | AF076A |
| | NOTE: For additional information regarding Rack Options, please see the following URL: http://www.hp.com/go/rackandpower . | |
| | | |

| | | |
|-----------------------|--|--------|
| HP KVM Switch Options | HP BladeSystem Cat 5 KVM Interface Adapter | AF100A |
| | NOTE: Cat5e cables are required to connect Interface Adapters to Consoles Switches. Cat52 cables can be found at the following URL: http://www.hp.com/go/kvm | |
| | NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: http://www.hp.com/go/kvm | |

| | | |
|---|---|--------|
| Service and Support Offerings (HP Care Pack Services) | NOTE: The HP Care Pack service part numbers below for ProLiant BL c-Class server blades, cover the server blade and all HP branded hardware options qualified for the server, purchased at the same time or afterwards, internal to the server. | |
| | Hardware Services On-site Service | |
| | 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic | UE458E |
| | 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic | UE459E |
| | 6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic | UE460E |
| | Support Plus 24 | |
| | Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic | UE473E |
| | NOTE: HP Care Pack services for the c7000 Enclosure cover the enclosure, power supplies and fans. HP qualified rack options are covered by these services when installed within the same rack. HP Supported Ethernet devices covered include the Ethernet Pass-Through Module, Fibre Channel Pass-Through Module, Cisco Catalyst 3020 Blade Switch and GbE2c Ethernet Blade Switch. | |
| | Hardware Services On-site Service | |
| | Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic | UE477E |

Options

| | |
|---|--------|
| 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic | UE478E |
| 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic | UE479E |
| 6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic | UE480E |
| Hardware Installation, Electronic | U5988E |
| NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 12 Port SAN Switch & 4Gb, 12 Port SAN Switch Upgrade LTU. | |
| Hardware Services On-site Service | |
| Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic | UC007E |
| 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic | UC008E |
| 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic | UC009E |
| 6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic | UC023E |
| Hardware Installation, Electronic | U5988E |
| NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch. | |
| Hardware Services On-site Service | |
| Next Business Day On-site Service, 5-Day x 9-Hour Coverage, 3 Years, Electronic | UE436E |
| 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic | UE437E |
| 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic | UE438E |
| 6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic | UE439E |
| Hardware Installation, Electronic | U5988E |
| NOTE: The HP Care Pack service part numbers below covers the HP 4Gb, 24 Port SAN Switch Power Pack. | |
| Hardware Services On-site Service | |
| Support Plus | |
| Onsite HW support, 8am-9pm, M-F, 4hr response and SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays, Electronic | UE728E |
| Support Plus 24 | |
| Onsite HW support 24x7, 4hr response and SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic | UE729E |
| Installation & Start-up Services | |
| HP Installation & Startup Service for HP BladeSystem Infrastructure, Electronic | UE602E |
| NOTE: Provides for an integrated hardware and software implementation that includes remote service planning, onsite deployment of hardware and software, installation verification testing and customer orientation. Hardware deployment covers the installation of a single BladeSystem enclosure that include server blades (up to 16), Ethernet network interconnect, and power options. Software deployment covers the installation and configuration of HP BladeSystem Essential Insight Control Datacenter | |

Options

| | |
|---|--------|
| Edition which includes Systems Insight Manager (SIM), HP Rapid Deployment Pack (RDP), Vulnerability and Patch Management Pack (VPM) and Performance Management Pack (PMP) and deploy up to two editions of either Windows or Linux, using scripted operating system installation software. | |
| ProLiant BL c-Class Blade Server Hardware Installation, Electronic | UE493E |
| ProLiant BL c-Class Enclosure and Server Blade Hardware Installation, Electronic | UE494E |
| Provides for the Installation and Start-up of ProLiant Essentials Rapid Deployment Pack, Electronic | U5683E |
| NOTE: Provides installation on a Customer supplied server designated as a Deployment Server. Includes the deployment of a single server. This new server will be deployed using either one of the pre-configured scripts or an image. In addition, the service will provide for the capture and storage of the configuration of the newly deployed server and orientation on product usage. To be delivered during standard office ours, standard office days. | |
| Provides for the Installation and Start-up of Rapid Deployment Pack Implementation of Rapid Deployment Pack (Basic) (Electronic) | UA042E |
| HP ProLiant Essentials Vulnerability and Patch Management Pack Installation and Startup Service, Electronic | UC929E |
| NOTE: Service coverage: onsite installation of the Vulnerability and Patch Management (VPM) software on a customer designated server, configuration of the VPM software to acquire security patches, enabling the VPM software to scan up to five (5) systems, applying the security patches to the designated servers, generating a report from VPM that shows the vulnerability assessment results, and providing customer with an orientation to the software. | |
| Provides for the Installation and Start-up of System Insight Manager (Electronic) | UA041E |
| Provides for the Installation and Start-up of System Insight Manager Agents (Electronic) | UA040E |
| NOTE: For more information, customer/resellers can contact http://www.hp.com/hps/carepack/services/ | |
| Software Operating Environment Care Packs | |
| Microsoft Software Operating Environment Software Telephone 9x5 - 3 incident (Electronic) | U8169E |
| Red Hat Software Operating Environment Software Telephone 9x5 - 10 incident (Electronic) | U3402E |
| SUSE Software Operating Environment Software Telephone 9x5 - 3 incident (Electronic) | U9615E |
| ProLiant Essentials Operating Environment, - 5 Day, 9x5,1 year, 3 incident (Electronic) | U8222E |
| ProLiant Essentials Operating Environment, - 5 Day, 24x7,1 year, 3 incident (Electronic) | U8301E |
| ProLiant Essentials Operating Environment, - 5 Day, 9x5,1 year, 10 incident | UE006E |
| ProLiant Essentials Operating Environment, - 5 Day, 24x7,1 year, 10 incident | UE116E |
| ProLiant Essentials Operating Environment, - 5 Day, 9x5,1 year, 25 incident | UE117E |
| ProLiant Essentials Operating Environment, - 5 Day, 24x7,1 year, 25 incident | UE118E |
| ProLiant Essentials Operating Environment, - 5 Day, 9x5,1 year, 50 incident | UE119E |
| ProLiant Essentials Operating Environment, - 5 Day, 24x7,1 year,50 incident | UE120E |

Options

| | |
|---|--------|
| ProLiant Essentials Operating Environment, - 5 Day, 9x5, 1 year, unlimited SW Tech Support | UE121E |
| ProLiant Essentials Operating Environment, - 5 Day, 24x7, 1 year, unlimited SW Tech Support | UE452E |
| ProLiant Essentials Operating Environment, - 5 Day, 9x5, 3 year, unlimited SW Tech Support | UE453E |
| ProLiant Essentials Operating Environment, - 5 Day, 24x7, 3 year, unlimited SW Tech Support | UE454E |

NOTE: For more information, customer/resellers can contact
<http://www.hp.com/hps/carepack/services/>

Memory

DIMM installation guidelines:

1. All DIMMs must be PC2-5300 Fully Buffered DIMMs running at 667 MHz.
2. Both DIMM slots in a memory bank must be populated.
3. Banks must be populated in sequential alphabetic order, starting with bank A.
4. Both DIMMs in a memory bank must be identical. Install identical DIMMs as pairs only, starting with DIMM socket 1, bank A.
5. Multiple advanced memory protection (AMP) modes are supported, based on FBDIMM population and RBSU selection. The server blade defaults to Advanced ECC

HP ProLiant BL460c Server Blade (1P Model)

Standard Memory

1024-MB (2 x 512 MB) or 2048 MB (2 x 1024 MB) (depending on model)of PC2-5300, FBD DDR2-667 ECC DIMMs

Standard Memory Plus Optional Memory

Up to 2560 MB or 26624 MB (depending on model) of PC2-5300, FBD DDR2-667 ECC DIMMs. Memory is available with the installation of optional PC2-5300, FBD DDR2-667 DIMM memory expansion kits.

Standard Memory Replaced with Optional Memory

Up to 32768-MB of Pc2-5300, FBD DDR2-667 ECC DIMMs. Memory is available with the removal of standard memory and the installation of optional PC2-5300, FBD DDR2-667 DIMM memory expansion kits.

| Memory | | Slot | | | | | | | |
|----------|----------|---------|---------|---------|---------|---------|---------|---------|---------|
| | | 1A | 2C | 3A | 4C | 5B | 6D | 7B | 8D |
| Standard | 1024 MB | 512 MB | Empty | 512 MB | Empty | Empty | Empty | Empty | Empty |
| Standard | 2048 MB | 1024 MB | Empty | 1024 MB | Empty | Empty | Empty | Empty | Empty |
| Optional | 25600 MB | 512 MB | 4096 MB | 512 MB | 4096 MB | 4096 MB | 4096 MB | 4096 MB | 4096 MB |
| Optional | 26624 MB | 1024 MB | 4096 MB | 1024 MB | 4096 MB | 4096 MB | 4096 MB | 4096 MB | 4096 MB |
| Maximum | 32768 MB | 4096 MB | 4096 MB | 4096 MB | 4096 MB | 4096 MB | 4096 MB | 4096 MB | 4096 MB |

Following are memory options available from HP:


- 1GB FBD PC2-5300 2X512MB Kit
 - 2GB FBD PC2-5300 2X1GB Kit
 - 4GB FBD PC2-5300 2x2GB Kit
 - 8GB FBD PC2-5300 2x4GB Kit
- 397409-B21

397411-B21

397413-B21

397415-B21

Storage

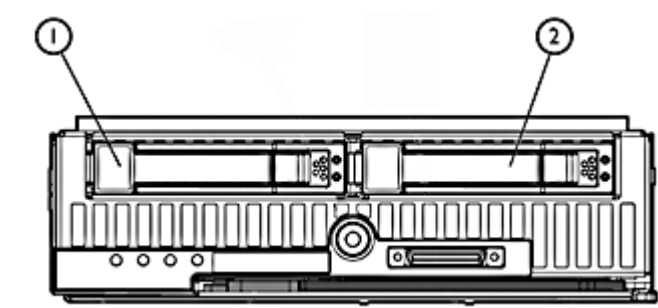

1-2 2 x SFF SAS or SATA Hot Plug Hard Drives

Hard Drives

SAS Hard Drive

| | Quantity Supported | Position Supported | Controller |
|----------------------|-----------------------|-----------------------|------------------------------|
| 36 GB 10,000 rpm SAS | 2 | 1-2 | Smart Array E200i Controller |
| 72 GB 10,000 rpm SAS | | | |

Serial-ATA (SATA) Hard Drive

| | Quantity Supported | Position Supported | Controller |
|----------------------|-----------------------|-----------------------|------------------------------|
| 60 GB 5,400 rpm SATA | 2 | 1-2 | Smart Array E200i Controller |

External Storage

| | Quantity Supported | Position Supported | Host Controller or Adapter |
|--------------------------|--|-----------------------|--|
| Modular Smart Array 1000 | Please see the Modular Smart Array 1000 QuickSpecs below to determine configuration requirements | External | Please see the Modular Smart Array 1000 QuickSpecs (URL below) for the latest list of supported HBAs |

Modular Smart Array 1000:

http://h18000.www1.hp.com/products/quickspecs/11033_div/11033_div.HTML (Worldwide)

HP StorageWorks 1500cs Modular Smart Array:

http://h18000.www1.hp.com/products/quickspecs/11945_div/11945_div.html (Worldwide)

HP StorageWorks 1510i Modular Smart Array:

http://h18000.www1.hp.com/products/quickspecs/12230_div/12230_div.html (Worldwide)

| | | | |
|-----------------------|--|----------|--|
| XP Disk Array Systems | Please see the XP Disk Array Systems QuickSpecs below to | External | Please see the XP Disk Array Systems Quick Specs for the latest list of supported HBAs |
|-----------------------|--|----------|--|



Storage

| | | | |
|--|---|----------|--|
| | determine configuration requirements | | |
| HP StorageWorks XP10000 Disk Array: http://h18006.www1.hp.com/products/storageworks/xp10000/index.html (Worldwide) | | | |
| Enterprise Virtual Array Systems | Please see the XP Disk Array Systems QuickSpecs below to determine configuration requirements | External | Please see the XP Disk Array Systems Quick Specs for the latest list of supported HBAs |
| HP StorageWorks Enterprise Virtual Array Family http://h18006.www1.hp.com/products/quickspecs/12408_div/12408_div.html (Worldwide) | | | |

Tape Libraries

NOTE: For complete listing of tape library compatibility see <http://www.hp.com/go/ebs>.

| | Quantity Supported | Position Supported | Controller |
|---|--|-----------------------|--|
| HP StorageWorks Tape Libraries | Please reference the relevant MSL or Tape Library QuickSpecs to determine configuration requirements | External | Please consult the EBS connectivity matrix at http://www.hp.com/go/ebs for detailed connectivity information. |
| MSL2024 (Ultrium 448 and 960-based) | | | |
| MSL4048 (Ultrium 448 and 960-based) | | | |
| MSL6000 (Ultrium 960 and 460-based) | | | |
| MSL6000 (SDLT 600-based) | | | |
| HP StorageWorks Virtual Library Systems | Please reference the VLS QuickSpecs to determine configuration requirements | External | Please consult the EBS connectivity matrix at http://www.hp.com/go/ebs for detailed connectivity information. |
| 6105 VLS | | | |
| 6109 VLS | | | |
| 6510 VLS | | | |
| 6518 VLS | | | |
| 6840 VLS | | | |
| 6870 VLS | | | |

Power Specifications

NOTE: To review maximum system power ratings for facilities planning purposes use the Active Answers Power Calculator which is available via the online tool located at URL:

<http://h30099.www3.hp.com/configurator/calc/Power%20Calculator%20Catalog.xls>

Technical Specifications

HP ProLiant BL460c Server Blade

| | | |
|---------------------|------------------------------|--------------------------------|
| Dimensions | Height | 2.207in (5.61cm) |
| | Depth | 20.058in (50.95cm) |
| | Width | 7.154 in (18.17cm) |
| Weight | Maximum | 14.20 lb (6.44kg) |
| Temperature Range* | Operating | 10°C to 35°C (50°F to 95°F) |
| | Non-Operating | -40°C to 60°C (-40°F to 140°F) |
| | Storage | -20°C to 60°C (-4 to 140°C) |
| | Maximum Wet Bulb Temperature | -30°C (86°F) |
| | Operating | 10% to 90% |
| Relative Humidity** | Shipping | 10% to 90% |
| | Storage | 10% to 95% |

*NOTE: All temperature ratings shown are for sea level. An altitude derating of 1°C per 304.8 m (1.8°F per 1,000 ft) to 3048 m (10,000 ft) is applicable. No direct sunlight allowed. Upper operating limit is 3,048m (10,000 ft) or 70 Kpa/10.1 psia. Upper non-operating limit is 9,144 m (30,000 ft) or 30.3 KPa/4.4 psia.

**NOTE: Storage maximum humidity of 95% is based on a maximum temperature of 45°C (113°F). Altitude maximum for storage corresponds to a pressure minimum of 70 KPa.

| | | |
|---------------------------------|--------------------------------|--|
| Smart Array E200i Controller | Disk Drive and Enclosure | 3G SAS (Serial Attached SCSI) |
| | Interface | 1.5G SATA (Serial Advanced Technology Attachment) |
| | SAS Connectors | 2 internal (SFF8484) x4 wide port connectors |
| | Cache Memory Speed | DDR-1/266 MHz provides up to 4.2 GB/s maximum bandwidth. |
| | Server Interface | x4 2.5G PCIe provides 2GB/s maximum bandwidth. |
| | SAS Speed | x8 3G SAS provides 2.4GB/s maximum bandwidth. |
| | Cache Memory | 40-bit 64MB or 128MB cache: ECC protection, battery-backed, and transportable |
| | Logical Drives Supported | Up to 32 logical volumes |
| | Maximum Logical Drive Capacity | 144GB (2 x 72GB) |
| | Host Memory Addressing | 64-bit, supporting greater than 4GB server memory space |
| | RAID Support | RAID 5 (Distributed Data Guarding) RAID 1+0 (Striping & Mirroring) RAID 0 (Striping) |
| | Upgradeable Firmware | Upgradeable Firmware |

Technical Specifications

| | | | |
|--|--|------------------------------|--|
| Dual NC373m Multifunction Gigabit NICs | Network Interface | 1000Base-T | |
| | Compatibility | IEEE 802.3ab 1000Base-T | |
| | Data Transfer Method | PCI Express, four lanes (x4) | |
| | Network Transfer Rate (Theoretical Maximum Values) | 1000Base-TX (Full-Duplex) | 2000 Mb/s |
| | Connector | RJ-45 | (via Interconnect switch or pass thru module) |
| | Cable Support | 1000 Base-TX | Category 5 UTP up to 328 ft (100 m) (via Interconnect switch or pass thru module) |
| <hr/> | | | |
| Dual NC326m Multifunction Gigabit NICs | Network Interface | 1000Base-T | |
| | Compatibility | IEEE 802.3ab 1000Base-T | |
| | Data Transfer Method | PCI Express, four lanes (x4) | |
| | Network Transfer Rate (Theoretical Maximum Values) | 1000Base-TX (Full-Duplex) | 2000 Mb/s |
| | Connector | RJ-45 | (via Interconnect switch or pass thru module) |
| | Cable Support | 1000 Base-TX | Category 5 UTP up to 328 ft (100 m) (via Interconnect switch or pass thru module) |
| <hr/> | | | |

© Copyright 2006 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.