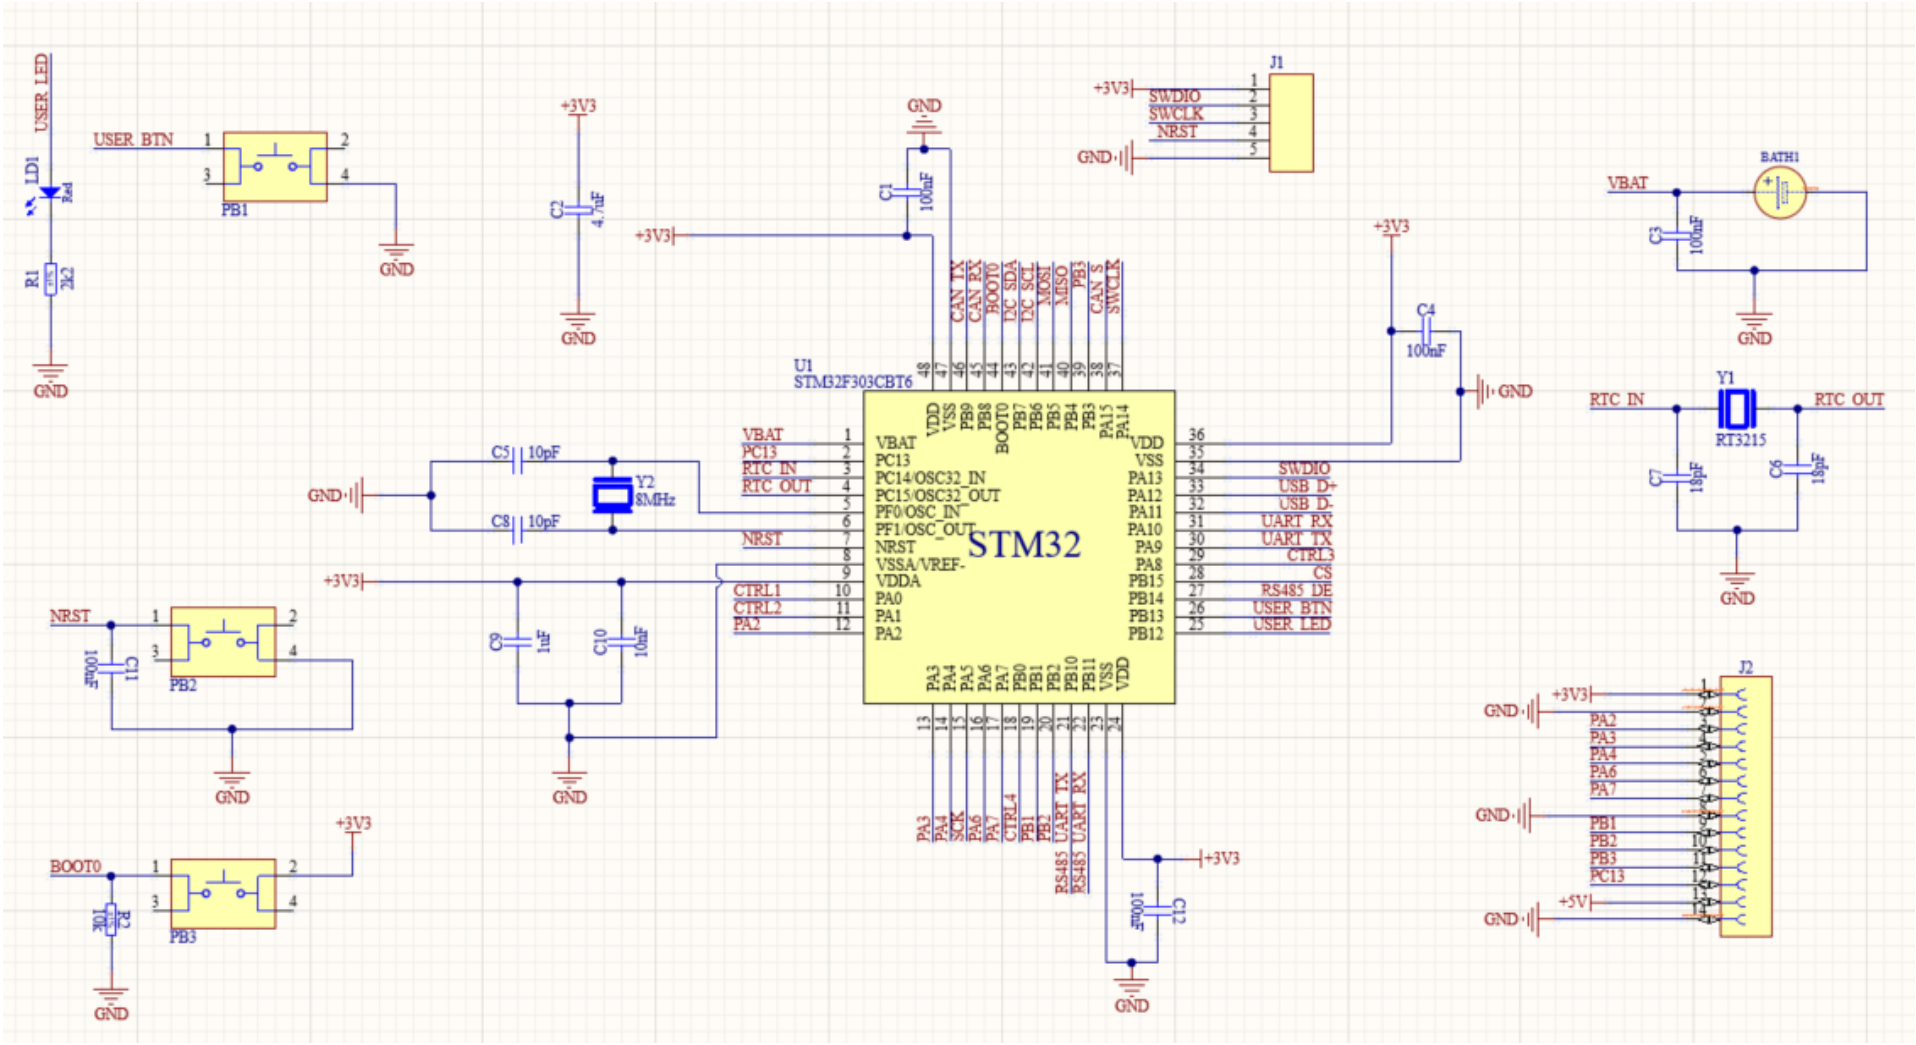

USER LED
LD1
Red
R1
2k2
GND
USER BTN
PB1
+3V3
C2
4.7uF
C1
100nF
J1
SWDIO
SWCLK
NRST
U1
STM32F303CBT6
STM32
VBAT
PC13
RTC_IN
RTC_OUT
NRST
CTRL1
CTRL2
PA2
SWDIO
USB D+
USB D-
UART RX
UART TX
CTRL3
CS
RS485 DE
USER BTN
USER LED
C4
100nF
BATH1
C3
100nF
Y1
RT3215
C7
18pF
C6
18pF
C5
10pF
C8
10pF
Y2
8MHz
C9
1uF
C10
10uF
C11
100nF
C12
100nF
BOOT0
R2
10K
PB3
PB2
J2
PA2
PA3
PA4
PA6
PA7
PB1
PB2
PB3
PC13
+5V