



Pump Performance Datasheet

Customer	: SERTECPET	Quote number	: 2414687
Customer reference	: Ings. Juan Guerrero/ Víctor Nole	Size	: TJ12000
Item number	: TJ12000 64stg	Stages	: 64
Service	: Reinyeccion de Agua	Based on curve number	: TJ12000
Quantity	: 1	Date last saved	: 14 Feb 2026 3:18 PM
Operating Conditions		Liquid	
Flow, rated	: 11,772.0 USbl/day	Liquid type	: User Defined
Differential head / pressure, rated (requested)	: 2,503.0 psi	Additional liquid description	: Water Produced
Differential head / pressure, rated (actual)	: 2,504.9 psi	Solids diameter, max	: 0.00 in
Discharge pressure (actual)	: 2,642.9 psi	Solids concentration, by volume	: 0.00 %
Suction pressure, rated / max	: 138.0 / 138.0 psi.g	Temperature, max	: 140.0 deg F
NPSH available, rated	: Ample	Fluid density, rated / max	: 1.000 / 1.030 SG
Site Supply Frequency	: 60 Hz	Viscosity, rated	: 1.00 cP
Performance		Vapor pressure, rated	: 0.00 psi.a
Speed, rated	: 3553 rpm	Material	
Impeller diameter, rated	: 5.12 in	Material selected	: Standard
Impeller diameter, maximum	: 5.12 in	Pressure Data	
Impeller diameter, minimum	: 5.12 in	Maximum working pressure	: 3,205.7 psi.g
Efficiency	: 79.37 %	Maximum allowable working pressure	: N/A
NPSH required / margin required	: 21.51 / 3.00 ft	Maximum allowable suction pressure	: N/A
Ns (imp. eye flow) / Nss (imp. eye flow)	: 2,394 / 6,333 US Units	Hydrostatic test pressure	: 4,808.6 psi.g
MCSF	: 5,278.7 USbl/day	Driver & Power Data (@Max density)	
Head, maximum, rated diameter	: 2,978.4 psi	Driver sizing specification	: Rated power
Head rise to shutoff	: 17.95 %	Margin over specification	: 0.00 %
Flow, best eff. point	: 12,684.5 USbl/day	Service factor	: 1.00
Flow ratio, rated / BEP	: 92.81 %	Power, hydraulic	: 517 hp
Diameter ratio (rated / max)	: 100.00 %	Power, rated	: 651 hp
Head ratio (rated dia / max dia)	: 100.00 %	Power, maximum, rated diameter	: 775 hp
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00	Minimum recommended motor rating	: 800 hp / 597 kW
Selection status	: Acceptable		

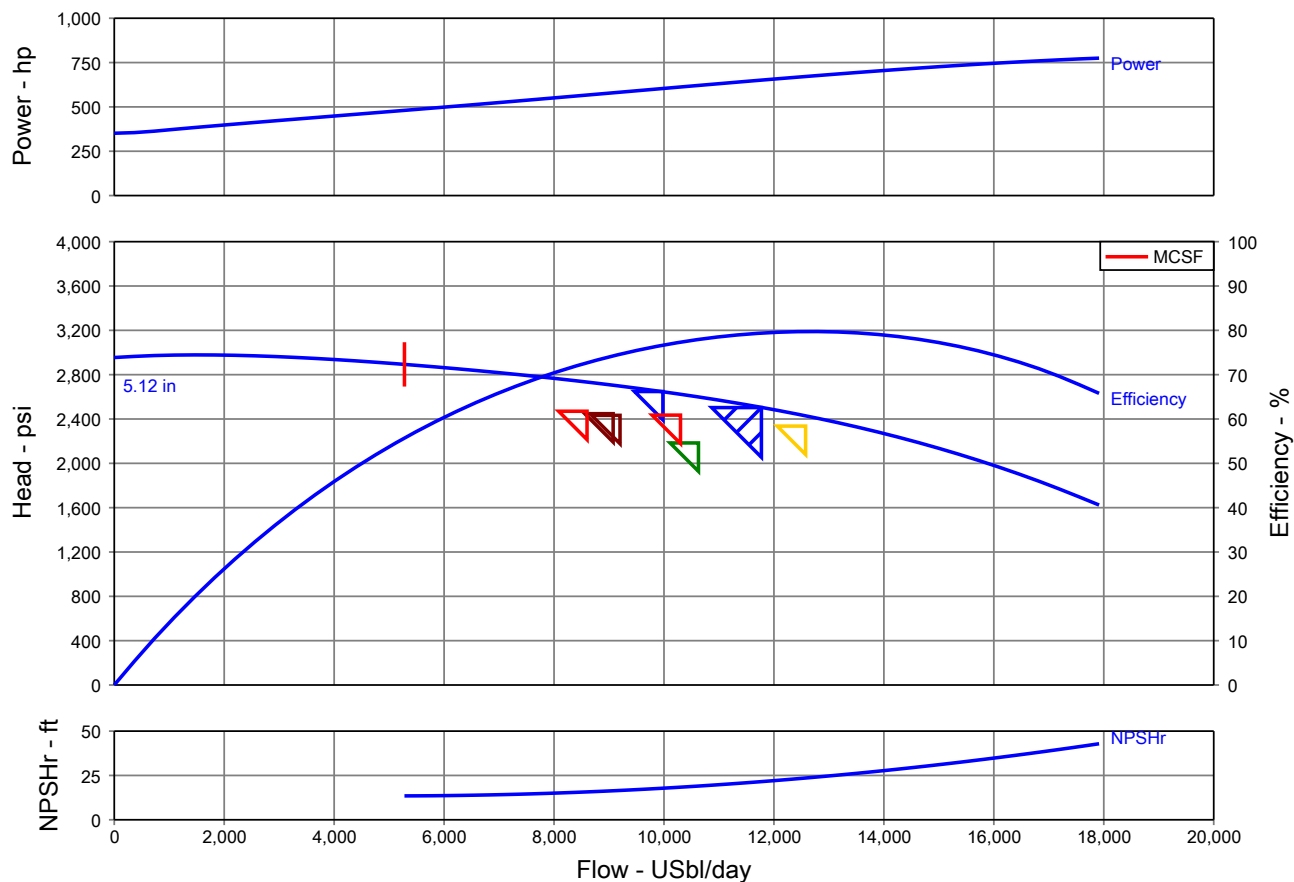

Multi-Speed Performance Curve

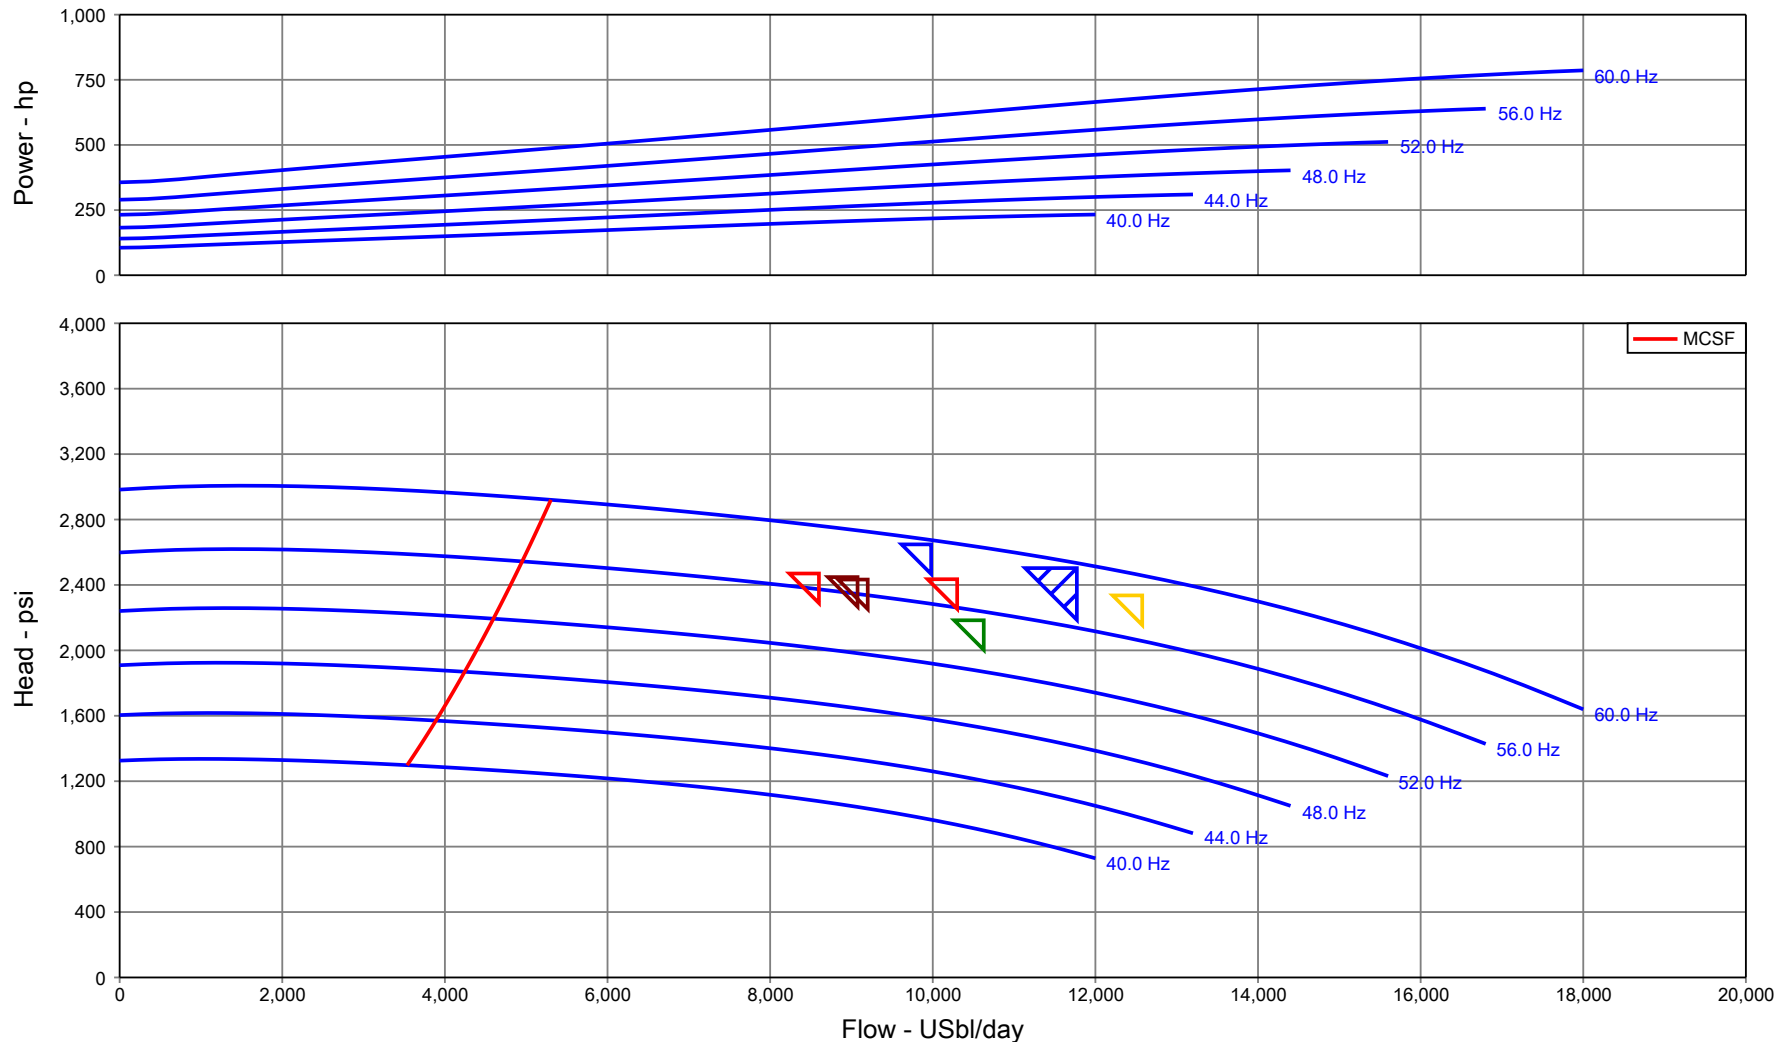


Customer	: SERTECPET	Stages	: 64	Nominal speed	: 3570 rpm
Customer reference	: Ings. Juan Guerrero/ Victor Nole	Based on curve number	: TJ12000	Flow, rated	: 11,772.0 USbl/day
Item number	: TJ12000 64stg	Efficiency	: 79.37 %	Differential head / pressure, rated	: 2,503.0 psi
Service	: Reinyeccion de Agua	Power, rated	: 651 hp	Speed, rated	: 3553 rpm
Quantity	: 1	NPSH required	: 21.51 ft	Impeller diameter, rated	: 5.12 in
Quote number	: 2414687	Site Supply Frequency	: 60 Hz	Fluid density, rated / max	: 1.000 / 1.030 SG
Date last saved	: 14 Feb 2026 3:18 PM			Viscosity, rated	: 1.00 cP
Size	: TJ12000			Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00

Multiple Conditions Datasheet

Customer : SERTECPET		Quantity : 1				Size : TJ12000			
Customer reference : Ings. Juan Guerrero/ Victor Nole		Quote number : 2414687				Stages : 64			
Item number : TJ12000 64stg		Date last saved : 14 Feb 2026 3:18 PM				Speed, rated : 3553 rpm			
Service : Reinyeccion de Agua									
Condition #		1	2	3	4	5	6	7	8
Description		HPS-12	HPS-15	HPS-14	HPS-11	HPS-10	HPS-06	HPS-05	HPS-04
Temperature, max	deg F	140.0	140.0	140.0	140.0	140.0	140.0	140.0	140.0
Fluid density, rated / max	SG	1.000 / 1.030	1.000 / 1.030	1.000 / 1.030	1.000 / 1.030	1.000 / 1.030	1.000 / 1.030	1.000 / 1.030	1.000 / 1.030
Viscosity, rated	cP	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Vapor pressure, rated		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Primary condition		☉	○	○	○	○	○	○	○
Size		TJ12000							
Stages		64							
Impeller diameter, rated	in	5.12							
Flow, rated	USbl/day	11,772.0	9,075.0	8,600.0	12,576.0	10,627.0	9,980.0	9,200.0	10,300.0
Head, rated (requested)	psi	2,503.0	2,448.0	2,470.0	2,336.0	2,184.0	2,648.0	2,433.0	2,435.0
Head, rated (actual)	psi	2,504.9	2,450.1	2,472.3	2,338.0	2,185.7	2,649.2	2,435.9	2,437.2
Suction pressure, rated / max	psi.g	138.0 / 138.0	127.0 / 127.0	110.0 / 110.0	140.0 / 140.0	70.00 / 70.00	14.00 / 14.00	127.0 / 127.0	148.0 / 148.0
NPSH available, rated	ft	Ample	Ample	Ample	Ample	Ample	Ample	Ample	Ample
Speed, rated	rpm	3553	3398	3394	3500	3300	3555	3394	3441
Selection status		Acceptable	Acceptable	Acceptable	Acceptable	Acceptable	Acceptable	Acceptable	Acceptable
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]		1.00 / 1.00 / 1.00 / 1.00	1.00 / 1.00 / 1.00 / 1.00	1.00 / 1.00 / 1.00 / 1.00	1.00 / 1.00 / 1.00 / 1.00	1.00 / 1.00 / 1.00 / 1.00	1.00 / 1.00 / 1.00 / 1.00	1.00 / 1.00 / 1.00 / 1.00	1.00 / 1.00 / 1.00 / 1.00
Efficiency	%	79.37	75.42	74.01	79.73	79.07	76.63	75.80	77.96
NPSH required	ft	21.51	15.53	14.83	23.36	17.90	17.81	15.70	17.85
Submergence	ft	-	-	-	-	-	-	-	-
Power, rated	hp	651	517	503	646	515	605	518	564

Multiple Conditions Curve

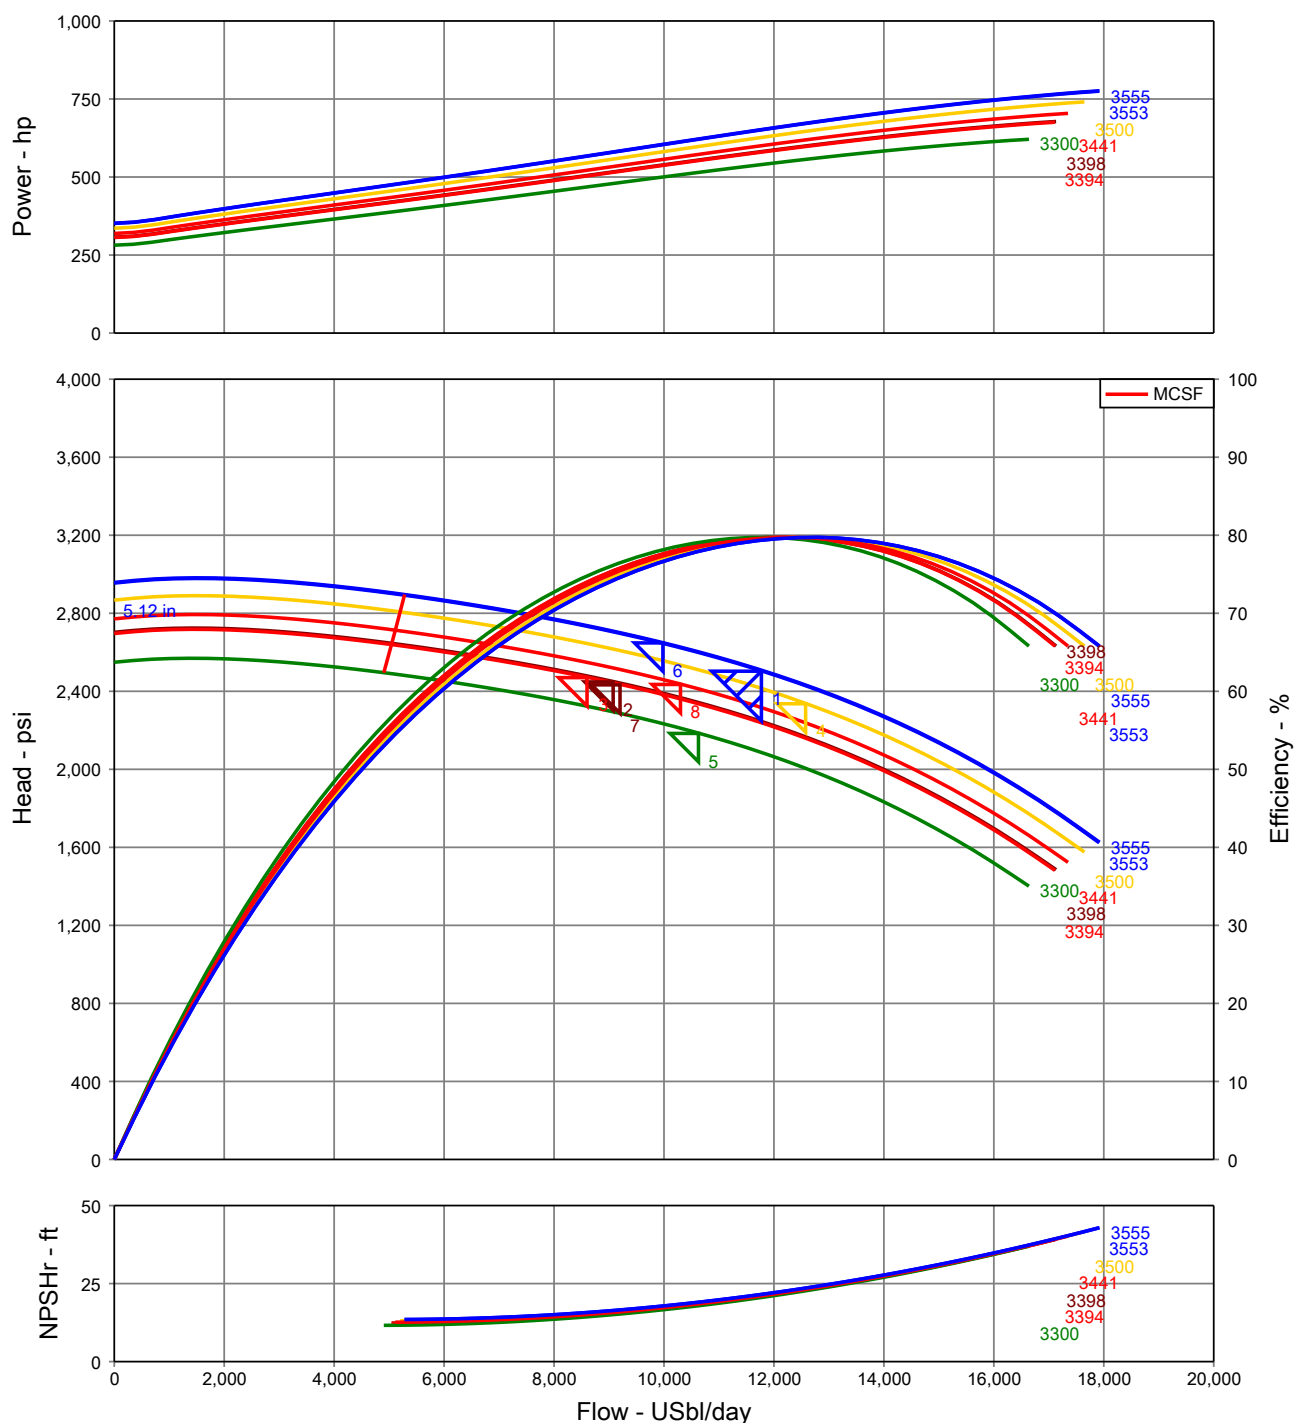

Customer : SERTECPET
 Customer reference : Ings. Juan Guerrero/ Victor Nole
 Item number : TJ12000 64stg
 Service : Reinyeccion de Agua
 Quantity : 1
 Quote number : 2414687
 Date last saved : 14 Feb 2026 3:18 PM

Flow, rated : 11,772.0 USbl/day
 Differential head / pressure, rated : 2,503.0 psi
 Fluid density, rated / max : 1.000 / 1.030 SG

Size : TJ12000
 Stages : 64
 Speed, rated : 3553 rpm
 Based on curve number : TJ12000
 Efficiency : 79.37 %
 Power, rated : 651 hp
 NPSH required : 21.51 ft

Viscosity : 1.00 cP
 Cq/Ch/Ce/Cn : 1.00 / 1.00 / 1.00 / 1.00
 [ANSI/HI 9.6.7-2010]
 Submergence