



Pump Performance Datasheet

Customer	: SERTECPET	Quote number	: 2414687
Customer reference	: Ings. Juan Guerrero/ Víctor Nole	Size	: HC12500
Item number	: HC12500 61stg	Stages	: 61
Service	: Reinyeccion de Agua	Based on curve number	: HC12500
Quantity	: 1	Date last saved	: 14 Feb 2026 3:34 PM

Operating Conditions		Liquid	
Flow, rated	: 10,800.0 USbl/day	Liquid type	: User Defined
Differential head / pressure, rated (requested)	: 2,227.0 psi	Additional liquid description	: Water Produced
Differential head / pressure, rated (actual)	: 2,227.7 psi	Solids diameter, max	: 0.00 in
Discharge pressure (actual)	: 2,300.7 psi	Solids concentration, by volume	: 0.00 %
Suction pressure, rated / max	: 73.00 / 73.00 psi.g	Temperature, max	: 140.0 deg F
NPSH available, rated	: Ample	Fluid density, rated / max	: 1.000 / 1.030 SG
Site Supply Frequency	: 60 Hz	Viscosity, rated	: 1.00 cP
		Vapor pressure, rated	: 0.00 psi.a
Performance		Material	
Speed, rated	: 3390 rpm	Material selected	: Standard
Impeller diameter, rated	: 5.17 in	Pressure Data	
Impeller diameter, maximum	: 5.17 in	Maximum working pressure	: 2,698.7 psi.g
Impeller diameter, minimum	: 5.17 in	Maximum allowable working pressure	: N/A
Efficiency	: 76.63 %	Maximum allowable suction pressure	: N/A
NPSH required / margin required	: 18.58 / 3.00 ft	Hydrostatic test pressure	: 4,048.1 psi.g
Ns (imp. eye flow) / Nss (imp. eye flow)	: 2,362 / 6,640 US Units	Driver & Power Data (@Max density)	
MCSF	: 3,995.4 USbl/day	Driver sizing specification	: Maximum power
Head, maximum, rated diameter	: 2,549.2 psi	Margin over specification	: 0.00 %
Head rise to shutoff	: 14.43 %	Service factor	: 1.00
Flow, best eff. point	: 11,988.7 USbl/day	Power, hydraulic	: 422 hp
Flow ratio, rated / BEP	: 90.09 %	Power, rated	: 550 hp
Diameter ratio (rated / max)	: 100.00 %	Power, maximum, rated diameter	: 627 hp
Head ratio (rated dia / max dia)	: 100.00 %	Minimum recommended motor rating	: 700 hp / 522 kW
Cq/Ch/Ce/Cn [Blue Pumps]	: 1.00 / 1.00 / 1.00 / 1.00		
Selection status	: Acceptable		

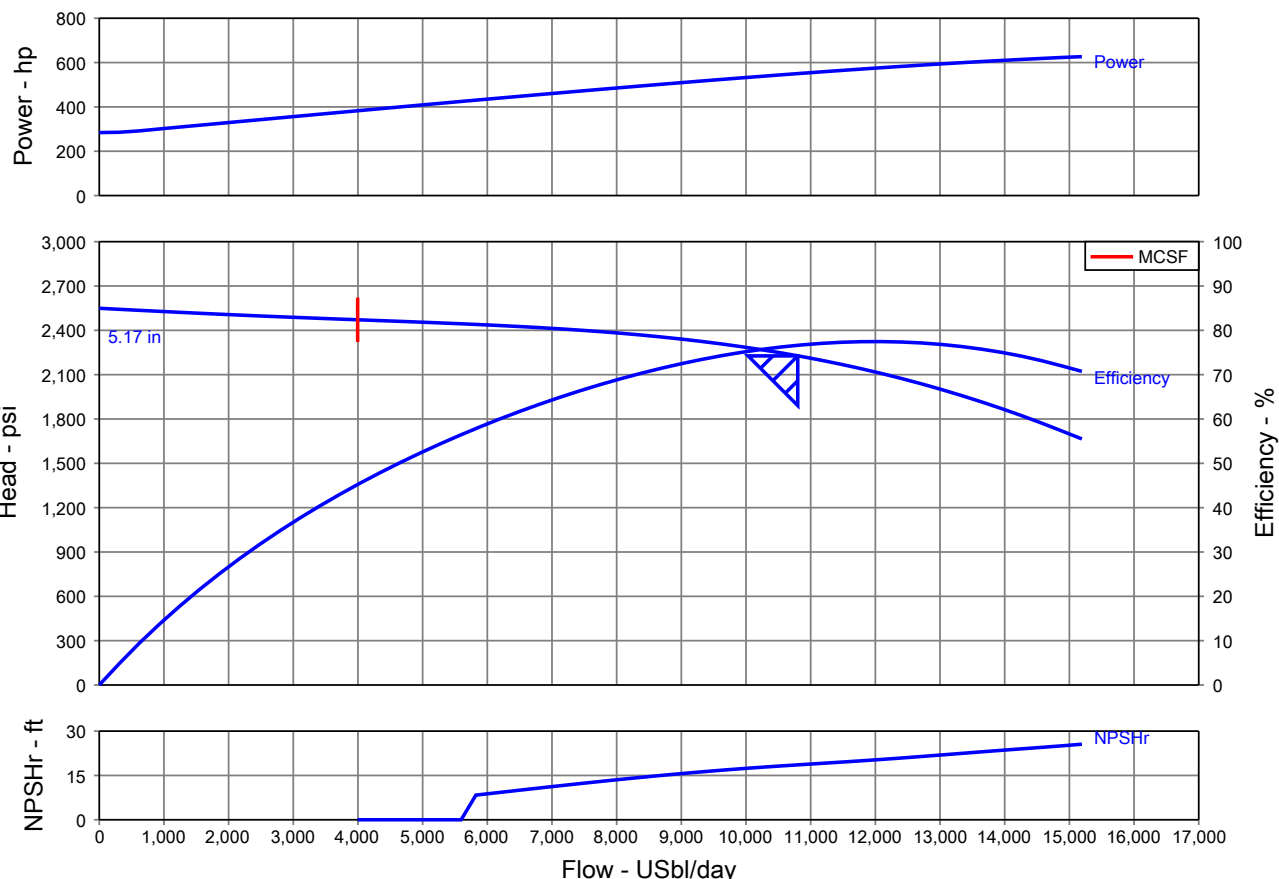

Multi-Speed Performance Curve

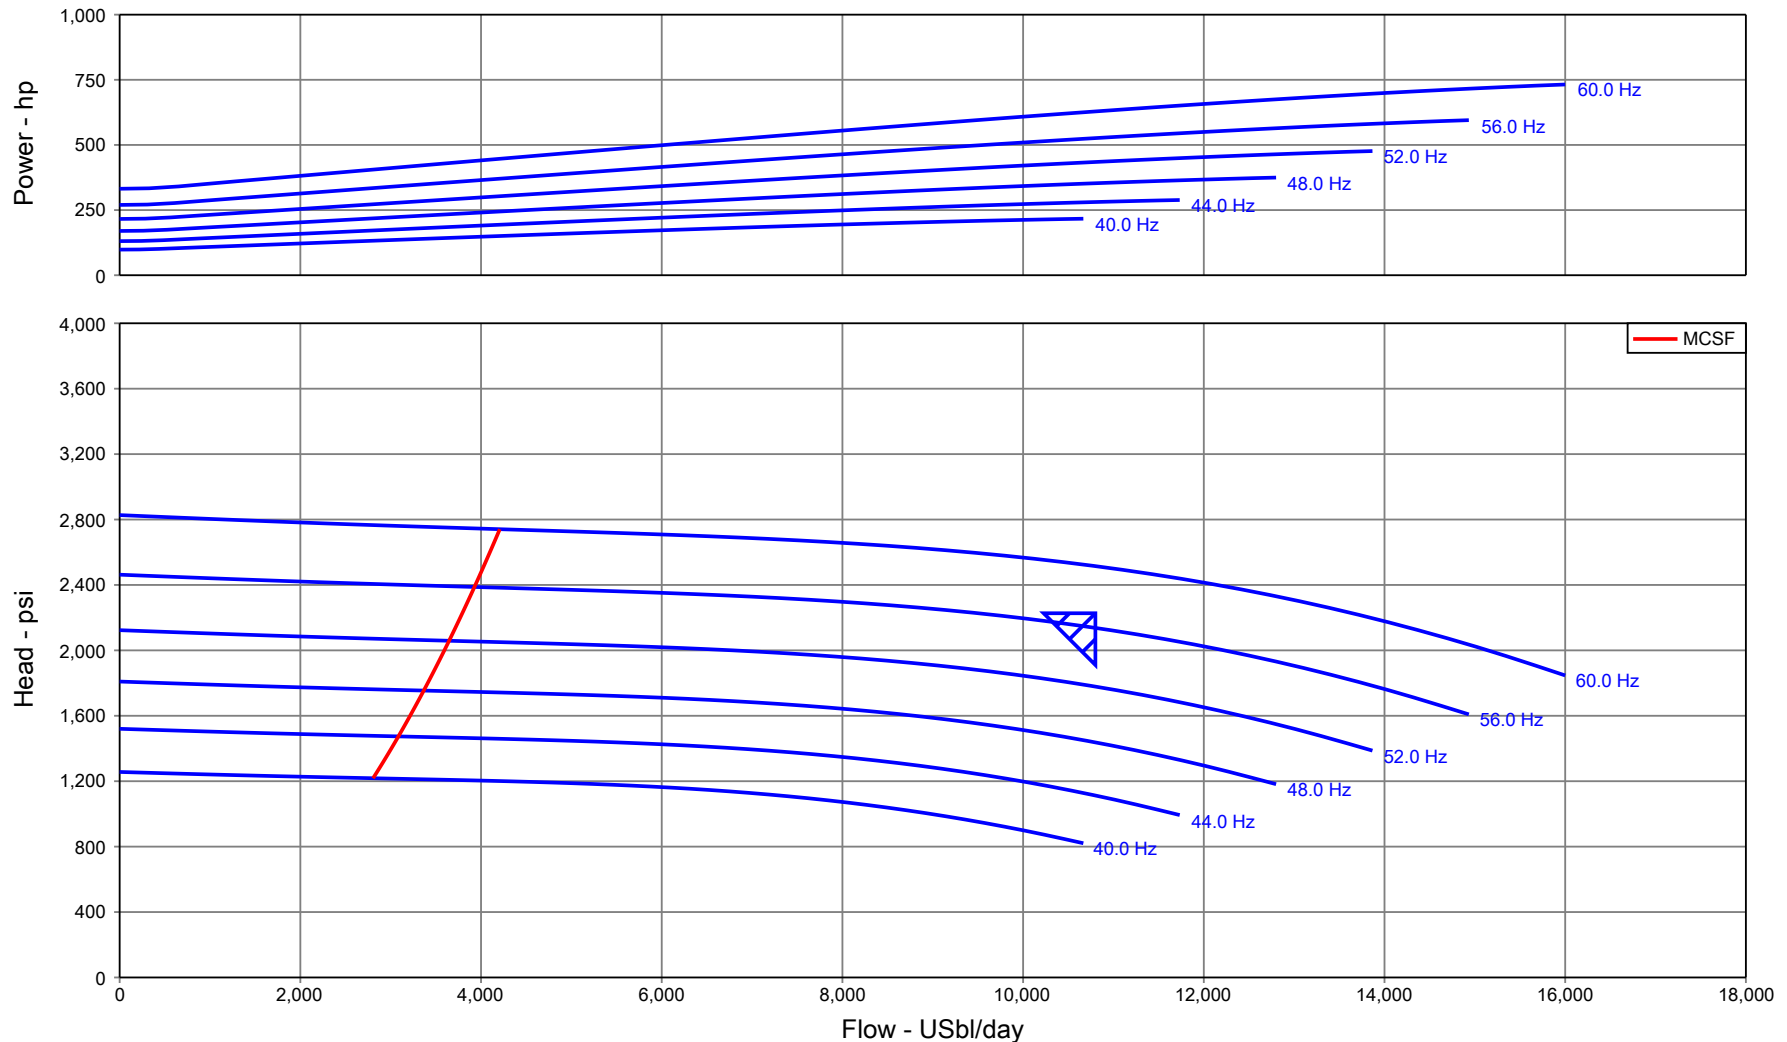

Customer	: SERTECPET	Stages	: 61	Nominal speed	: 3570 rpm
Customer reference	: lngs. Juan Guerrero/ Victor Nole	Based on curve number	: HC12500	Flow, rated	: 10,800.0 USbl/day
Item number	: HC12500 61stg	Efficiency	: 76.63 %	Differential head / pressure, rated	: 2,227.0 psi
Service	: Reinyeccion de Agua	Power, rated	: 550 hp	Speed, rated	: 3390 rpm
Quantity	: 1	NPSH required	: 18.58 ft	Impeller diameter, rated	: 5.17 in
Quote number	: 2414687	Site Supply Frequency	: 60 Hz	Fluid density, rated / max	: 1.000 / 1.030 SG
Date last saved	: 14 Feb 2026 3:34 PM			Viscosity, rated	: 1.00 cP
Size	: HC12500			Cq/Ch/Ce/Cn [Blue Pumps]	: 1.00 / 1.00 / 1.00 / 1.00