



Pump Performance Datasheet

Customer	: Sertecpet SA	Quote number	:
Customer reference	: Victor Nole	Size	: 675HC27000 - Obsolete
Item number	: Default	Stages	: 26
Service	:	Based on curve number	: 675HC27000
Quantity	: 1	Date last saved	: 06 Feb 2025 12:47 PM
Operating Conditions		Liquid	
Flow, rated	: 27,700.0 USbl/day	Liquid type	: User Defined
Differential head / pressure, rated (requested)	: 850.0 psi	Additional liquid description	:
Differential head / pressure, rated (actual)	: 860.1 psi	Solids diameter, max	: 0.00 in
Discharge pressure (actual)	: 940.1 psi	Solids concentration, by volume	: 0.00 %
Suction pressure, rated / max	: 80.00 / 80.00 psi.g	Temperature, max	: 140.0 deg F
NPSH available, rated	: Ample	Fluid density, rated / max	: 1.000 / 1.000 SG
Site Supply Frequency	: 60 Hz	Viscosity, rated	: 1.00 cP
Performance		Vapor pressure, rated	: 0.00 psi.a
Speed, rated	: 3570 rpm	Material	
Impeller diameter, rated	: 5.75 in	Material selected	: Standard
Impeller diameter, maximum	: 5.75 in	Pressure Data	
Impeller diameter, minimum	: 5.75 in	Maximum working pressure	: 1,053.0 psi.g
Efficiency	: 72.55 %	Maximum allowable working pressure	: N/A
NPSH required / margin required	: 59.00 / 3.00 ft	Maximum allowable suction pressure	: N/A
Ns (imp. eye flow) / Nss (imp. eye flow)	: 3,899 / 4,753 US Units	Hydrostatic test pressure	: 1,579.5 psi.g
MCSF	: 20,402.1 USbl/day	Driver & Power Data (@Max density)	
Head, maximum, rated diameter	: 973.0 psi	Driver sizing specification	: Rated power
Head rise to shutoff	: 13.12 %	Margin over specification	: 0.00 %
Flow, best eff. point	: 27,506.1 USbl/day	Service factor	: 1.00
Flow ratio, rated / BEP	: 100.70 %	Power, hydraulic	: 405 hp
Diameter ratio (rated / max)	: 100.00 %	Power, rated	: 559 hp
Head ratio (rated dia / max dia)	: 100.00 %	Power, maximum, rated diameter	: 559 hp
Cq/Ch/Ce/Cn [Blue Pumps]	: 1.00 / 1.00 / 1.00 / 1.00	Minimum recommended motor rating	: 600 hp / 447 kW
Selection status	: Acceptable		

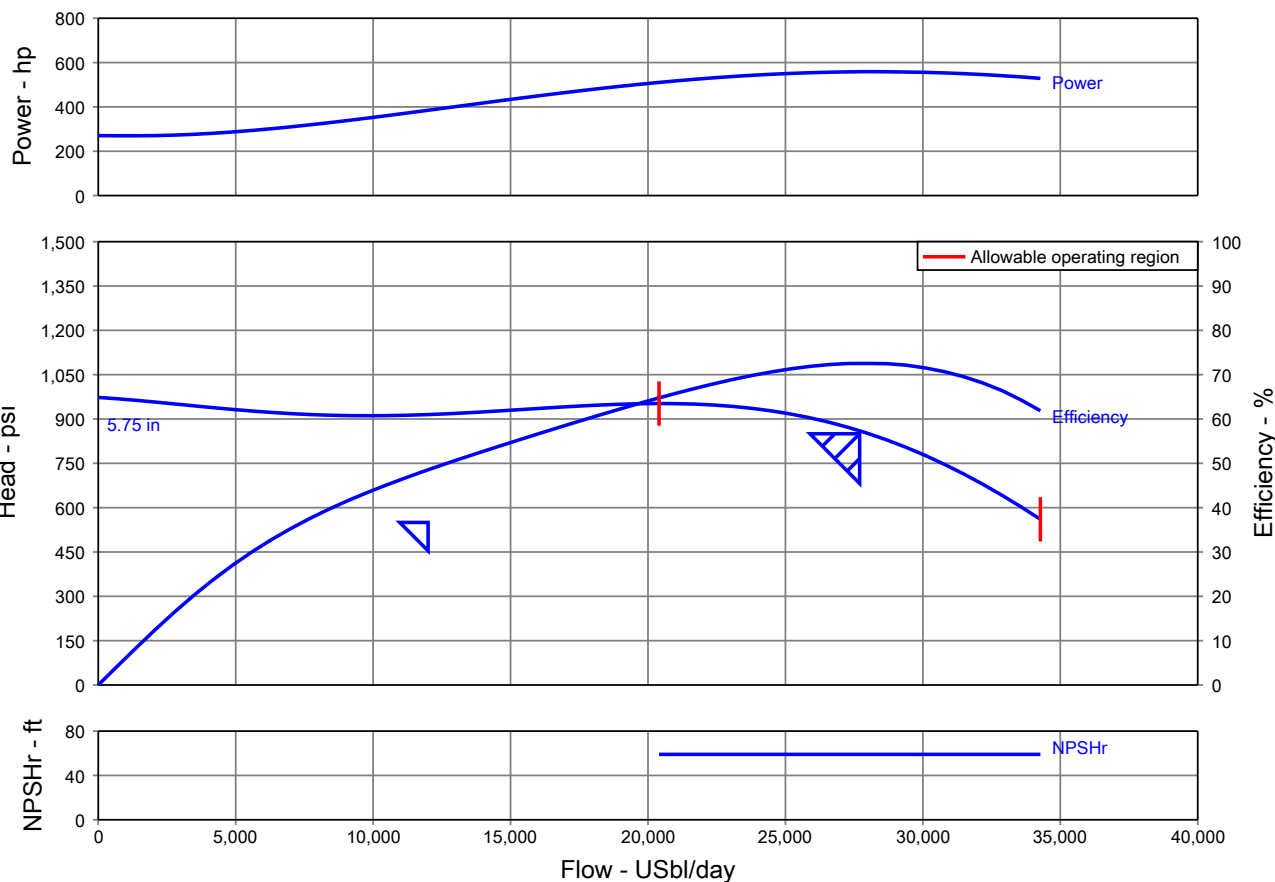

Multi-Speed Performance Curve

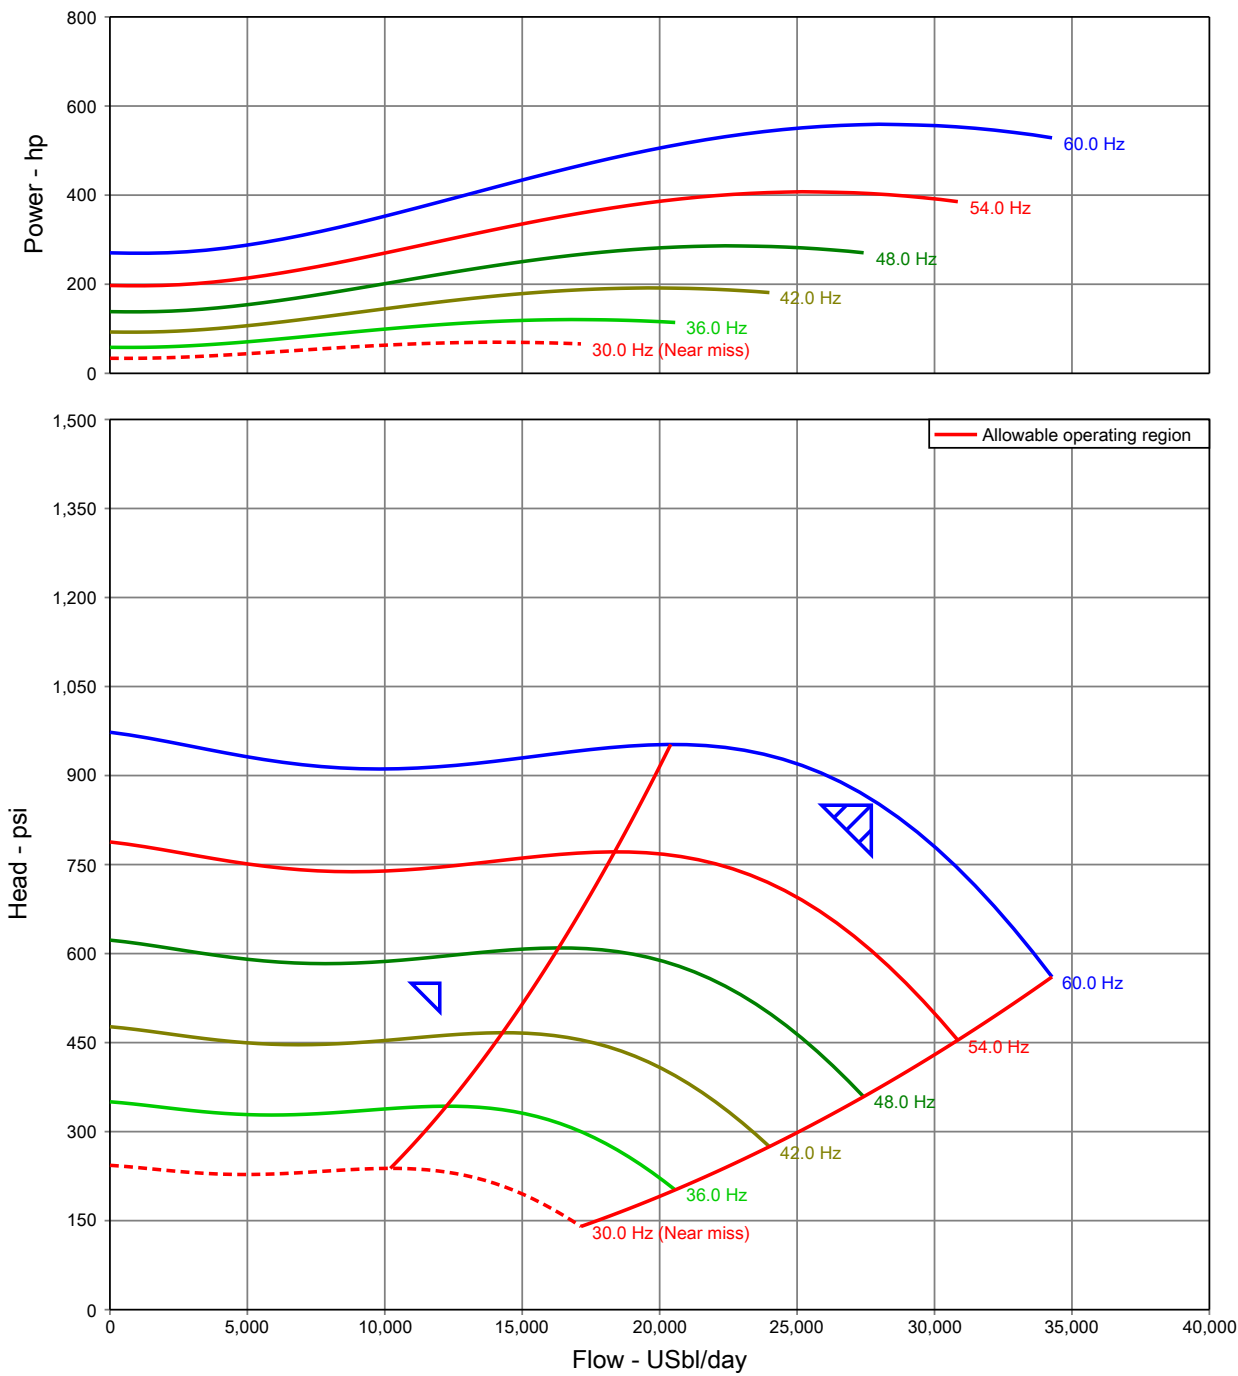


Customer	: Sertecpet SA	Quote number	:
Customer reference	: Victor Nole	Size	: 675HC27000 - Obsolete
Item number	: Default	Stages	: 26
Service	:	Based on curve number	: 675HC27000
Quantity	: 1	Date last saved	: 06 Feb 2025 12:47 PM
Flow, rated	: 27,700.0 USbl/day	Efficiency	: 72.55 %
Differential head / pressure, rated	: 850.0 psi	Power, rated	: 559 hp
Speed, rated	: 3570 rpm	NPSH required	: 59.00 ft
Impeller diameter, rated	: 5.75 in	Fluid density, rated / max	: 1.000 / 1.000 SG
Site Supply Frequency	: 60 Hz	Viscosity, rated	: 1.00 cP
Nominal speed	: 3570 rpm	Cq/Ch/Ce/Cn [Blue Pumps]	: 1.00 / 1.00 / 1.00 / 1.00

Multiple Conditions Datasheet

Customer : Sertecpet SA		Quantity : 1		Size : 675HC27000 - Obsolete					
Customer reference : Victor Nole		Quote number :		Stages : 26					
Item number : Default		Date last saved : 06 Feb 2025 12:47 PM		Speed, rated : 3570 rpm					
Service :									
Condition #		1	2	3	4	5	6	7	8
Description		BEST	CASE 2						
Temperature, max	deg F	140.0	140.0						
Fluid density, rated / max	SG	1.000 / 1.000	1.000 / 1.000						
Viscosity, rated	cP	1.00	1.00						
Vapor pressure, rated		0.00	0.00						
Primary condition		☉	○	○	○	○	○	○	○
Size		675HC27000 - Obsolete							
Stages		26							
Impeller diameter, rated	in	5.75							
Flow, rated	USbl/day	27,700.0	12,000.0						
Head, rated (requested)	psi	850.0	550.0						
Head, rated (actual)	psi	860.1	962,708,462.4						
Suction pressure, rated / max	psi.g	80.00 / 80.00	80.00 / 80.00						
NPSH available, rated	ft	Ample	Ample						
Speed, rated	rpm	3570	1						
Selection status		Acceptable	Full reject						
Cq/Ch/Ce/Cn [Blue Pumps]		1.00 / 1.00 / 1.00 / 1.00							
Efficiency	%	72.55							
NPSH required	ft	59.00							
Submergence	ft	-	-	-	-	-	-	-	-
Power, rated	hp	559							

Multiple Conditions Curve

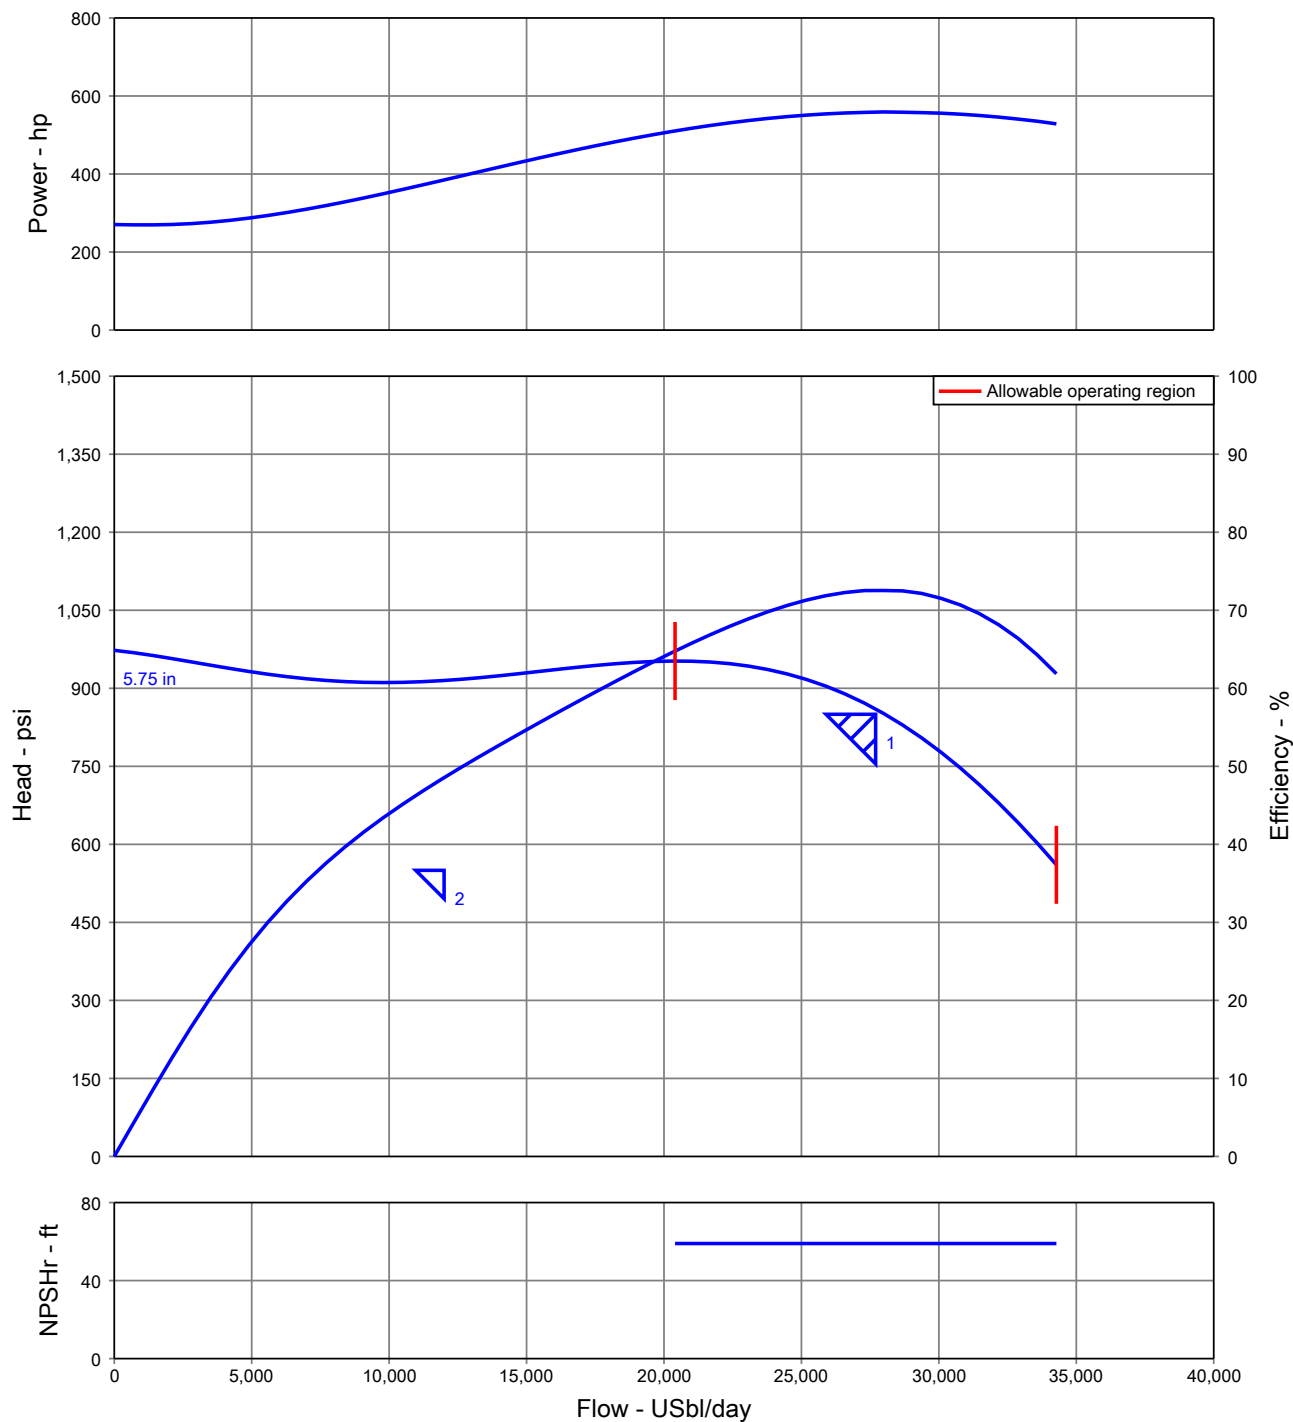

Customer	: Sertecpet SA	Size	: 675HC27000 - Obsolete
Customer reference	: Victor Nole	Stages	: 26
Item number	: Default	Speed, rated	: 3570 rpm
Service	:	Based on curve number	: 675HC27000
Quantity	: 1	Efficiency	: 72.55 %
Quote number	:	Power, rated	: 559 hp
Date last saved	: 06 Feb 2025 12:47 PM	NPSH required	: 59.00 ft
Flow, rated	: 27,700.0 USbl/day	Viscosity	: 1.00 cP
Differential head / pressure, rated	: 850.0 psi	Cq/Ch/Ce/Cn [Blue Pumps]	: 1.00 / 1.00 / 1.00 / 1.00
Fluid density, rated / max	: 1.000 / 1.000 SG	Submergence	