


Pump Performance Datasheet


Customer	: SERTECPET	Quote number	: 2414687
Customer reference	: Ings. Juan Guerrero/ Víctor Nole	Size	: HC20000
Item number	: HC20000 45stg	Stages	: 45
Service	: Reinyeccion de Agua	Based on curve number	: HC20000
Quantity	: 1	Date last saved	: 14 Feb 2026 3:24 PM

Operating Conditions		Liquid	
Flow, rated	: 17,000.0 USbl/day	Liquid type	: User Defined
Differential head / pressure, rated (requested)	: 800.0 psi	Additional liquid description	: Water Produced
Differential head / pressure, rated (actual)	: 801.4 psi	Solids diameter, max	: 0.00 in
Discharge pressure (actual)	: 916.4 psi	Solids concentration, by volume	: 0.00 %
Suction pressure, rated / max	: 115.0 / 115.0 psi.g	Temperature, max	: 140.0 deg F
NPSH available, rated	: Ample	Fluid density, rated / max	: 1.000 / 1.030 SG
Site Supply Frequency	: 60 Hz	Viscosity, rated	: 1.00 cP

Performance		Vapor pressure, rated : 0.00 psi.a	
Speed, rated	: 2705 rpm	Material	
Impeller diameter, rated	: 5.31 in	Material selected	: Standard
Impeller diameter, maximum	: 5.31 in	Pressure Data	
Impeller diameter, minimum	: 5.31 in	Maximum working pressure	: 1,337.4 psi.g
Efficiency	: 75.00 %	Maximum allowable working pressure	: N/A
NPSH required / margin required	: 22.33 / 3.00 ft	Maximum allowable suction pressure	: N/A
Ns (imp. eye flow) / Nss (imp. eye flow)	: 3,341 / 6,284 US Units	Hydrostatic test pressure	: 2,006.1 psi.g
MCSF	: 5,100.9 USbl/day	Driver & Power Data (@Max density)	
Head, maximum, rated diameter	: 1,186.8 psi	Driver sizing specification	: Maximum power
Head rise to shutoff	: 48.09 %	Margin over specification	: 0.00 %
Flow, best eff. point	: 15,616.2 USbl/day	Service factor	: 1.00
Flow ratio, rated / BEP	: 108.86 %	Power, hydraulic	: 239 hp
Diameter ratio (rated / max)	: 100.00 %	Power, rated	: 318 hp
Head ratio (rated dia / max dia)	: 100.00 %	Power, maximum, rated diameter	: 319 hp
Cq/Ch/Ce/Cn [Blue Pumps]	: 1.00 / 1.00 / 1.00 / 1.00	Minimum recommended motor rating	: 350 hp / 261 kW
Selection status	: Acceptable		

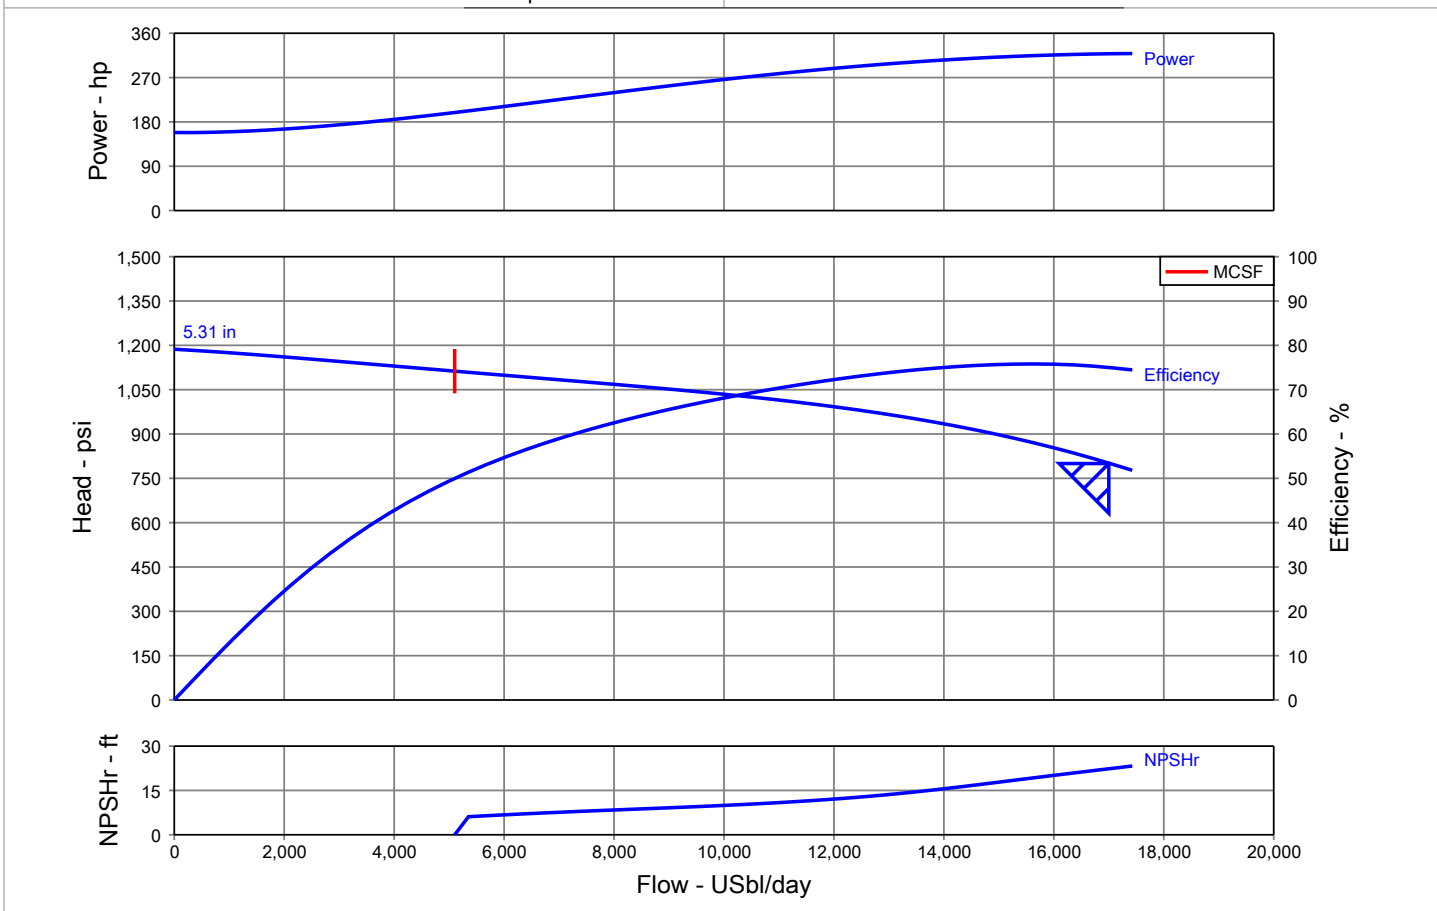

Multi-Speed Performance Curve

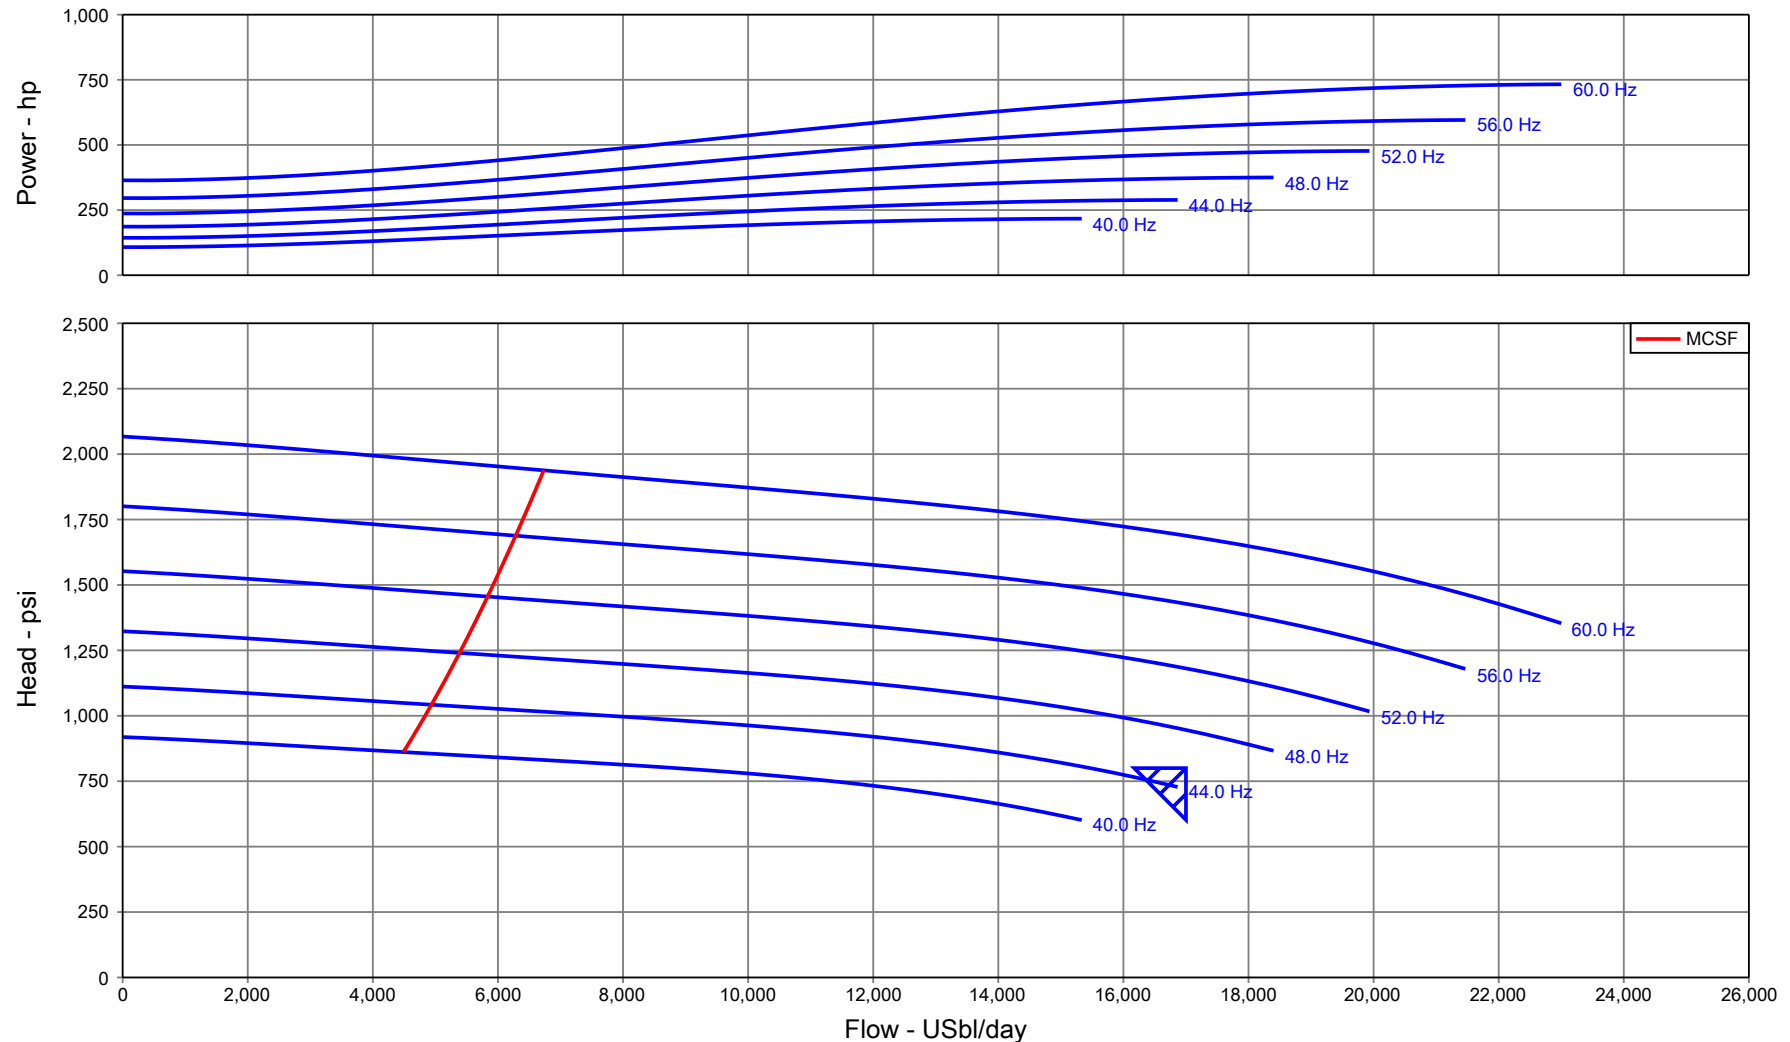

Customer	: SERTECPET	Stages	: 45	Nominal speed	: 3570 rpm
Customer reference	: Ings. Juan Guerrero/ Victor Nole	Based on curve number	: HC20000	Flow, rated	: 17,000.0 USbl/day
Item number	: HC20000 45stg	Efficiency	: 75.00 %	Differential head / pressure, rated	: 800.0 psi
Service	: Reinyeccion de Agua	Power, rated	: 318 hp	Speed, rated	: 2705 rpm
Quantity	: 1	NPSH required	: 22.33 ft	Impeller diameter, rated	: 5.31 in
Quote number	: 2414687	Site Supply Frequency	: 60 Hz	Fluid density, rated / max	: 1.000 / 1.030 SG
Date last saved	: 14 Feb 2026 3:24 PM			Viscosity, rated	: 1.00 cP
Size	: HC20000			Cq/Ch/Ce/Cn [Blue Pumps]	: 1.00 / 1.00 / 1.00 / 1.00