



Pump Performance Datasheet

Customer	: SERTECPET	Quote number	: 2414687
Customer reference	: Ings. Juan Guerrero/ Víctor Nole	Size	: TJ12000
Item number	: TJ12000 76stg	Stages	: 76
Service	: RYA	Based on curve number	: TJ12000
Quantity	: 1	Date last saved	: 11 Feb 2026 9:26 AM

Operating Conditions		Liquid	
Flow, rated	: 13,000.0 USbl/day	Liquid type	: User Defined
Differential head / pressure, rated (requested)	: 2,952.0 psi	Additional liquid description	: water injection
Differential head / pressure, rated (actual)	: 2,952.9 psi	Solids diameter, max	: 0.00 in
Discharge pressure (actual)	: 3,032.9 psi	Solids concentration, by volume	: 0.00 %
Suction pressure, rated / max	: 80.00 / 80.00 psi.g	Temperature, max	: 150.0 deg F
NPSH available, rated	: Ample	Fluid density, rated / max	: 1.030 / 1.040 SG
Site Supply Frequency	: 60 Hz	Viscosity, rated	: 1.00 cP
		Vapor pressure, rated	: 0.00 psi.a
Performance		Material	
Speed, rated	: 3570 rpm	Material selected	: Standard
Impeller diameter, rated	: 5.12 in	Pressure Data	
Impeller diameter, maximum	: 5.12 in	Maximum working pressure	: 3,793.6 psi.g
Impeller diameter, minimum	: 5.12 in	Maximum allowable working pressure	: N/A
Efficiency	: 79.70 %	Maximum allowable suction pressure	: N/A
NPSH required / margin required	: 24.78 / 3.00 ft	Hydrostatic test pressure	: 5,690.3 psi.g
Ns (imp. eye flow) / Nss (imp. eye flow)	: 2,394 / 6,333 US Units	Driver & Power Data (@Max density)	
MCSF	: 5,304.0 USbl/day	Driver sizing specification	: Maximum power
Head, maximum, rated diameter	: 3,677.9 psi	Margin over specification	: 5.00 %
Head rise to shutoff	: 23.56 %	Service factor	: 1.00
Flow, best eff. point	: 12,745.2 USbl/day	Power, hydraulic	: 659 hp
Flow ratio, rated / BEP	: 102.00 %	Power, rated	: 827 hp
Diameter ratio (rated / max)	: 100.00 %	Power, maximum, rated diameter	: 943 hp
Head ratio (rated dia / max dia)	: 100.00 %	Minimum recommended motor rating	: 1,000 hp / 746 kW
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00		
Selection status	: Acceptable		

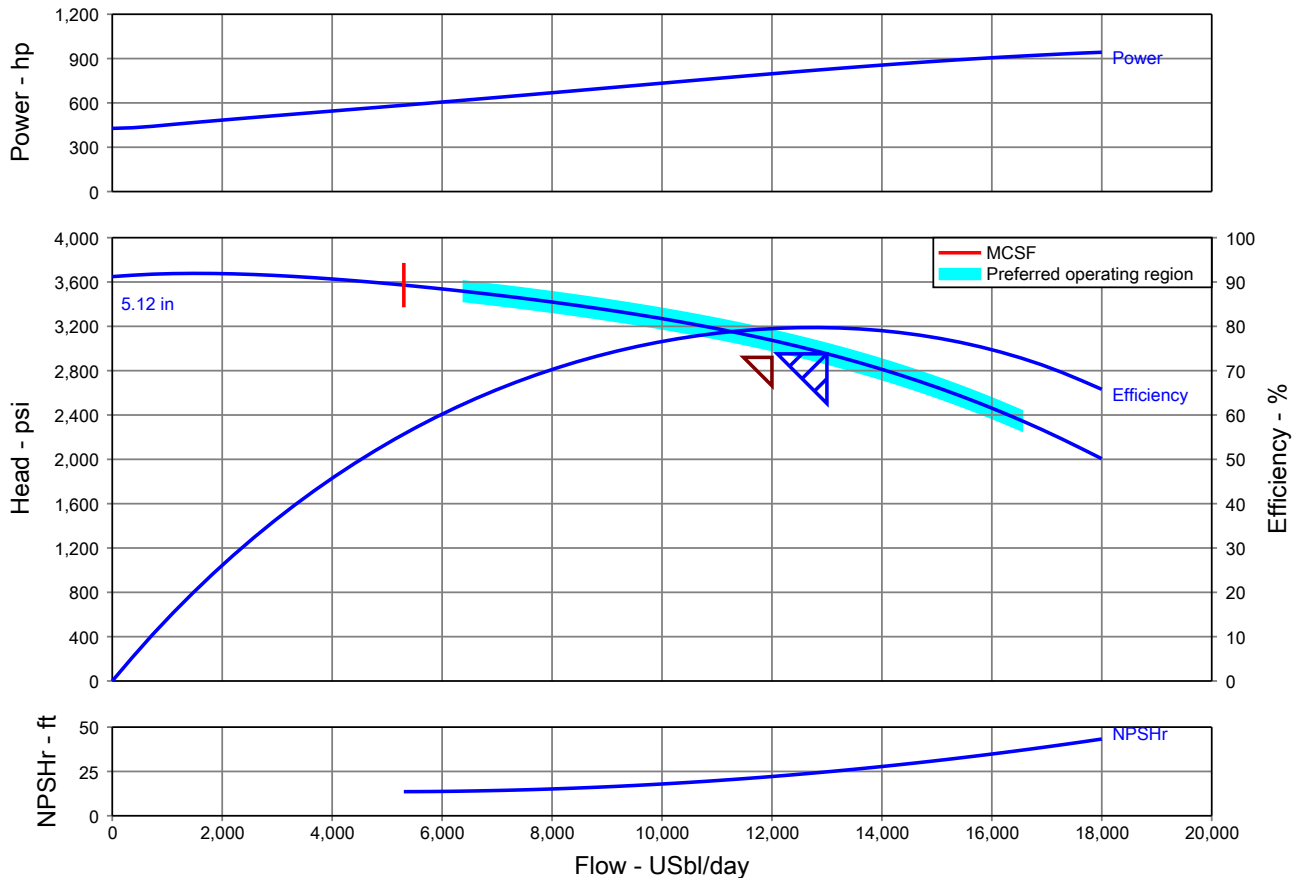

Multi-Speed Performance Curve

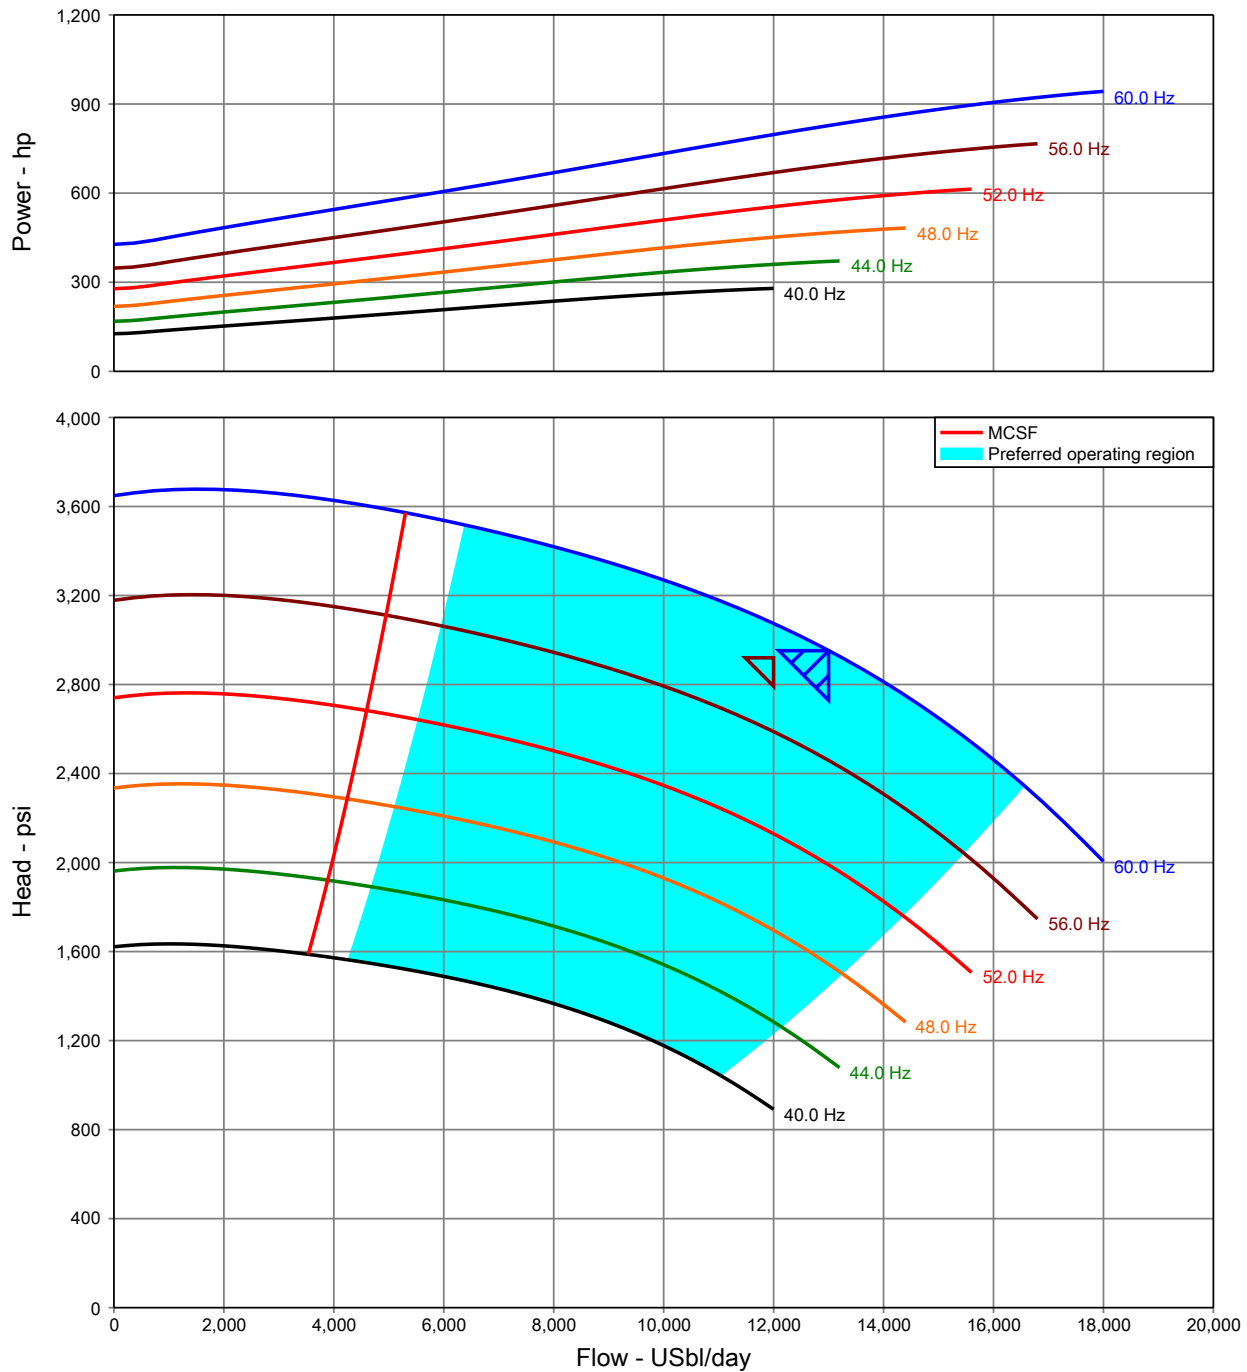


Customer	: SERTECPET	Quote number	: 2414687
Customer reference	: Ings. Juan Guerrero/ Victor Nole	Size	: TJ12000
Item number	: TJ12000 76stg	Stages	: 76
Service	: RYA	Based on curve number	: TJ12000
Quantity	: 1	Date last saved	: 11 Feb 2026 9:26 AM
Flow, rated	: 13,000.0 USbl/day	Efficiency	: 79.70 %
Differential head / pressure, rated	: 2,952.0 psi	Power, rated	: 827 hp
Speed, rated	: 3570 rpm	NPSH required	: 24.78 ft
Impeller diameter, rated	: 5.12 in	Fluid density, rated / max	: 1.030 / 1.040 SG
Site Supply Frequency	: 60 Hz	Viscosity, rated	: 1.00 cP
Nominal speed	: 3570 rpm	Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00

Multiple Conditions Datasheet

Customer : SERTECPET		Quantity : 1		Size : TJ12000					
Customer reference : Ings. Juan Guerrero/ Victor Nole		Quote number : 2414687		Stages : 76					
Item number : TJ12000 76stg		Date last saved : 11 Feb 2026 9:26 AM		Speed, rated : 3570 rpm					
Service : RYA									
Condition #		1	2	3	4	5	6	7	8
Description		Design	12kbbbl@3000psi						
Temperature, max	deg F	150.0	150.0						
Fluid density, rated / max	SG	1.030 / 1.040	1.030 / 1.040						
Viscosity, rated	cP	1.00	1.00						
Vapor pressure, rated		0.00	0.00						
Primary condition		☉	○	○	○	○	○	○	○
Size		TJ12000							
Stages		76							
Impeller diameter, rated	in	5.12							
Flow, rated	USbl/day	13,000.0	12,000.0						
Head, rated (requested)	psi	2,952.0	2,920.0						
Head, rated (actual)	psi	2,952.9	2,922.2						
Suction pressure, rated / max	psi.g	80.00 / 80.00	80.00 / 80.00						
NPSH available, rated	ft	Ample	Ample						
Speed, rated	rpm	3570	3497						
Selection status		Acceptable	Acceptable						
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]		1.00 / 1.00 / 1.00 / 1.00	1.00 / 1.00 / 1.00 / 1.00						
Efficiency	%	79.70	79.63						
NPSH required	ft	24.78	21.84						
Submergence	ft	-	-	-	-	-	-	-	-
Power, rated	hp	827	757						

Multiple Conditions Curve

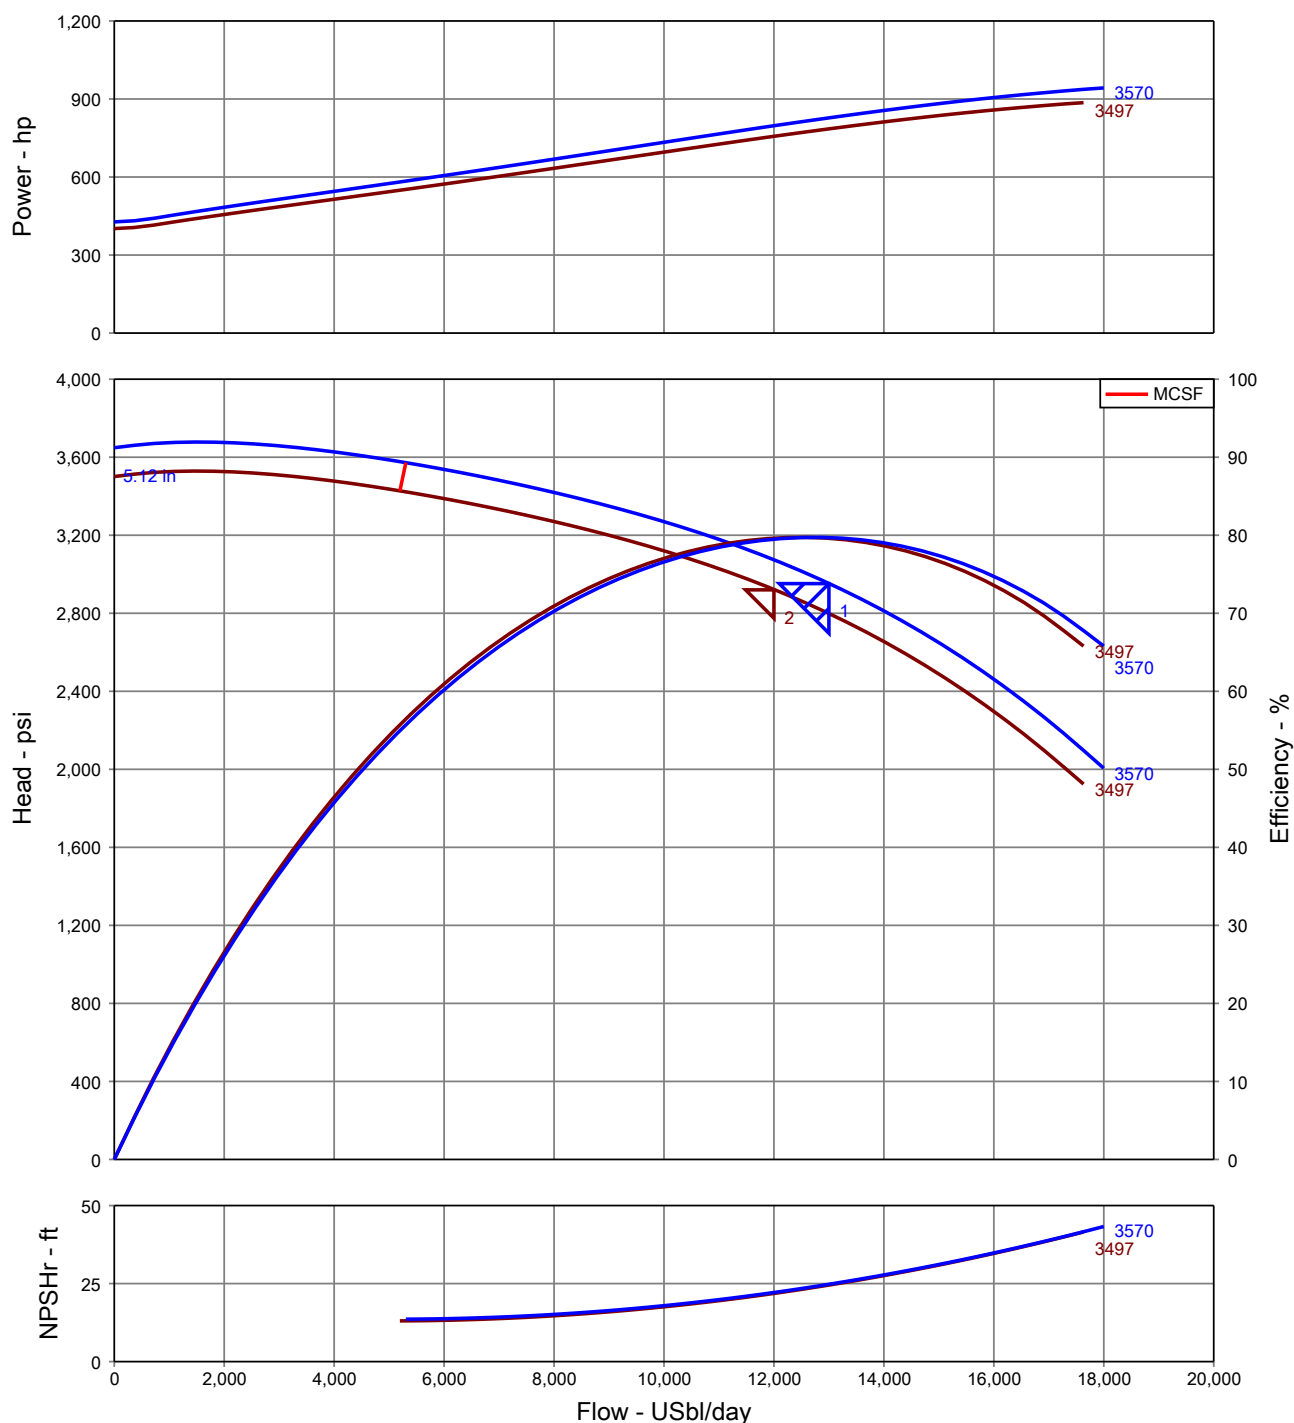

Customer : SERTECPET
Customer reference : Ings. Juan Guerrero/ Victor Nole
Item number : TJ12000 76stg
Service : RYA
Quantity : 1
Quote number : 2414687
Date last saved : 11 Feb 2026 9:26 AM
Flow, rated : 13,000.0 USbl/day
Differential head / pressure, rated : 2,952.0 psi
Fluid density, rated / max : 1.030 / 1.040 SG

Size : TJ12000
Stages : 76
Speed, rated : 3570 rpm
Based on curve number : TJ12000
Efficiency : 79.70 %
Power, rated : 827 hp
NPSH required : 24.78 ft
Viscosity : 1.00 cP
Cq/Ch/Ce/Cn : 1.00 / 1.00 / 1.00 / 1.00
[ANSI/HI 9.6.7-2010]
Submergence

Construction Datasheet

1	Customer	: SERTECPET				Quote number	: 2414687
2	Customer reference	: Ings. Juan Guerrero/ Victor Nole				Pump Size	: TJ12000
3	Item number	: TJ12000 76stg				Number of Stages	: 76
4	Service	: RYA					
5	Quantity of pumps	: 1				Date last saved	: 11 Feb 2026 9:26 AM
6	Pump Design					Seal & Flush	
7	Nozzle	Size	Rating	Face	Position	Arrangement	: Single component
8	Suction	6 inch	150#	RF	Side	Size	: 1.5 Inch
9	Discharge	4 inch	2500#	RTJ	End	Manufacturer / Model	: John Crane/Type 2
10	Pump Type : Baker Hughes - Multistage Centrifugal Pump Model : TJ Pump Size : TJ12000 Number of Stages : 76 Rotation (From Drive) : Clockwise Impeller Type : Closed Casing Mounting : Foot Casing Split : Radial Casing Type : Carbon Steel Housing					Type	: single metal spring
11						API Material Code	: n/a
12						Gland Material	: n/a
13						Rotating Face	: silicon carbide
14						Stationary Face	: Silicon carbide
15						O-rings	: Viton o-rings
16						Springs/Bellows	: 316 stainless steel/ monel
17						Flush	: n/a
18						Vent	: n/a
19						Drain	: n/a
20	Materials					Seal Flush Plan	: API 11
21	Barrel/Case	: Carbon steel				Flush Piping Material/Type	: n/a
22	Impeller	: Ni-Resist Type 1 impellers/diffusers				Driver Information	
23	Diffuser	: Ni-Resist Type 1 impellers/diffusers				Manufacturer	: GE or similar
24	Shaft	: Nickel Alloy 718 shaft material				Power	: 1000 hp
25	Suction Housing	: 316 stainless steel				Speed	: 3600 rpm
26	Discharge Flange	: Carbon steel flange / 316SS wetted components				Driver Type	: NEMA
27	Head & Base	: 316ss head and base				Efficiency Rating	: Premium
28	Stage Bushing	: 1:1 AR Tungsten Carbide stage bushings				Enclosure	: TEFC/ WPII
29	Baseplate, Coupling, & Guard					Voltage	: 4160
30	Baseplate Type	: 1K Series Baseplate with Pump Supports				Frame Size	: TBD
31	Baseplate Material	: Fabricated steel				Hertz	: 60 Hz
32	Pump Supports	: Cast Iron				Motor RTD's	: Included
33	Coupling Manufacturer	: Rexnord/ Dodge Baldor				Space Heater	: Included
34	Coupling Size	: TBD				Starter/VFD Information	
35	Coupling Guard	: Aluminum				Type	: Customer
36	Bearing Thrust Chamber					Manufacturer	: -
37	Radial Bearing Type	: Deep groove ball				Size	: -
38	Thrust Bearing Type	: Tandem 40 degree angular contact				Voltage	: -
39	Bearing Lubrication	: Force lubrication				Enclosure	: -
40	Oil Cooler	: BOL8EX				Controller	: -
41	Oil Temp Monitor /Level Switch	: Yokogawa/Murphy thrust chamber vibration transmitter				Pulse	: -
42	Accessories					Weight (Approx.)	
43	Suction Monitor	: Yokogawa suction pressure transmitter				Pump & base	: -
44	Discharge Monitor	: Yokogawa discharge pressure transmitter				Motor	: -
45	Vibration Switch	: Metrix thrust chamber vibration transmitter				Starter/Drive	: -
	Baker Hughes, a GE Company - Panamericana Norte Km. 12 1/2 y El Arenal Parque Delta - Quito, Ecuador					Total	: 0.00 lb
	phone: +593 2 242 82 12 - fax: +593 2 242 82 13 - www.geoilandgas.com/sps						





General Arrangement Drawing - TJ12000 with 1K Series Baseplate with Pump Supports

Symbol	Nozzle	Size	Standard	Rating	Face	Position
1	Suction	6 inch	ANSI	150#	RF	Side
2	Discharge	4 inch	ANSI	2500#	RTJ	End

For information only - not for construction.

Not to scale.

Symbol	Comment
1	Suction housing and nozzle may be rotated @ 45 deg. increments.
3	Recommended customer supplied drop-out spool for mechanical seal change out.
4	Suggested frame hold down clamps, customer supplied.
5	Quantity of R for this configuration = 8
6	Grounding screw holes are located in the frame endplates on both ends, both sides.

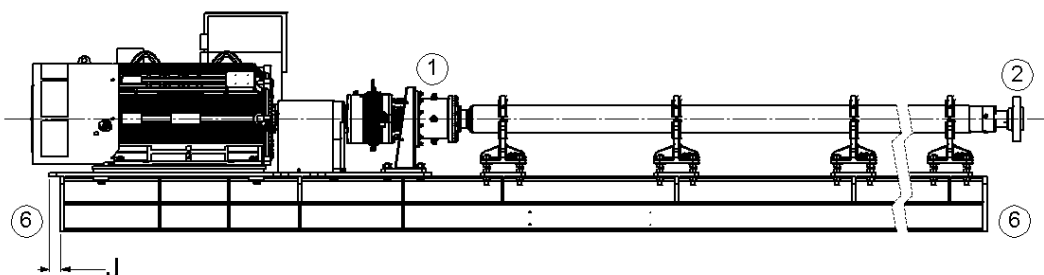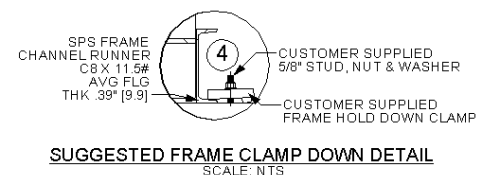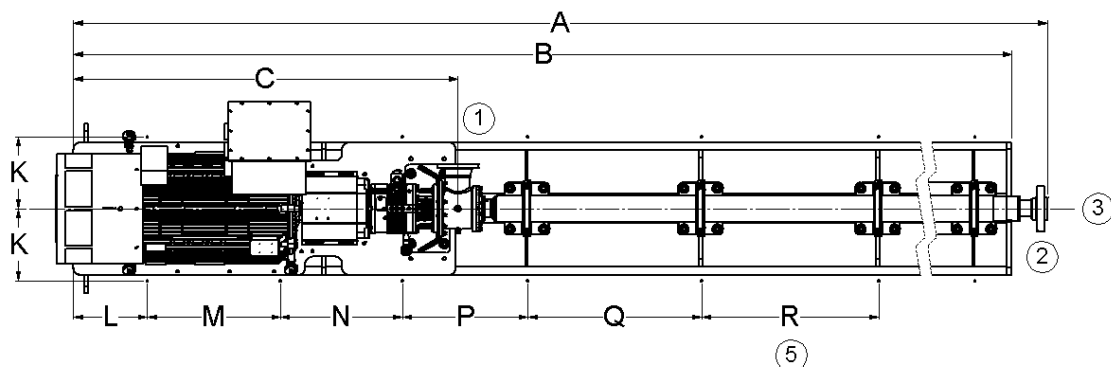

Unless noted, all dimensions are in inches

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	-	-
580	564	104	46.00	30.50	12.00	0.00	18.00	3.00	19.50	20.00	36.00	33.00	34.00	47.00	48.00	-	-

Customer : SERTECPET
Customer reference TEST : Ings. Juan Guerrero/ Victor Nole
Item number : TJ12000 76stg

Quote number : 2414687
Pump size : TJ12000
Stages : 76

Driver Rating : 1000 hp
Driver Frame Size : TBD
Quantity of pumps : 1