


Pump Performance Datasheet


Customer	: SERTECPET	Quote number	: 2414687
Customer reference	: Ings. Juan Guerrero/ Víctor Nole	Size	: TM18500
Item number	: TM18500	Stages	: 38
Service	: RYA Proyecto	Based on curve number	: TM18500
Quantity	: 1	Date last saved	: 19 Mar 2026 12:59 AM

Operating Conditions		Liquid	
Flow, rated	: 12,000.0 USbl/day	Liquid type	: User Defined
Differential head / pressure, rated (requested)	: 2,751.0 psi	Additional liquid description	: Water Produced
Differential head / pressure, rated (actual)	: 2,751.5 psi	Solids diameter, max	: 0.00 in
Discharge pressure (actual)	: 2,871.5 psi	Solids concentration, by volume	: 0.00 %
Suction pressure, rated / max	: 120.0 / 120.0 psi.g	Temperature, max	: 140.0 deg F
NPSH available, rated	: Ample	Fluid density, rated / max	: 1.000 / 1.030 SG
Site Supply Frequency	: 60 Hz	Viscosity, rated	: 1.00 cP
Performance		Vapor pressure, rated	: 0.00 psi.a

Performance		Vapor pressure, rated	: 0.00 psi.a
Speed, rated	: 3570 rpm	Material	
Impeller diameter, rated	: 6.12 in	Material selected	: Standard
Impeller diameter, maximum	: 6.12 in	Pressure Data	
Impeller diameter, minimum	: 6.12 in	Maximum working pressure	: 3,114.9 psi.g
Efficiency	: 68.96 %	Maximum allowable working pressure	: N/A
NPSH required / margin required	: 15.24 / 3.00 ft	Maximum allowable suction pressure	: N/A
Ns (imp. eye flow) / Nss (imp. eye flow)	: 1,981 / 7,347 US Units	Hydrostatic test pressure	: 4,672.3 psi.g
MCSF	: 6,227.1 USbl/day	Driver & Power Data (@Max density)	
Head, maximum, rated diameter	: 2,907.7 psi	Driver sizing specification	: Rated power
Head rise to shutoff	: 5.68 %	Margin over specification	: 0.00 %
Flow, best eff. point	: 19,231.9 USbl/day	Service factor	: 1.00
Flow ratio, rated / BEP	: 62.40 %	Power, hydraulic	: 579 hp
Diameter ratio (rated / max)	: 100.00 %	Power, rated	: 839 hp
Head ratio (rated dia / max dia)	: 100.00 %	Power, maximum, rated diameter	: 1,152 hp
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00 / 1.34	Minimum recommended motor rating	: 900 hp / 671 kW
Selection status	: Acceptable		

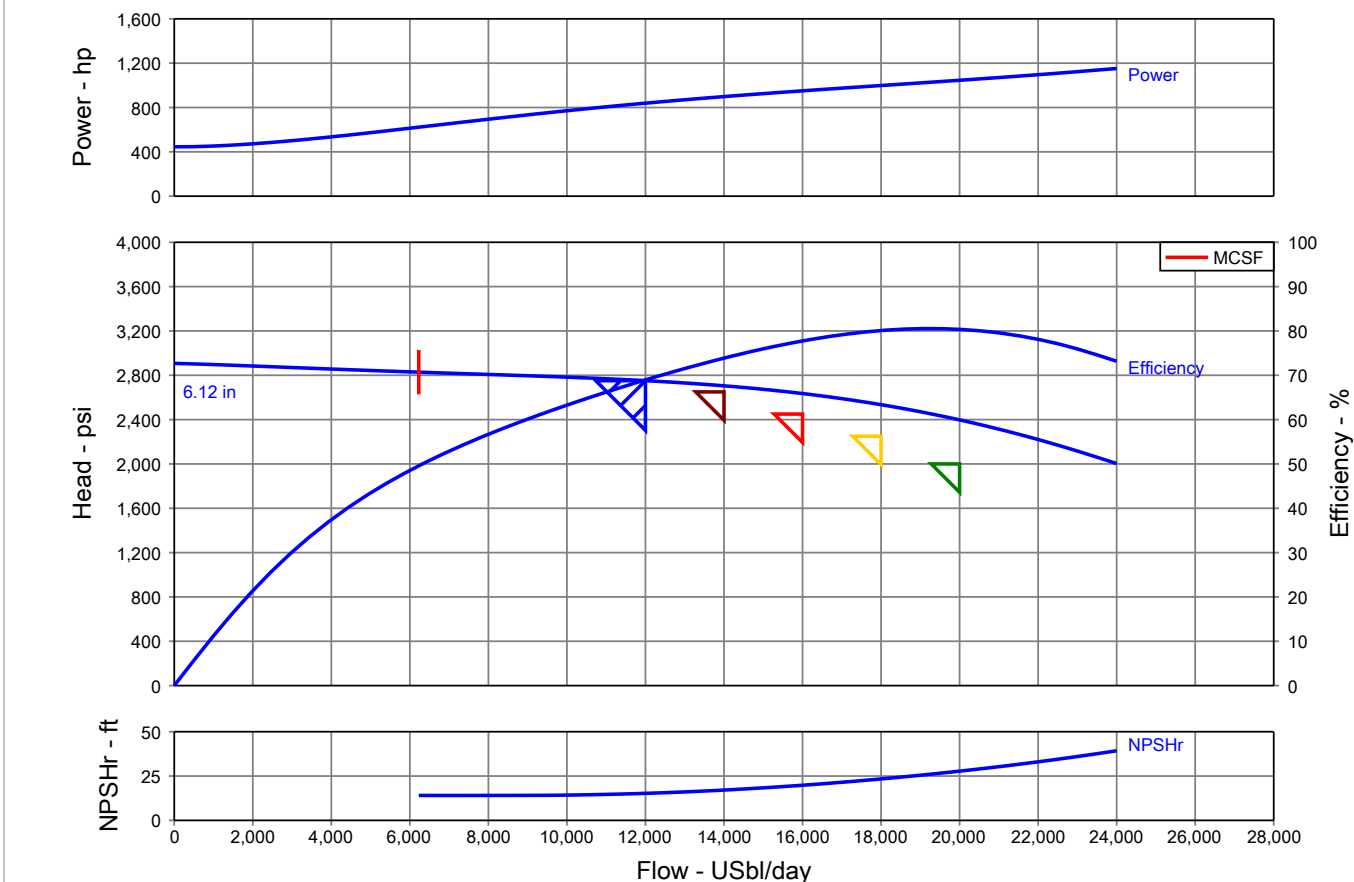


Pump Performance Curve

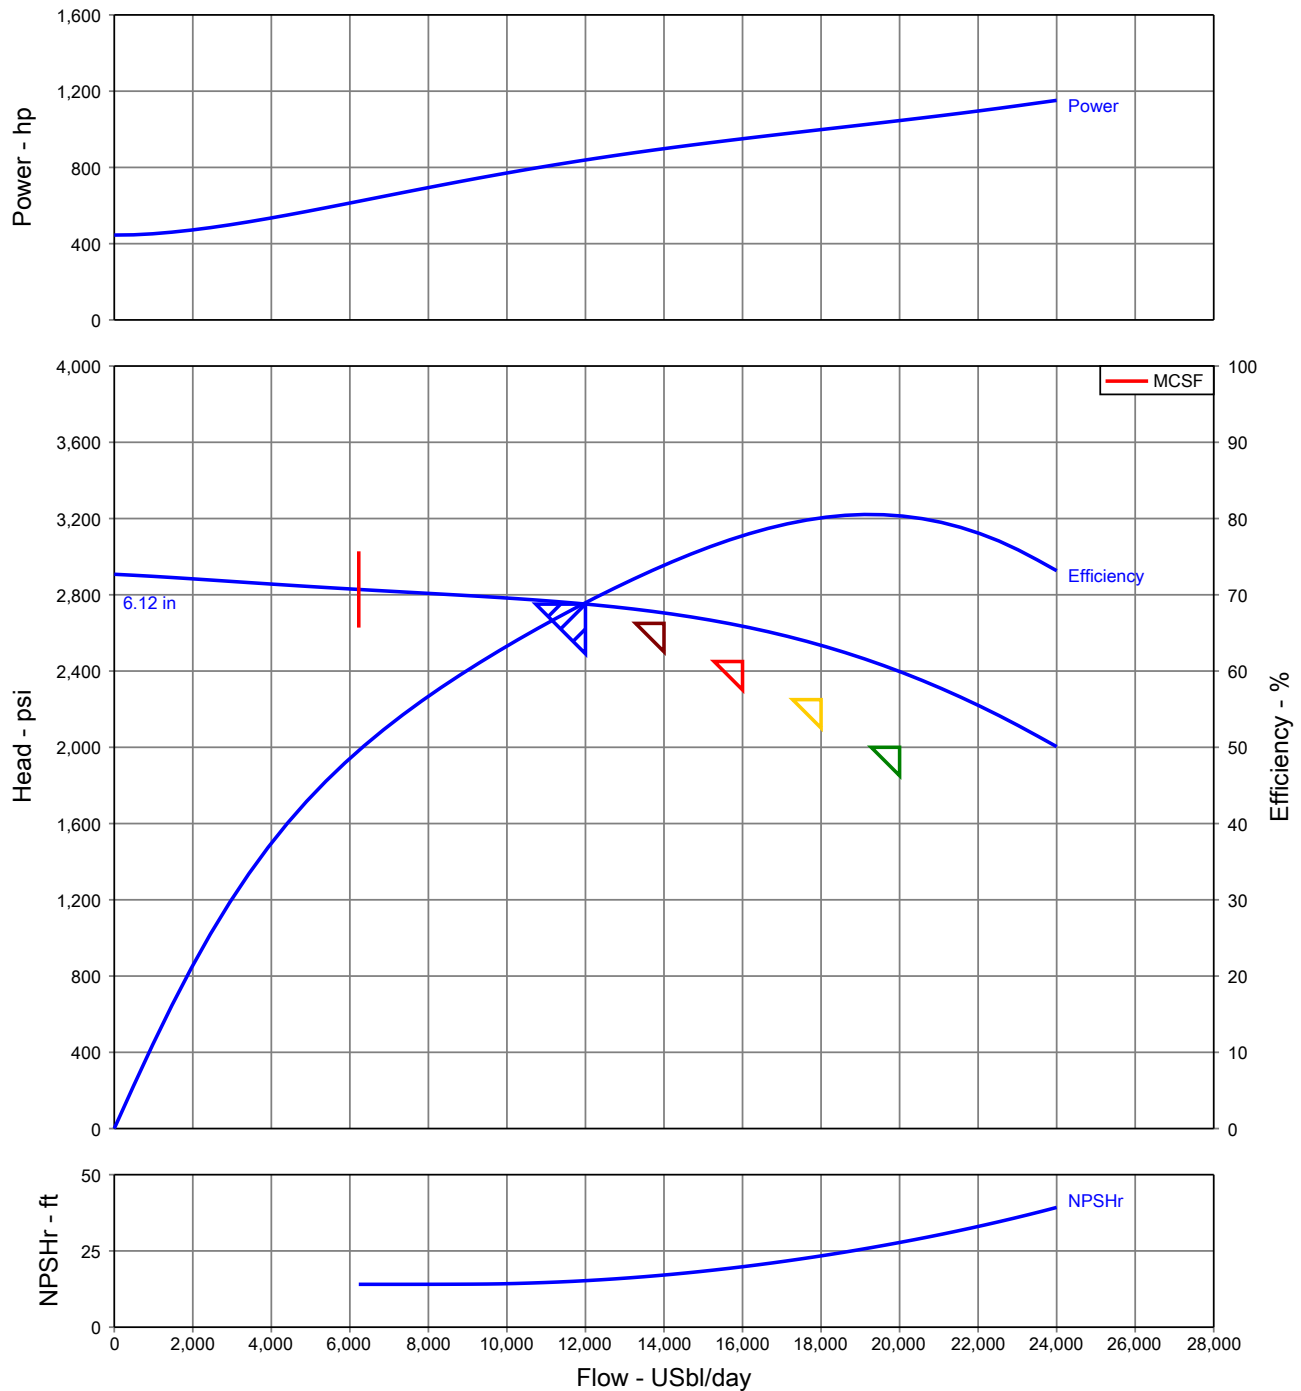

Customer	: SERTECPET	Size	: TM18500
Customer reference	: Ings. Juan Guerrero/ Victor Nole	Stages	: 38
Item number	: TM18500	Speed, rated	: 3570 rpm
Service	: RYA Proyecto	Based on curve number	: TM18500
Quantity	: 1	Efficiency	: 68.96 %
Quote number	: 2414687	Power, rated	: 839 hp
Date last saved	: 19 Mar 2026 12:59 AM	NPSH required	: 15.24 ft
Flow, rated	: 12,000.0 USbl/day	Viscosity	: 1.00 cP
Differential head / pressure, rated	: 2,751.0 psi	Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00 / 1.34
Fluid density, rated / max	: 1.000 / 1.030 SG		

Multi-Speed Performance Curve

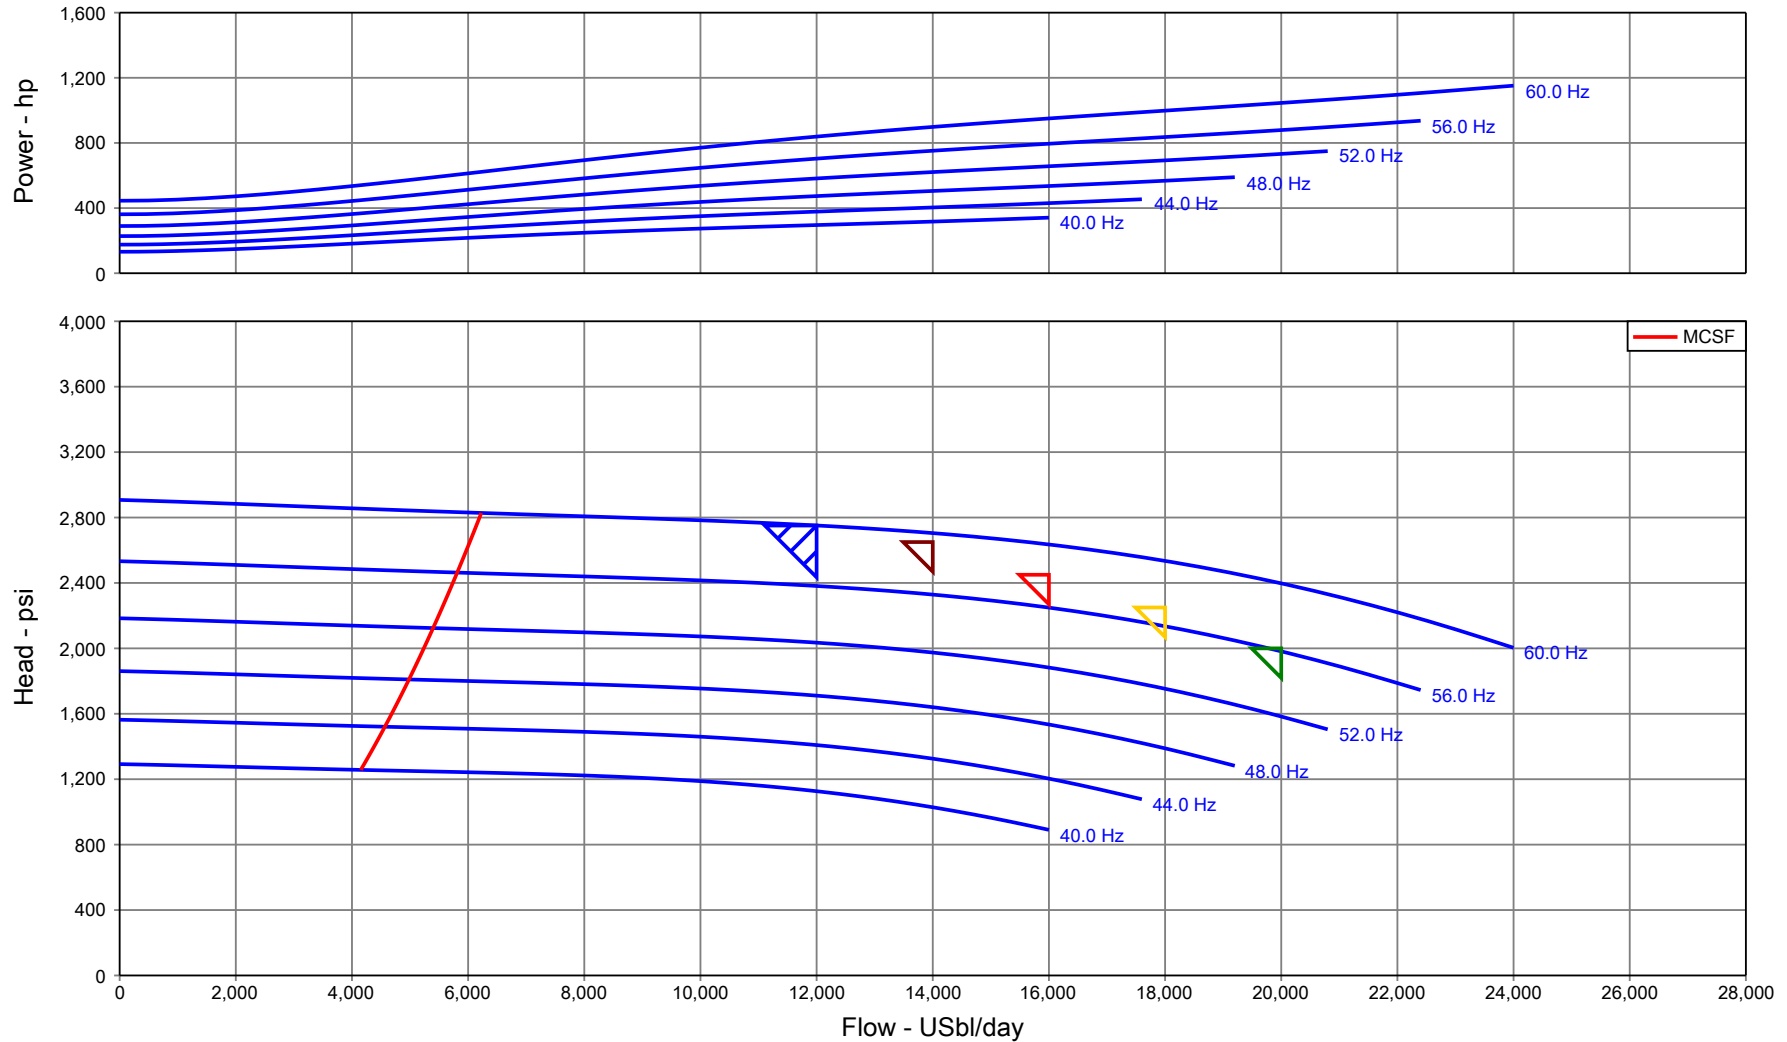


Customer	: SERTECPET	Stages	: 38	Nominal speed	: 3570 rpm
Customer reference	: Ings. Juan Guerrero/ Victor Nole	Based on curve number	: TM18500	Flow, rated	: 12,000.0 USbl/day
Item number	: TM18500	Efficiency	: 68.96 %	Differential head / pressure, rated	: 2,751.0 psi
Service	: RYA Proyecto	Power, rated	: 839 hp	Speed, rated	: 3570 rpm
Quantity	: 1	NPSH required	: 15.24 ft	Impeller diameter, rated	: 6.12 in
Quote number	: 2414687	Site Supply Frequency	: 60 Hz	Fluid density, rated / max	: 1.000 / 1.030 SG
Date last saved	: 19 Mar 2026 1:02 AM			Viscosity, rated	: 1.00 cP
Size	: TM18500			Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00 / 1.34

Multiple Conditions Datasheet

Customer : SERTECPET		Quantity : 1				Size : TM18500			
Customer reference : Ings. Juan Guerrero/ Victor Nole		Quote number : 2414687				Stages : 38			
Item number : TM18500		Date last saved : 19 Mar 2026 12:59 AM				Speed, rated : 3570 rpm			
Service : RYA Proyecto									
Condition #		1	2	3	4	5	6	7	8
Description		12kbpd	14kbpd	16kpd	18kbpd	20kpd			
Temperature, max	deg F	140.0	140.0	140.0	140.0	140.0			
Fluid density, rated / max	SG	1.000 / 1.030	1.000 / 1.030	1.000 / 1.030	1.000 / 1.030	1.000 / 1.030			
Viscosity, rated	cP	1.00	1.00	1.00	1.00	1.00			
Vapor pressure, rated		0.00	0.00	0.00	0.00	0.00			
Primary condition		☉	○	○	○	○	○	○	○
Size		TM18500							
Stages		38							
Impeller diameter, rated	in	6.12							
Flow, rated	USbl/day	12,000.0	14,000.0	16,000.0	18,000.0	20,000.0			
Head, rated (requested)	psi	2,751.0	2,650.0	2,450.0	2,250.0	2,000.0			
Discharge, rated (actual)	psi	2,871.5	2,771.5	2,571.1	2,370.8	2,120.7			
Suction pressure, rated / max	psi.g	120.0 / 120.0	120.0 / 120.0	120.0 / 120.0	120.0 / 120.0	120.0 / 120.0			
NPSH available, rated	ft	Ample	Ample	Ample	Ample	Ample			
Speed, rated	Hz	60	59.4	58.1	57.2	56.2			
Selection status		Acceptable	Acceptable	Acceptable	Acceptable	Acceptable			
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]		1.00 / 1.00 / 1.00 / 1.00	1.00 / 1.00 / 1.00 / 1.00	1.00 / 1.00 / 1.00 / 1.00	1.00 / 1.00 / 1.00 / 1.00	1.00 / 1.00 / 1.00 / 1.00			
Efficiency	%	68.96	74.16	78.52	80.50	79.12			
NPSH required	ft	15.24	16.93	19.38	22.90	27.38			
Submergence	ft	-	-	-	-	-	-	-	-
Power, rated	hp	839	877	875	882	886			

Multiple Conditions Curve

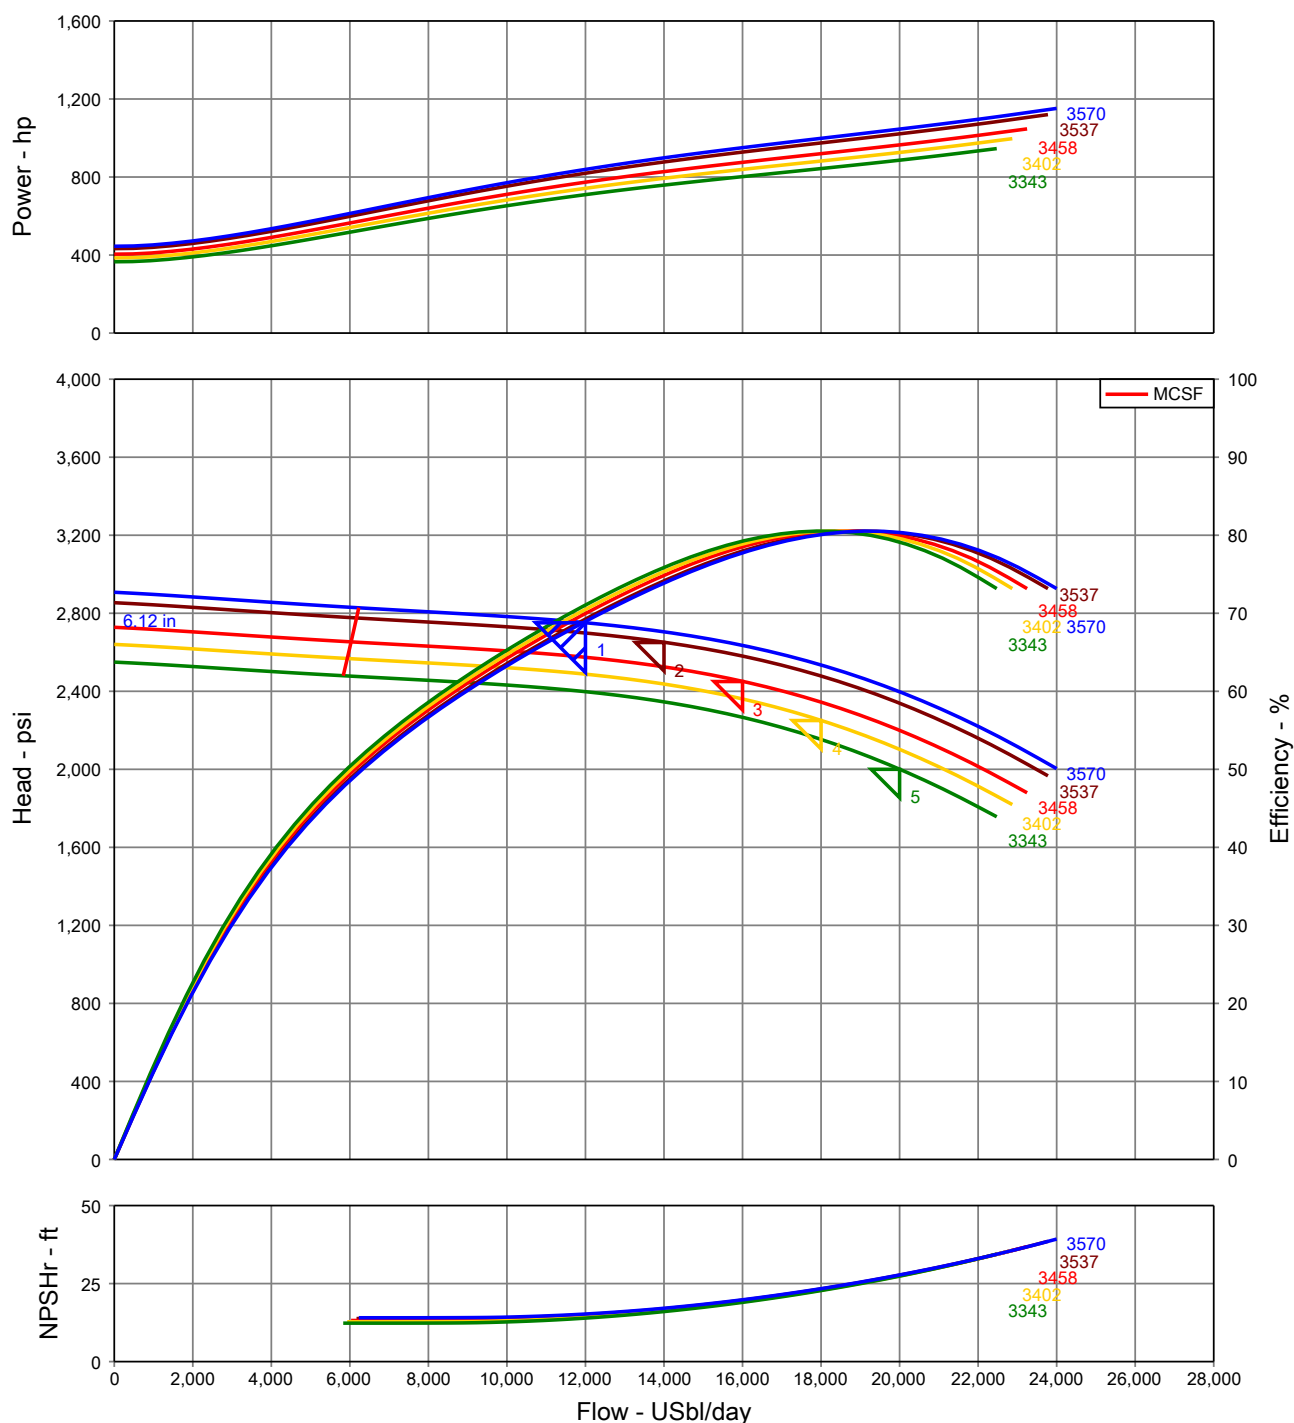

Customer : SERTECPET
 Customer reference : Ings. Juan Guerrero/ Victor Nole
 Item number : TM18500
 Service : RYA Proyecto
 Quantity : 1
 Quote number : 2414687
 Date last saved : 19 Mar 2026 12:59 AM
 Flow, rated : 12,000.0 USbl/day
 Differential head / pressure, rated : 2,751.0 psi
 Fluid density, rated / max : 1.000 / 1.030 SG

Size : TM18500
 Stages : 38
 Speed, rated : 3570 rpm
 Based on curve number : TM18500
 Efficiency : 68.96 %
 Power, rated : 839 hp
 NPSH required : 15.24 ft
 Viscosity : 1.00 cP
 Cq/Ch/Ce/Cn : 1.00 / 1.00 / 1.00 / 1.00
 [ANSI/HI 9.6.7-2010]
 Submergence

Construction Datasheet

1	Customer	: SERTECPET				Quote number	: 2414687
2	Customer reference	: Ings. Juan Guerrero/ Victor Nole				Pump Size	: TM18500
3	Item number	: TM18500				Number of Stages	: 38
4	Service	: RYA Proyecto					
5	Quantity of pumps	: 1				Date last saved	: 19 Mar 2026 12:59 AM
6	Pump Design					Seal & Flush	
7	Nozzle	Size	Rating	Face	Position	Arrangement	: Single component
8	Suction	6 inch	150#	RF	Side	Size	: 1.5 Inch
9	Discharge	4 inch	1500#	RTJ	End	Manufacturer / Model	: Type 2
10	Pump Type : Baker Hughes - Multistage Centrifugal Pump Model : TM Pump Size : TM18500 Number of Stages : 38 Rotation (From Drive) : Clockwise Impeller Type : Closed Casing Mounting : Foot Casing Split : Radial Casing Type : Carbon Steel Housing					Type	: single metal spring
11						API Material Code	: /
12						Gland Material	: n/a
13						Rotating Face	: silicon carbide
14						Stationary Face	: Silicon carbide
15						O-rings	: Nitrile o-rings
16						Springs/Bellows	: 316 stainless steel
17						Flush	: n/a
18						Vent	: n/a
19						Drain	: n/a
20	Materials					Seal Flush Plan	: /
21	Barrel/Case	: Carbon steel				Flush Piping Material/Type	: /
22	Impeller	: Ni-Resist Type 1 impellers/diffusers				Driver Information	
23	Diffuser	: Ni-Resist Type 1 impellers/diffusers				Manufacturer	: GE or similar
24	Shaft	: Nickel Alloy 718 shaft material				Power	: 900 hp
25	Suction Housing	: 316 stainless steel				Speed	: 3570 rpm
26	Discharge Flange	: Carbon steel flange / 316SS wetted components				Driver Type	: NEMA
27	Head & Base	: 316ss head and base				Efficiency Rating	: Premium
28	Stage Bushing	: ARHB Tungsten Carbide stage bushings				Enclosure	: TEFC/ WP11
29	Baseplate, Coupling, & Guard					Voltage	: 460 VAC
30	Baseplate Type	: 1K Series Baseplate with Pump Supports				Frame Size	: TBD
31	Baseplate Material	: Fabricated steel				Hertz	: 60 Hz
32	Pump Supports	: Cast Iron				Motor RTD's	: Winding & bearing
33	Coupling Manufacturer	: Rexnord/ Dodge Baldor				Space Heater	: 120 Volt
34	Coupling Size	: For 1000 hp				Starter/VFD Information	
35	Coupling Guard	: Aluminum				Type	: ESPD 8900 4ADV 12P
36	Bearing Thrust Chamber					Manufacturer	: Baker Hughes
37	Radial Bearing Type	: Deep groove ball				Size	: 1000 kVA
38	Thrust Bearing Type	: Tandem 40 degree angular contact				Voltage	: 460 VAC
39	Bearing Lubrication	: Ring oil				Enclosure	: NEMA 4 IP56
40	Oil Cooler	: N/A				Controller	: Advantage
41	Oil Temp Monitor /Level Switch	: Yokogawa YTA610				Pulse	: 12 pulse
42	Accessories					Weight (Approx.)	
43	Suction Monitor	: Yokogawa suction pressure transmitter				Pump & base	: -
44	Discharge Monitor	: Yokogawa discharge pressure transmitter				Motor	: -
45	Vibration Switch	: Metrix thrust chamber vibration transmitter				Starter/Drive	: -
						Total	: 0.00 lb





General Arrangement Drawing - TM18500 with 1K Series Baseplate with Pump Supports

Symbol	Nozzle	Size	Standard	Rating	Face	Position
1	Suction	6 inch	ANSI	150#	RF	Side
2	Discharge	4 inch	ANSI	1500#	RTJ	End

For information only - not for construction.

Not to scale.

Symbol	Comment
1	Suction housing and nozzle may be rotated @ 45 deg. increments.
3	Recommended customer supplied drop-out spool for mechanical seal change out.
4	Suggested frame hold down clamps, customer supplied.
5	Quantity of R for this configuration = 4
6	Grounding screw holes are located in the frame endplates on both ends, both sides.

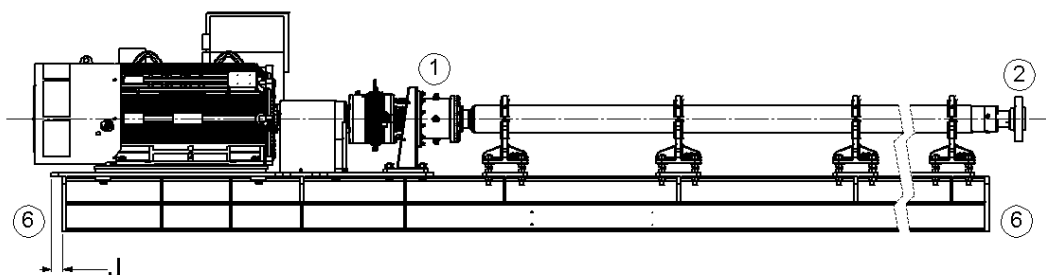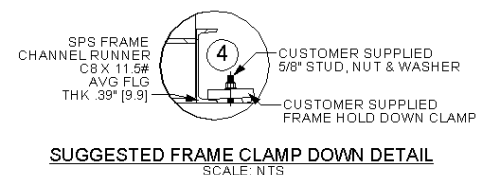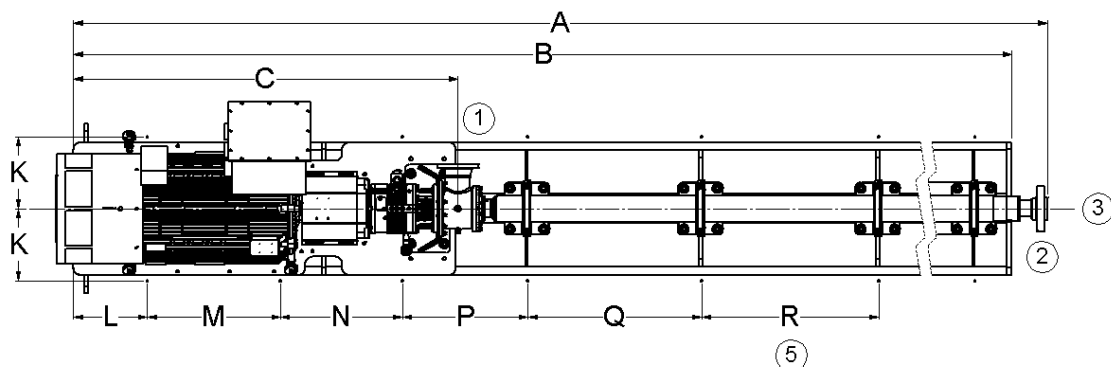

Unless noted, all dimensions are in inches

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	-	-
419	372	104	46.00	30.50	12.00	0.00	18.00	3.00	19.50	20.00	36.00	33.00	34.00	47.00	48.00	-	-

Customer : SERTECPET
 Customer reference TEST : Ings. Juan Guerrero/ Victor Nole
 Item number : TM18500

Quote number : 2414687
 Pump size : TM18500
 Stages : 38

Driver Rating : 900 hp
 Driver Frame Size : TBD
 Quantity of pumps : 1