



Pump Performance Datasheet

Customer	: SERTECPET	Quote number	: 2414687
Customer reference	: Ings. Juan Guerrero/ Victor Nole	Size	: TN35000
Item number	: TN35000 09STG	Stages	: 9
Service	: Transfer Oil	Based on curve number	: TN35000
Quantity	: 1	Date last saved	: 10 Jul 2026 2:27 AM
Operating Conditions		Liquid	
Flow, rated	: 32,000.0 USbl/day	Liquid type	: User Defined
Differential head / pressure, rated (requested)	: 655.0 psi	Additional liquid description	: Crude + water produced
Differential head / pressure, rated (actual)	: 672.5 psi	Solids diameter, max	: 0.00 in
Discharge pressure (actual)	: 792.5 psi	Solids concentration, by volume	: 0.00 %
Suction pressure, rated / max	: 120.0 / 120.0 psi.g	Temperature, max	: 140.0 deg F
NPSH available, rated	: Ample	Fluid density, rated / max	: 0.944 / 0.944 SG
Site Supply Frequency	: 60 Hz	Viscosity, rated	: 80.00 cP
Performance		Vapor pressure, rated	: 0.00 psi.a
Speed, rated	: 3570 rpm	Material	
Impeller diameter, rated	: 7.67 in	Material selected	: Standard
Impeller diameter, maximum	: 7.67 in	Pressure Data	
Impeller diameter, minimum	: 7.67 in	Maximum working pressure	: 971.3 psi.g
Efficiency	: 78.20 %	Maximum allowable working pressure	: N/A
NPSH required / margin required	: 43.52 / 3.00 ft	Maximum allowable suction pressure	: N/A
Ns (imp. eye flow) / Nss (imp. eye flow)	: 2,525 / 6,699 US Units	Hydrostatic test pressure	: 1,456.9 psi.g
MCSF	: 12,790.8 USbl/day	Driver & Power Data (@Max density)	
Head, maximum, rated diameter	: 851.3 psi	Driver sizing specification	: Maximum power
Head rise to shutoff	: 26.58 %	Margin over specification	: 0.00 %
Flow, best eff. point	: 37,189.4 USbl/day	Service factor	: 1.00
Flow ratio, rated / BEP	: 86.05 %	Power, hydraulic	: 366 hp
Diameter ratio (rated / max)	: 100.00 %	Power, rated	: 468 hp
Head ratio (rated dia / max dia)	: 100.00 %	Power, maximum, rated diameter	: 505 hp
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00	Minimum recommended motor rating	: 600 hp / 447 kW
Selection status	: Acceptable		

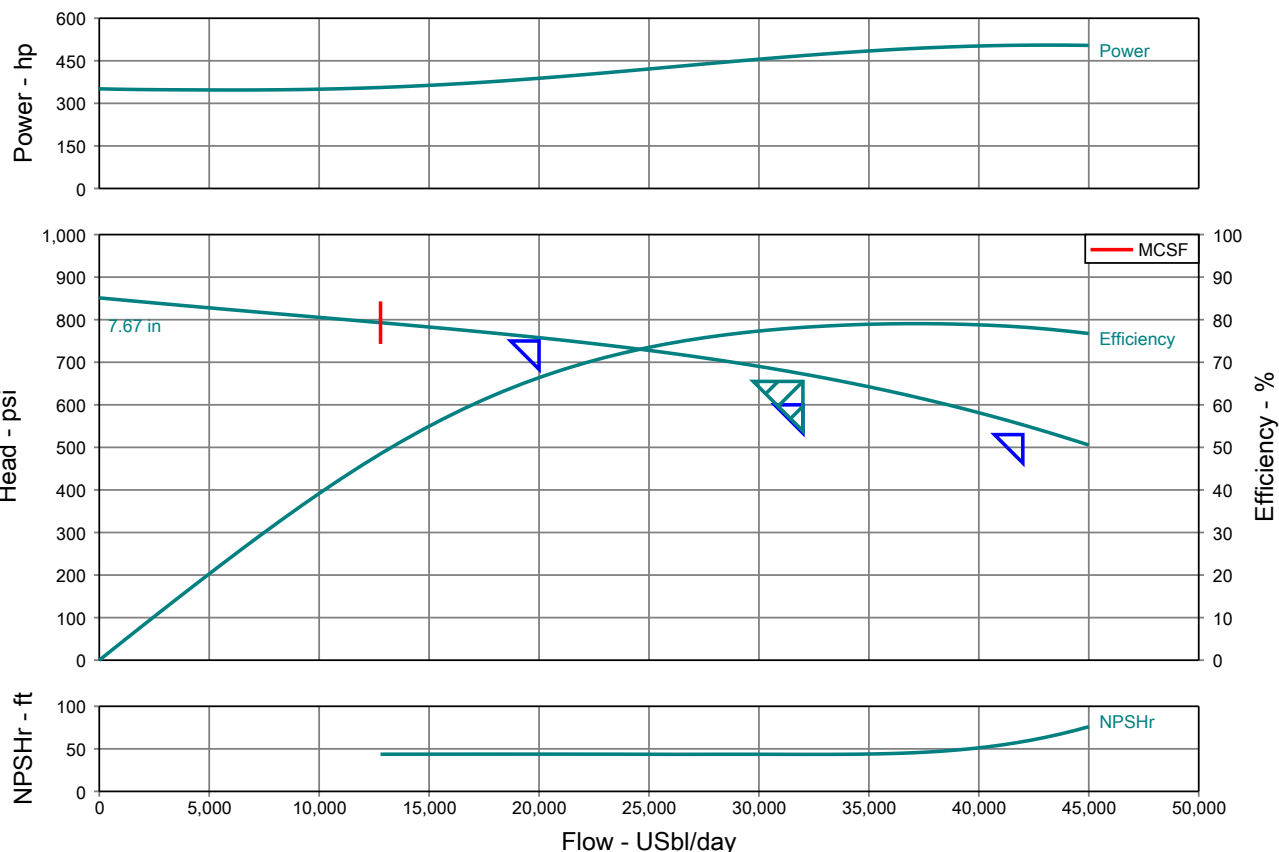

Multi-Speed Performance Curve

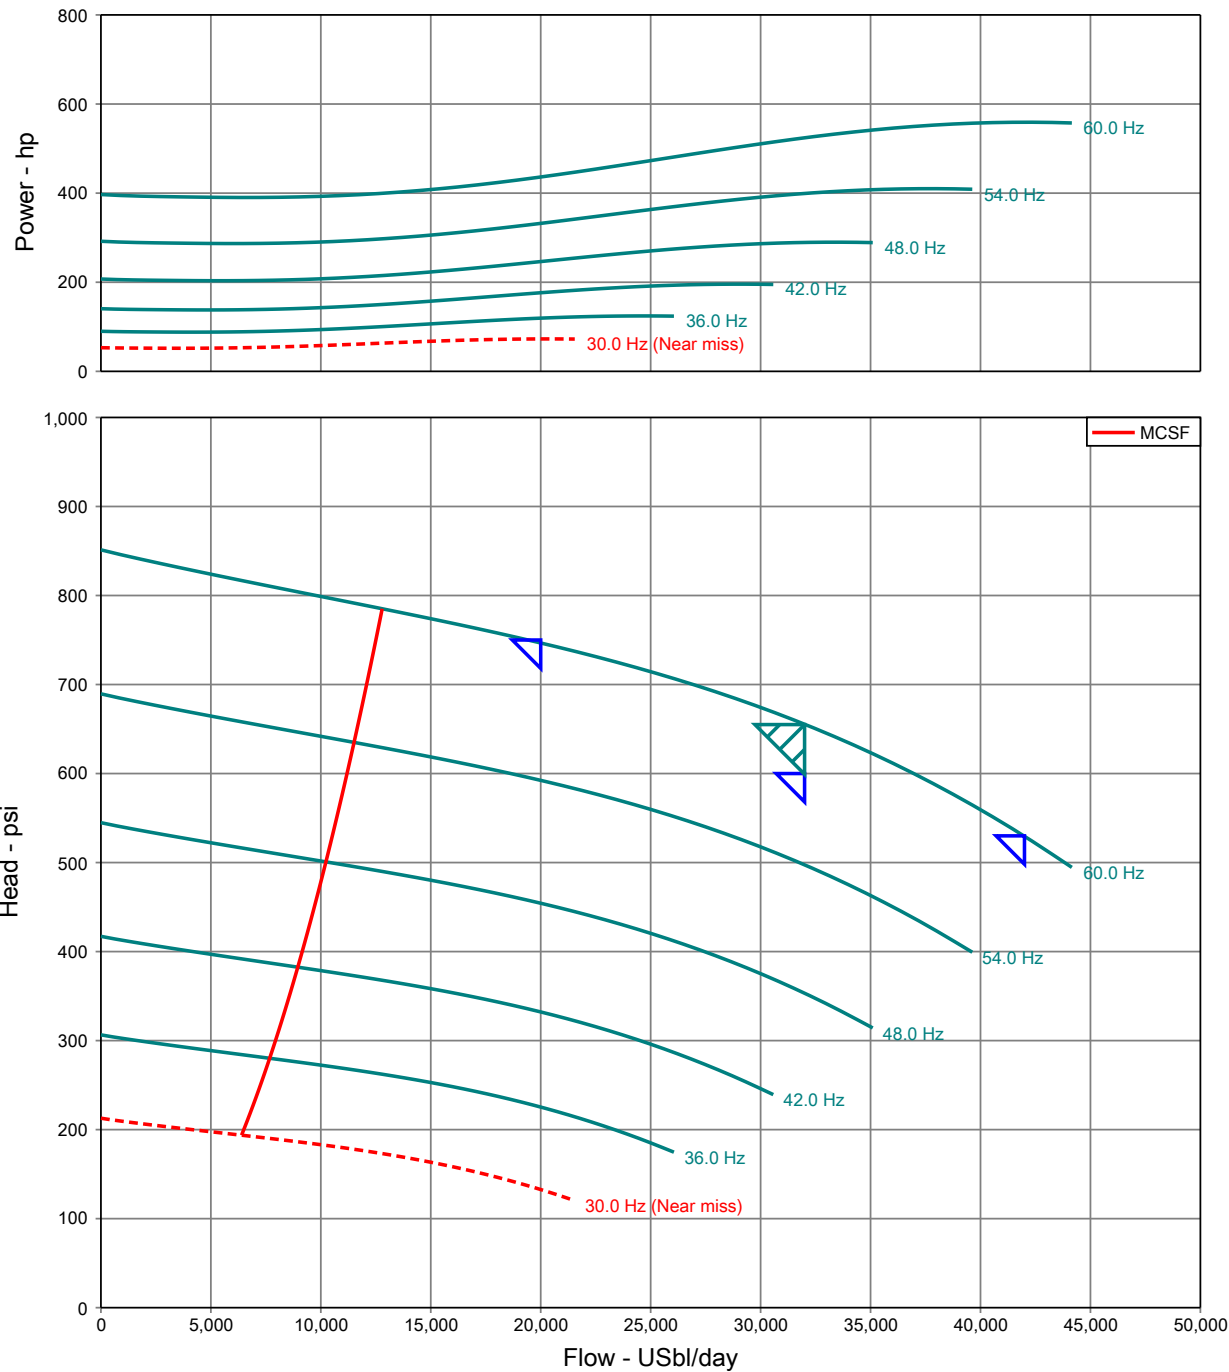


Customer	: SERTECPET	Quote number	: 2414687
Customer reference	: Ings. Juan Guerrero/ Victor Nole	Size	: TN35000
Item number	: TN35000 09STG	Stages	: 9
Service	: Transfer Oil	Based on curve number	: TN35000
Quantity	: 1	Date last saved	: 10 Jul 2026 2:34 AM
Flow, rated	: 32,000.0 USbl/day	Efficiency	: 78.20 %
Differential head / pressure, rated	: 655.0 psi	Power, rated	: 468 hp
Speed, rated	: 3570 rpm	NPSH required	: 43.52 ft
Impeller diameter, rated	: 7.67 in	Fluid density, rated / max	: 0.944 / 0.944 SG
Site Supply Frequency	: 60 Hz	Viscosity, rated	: 80.00 cP
Nominal speed	: 3570 rpm	Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00

Multiple Conditions Datasheet

Customer : SERTECPET		Quantity : 1		Size : TN35000					
Customer reference : Ings. Juan Guerrero/ Victor Nole		Quote number : 2414687		Stages : 9					
Item number : TN35000 09STG		Date last saved : 10 Jul 2026 2:27 AM		Speed, rated : 3570 rpm					
Service : Transfer Oil									
Condition #		1	2	3	4	5	6	7	8
Description		Design	32kbd@720psi dsch	Max condition	Min condition				
Temperature, max	deg F	140.0	140.0	140.0	140.0				
Fluid density, rated / max	SG	0.944 / 0.944	0.944 / 0.944	0.944 / 0.944	0.944 / 0.944				
Viscosity, rated	cP	80.00	80.00	80.00	80.00				
Vapor pressure, rated		0.00	0.00	0.00	0.00				
Primary condition		☉	○	○	○	○	○	○	○
Size		TN35000							
Stages		9							
Impeller diameter, rated	in	7.67							
Flow, rated	USbl/day	32,000.0	32,000.0	42,000.0	20,000.0				
Head, rated (requested)	psi	655.0	600.0	530.0	750.0				
Head, rated (actual)	psi	655.4	600.3	531.0	750.3				
Suction pressure, rated / max	psi.g	120.0 / 120.0	120.0 / 120.0	120.0 / 120.0	120.0 / 120.0				
NPSH available, rated	ft	Ample	Ample	Ample	Ample				
Speed, rated	rpm	3570	3449	3573	3578				
Selection status		Acceptable	Acceptable	Acceptable	Acceptable				
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]		0.98 / 0.98 / 0.87 / 1.00	0.98 / 0.98 / 0.86 / 1.00	0.98 / 0.98 / 0.87 / 1.00	0.98 / 0.99 / 0.87 / 1.00				
Efficiency	%	68.07	68.08	67.70	58.19				
NPSH required	ft	43.52	40.62	58.40	44.00				
Submergence	ft	-	-	-	-	-	-	-	-
Power, rated	hp	524	480	561	439				

Multiple Conditions Curve

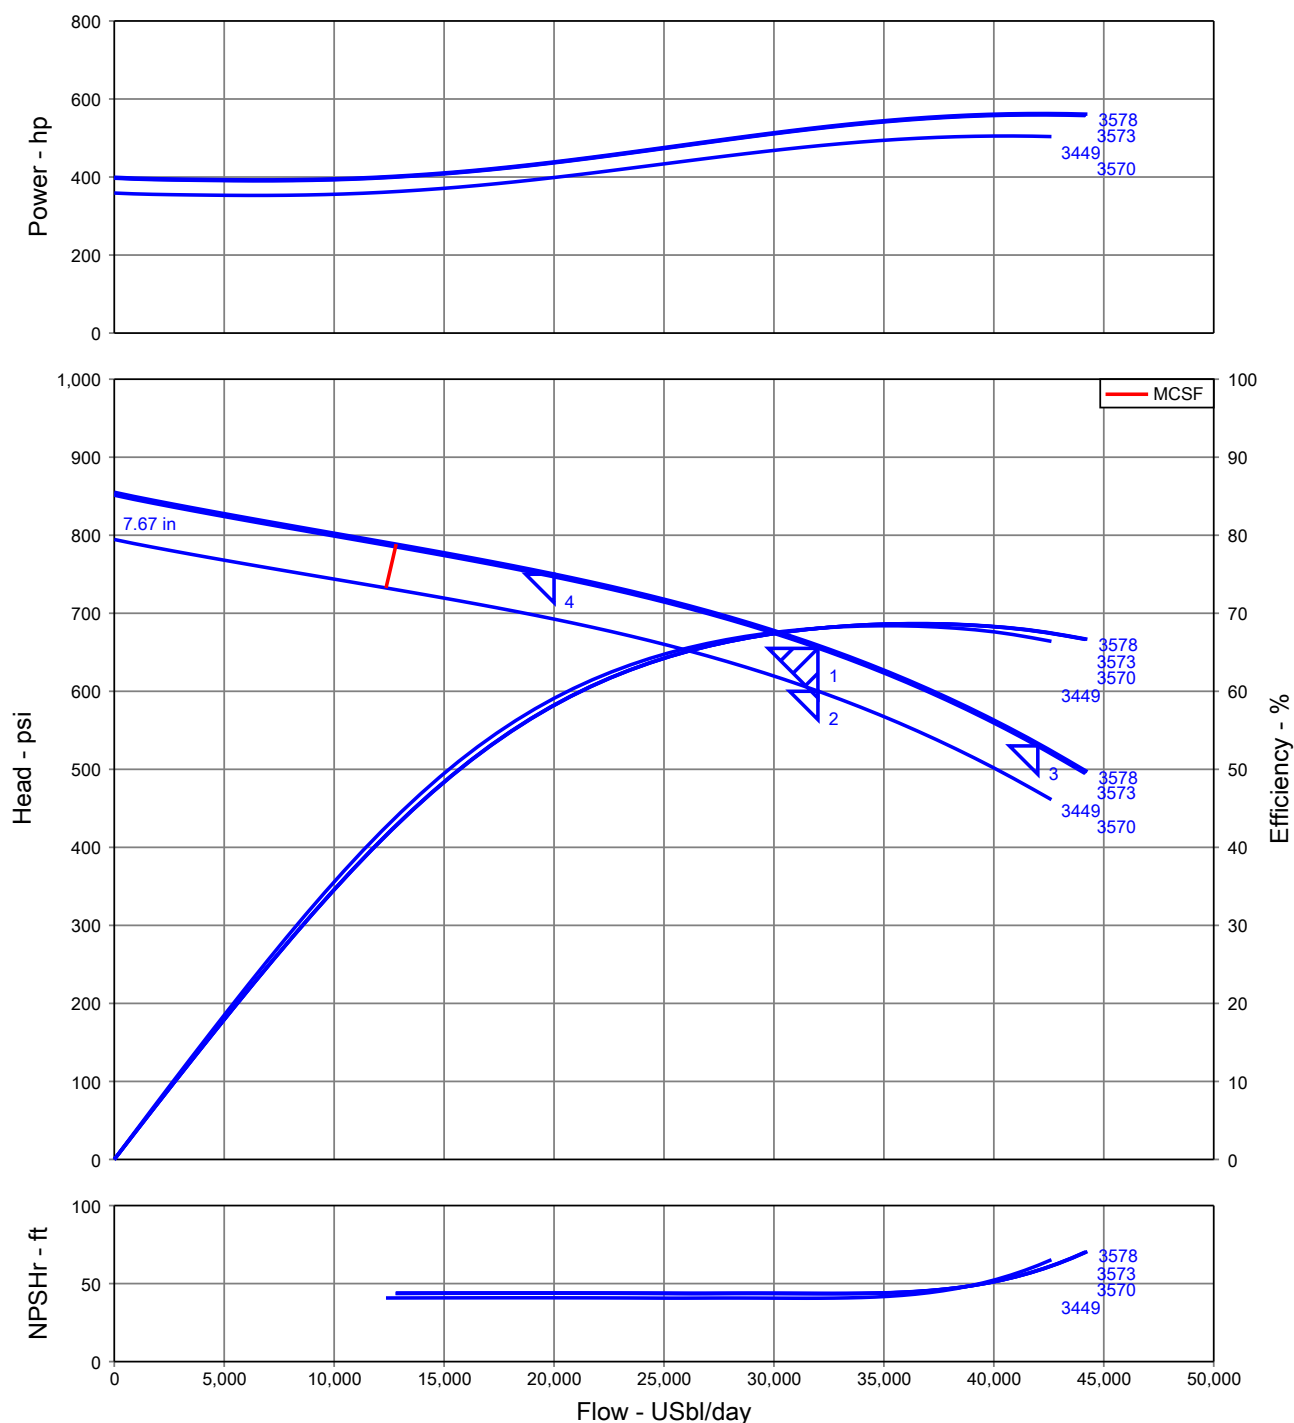

Customer : SERTECPET
 Customer reference : Ings. Juan Guerrero/ Victor Nole
 Item number : TN35000 09STG
 Service : Transfer Oil
 Quantity : 1
 Quote number : 2414687
 Date last saved : 10 Jul 2026 2:27 AM

Flow, rated : 32,000.0 USbl/day
 Differential head / pressure, rated : 655.0 psi
 Fluid density, rated / : 0.944 / 0.944 SG max

Size : TN35000
 Stages : 9
 Speed, rated : 3570 rpm
 Based on curve number : TN35000
 Efficiency : 78.20 %
 Power, rated : 468 hp
 NPSH required : 43.52 ft

Viscosity : 80.00 cP
 Cq/Ch/Ce/Cn : 1.00 / 1.00 / 1.00 / 1.00 [ANSI/HI 9.6.7-2010]
 Submergence





General Arrangement Drawing - TN35000 with 1K Series Baseplate with Pump Supports

Symbol	Nozzle	Size	Standard	Rating	Face	Position
1	Suction	8 inch	ANSI	150#	RF	Side
2	Discharge	6 inch	ANSI	600#	RF	End

For information only - not for construction.

Not to scale.

Symbol	Comment
1	Suction housing and nozzle may be rotated @ 45 deg. increments.
3	Recommended customer supplied drop-out spool for mechanical seal change out.
4	Suggested frame hold down clamps, customer supplied.
5	Quantity of R for this configuration = 0
6	Grounding screw holes are located in the frame endplates on both ends, both sides.

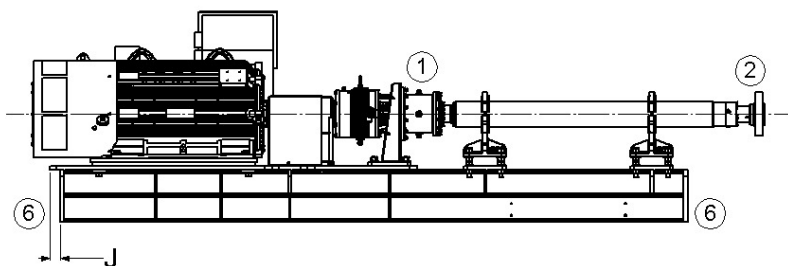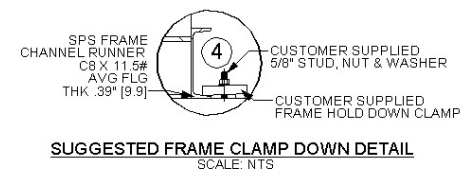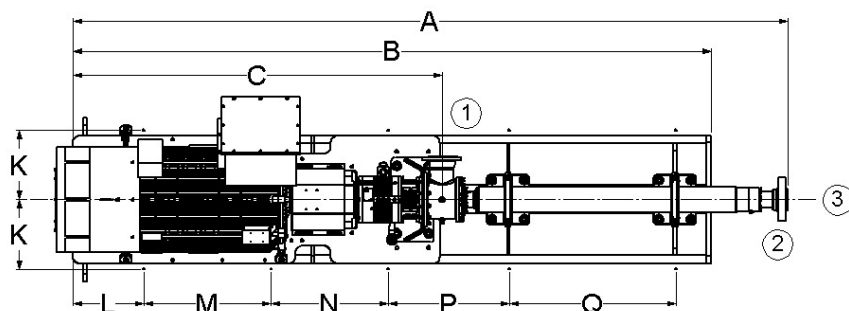

Unless noted, all dimensions are in inches

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	-	-
203	180	104	46.00	30.50	12.00	0.00	18.00	3.00	19.50	20.00	36.00	33.00	34.00	47.00	48.00	-	-

Customer : SERTECPET
 Customer reference TEST : Ings. Juan Guerrero/ Victor Nole
 Item number : TN35000 09STG

Quote number : 2414687
 Pump size : TN35000
 Stages : 9

Driver Rating : 600 hp
 Driver Frame Size : 5013ST
 Quantity of pumps : 1