

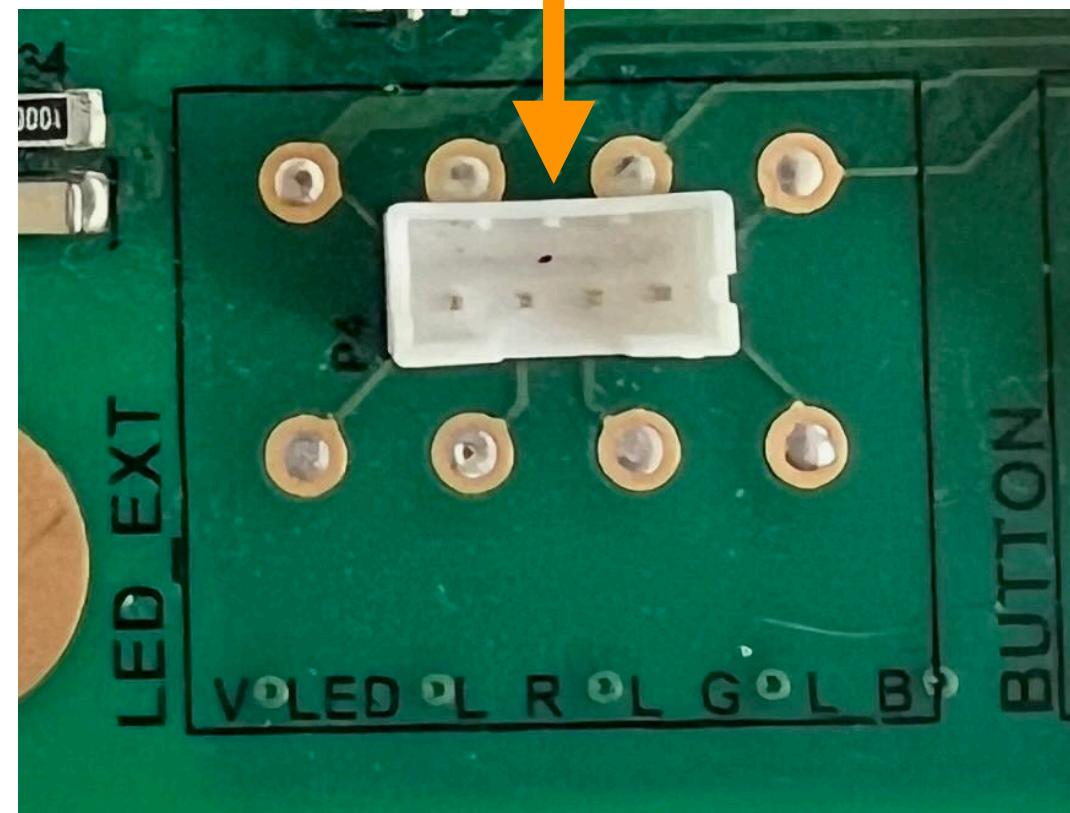
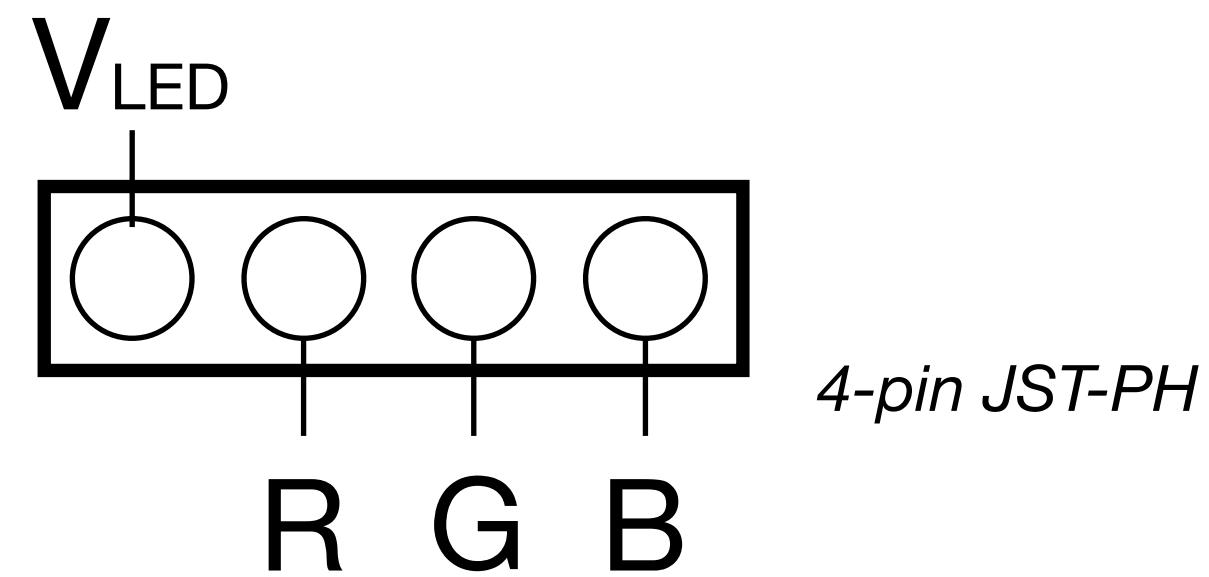


LED_EXT

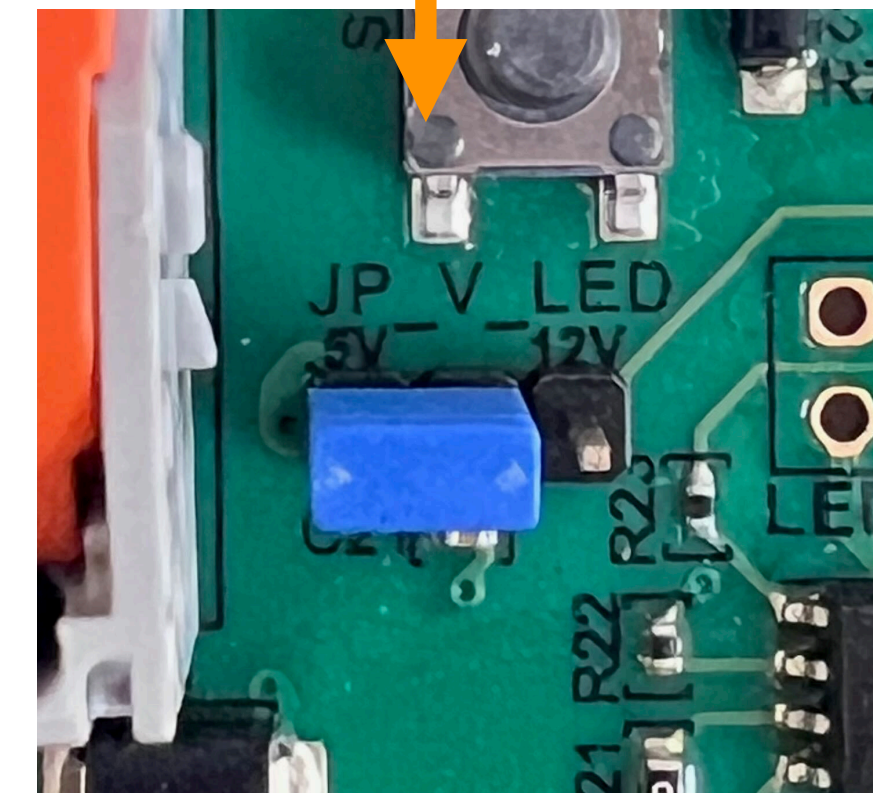



Use 4-pin JST-PH connector to connect an external common cathode RGB LED (or 3 separate LEDs)

JP_V_LED

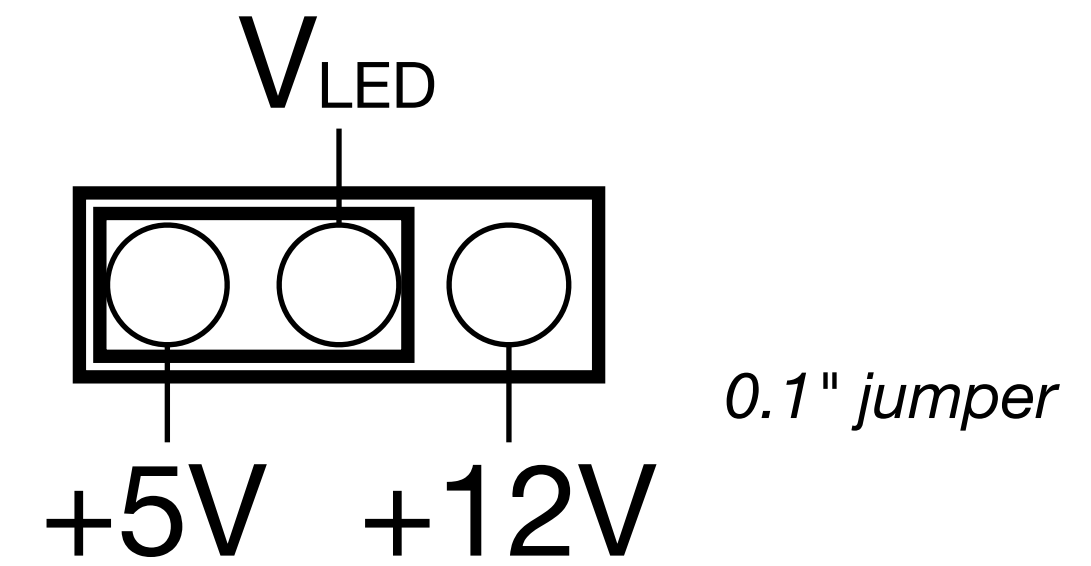

Voltage of LED (on V_{LED}) can be 5V or 12V and is selected by jumper on JP_V_LED (see also next page)

LED TEST connector

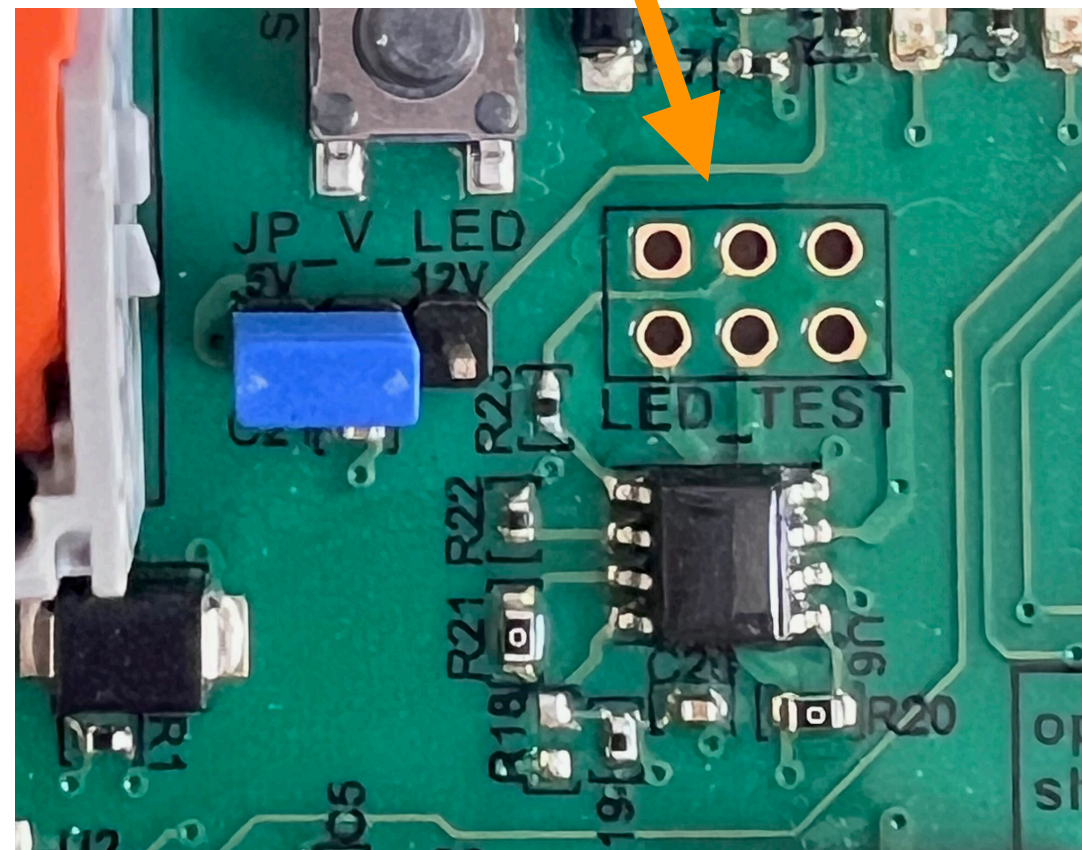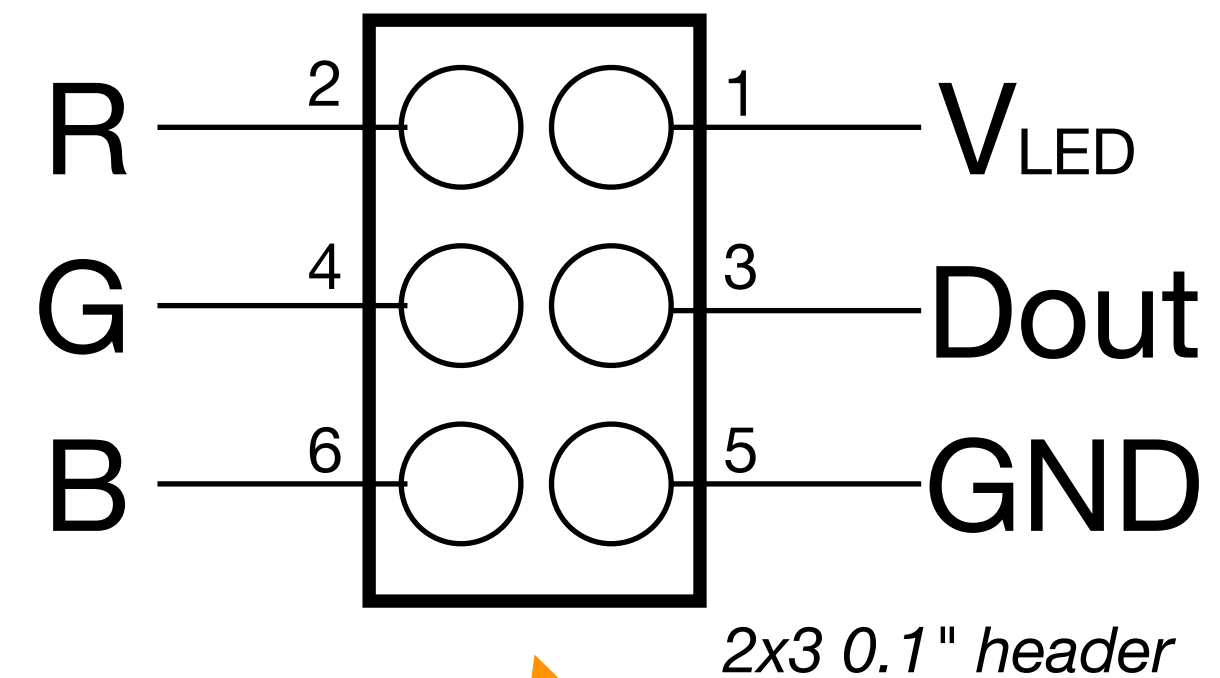

LED TEST connector (solder) has the same connections as LED EXT.

LED TEST can also output digital output for WS2811 type addressable LEDs. External power is required if using more than one addressable LED