

TOP

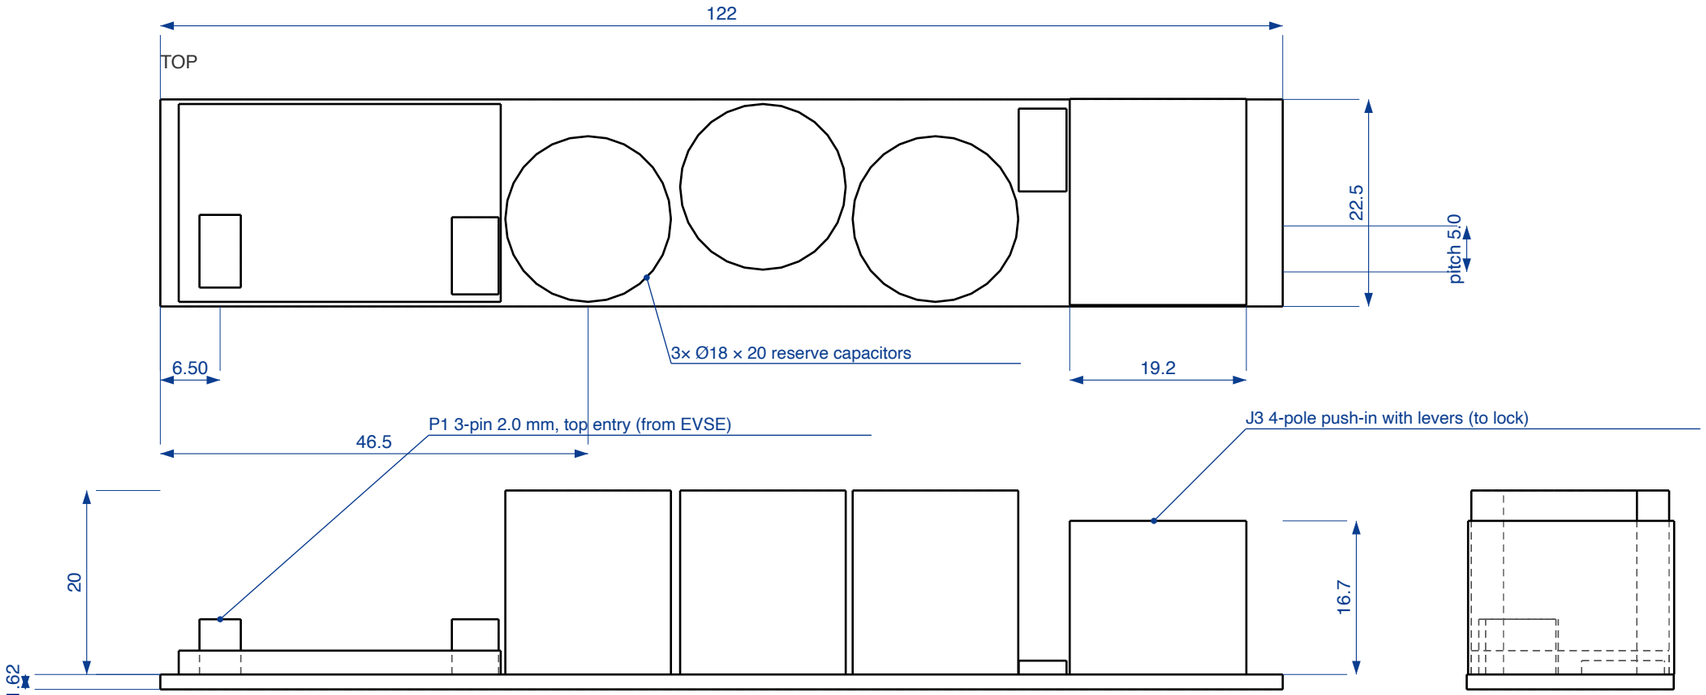

FRONT

RIGHT

ISOMETRIC (not to scale)

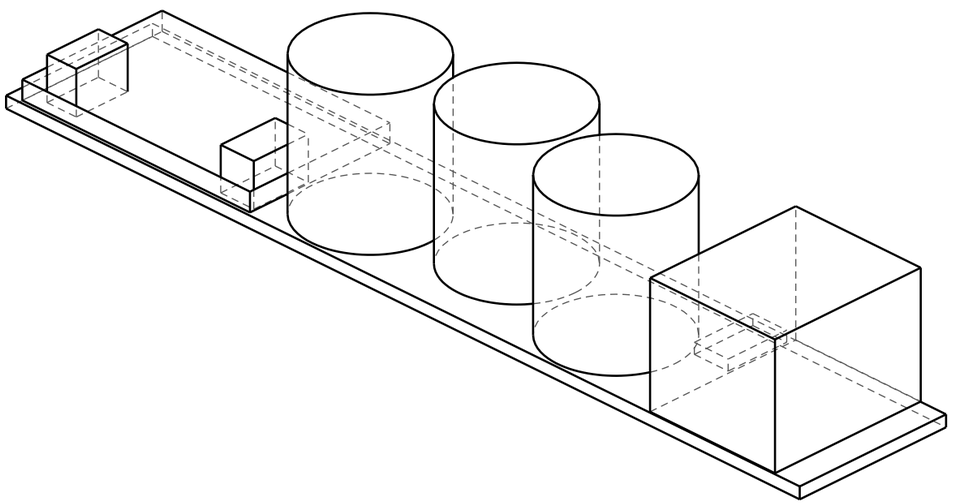

NOTES

1. No mounting holes: hold the board by its edges (card guide or clip); keep 4 mm free below (capacitor and terminal pins).
2. P1: lock signal in, +12 V, GND from the EVSE controller; leave 20 mm above P1 for the plug and wires.
3. J3: drive and position feedback of the lock actuator; leave 20 mm above J3 for the wires and opening the levers.
4. Highest parts: reserve capacitors 20.0 and J3 16.7 above the board; J3 overhangs the board edge by 0.05.
5. Outline and positions from the board's CAD model; capacitor height as fitted; part shapes are envelopes (±0.5 mm).

EdgeTech Cable lock driver board

PART NUMBER	REVISION	DATE
EVSE-X-CL	A	2026-10-12
UNITS	SCALE (A3)	PROJECTION
mm	1.5:1	third angle

For fit and installation only, not for manufacture.

≈ = estimated dimension (see notes). File: evse-x-cl.step