

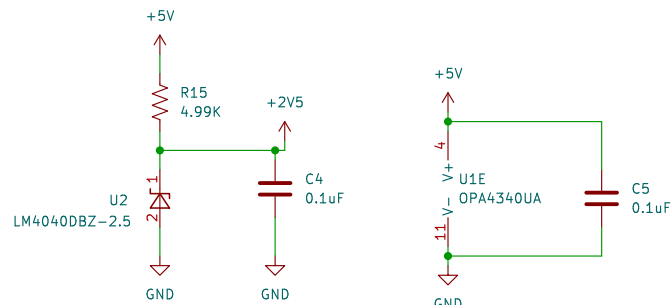
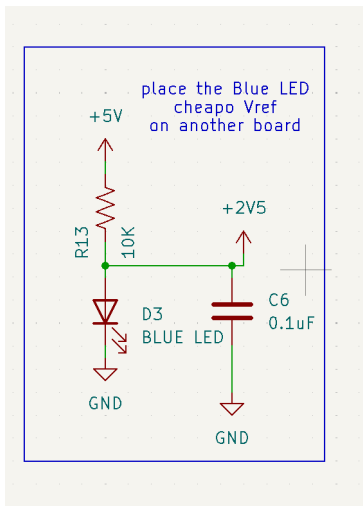


PART VALUES NEED ADJUSTMENT

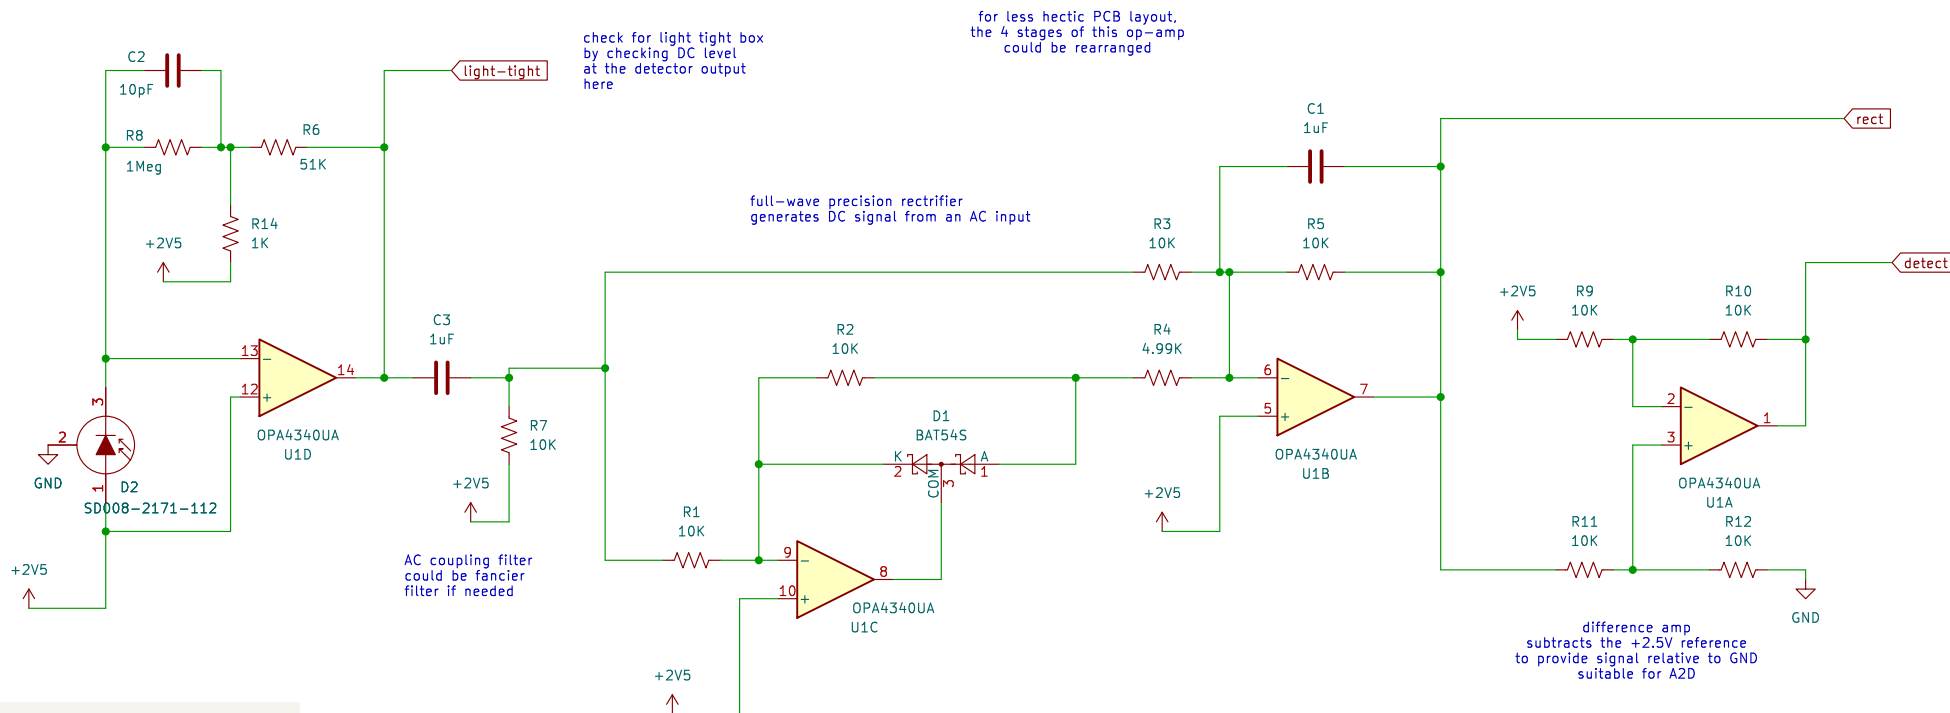

the detector stage op-amps use +5V and GND, and a +2.5V ref



- H1 MountingHole
- H2 MountingHole
- H3 MountingHole
- H4 MountingHole

Sheet: /
File: UV-Detector-v0.2.kicad_sch

Title:

Size: A4
KiCad E.D.A. 8.0.0

Date:

Rev:

Id: 1/1