PART VALUES NEED ADJUSTMENT

check for light tight box
by checking DC level
at the detector output
here

for less hectic PCB layout,
the 4 stages of this op-amp
could be rearranged


full-wave precision rectrifier
generates DC signal from an AC input


AC coupling filter
could be fancier
filter if needed

difference amp
subtracts the +2.5V reference
to provide signal relative to GND
suitable for A2D

the detector stage op-amps
use +5V and GND,
and a +2.5V ref

place the Blue LED
cheapo Vref
on another board

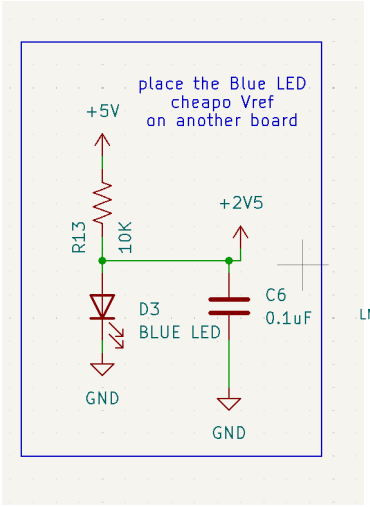

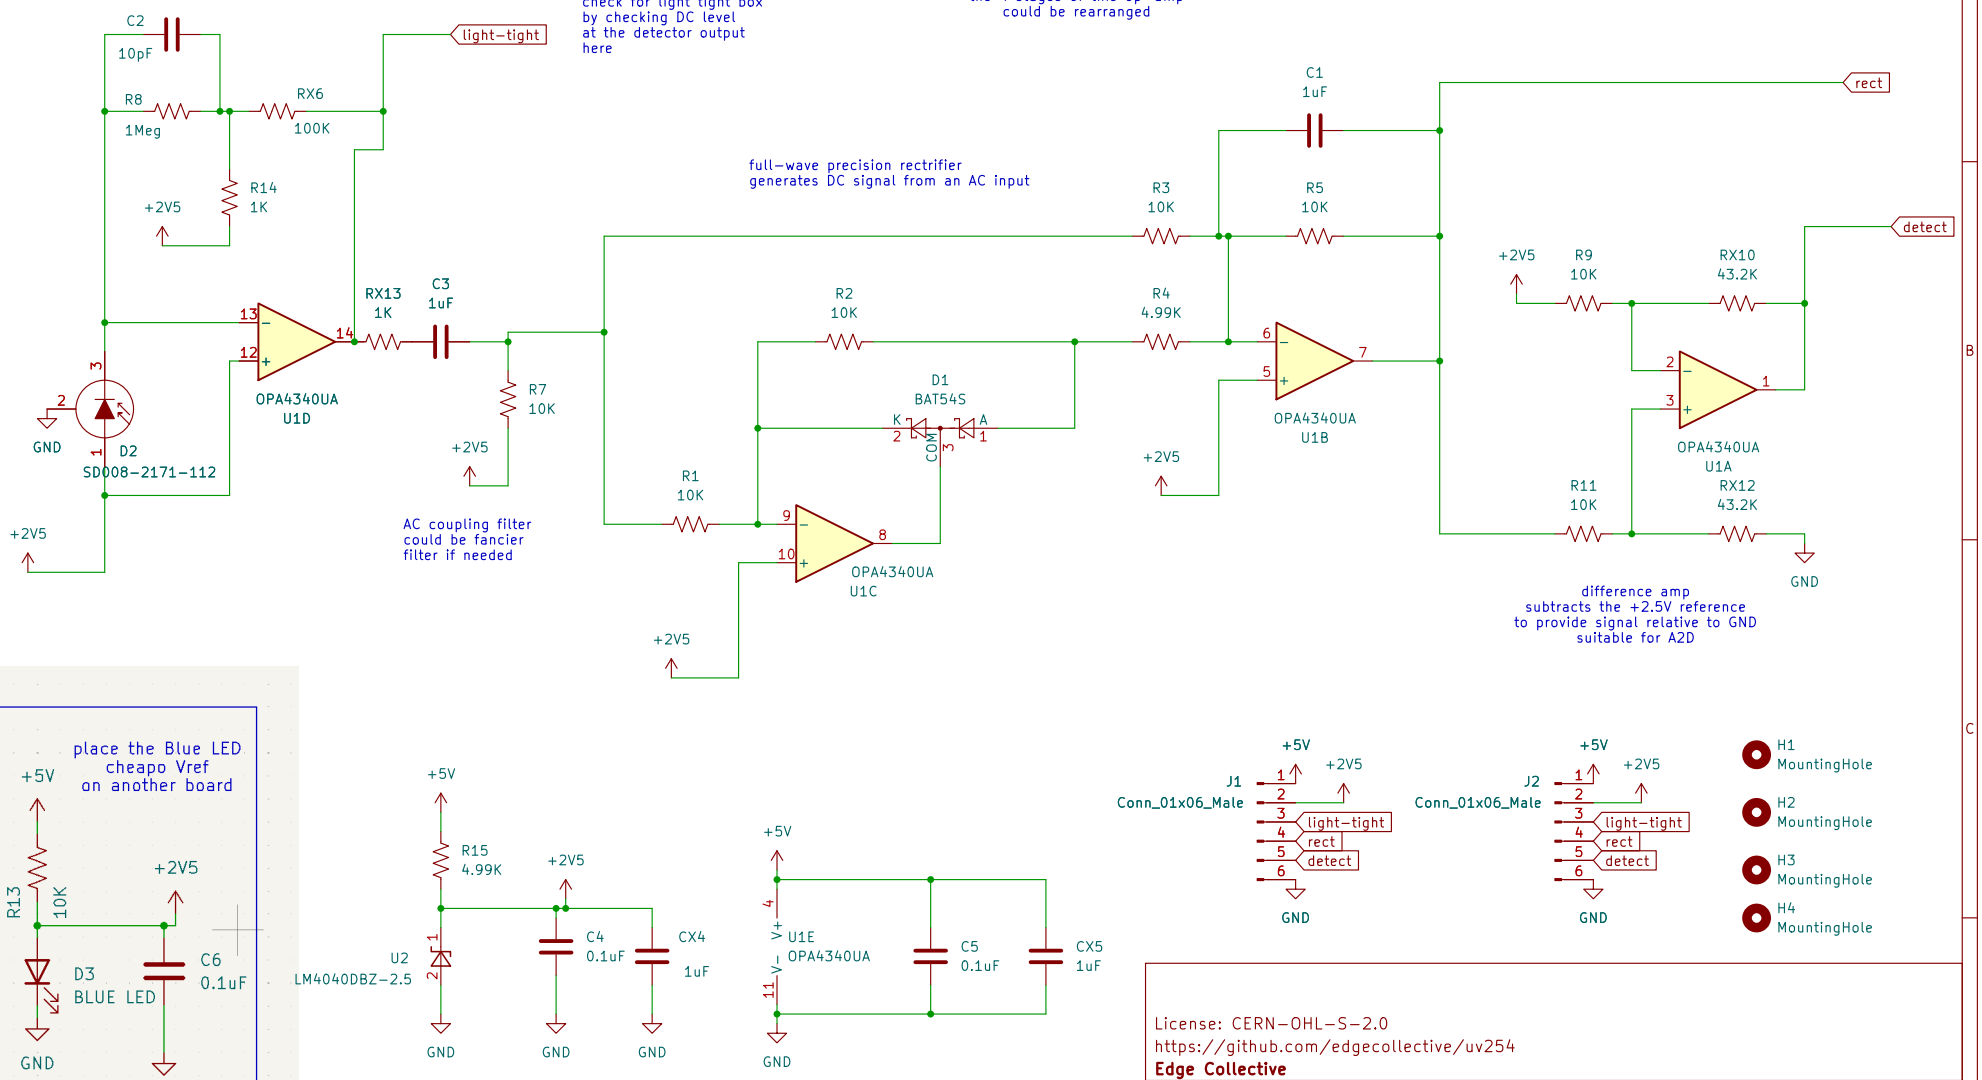

License: CERN-OHL-S-2.0
https://github.com/edgecollective/uv254

Edge Collective

Sheet: /
File: uv-detector.kicad_sch

Title: UV-Detector

Size: A4	Date: 2026-11-08	**Rev: v0.4**
KiCad E.D.A. 10.0.8		Id: 1/1