

Street Networks of Organic City Cores — Research Process

Objective

The research asks whether the street layout of city cores that grew without a plan can be measured, summarised as a signature, and then reproduced by an algorithm. The end goal is a generator for a "naturally formed" core. Prague is the model: footpaths became roads, roads became main streets, and the city grew outward from one central point. The generator is meant to drive a p5.js city-growth clock.

Three questions organised the work:

1. How do street segment lengths, junction angles and street orientations differ between each city's oldest core and its contemporary areas?
2. Is there a shared "organic-core" signature, and where does it show up in other areas and at other dates?
3. Can a growth model reproduce that signature?

Stage 1 — Cities and study areas


Stage 1 compared one old core with one or two contemporary areas in each of four cities: London, Istanbul, Prague and New York. Paris was added before the full run. The cities give a spread of histories:

- a medieval core rebuilt after fire and war (London);
- a Byzantine and Ottoman peninsula (Istanbul);
- a Central European old town (Prague);
- a colonial tip beside an 1811 grid (New York);
- a medieval quarter inside a Haussmann city (Paris).

Each area was sampled as a circle of equal area: 750 m radius, with 500 m and 1,000 m as sensitivity checks. Centre points were checked by reverse geocoding and moved in instances where the first choice was put it outside the district it was meant to represent, or on a site whose streets weren't typical of that district.¹

City	Old core (centre)	Contemporary areas (centre)	Adjustments made
London	City of London, Bank (51.5133, -0.0890)	Canary Wharf (51.5054, -0.0235); Thamesmead (51.5010, 0.1180)	none
Istanbul	Fatih, Grand Bazaar / Beyazıt (41.0106, 28.9680)	Ataşehir (40.9923, 29.1244); Başakşehir 4.-5. Etap (41.1000, 28.7920)	Başakşehir moved off a gated estate whose roads are private in OSM
Prague	Staré Město, Old Town Square (50.0875, 14.4213)	Jižní Město (50.0310, 14.5270)	none
Paris	Le Marais (48.8575, 2.3575)	Sarcelles grand ensemble, Lochères (48.9785, 2.3830)	Sarcelles moved from the old village to the postwar estate
New York	Lower Manhattan (40.7047, -74.0094), clipped to land and without Battery Park City	Midtown 1811 grid (40.7549, -73.9840); Staten Island, Rossville/Woodrow (40.5500, -74.1990)	Staten Island chosen from 8 candidates for the strongest cul-de-sac pattern

¹ Only one centre was moved: Başakşehir, where the first point fell on Metrokent, a gated complex with private internal roads, so it was moved to the public 4th–5th Etap mass housing. Clipping water and Battery Park City out of Lower Manhattan was handled separately.

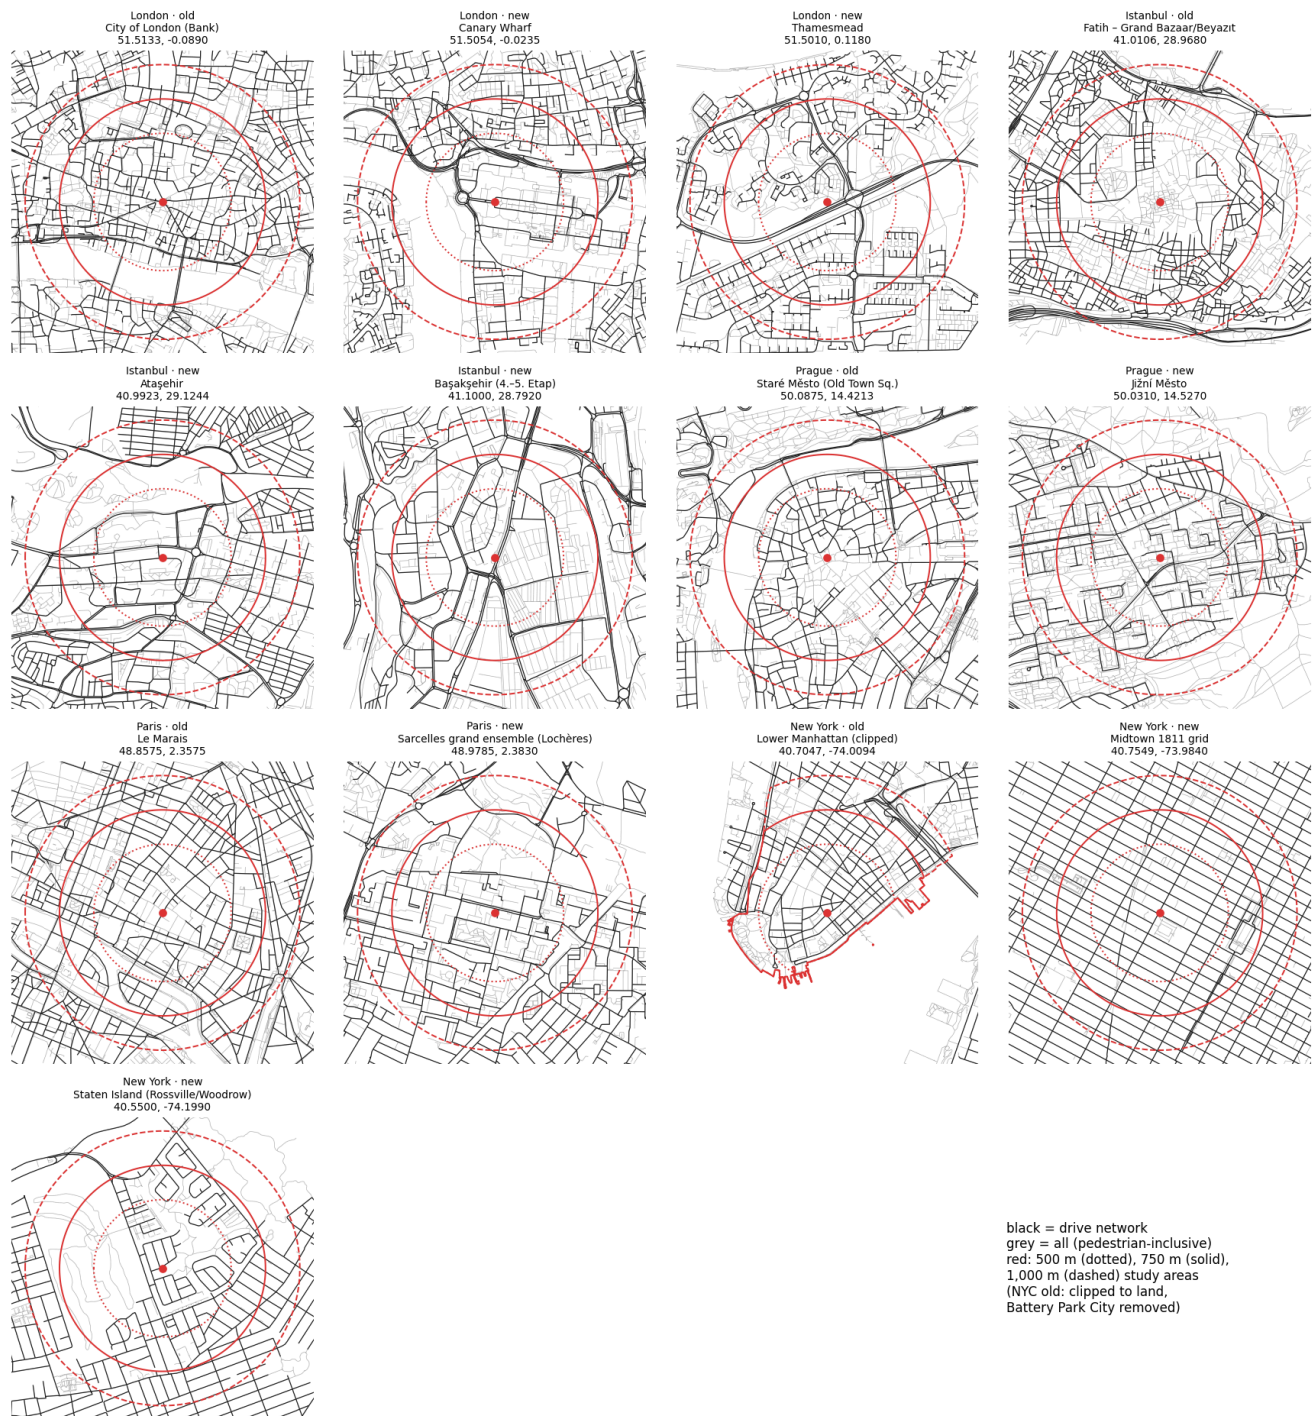

Stage 1 — Information gathering and method

All street networks came from OpenStreetMap [1] through the OSMnx library (version 2.1) [2]. The Overpass and Nominatim servers provided the initial download but the connection proved at times unreliable. Additional downloads went through a retrying fetcher with a local cache.

Two networks per area:

- **Drive network** (main analysis): streets open to cars, with motorways and their ramps removed.
- **Pedestrian-inclusive network** (reported separately): adds footpaths, lanes and steps, which matter in the old cores of Istanbul and Prague. Sidewalks and crossings mapped as separate lines were removed, because they duplicate the street next to them.

Cleaning steps, needed so that one real junction counts once:

- Nearby nodes were merged into one intersection (12 m tolerance, so nodes up to 24 m apart merge). Merged clusters were capped at 40 m across. Without the cap, dense footpath meshes such as Istanbul's Grand Bazaar fused into single "junctions" hundreds of metres wide.
- Divided roads (two parallel carriageways within 25 m) were counted as one street.
- A "segment" is the stretch of street between two junctions.
- Segments crossing the circle's edge were left out of length statistics.

Measures:


Measure	What it captures	How it is computed
Segment length	how often streets are interrupted by junctions	median, standard deviation, coefficient of variation (CV) and interquartile range of junction-to-junction lengths
Junction angle	how square the junctions are	angle between neighbouring streets, measured over the first 15 m of each street; deviation from the nearest of 90°, 180° or 270°
Orientation entropy	how many directions the streets run in	36 bins of 10°, street length per bin, $H = -\sum p \ln p$ (Boeing 2019) [3] ; 1.39 = perfect grid, 3.58 = every direction equally
Junction mix	T-junctions vs. crossroads vs. dead ends	share of 3-way and 4-way junctions; share of dead ends
Circuitry	how winding streets are	street length ÷ straight-line distance between its junctions


Stage 1 — Results

Old cores differ from contemporary areas mainly in orientation and junction type, not in how variable their segment lengths are. Findings for the drive network in 750 m circles:

- **Orientation entropy** is highest or tied highest in every old core (3.16–3.46), against 3.00–3.35 elsewhere. Midtown's grid is the outlier at 1.45.
- **Segment lengths are not more variable in old cores.** CV is lower in the old core in London, Prague, Paris and New York. Old cores have short, fairly even segments; newer areas mix long arterials with short cul-de-sacs.
- **Junctions in old cores are close to square** (9–13° off), mostly as T-junctions. Newer areas split into square estates (Midtown, Staten Island, Thamesmead, Jižní Město) and oblique layouts (Canary Wharf, Ataşehir, Başakşehir, 18–21° off).
- **Topology separates them most clearly.** Old cores have more crossroads and few dead ends. Postwar estates are dominated by T-junctions and dead ends (Thamesmead 38%, Jižní Město 33%).

City	Area	Type	Median segment (m)	Length CV	Off-square (°)	Entropy	4-way	Dead ends
London	City of London	old	71	0.62	11.2	3.30	24%	21%
London	Canary Wharf	new	81	0.78	17.7	3.13	18%	20%
London	Thamesmead	new	71	1.04	9.7	3.35	10%	38%
Istanbul	Fatih	old	61	0.89	11.9	3.43	33%	17%
Istanbul	Ataşehir	new	124	0.66	20.7	3.26	31%	3%
Istanbul	Başakşehir	new	115	0.73	20.6	3.27	21%	2%
Prague	Staré Město	old	78	0.60	12.6	3.46	23%	16%
Prague	Jižní Město	new	94	0.79	9.3	3.04	20%	33%
Paris	Le Marais	old	91	0.57	8.7	3.16	33%	8%
Paris	Sarcelles	new	108	0.68	10.6	3.00	17%	18%
New York	Lower Manhattan	old	81	0.51	9.1	3.33	39%	1%
New York	Midtown grid	new	86	0.62	2.8	1.45	87%	0%
New York	Staten Island	new	81	0.68	6.3	3.16	12%	19%

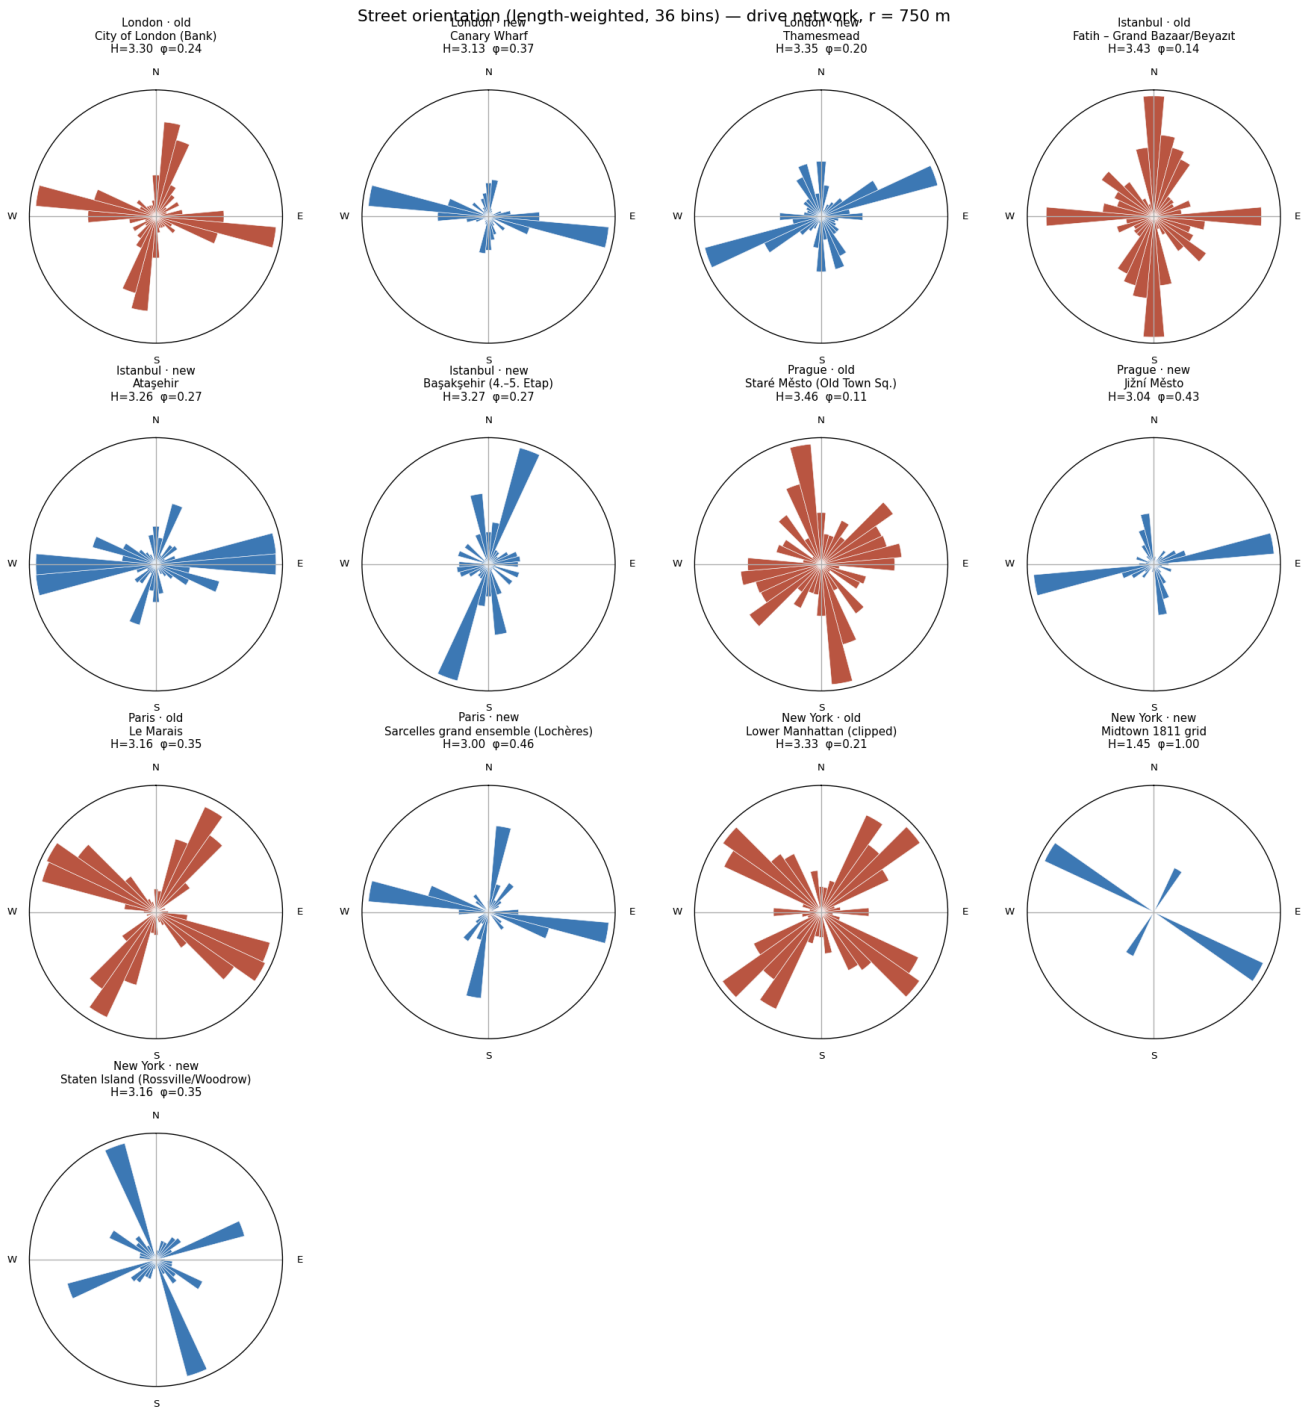

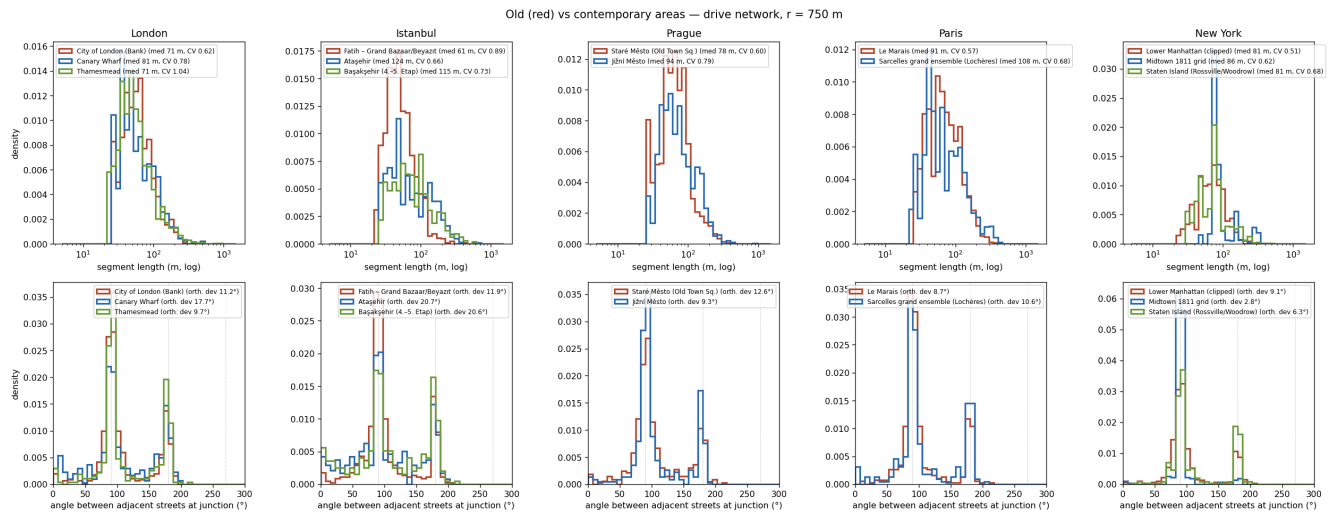

New York's "contemporary" areas are two opposite patterns: a near-perfect grid and a suburban loop estate. The 1811 grid is also older than every other contemporary area in the study.

The conclusions held at 500 m and 1,000 m, and at a tighter 6 m merge tolerance. The main caveats:

- private or gated roads drop out of the drive network (Canary Wharf, the new Istanbul districts);
- the Marais circle includes 19th-century streets and Île Saint-Louis;
- merging junctions removes every segment shorter than about 24 m.

Stage 2 — From one circle to many windows and square cells, more cities, and Paris in 1380

Stage 2 changed the sampling from one large circle per area to many small overlapping circular windows (250 m radius, centered every 125 m), whose scores were then collapsed into 125 m square cells. It also added dated historical maps of Paris. Two problems prompted the change:

- One 750 m circle yields a single set of numbers per place, too thin to define a "signature" or see where it fades.
- The old cores were not as "continuous" as first assumed. Prague's street network survived the Second World War [\[4\]](#), but the Josefov clearance (1893–1913) [\[5\]](#) rebuilt part of the Old Town circle. In Paris, London, and Istanbul, peacetime replanning (Haussmann, post-fire rebuilding, road widening) altered street layouts more than war damage.

Windows and squares. Every area was covered with windows of 250 m radius, centered every 125 m. Each window gets nine measures and a score for how closely it resembles the organic reference. Because the windows overlap, each 125 m square is covered by about 13 of them. Three ways of turning overlapping windows into one value per square were compared:


- **mean** of the windows covering the square;
- **minimum**, following the proposed formula $(A + C) - |A - C|$, which equals $2 \times \min(A, C)$. A square counts as organic only if every window agrees;
- **deconvolution**: solve for square values whose average inside each window reproduces that window's score.

The minimum proved too strict: one mixed window pulls a square to zero. The deconvolved squares were used from then on.



Why a 1380 map of Paris. Modern Paris is Haussmann's, so a pre-Haussmann network was needed to see the medieval core. Georges-Eugène Haussmann was Prefect of the Seine under Napoleon III from 1853 to 1870. He had long, straight boulevards cut through the medieval street fabric, cleared much of the old centre (including most of the Île de la Cité's houses), and lined the new streets with uniform apartment blocks. As a result, much of central Paris today follows his plan rather than its medieval layout, and even the surviving old quarters, such as the Marais, are hemmed in by his boulevards. [6][7]

The ALPAGE project [8] has digitised Paris street networks for 1300, 1380, 1553 and 1791; GeoHistoricalData supplied the 1825–36 Jacoubet atlas [9]. The 1380 layer was chosen as the reference because it is the complete walled city of Charles V, unplanned and centuries before Haussmann. The other years let the same territory be tracked through time.

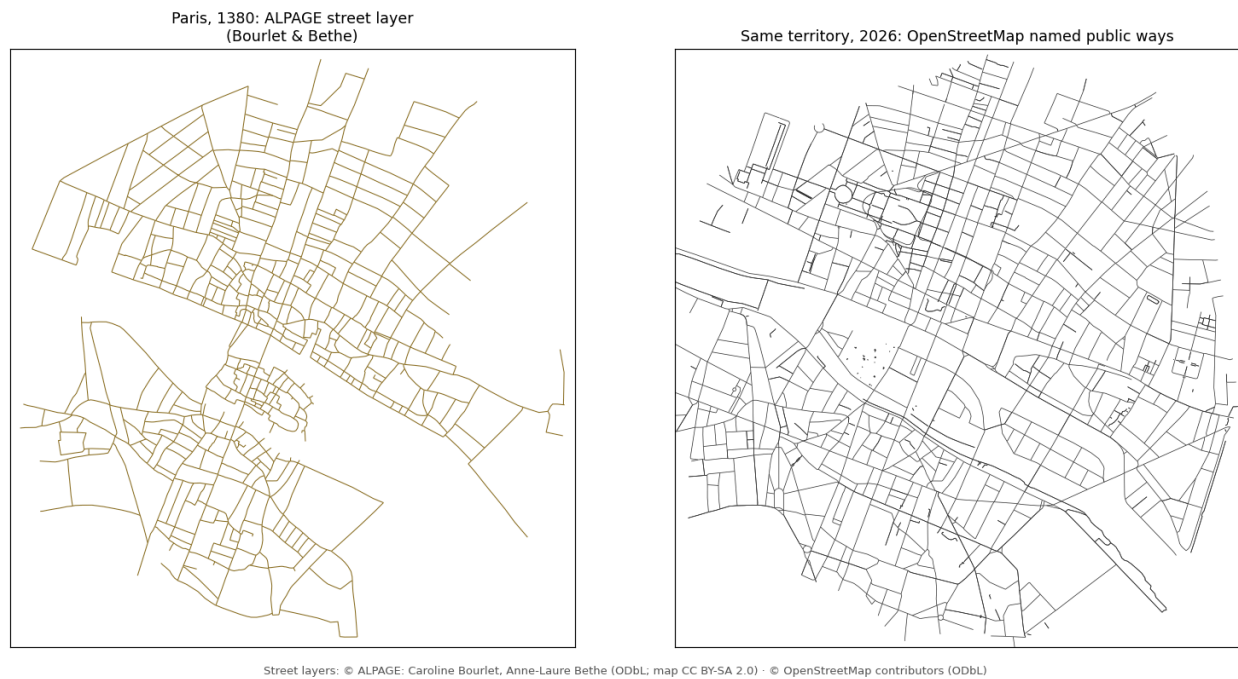

Other decisions in Stage 2:

- **Reference cores.** The signature is defined by two cores together: Staré Město (from OSM, with Josefov scored separately) and Paris 1380.
- **Comparable networks.** Modern areas were measured as "named public ways": drive streets plus pedestrian streets, alleys and named footpaths and steps. This matches what a historical street map records.
- **Larger areas for the ring analysis.** 3 km around each old centre (4 km for New York): Old Town Square, Île de la Cité, Bank, Hagia Sophia and Bowling Green. London, Istanbul and New York had to be downloaded from a mirror Overpass server after the main one stopped responding.

Stage 2 — Findings

A shared organic-core signature exists, but only when both reference cores define it. Where it fades with distance, it drops in a step at the old city limits rather than a smooth gradient.

The signature needs both cores. Built from Prague alone, it rated medieval Paris windows as atypical (median 0.04). It separated Paris from planned districts only moderately (AUC 0.72). Built from Paris 1380 alone, it rated Prague at 0.11 (AUC 0.81). Built from both, it separates cleanly:


- planned districts score 0.11 or lower (Midtown 0.00);

- old cores score 0.19–0.45;
- Paris before Haussmann scores 0.40–0.67.


Its strongest cues are:

- many street directions;
- few dead ends;
- square junctions;
- short segments;
- streets running fairly straight between junctions.

Where it shows up. Fatih (Istanbul) scores highest outside the reference (0.45), then the Marais (0.32), Lower Manhattan (0.25) and the City of London (0.19). Prague's Nové Město, a town planned in 1348, scores 0.07. That shows the signature is detecting planning, not age.

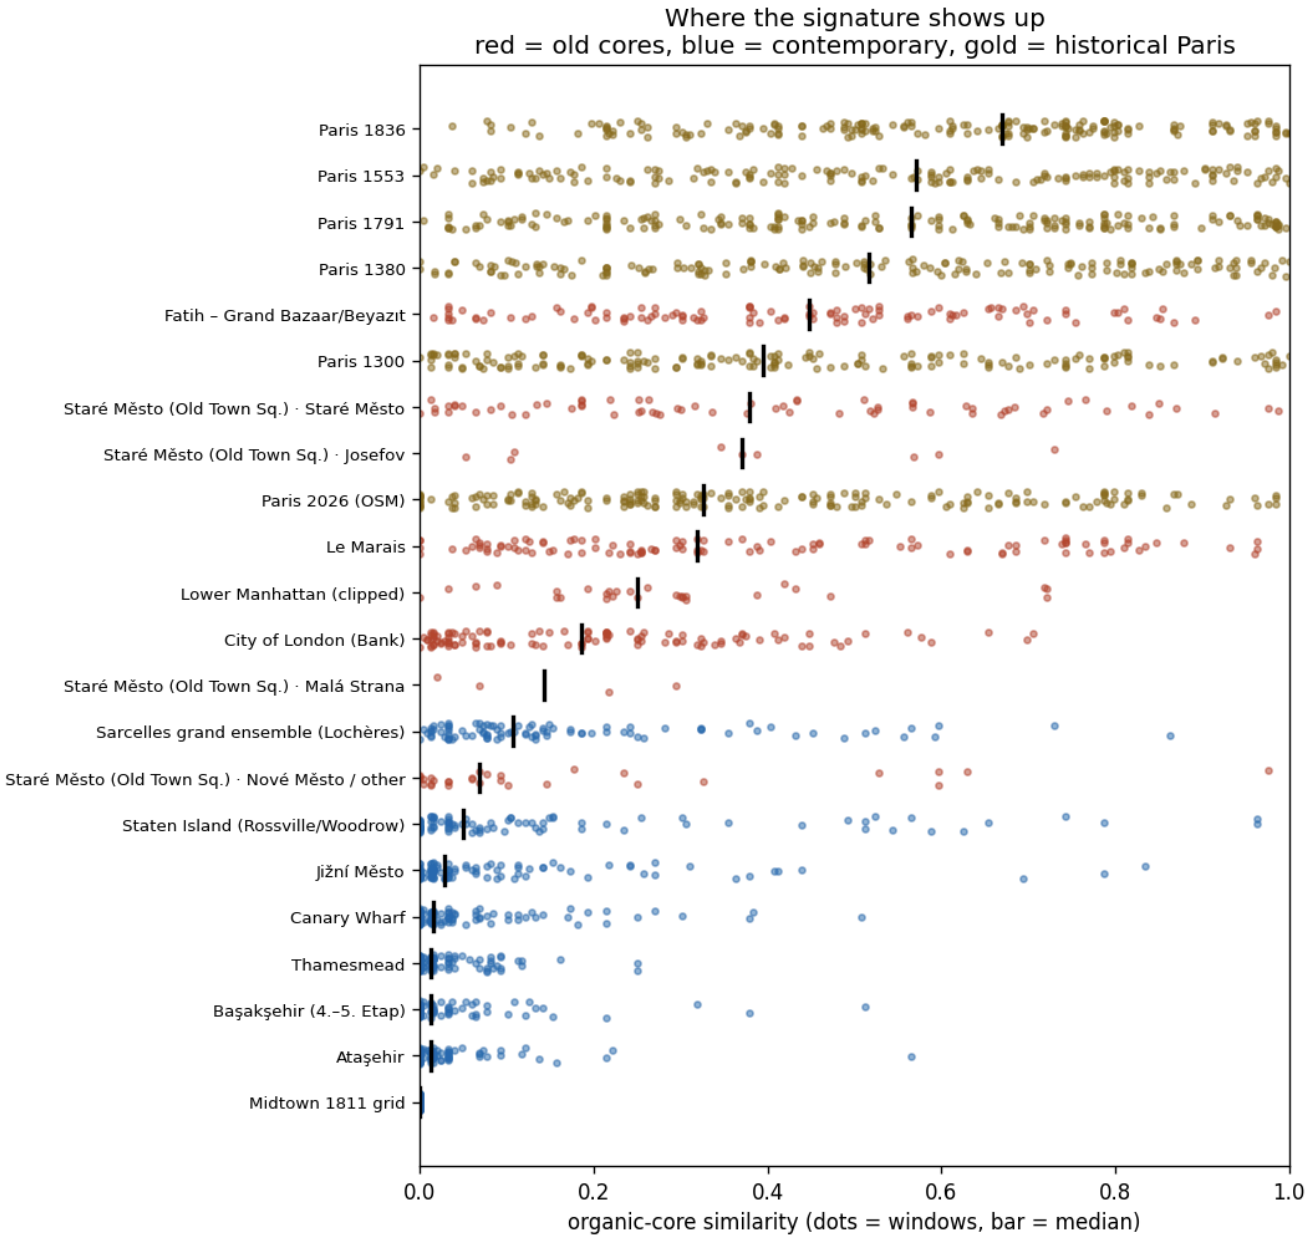


Organic-core signature, 250 m moving window (reference: Staré Město + Paris 1380)

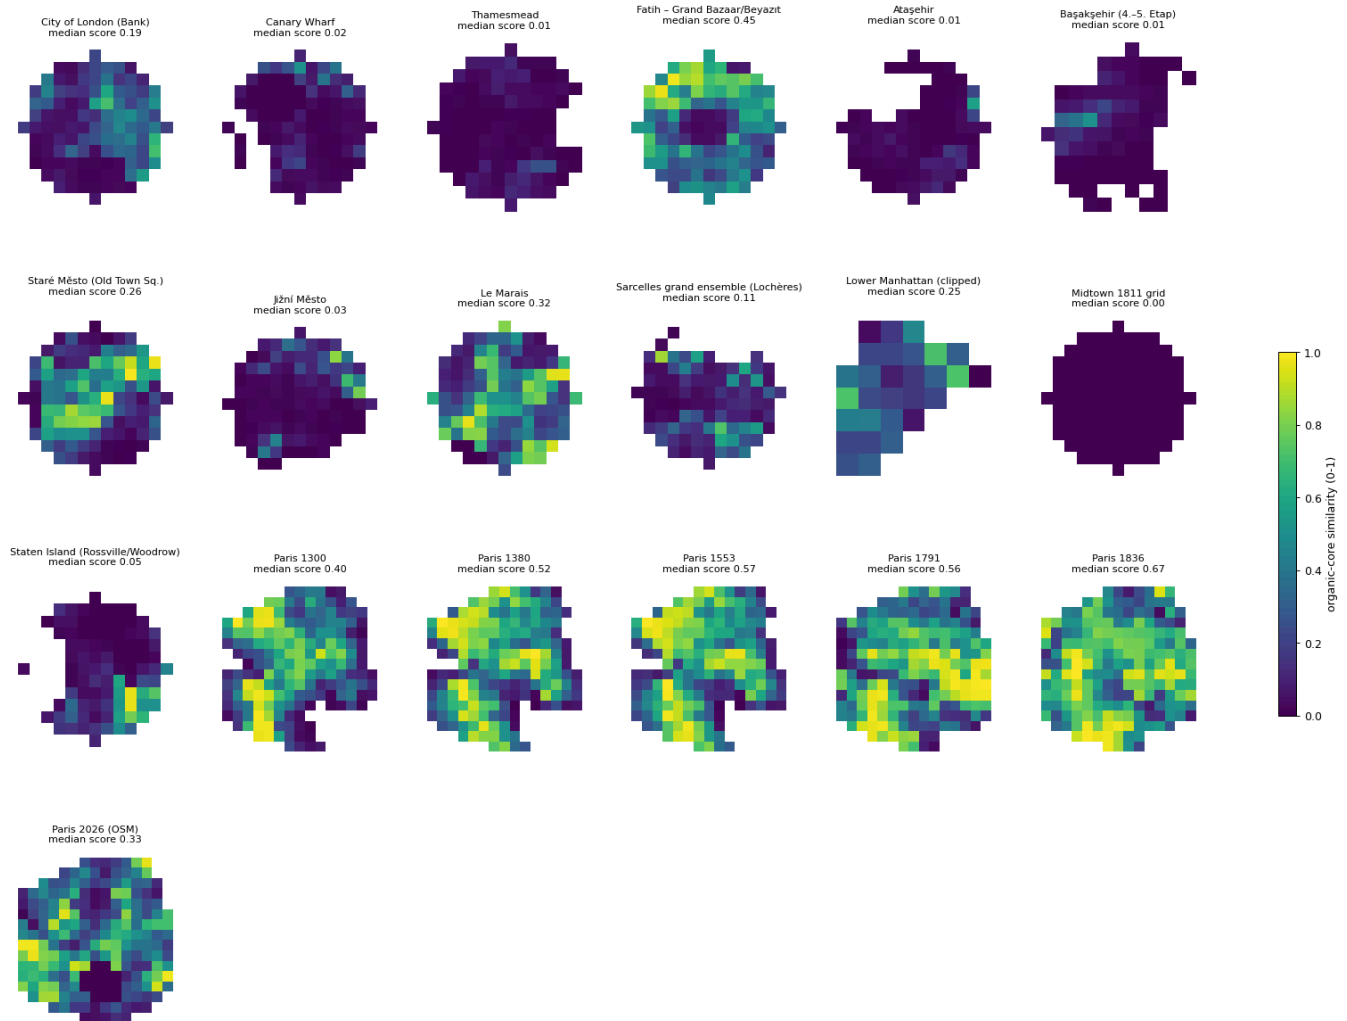

Paris through time. On the same territory, the score rises through the medieval maps, then halves by 2026. The darkest area on the 2026 map is the Île de la Cité, which Haussmann cleared almost entirely [7].

Hausmann roughly halved the organic score of central Paris


Median organic-core score of 250 m windows, same territory (0 to 1)

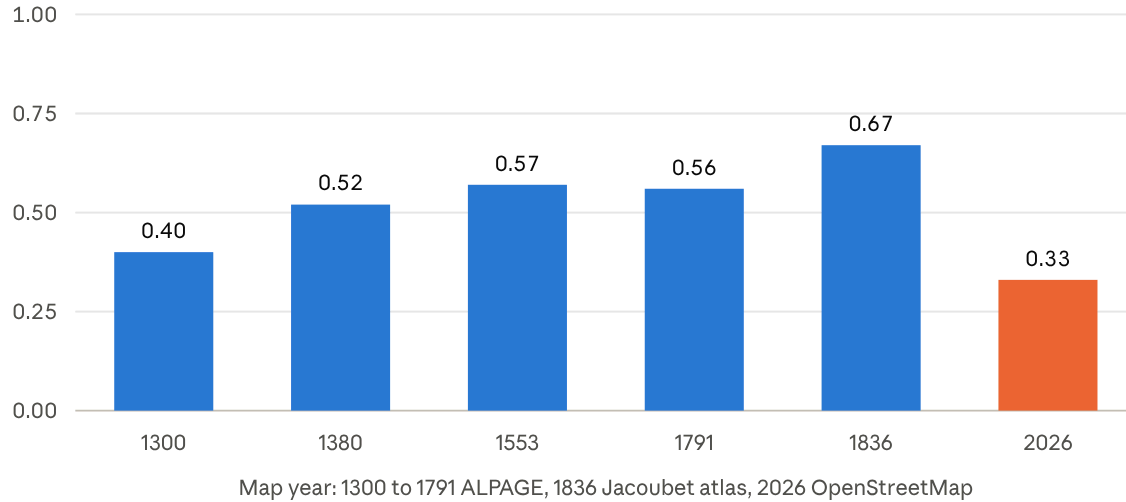


signature/score_summary.csv · Paris, 6 map dates

Rings and distance from the centre. Decline with distance appeared only where the old core is surrounded by planned growth:

- **New York:** 0.68 at the tip, 0.04 by 1.1 km, where the grid begins.
- **Prague:** 0.70 at the centre, 0.05 by 875 m, the edge of Staré Město. Nové Město scores 0.12, 19th-century districts 0.01–0.15.
- **Paris:** 0.36 inside the 1380 walls, 0.18 in the growth up to 1791. This gap mostly disappears when Paris is left out of the signature.
- **Istanbul:** no decline; the peak is at Vefa, 1.8 km out.
- **London:** reversed; the City (0.17) scores below the ring around it (0.28).

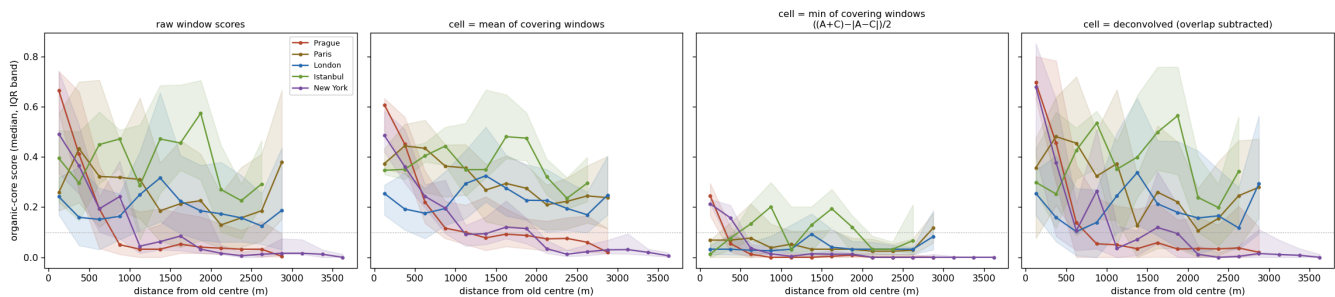

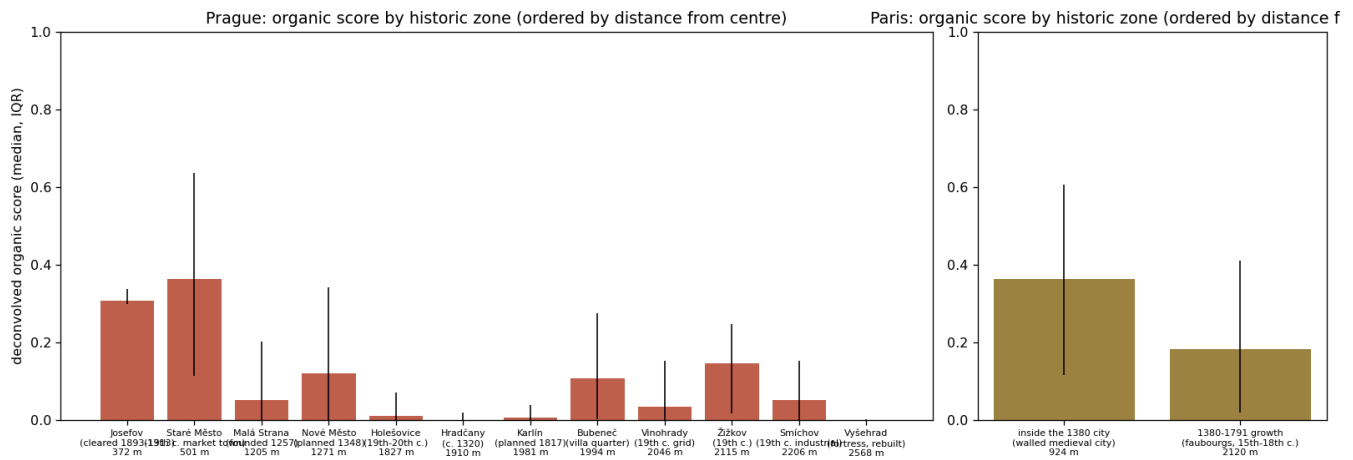

Beyond the first edge the score levels off, with separate high spots. These are mostly old villages or towns the city absorbed: Clerkenwell, St Giles and Bermondsey in London, Vefa in Istanbul, Malá Strana in Prague. That points to growth from several seeds, not one. No core had streets radiating from its centre. Instead, streets ran slightly around it 800–1,000 m out, near the old walls. Some London postwar estates also scored high, a known false positive.

Stage 3 — The 1997 Nature paper and how it was integrated

Helbing, Keltsch & Molnár's "Modelling the evolution of human trail systems" (*Nature* 388, 47–50, 1997) [\[10\]](#) supplies the "footpaths become roads" mechanism. Walkers wear down the ground where they step, and worn ground attracts later walkers. Unused trails grow back. The model runs on four equations:

$$\frac{dG}{dt} = \frac{1}{T} \left[G_0 - G \right] + I \left[1 - \frac{G}{G_{\max}} \right] \sum_{\alpha} \Delta(\mathbf{r} - \mathbf{r}_{\alpha})$$

$$V_{tr}(\mathbf{r}_{\alpha}, t) = \int d^2r \, e^{-|\mathbf{r} - \mathbf{r}_{\alpha}| / \sigma} G(\mathbf{r}, t)$$

$$\mathbf{e}_{\alpha} = \frac{\mathbf{d}_{\alpha} - \mathbf{r}_{\alpha} + \nabla V_{tr}}{|\mathbf{d}_{\alpha} - \mathbf{r}_{\alpha} + \nabla V_{tr}|} \\ \frac{d\mathbf{r}_{\alpha}}{dt} = v_0 \mathbf{e}_{\alpha}$$

In words:


- G is how worn the ground is. It grows by I per footstep, up to a maximum, and regrows toward bare ground at rate $1/T$.

- V is how attractive nearby worn ground looks from where a walker stands, fading with distance over the visibility range σ .
- Each walker heads toward its destination d but is pulled up the slope of V .
- The whole model depends on only two numbers, $\kappa = IT/\sigma$ and $\lambda = V^0T/\sigma$.

Small κ gives direct paths between destinations; large κ gives a minimal shared path system. In between is a compromise with an "island" in the middle.

The implementation was then tested on the paper's own three-point case (its Fig. 2). It reproduced the sequence from direct triangle to island to near-Y as κ rose. Five choices the paper leaves open were needed:


- the destination term as a unit vector; taken literally as printed, every walker got stuck circling short of its goal;
- trail wear capped at $G_{\text{max}} = \sigma/(2 \times \text{cell size})$;
- trail pull capped at 0.9 of the destination pull;
- paved destinations;
- λ fixed at 600.

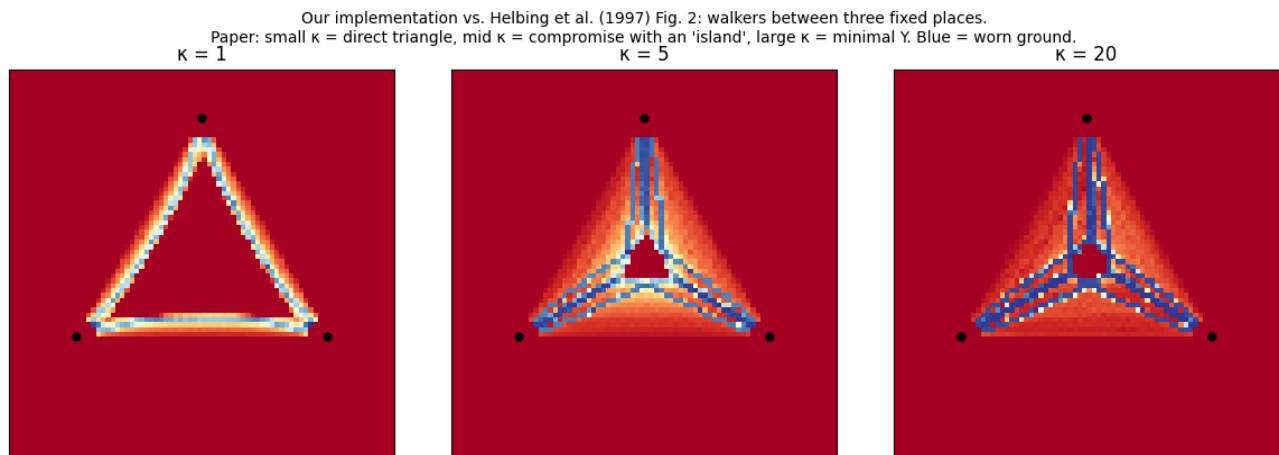

Integration into a city. The paper's model produces trails between fixed places; a city needs more. The prototype runs on a 1.3–1.6 km grid for 12 stages, one per clock "hour":

1. Walkers travel between a market square, gates on the edge, and houses.
2. Worn trails above a traffic threshold become the main streets, straightened into line segments.
3. New houses settle near trails, a ring further out each hour.
4. A lane rule fills the blocks: straight lanes leave a street at close to a right angle and stop at the next street they meet.

The paper supplies the walkers and trail field; the rest was added

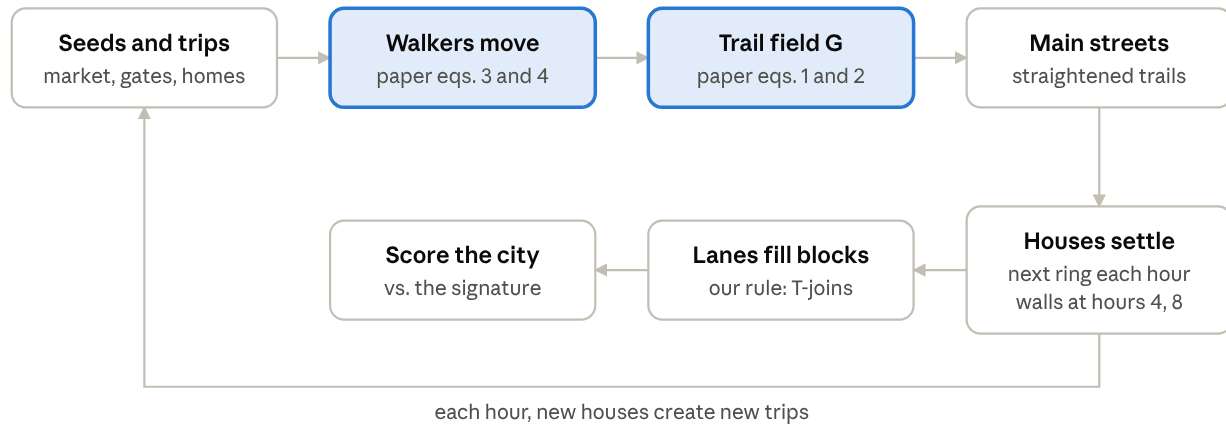


☒ from Helbing et al. (1997)

☐ added in this project

prototype pipeline · 7 steps, 1 hourly loop

Round 1. The paper's model alone made only a five-arm star of main streets to the gates, at every κ from 0.5 to 20. The dense street mesh came entirely from the lane rule. Lane wobble controlled junction angle almost perfectly (correlation 0.95). The best settings scored 0.25–0.30, inside the old-core range.

hour 12 · $\kappa=5$, $\sigma=40$ m · black = walker trails, red = lanes

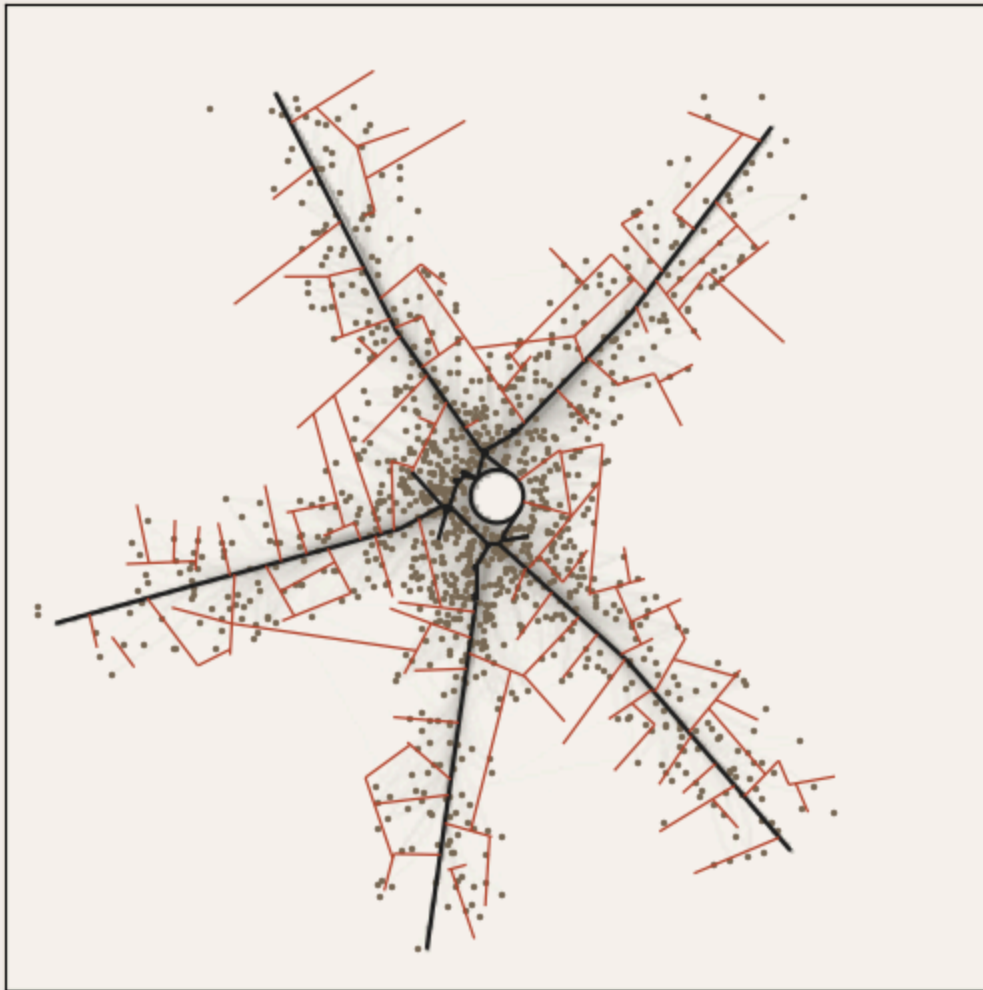


Round 2 fixes. Three changes were tested, then the best combination was checked on 8 random seeds:

- **A grain rule** turning lanes toward the local street direction. It failed: it made junctions less square and lowered the score.
- **Villages and walls:** secondary seeds, plus ring roads with gates at hours 4 and 8. These helped.
- **Fewer, better-connected lanes.** This brought junction density, circuitry and the junction mix onto target.

Measure	Organic target	Round 1	Round 2
Organic-core score (median of 8 seeds)	0.19–0.45 (old cores)	0.23	0.38
Junctions per km ²	119	163	120
Dead-end share	11%	29%	24%
Orientation entropy	3.02	3.48	3.32
Off-square (°)	11.0	14.7	15.9
Circuitry	1.07	1.15	1.09

Round 2 scored higher on 6 of 8 seeds, but two seeds collapsed to 0.02, so the gain is not statistically reliable ($p = 0.25$).

hour 01 · black = walker trails, red = lanes, blue = walls / villages

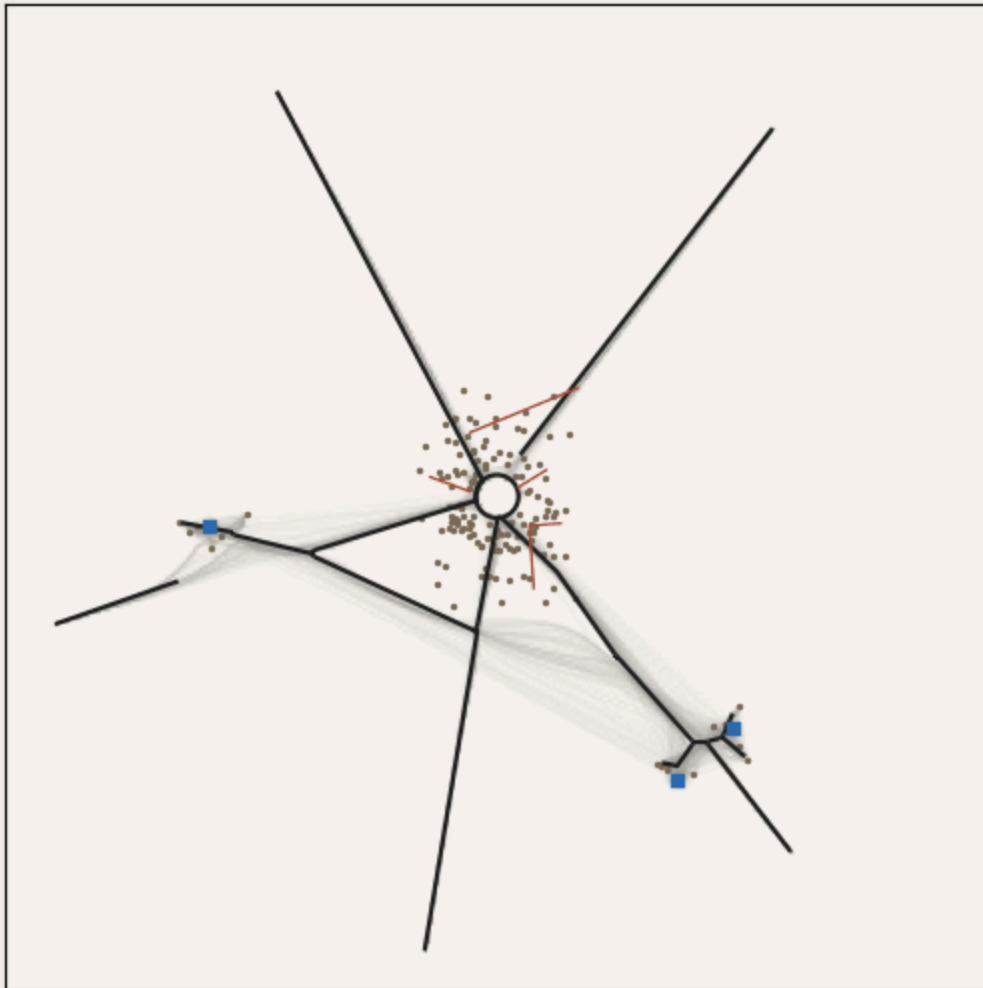

Discussion — strengths and weaknesses of the model

The model can already generate cities that score like real organic cores, but for partly the wrong reasons, and not reliably. It is a working prototype with a clear list of what to fix, not a finished generator.

Strengths

- **Grounded in measurement.** Every target comes from real street networks: five cities, two reference cores and seven dated maps of Paris. Nothing is tuned by eye.

- **An honest yardstick.** The signature separates organic from planned areas, rejects a planned 14th-century town (Nové Město), and detects Haussmann's changes in Paris. The same score judges the generator.
- **A published mechanism, checked.** The trail model was verified against the paper's equations and its own test case before use, and every departure from the paper is documented.
- **Several targets met.** Junction density, circuitry, the T-junction and crossroads mix, and near-square junctions are all within reach. Walls and villages reproduce the step-like decline and the absorbed villages seen in real cities.
- **Fits the clock.** It grows in 12 hourly stages, uses only straight segments, and is fully reproducible from code and a random seed.

Weaknesses

- **The paper's mechanism does little at city scale.** With one market and a few gates, every setting of κ gives the same star of main streets. The organic texture comes from the added lane rule, which is a hand-made rule rather than an emergent one.
- **No grain.** Real cores run in a few shared directions; the prototype's streets run in too many (entropy 3.32 vs. 3.02). The attempted fix failed. The main streets likely need to share directions, for example by following a river or slope.
- **Too many dead ends** (24% vs. 11%).
- **Unstable.** Two of eight seeds collapsed when villages drew growth away from the core. The round-2 gain is not statistically significant.
- **A thin reference.** The signature rests on two cores. Prague alone could not recognise Paris, so a third or fourth unplanned core would change the targets.
- **Map conventions differ.** OSM maps named passages and courtyards that historical maps leave out, which inflates dead ends in the modern reference.
- **Windows overlap.** Scores are descriptive, not statistical tests.
- **Some false positives.** A few postwar estates also score as organic, so the signature cannot yet tell them apart.

Next steps

1. Shape the main streets with a river or terrain instead of a radial star.
2. Keep the core the densest place so villages cannot overtake it.
3. Add more unplanned reference cores.
4. Add a street-hierarchy measure to rule out postwar estates.

Stage 4 — Research steps and tests

Stage 4 (28 September – 4 October 2026) worked through the next steps listed above and tested about twenty changes to the prototype. Three were adopted: a five-core reference, a village cap with half the dead ends closed, and a tighter lane rule. The rest stay in the code, switched off.

Each change was run on 8 or 24 generated cities and compared with the unchanged model on the same random seeds. A change was adopted only if it brought the model closer to real cores. Stage 4 supersedes parts of the Discussion above, which describes the model as it stood after round 2.

Step	Test	Outcome
More reference cores (next step 3)	Siena, Regensburg and Toledo added as references; Fez and Kraków scored as controls. Each core scored with itself held out.	Adopted: five-core signature
Rings redone	Ten cities, 3 km around each centre, five-core scores	Step at the old edge holds in four cities
Keep the core densest (next step 2)	Village cap and closing of dead ends, 2 × 3 settings	Adopted: cap + half the dead ends closed
Proximity-graph lanes	Lanes drawn as a relative-neighbourhood graph instead of square stubs	Rejected as the lane rule; kept only for the closing links
Measures from the literature [16] [17] [18]	Street length, blocks and street continuity on 350 m discs: 9 old cores, 8 planned districts	New yardsticks beside the signature
River (next step 1)	Bank alignment measured in real cores; three river versions in the model	Not adopted
Plots	Width, depth and area of plots in Paris 1810–36, Prague, Siena and Toledo [11] – [15]	Blocks are two plots deep
Tighter lane rule	Lane threshold of 40, 30, 25, 20 and 15 m	Adopted at 25 m, after replication

Step	Test	Outcome
Plot rule	Houses at least 14 m apart, three settings	Not adopted
Lane direction	Six settings, pass mark fixed in advance	Not adopted
Local hubs (churches)	Places of worship counted in four cores; three settings in the model	Not adopted
Fainter paths as streets	Street threshold halved and quartered	Not adopted
Replication	24 new cities, criteria written before the run	Lane rule confirmed; hubs not

Next step 4, a street-hierarchy measure, was not built as such. The continuity measure from the literature does part of that job.

Stage 4 — Findings

The reference is firmer and the model now matches real cores on street length and block count. Its fine streets are still drawn by rule; walking produces only the main roads.

A firmer reference. The two-core signature recognised Regensburg (0.48) but scored Siena 0.13 and Toledo 0.09. It fitted flat river towns and missed hill towns. With five cores, each scored by the other four, every core is recognised (0.18–0.56) and planned districts stay at 0.02–0.05.

- Kraków's planned grid of 1257 scores 0.15, so the signature still detects planning.
- Fez scores 0.12. The signature captures European organic growth, not organic growth in general.
- The targets moved: dead ends 15% (was 11%), orientation entropy 3.15 (3.02), off-square 14.9° (11.0°), junctions 124 per km² (119).
- The broader reference also raises some false positives outside the cores.

The step at the old edge holds. Median score at 0–500 m from the centre, then at 500–1,000 m: Siena 0.74 → 0.13, Regensburg 0.52 → 0.22, Prague 0.51 → 0.18, New York 0.54 → 0.11. Istanbul still shows no decline and London is still inverted.

Collapses were chance, not villages. This corrects the Discussion: villages never outgrew the core. The failed cities were fragmented networks in which about half the junctions were dead ends. With the village cap and half the dead ends closed, 24 cities score 0.64 against 0.59, and none falls below 0.3 (6 before). The gain at the bottom is significant; the gain in the median is not quite ($p = 0.053$).

Density separates organic from planned. Street length per km², blocks per km² and street continuity separate old cores from planned districts almost perfectly on 350 m discs. The ranges are in the table that closes this stage.

Water sets street directions near the bank, but a river did not help the model. In real cores, 53–82% of street length within 150 m of water runs along or square to the bank (44% by chance), fading with distance. Three river versions of the model scored 0.43–0.53 against 0.64 without a river, and barely changed the spread of street directions. Not adopted.

Blocks are two plots deep. Median plots on the same 350 m discs:

	Width	Depth	Area	Plots per km ²
Paris 1810–36 [11]	6.5 m	14 m	98 m ²	3,390
Toledo [15]	8.5 m	14 m	130 m ²	3,000
Siena [14]	8.0 m	16 m	177 m ²	2,350
Prague [13]	15 m	24 m	399 m ²	1,240

Width and depth are for plots with a single street front. Only Paris is a historical plot map; the others are today's plots.

- Block width is 36 m in Siena, 41 m in Paris, 42 m in Toledo and 67 m in Prague: about twice the plot depth plus a street.
- Plot size does not change with distance from the centre, out to 500 m.
- Paris today at the same spot [\[12\]](#) has plots of 272 m². Today's plots are a poor stand-in where a core was rebuilt.



The model's houses overlap. It has 6,750 houses per km² within 150 m of the centre; real cores have 1,170–3,070 plots. A rule keeping houses 14 m apart fixed the centre (2,650) but left the streets unchanged and did not raise the score. Not adopted.

A tighter lane rule closes the density gap. Giving a lane to every house more than 25 m from a street (was 40 m) raises street length from 20.2 to 25.0 km per km² and blocks from 39 to 60 per km². The score does not drop (0.68 against 0.64, not significant), and the result held on 24 new cities. The cost: 4 of 48 cities score below 0.3, against none before.

The extra street directions arrive with the lanes. Walked paths alone have an entropy of 3.04; with lanes it is 3.39, against 3.24 in real windows of the same density. Lanes are square to paths that radiate from the market, so they inherit that spread. Reading a lane's direction over a longer stretch, or making neighbouring lanes parallel, cut entropy by at most 0.05. The five cores themselves range from 2.98 (Paris 1380) to 3.49 (Toledo).

Walking makes only the main roads. Worn paths supply about 5.8 of the 25 km of street per km². Real cores have a place of worship every 65–150 m; the model has one hub inside the core. Adding local hubs changed nothing: trips to a hub arrive from all sides and are too thin to wear a path.


The score has reached its ceiling. Real cores scored with their own core held out reach 0.18–0.56; the model is at 0.64–0.68. From here changes are judged on street length, blocks and continuity, with the score as a guard against getting worse.

Stage 4 — How the model works now

A city grows in 12 hourly steps on a 1,600 m square: people walk and wear paths, houses follow the paths, walls go up twice, and lanes are drawn to reach the houses. Three rules changed since round 2 and are marked below.

The ground starts with a market square at the centre (30 m radius, no path forms on it), five gates at the edge, twelve houses near the market and three villages 450–640 m out.

1. **Walking.** About 1.5 trips start per walking step, 2,500 steps an hour. Half link a house and its nearest hub (the market or a village), a quarter link two houses 30–300 m apart, 15% link the market and a gate, and 10% link two hubs. A walker heads for the destination and is pulled toward worn ground nearby; that pull is capped at 90% of the pull of the destination. Footsteps wear the ground, and wear fades where nobody walks.
2. **Houses.** Each hour up to 140 houses are placed 20–110 m from a worn path, inside a growth radius that widens from 115 m to 720 m. Land near the growth front, near a village, and near a wall's gates is favoured. *New:* in any hour a village may not gain more houses than the core.
3. **Walls.** At the end of hours 4 and 8 an irregular nine-sided wall is built just outside the built-up area. Gates open where streets cross it, and the wall line counts as a street.
4. **Streets from wear.** Ground worn above a threshold (about one walker per 150 steps) is thinned to a centre line and straightened. Stubs under 30 m are dropped.
5. **Lanes.** These are drawn, not walked, and the rule replays the 12 hours in order.
Changed: a house more than 25 m from any street (was 40 m) gets a lane. It leaves the nearest street at a right angle, give or take 6°, toward the house. Of these, 98% run on to the next street, and 30% of those cross it and stop at the one after. Lanes under 15 m, or running alongside a street, are dropped.
6. **Closing dead ends.** *New:* each remaining dead end may be joined to the nearest other street by a short link, up to 90 m long and within 30° of a right angle. Half of these links are kept, at random.

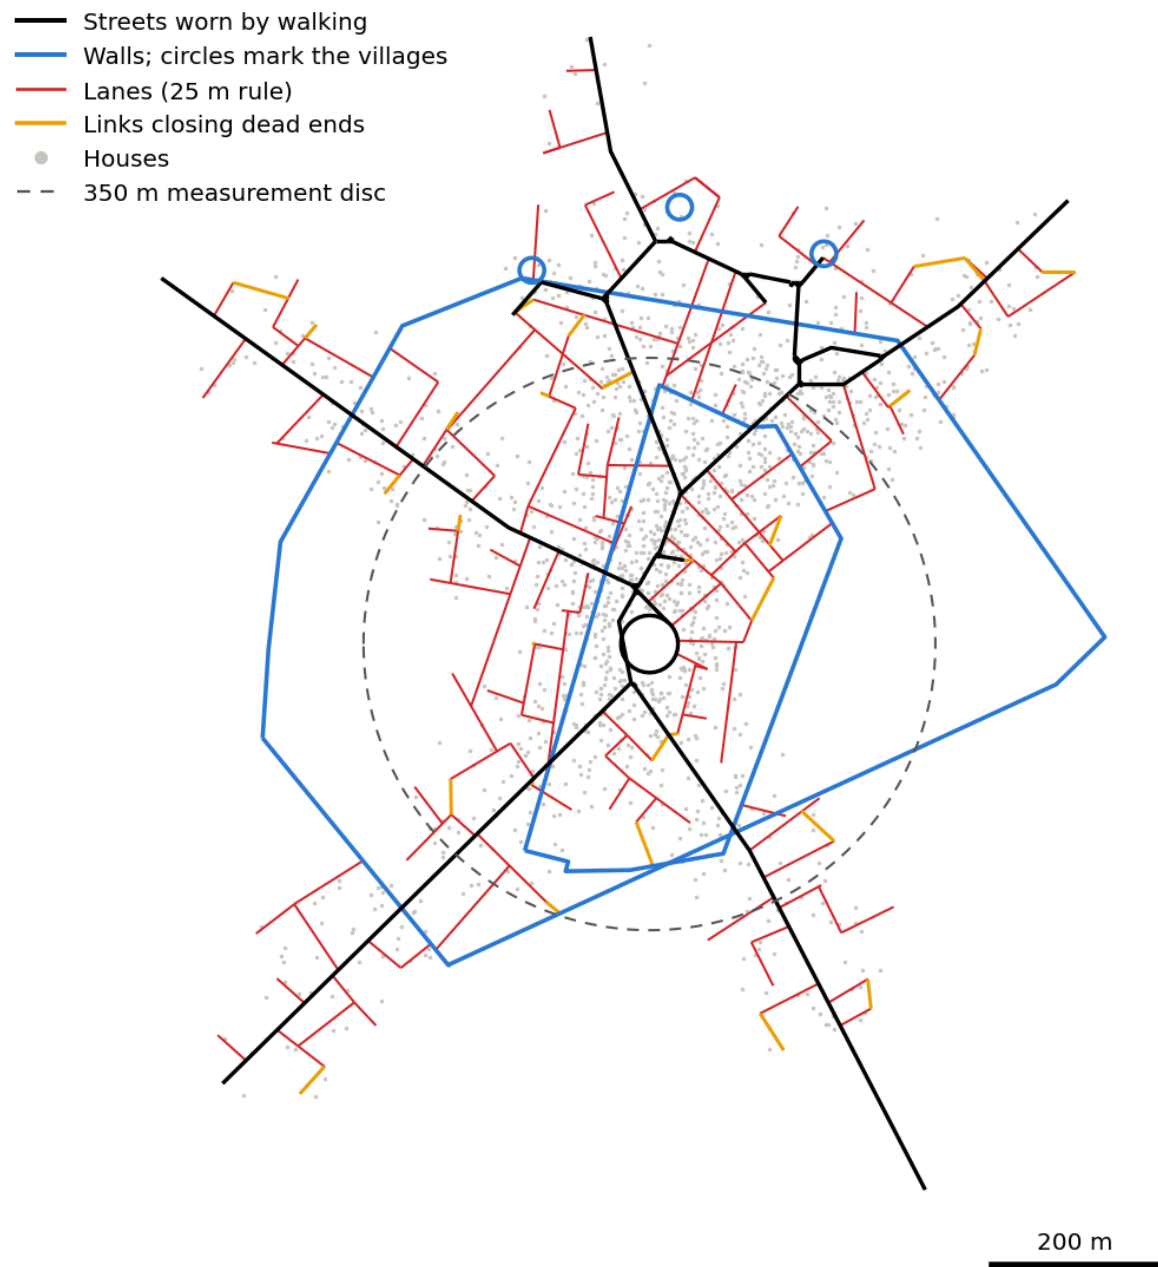

Where it stands. Medians of 48 generated cities. Score, entropy and dead ends come from the 250 m windows; the other rows from the 350 m disc around the market.

Measure	Real cores	Model before (lanes 40 m)	Model now (lanes 25 m)
Organic-core score	0.18–0.56 held out	0.64	0.68
Street km per km ²	24–38	20.2	25.0

Measure	Real cores	Model before (lanes 40 m)	Model now (lanes 25 m)
Blocks per km ²	60–166	39	60
Junctions per km ²	169–307	121	177
Block width	36–67 m	64 m	57 m
Street continuity	159–288 m	354 m	304 m
Orientation entropy	2.98–3.49	3.41	3.46
Dead-end share	15% (target)	18%	17%
Cities scoring below 0.3	–	0 of 48	4 of 48

Street continuity is the average length a street runs before it turns or ends. Planned districts, for comparison, have 11–21 km of street per km², 5–26 blocks per km² and a continuity of 310–579 m.

Tested and switched off. The plot rule, local hubs, the river (three versions), lane direction, the round-2 grain rule, proximity-graph lanes, and fainter paths counted as streets. All remain in the code as options.

Still open.

- Houses overlap at the centre and thin out too fast with distance.
- Streets run in more directions than in most real cores, because lanes hang off paths that radiate from one market.
- Streets are still a little too continuous, and a few more cities score poorly than before.
- The default has no water or slope.
- The fine streets do not come from walking.

References, data credits and code

1. OpenStreetMap contributors. [OpenStreetMap](#) street data, ODbL. Downloaded via overpass-api.de and, for the London, Istanbul and New York rings, the VK Maps Overpass mirror.
2. Boeing, G. (2025). [Modeling and analyzing urban networks and amenities with OSMnx](#). *Geographical Analysis* 57(4), 567–577. OSMnx 2.1 was used.

3. Boeing, G. (2019). [Urban spatial order: street network orientation, configuration, and entropy](#). *Applied Network Science* 4, 67. Orientation entropy method.
4. [Bombing of Prague](#). Wikipedia.
5. [The clearance of Josefov](#). Old Prague.
6. Britannica Editors. [Georges-Eugène, Baron Haussmann](#). *Encyclopædia Britannica*.
7. [Haussmann's renovation of Paris](#). Wikipedia.
8. [ALPAGE](#) street layers for Paris 1300, 1380, 1553 and 1791. Authors: Caroline Bourlet and Anne-Laure Bethe (1300, 1380), Davide Gherdevich (1553), Léa Hermenault (1791). ODbL; maps made from them are CC BY-SA 2.0.
9. GeoHistoricalData. [Paris 1825–36 street network \(Jacoubet atlas\)](#). Harvard Dataverse, CC0.
10. Helbing, D., Keltsch, J. & Molnár, P. (1997). [Modelling the evolution of human trail systems](#). *Nature* 388, 47–50.
11. ALPAGE. [Vasserot parcels, Paris 1810–1836](#). Vectorised by A.-L. Bethe. ODbL; maps made from them are CC BY-SA 2.0.
12. Etalab. [Cadastre of Paris](#), parcels of the 1st, 3rd and 4th arrondissements (today's plots).
13. ČÚZK (Czech Office for Surveying, Mapping and Cadastre). [Cadastral map shapefiles](#) for Staré Město, Josefov and Nové Město.
14. Agenzia delle Entrate. [Cadastral parcels of Italy, INSPIRE download service](#). Siena.
15. Dirección General del Catastro. [INSPIRE cadastral parcels, Toledo](#).
16. Courtat, T., Gloaguen, C. & Douady, S. (2011). [Mathematics and morphogenesis of the city: a geometrical approach](#). arXiv:1010.1762 (the preprint was read). Street continuity measure.
17. Barthélemy, M. & Flammini, A. (2008). [Modeling urban street patterns](#). arXiv:0708.4360. Block statistics.
18. Strano, E., Nicosia, V., Latora, V., Porta, S. & Barthélemy, M. (2012). [Elementary processes governing the evolution of road networks](#). *Scientific Reports* 2, 296.

Reports and code from this work, in the session outputs:

Stage	Report	Code
1	street_geometry_report.html	code/street_geometry.py