





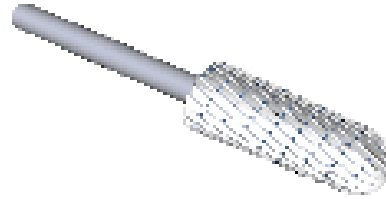

## Burr Ø1.2 Z8 with radius

A11-025




### 1. Cycletime for Production

<b>Workpiece:</b> D 1.2 mm, Z 8, L4.1 mm, H 6°, Nr. of threads 11 Material CARBIDE			
Operations			
	Probe	Flute 1	Flute 2
Feed [mm/Min]	2000	400	800
Power [kW]		1	1
Cutting speed [m/s]		19	19
Used wheels			
		1	1
Grinding time [s]	10	1	2
Total cycle time	3 Min 10 Sec		

The cycle times are indicative. Material to be ground, grinding wheels, coolants can influence the cycle times considerably.

### 2. Used Grinding Wheels

1	1V1 Ø60 D30
---	-------------



1

### 3. Machine and Software Requirements

Machines: 5 axes CNC grinder : Aries, Norma, NGC Coolant: Synthetic Oil, pressure 6 bar

Control: Fanuc 310i Software: Quinto 5

Accessories:

Responsible engineer: SIW. 12.2014

[www.schneeberger.ch](http://www.schneeberger.ch)

J. SCHNEEBERGER Maschinen AG 4914 Roggwil Switzerland

Subsidiaries in: France, Deutschland, Italia, United States, UK, China

TECHNOLOGY  
FOR TOOLING