Executable Operating Contracts for Anytime Aircraft Localization and Changing Inspection Requirements

Chuansu Peng[a], Haoran Dong[a], Ruoxuan Wu[a], Peipei Zeng[b]

[a]*School of Aeronautical Engineering, Civil Aviation University of China, China*
[b]*Engineering Training Center, Civil Aviation University of China, China*

Abstract

Aircraft inspection requires timely airframe-relative localization and evidence matched to the consuming task. We develop executable operating contracts linking task requirements, computational budgets, correlated source revisions and population-risk applicability. The retained localization service combines budgeted registration, source replacement, measured-motion replay and source-scoped evidence monitoring. Its prospective study contains 13,824 synthetic episode inputs and 432 complete-route executions. At standard service, the CART policy reduces integrated loss relative to Fixed2 by 15.68% on nominal geometry and 12.61% on unfitted geometry, with greater modeled work; FlatCART shares these gains, and Fixed2 remains competitive on ordinary routes. We extend this service to image acquisition, capture-time association and report delivery through requirement-event containment and producer-dependency invariance. Two additional studies execute 12,800 independent synthetic inputs with actual raster processing. At risk allowance 0.15, semantic reuse supports 24/192 and 26/192 configured requests, while cached direct renewal supports 30/192 and 32/192. Anchor preparation evaluates 53.66% fewer calibration records, with narrower service support. A fully informed procedural implementation matches the contract results, and complete reporting remains uncertified. The contribution is an executable task–source–evidence interface with demonstrated numerical trade-offs, auditable evidence reuse and explicit applicability limits. No new physical localization experiment or universal representation-specific advantage is claimed.

Keywords: Executable operating contracts, Engineering decision knowledge, Anytime localization, Evidence applicability, Risk calibration, Aircraft inspection

1. Introduction

An aircraft-inspection system needs more than a low-error pose. An observation must receive a fresh airframe-relative correction before its deadline; a continuing route needs acceptable error over a longer interval. The same localization computation can satisfy one requirement and fail the other. Moreover, a reliability statement established for one registration policy, sensor mixture or installation service does not automatically apply after a software update or a revision of the pose. The engineering decision is therefore which computation to execute, when to expose its result, and which evidence remains applicable to the result that a task actually consumes.

This problem connects engineering decision knowledge to an executable numerical service. Work on process and decision knowledge representation shows how explicit dependencies support engineering decisions [1, 2, 3]. Contract-based design makes assumptions and guarantees part of a component interface [4]. Anytime autonomous systems already connect computational contracts to estimation and control [5]; perception scheduling also studies the tradeoff between latency and precision [6]. The unresolved issue addressed here is narrower: an interrupted registration produces correlated revisions of one source, whereas a population-risk statement refers to a complete policy, installation model and specified task event. Their identities and lifetimes must remain consistent from pre-sensing selection to installed pose and final evidence attachment.

Our previous A19/A20 development established retained registration prefixes, source-time replacement and empirical computation–error tradeoffs. It also exposed three limitations. A guarded CART scheduler often

behaved like its flat predictor; fixed two-iteration registration could outperform it on ordinary complete routes; and metadata prototypes did not establish an integrated evidence lifecycle. Increasing a favorable mean or adding a knowledge-labelled diagram would not resolve these limitations. We retain the estimator and assets and instead test the contract mechanism against a task-aware, risk-calibrated procedural implementation supplied with the same information.

We represent sources, versions, policies, operating profiles, processing services, requests and calibrated event cards as typed entities with explicit dependencies and execution predicates. A task declared before sensing selects an admissible frozen policy or receives a refusal. During execution, budget and predicted-time constraints restrict computation, correlated results replace the same source posterior, and measured motion is replayed to installation. A source-scoped attachment monitor checks the identity and history needed to associate the installed result with its population-risk statement. Changes to a dependency revoke affected claims. A numerical result can remain available with a provisional status after its statistical attachment becomes inapplicable.

The study makes four connected contributions.

1. An executable representation of the relationship between engineering requirements, numerical versions and statistical evidence, including pre-sensing policy commitment, selective dependency invalidation and permanent source-level attachment refusal after a detected invalid version attempt. These mechanisms are evaluated separately from pose accuracy.
2. A common localization service that combines retained ICP computation, constrained publication, source replacement and causal replay. A dimensionally consistent work objective and two explicit timing ledgers permit comparisons with fixed, learned and earlier RAVC policies under the same resources.
3. A prospectively frozen empirical assessment of contract modules, task-driven selection, directly calibrated union events, certificate margin, unfitted geometry, binding time/profile constraints, continuous routes and influential failures. A fully validated procedural comparator prevents the engineering representation from receiving credit for information or checks withheld from its baseline.
4. An extension of the same operating-contract interface to image acquisition, capture-time association and report delivery. Requirement containment and event-specific producer dependencies determine evidence reuse or renewal. Two further executed studies compare this extension with complete procedural semantics and cached direct recalibration, retaining their equal or superior results.

The central hypothesis is that executable knowledge can prevent an engineering task from using evidence outside its scope while making computational tradeoffs explicit. It does not require graph storage to outperform a semantically equivalent program in localization accuracy. We accordingly separate numerical localization, engineering decision quality and evidence-attachment correctness. The localization and task-extension experiments use simulated geometric sensors and a declared processing model; original platform photographs and previous studies remain as documented context. No new physical localization experiment is claimed.

Figure 1 follows the complete decision path. Sections 3–5 define its objects, rules and execution. Section 6 states the properties needed to justify replacement and evidence applicability. Sections 10 and 12 report the localization and route study. Sections 7–9 extend its task interface; Sections 11 and 13 evaluate that extension on separately generated inputs. Each evidence block retains its own sampling units, calibration family and timing boundary.

2. Related work and contribution boundary

Engineering knowledge and executable contracts.. Process knowledge representation links decision context, alternatives and dependencies in complex engineered systems [1]. Decision knowledge graphs integrate and navigate engineering decisions [2]; manufacturing work further uses graph learning for knowledge reasoning [3]. Our representation is a typed dependency graph and a monitored state machine. It performs deterministic applicability checks, selection and invalidation. It does not learn relations or claim general semantic reasoning. Contract theory provides a much broader algebra of assumptions, guarantees and composition [4]. We

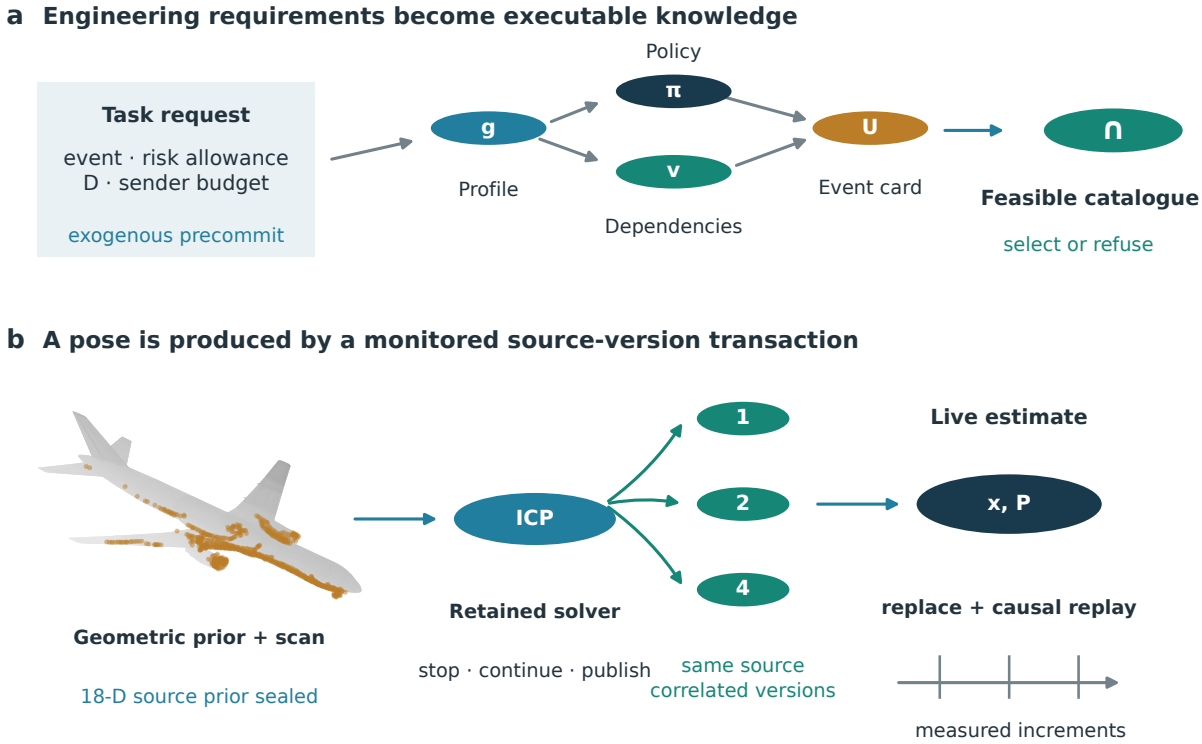


Figure 1: Executable engineering requirements, numerical execution and evidence applicability. (a) An exogenous event requirement, risk allowance, deadline and budget constrain a dependency-bound policy catalogue. (b) Retained computation revises one immutable source; ordered replacement and measured-motion replay produce the live pose. The airframe surface and source points illustrate an actual excluded pilot input. (c) Final attachment checks join an event card to the active source version and its service; invalid history or dependencies remove the bound. The feedback arrow denotes the interface for a future request or recalibration; autonomous feedback replanning and a physical control experiment are not evaluated. OpenAI ChatGPT/Codex (GPT-6) assisted the archived Python schematic code.

implement a specific operating contract whose statistical part concerns a fixed policy and an explicitly defined localization event.

Computational decisions in autonomous systems.. Metareasoning and anytime algorithms treat computation as a decision with opportunity cost [7, 8, 9]. Pant et al. already use contract-driven anytime estimation and control with robust model-predictive control and a physical aerial platform [5]. Their work is the closest precedent for connecting computational contracts to autonomy. We do not claim the first such connection, robust closed-loop control or a new general optimal-stopping theorem. Perception scheduling can preserve

Table 1: Closest mechanism precedents and the object evaluated here. The rows describe supported research objects and do not assert that a precedent lacks every other capability.

Study	Research object	Decision and conditions	Evaluation or claim boundary
Contract theory [4]	Assumption–guarantee specifications and their composition	Component compatibility under stated assumptions	General design formalism; not a new algebra in this paper
Pant et al. [5]	Error/delay contracts for anytime estimation and control	Joint computation/control with robust MPC conditions	Physical aerial-platform and closed-loop control evaluation
Learn-then-test [23]	Risk-controlled predictive configurations	Multiple tests admit configurations from calibration	Statistical risk control; used as an established selection principle
Runtime assurance [26]	Safe autonomy with a fallback controller	Monitoring and switching under safety conditions	Control assurance; our evidence refusal supplies no physical safety theorem
This study	Correlated pose revisions and event evidence bound to their policy/source/installation identity	Pre-sensing commitment, compatible execution, source-scoped statement lifetime	Numerical, task and applicability endpoints tested separately against a complete procedural control

stability while trading latency against precision [6]; computational abstraction relates robot task accuracy to compute expenditure [10]; kernel studies characterize practical computational demand [11]. Here the distinctive execution object is a correlated source-version stream, and the evidence object is an event-specific, population-level risk card that must retain that stream's policy and installation identity.

Registration and state consistency.. ICP variants and point-cloud registration are established methods [12, 13, 14, 15]. Our contribution lies in exposing a retained solve and governing its publication, not in replacing the registration objective. ICP curvature is also an imperfect surrogate for error uncertainty [16, 17, 18]. We therefore retain the joint robot/map state, propagate its covariance, and obtain empirical risk bounds from entire executed episodes rather than interpreting a Hessian as calibrated confidence. Delayed-measurement estimation already addresses temporal consistency [19]; our immutable-source replacement handles correlated revisions of one solve rather than fusing them as independent observations. Complete localization systems such as KISS-ICP and FAST-LIO2 address broader odometry and mapping problems [20, 21]. They are not substituted for same-task scheduling controls: our task uses a supplied structural prior and a common scan registration interface.

Risk control and runtime assurance.. Exact binomial inversion supplies the one-sided confidence bounds [22]. Learn-then-test separates fitted predictive algorithms from risk-controlled selection [23]; conformal risk control and conformal policy control provide other principled control constructions [24, 25]. We use a finite, pre-frozen catalogue with Bonferroni allocation because the events are binary and simultaneous bounds directly support the requested selector. This is not a new statistical bound. Runtime-assurance architectures can switch to a safety controller [26]; our refusal withdraws statistical attachment or retains an uncorrected pose and supplies no physical safety guarantee. The engineering contribution is the executable correspondence between requirements, numerical execution and evidence lifetime, assessed against an independently coded procedure that can enforce the same semantics.

Requirement evolution and inspection knowledge.. Engineering change reasoning has connected requirements, behavior and structure through semantic system models [27]; temporal, spatial and dimensional semantics have supported cyber-physical decisions [28]. Inspection knowledge has also been used to relate environments and defects to robot hardware requirements [29]. The extension here concerns an event bound attached to a specific numerical producer: it determines whether a revised requirement is covered by existing evidence, requires re-evaluation, or must be refused. It uses established containment and calibration principles rather than claiming a new general ontology. Its strongest procedural comparator receives the same quantities, dependencies, records and caches.

3. Localization service and engineering events

3.1. Joint state and immutable source

The robot localizes against a stationary airframe prior. The retained state is $x = (t, R, b, m_t, m_R)$, with translation, rotation, six motion-bias components and map translation/rotation. Its covariance P spans an 18-dimensional local perturbation. Reported airframe-relative position error is

$$e_p = \widehat{m}_R^\top(\widehat{t} - \widehat{m}_t) - (m_R^\star)^\top(t^\star - m_t^\star). \tag{1}$$

Measured motion increments propagate the joint state and covariance through $x_{k+1} = f(x_k, u_k)$ and $P_{k+1} = F_k P_k F_k^\top + Q_k$, using an $SE(3)$ local linearization [30]. Bias follows a first-order Gauss–Markov model. Truth is available to the simulator and scorer, not to the online policy or contract checker.

A source s comprises a scan and an immutable source-time prior (x_s^-, P_s^-). Registration checkpoint j exposes candidate $(x_s^{(j)}, P_s^{(j)})$, causal features h_j and cumulative work. These candidates revise one likelihood evaluation against the same prior. On delivery at t_d, the receiver assigns

$$(x_{t_d}^{(j)}, P_{t_d}^{(j)}) = \mathcal{R}_{s\to t_d}(x_s^{(j)}, P_s^{(j)}; u_{s+1:t_d}). \tag{2}$$

The measured increments are replayed only to a time already acquired. Later candidates replace earlier source versions; they are not fused as independent measurements. A rejected completion after a transient publication emits the original source prior as an ordered rollback. The service admits one active source job. A job releases its slot after its computation and all pending publications, including rollback, have drained. Interleaved independent measurements would require rewind and reprocessing and are outside this serial interface.

3.2. Three explicit event requirements

For an episode of duration $T = 4$ s, the loss is $L_\pi = \int_0^T \|e_p^\pi(t)\|^2 dt$, reported as the right-endpoint sum $\widehat{L}_\pi = 0.1 \sum_{k=1}^{40} \|e_p^\pi(0.1k)\|^2$. The trajectory event is

$$E_{\mathrm{tr}} = \{\max_{t\in\{0.5,0.6,\ldots,4.0\}} \|e_p(t)\| > \epsilon\}, \qquad \epsilon = 0.10 \text{ m}. \tag{3}$$

The first 0.5 s remains part of the reported loss and is identifiable as startup exposure. For an observation deadline D, define

$$E_{\mathrm{obs}} = \{\text{no positive scan version is active at } D\} \cup \{\|e_p(D)\| > \epsilon\}, \qquad E_{\mathrm{un}} = E_{\mathrm{tr}} \cup E_{\mathrm{obs}}. \tag{4}$$

Same-tick ordered installation and rollback precede assessment. A superseded positive version does not count as ready. The observation event is a correction-availability/position proxy; it does not model camera orientation, image quality or defect detection. The 0.10-m threshold is a study metric, not an aircraft clearance standard.

A request may require trajectory, observation, both *marginal* bounds, or a directly calibrated union bound. These four requirements differ: $U_{\mathrm{tr}} \le \delta$ and $U_{\mathrm{obs}} \le \delta$ imply only a union bound of $\min(1, U_{\mathrm{tr}} + U_{\mathrm{obs}})$. A union request instead uses the binary event E_{un} in calibration.

3.3. Work, deadlines and measurement boundaries

We keep two ledgers. The deterministic operation clock assigns CPU-equivalent seconds to actual counted registration queries, checkpoints, forecast traversals, publication/checking, front-end processing and propagation. Its coefficients are characterized on 48 excluded pilot inputs and frozen before calibration. This clock defines the controlled experiment's sender budget and installation schedule. Separately, native process CPU records work that actually executed. Controlled comparisons charge the shared executed front end, solver prefix, forecast and odometry to each policy; integrated wrappers additionally time their measured

claim bookkeeping and receiver components. Complete routes time the entire live online loop. Raycasting, file decompression and truth scoring are offline costs.

The hard stage budget B covers source sealing, registration, features, forecasts, rules and publication witnesses. It excludes the common front end and receiver/stream work, which remain included in total work and availability. A common conservative stage reservation prevents every policy, including a fixed cap, from starting unaffordable registration work. Thus an effective Fixed2 service may stop before two iterations when its budget binds; its newly calibrated card refers to that complete wrapper.

For publication j, let c_j be total sender work including the front end, $r_{<j}$ accumulated receiver work, h propagation work per step and r_0 fixed receiver work. Queue delay is $q = 0.05$ s and $\Delta t = 0.1$ s. The controlled installation rule is

$$n_j = \max\left(1, \left\lceil \frac{q + \alpha(c_j + r_{<j} + r_0)}{\Delta t - \alpha h} \right\rceil\right), \qquad r_{<j+1} = r_{<j} + r_0 + n_j h. \tag{5}$$

The denominator is positive in the frozen services. Complete routes execute causal incremental replay and defer installation until the modeled work is available. The load factor α represents constructed contention. Neither clock characterization nor α is an embedded-device latency measurement or a worst-case execution-time guarantee.

Selection minimizes $\overline{L}_\pi + \lambda_{\text{sel}}\overline{W}_\pi$, with $\lambda_{\text{sel}} = 1$ m^2 and W in CPU-equivalent seconds. The objective has units m^{2}s. Native CPU is reported separately and never added to loss without a stated weight.

The controlled-prefix ledger sums measured native component CPU. A second ledger times the inclusive replay program and includes offline truth assertions and scoring; it is reported separately and is not presented as pure online service CPU. Complete-route experiments directly time the online computation loop with sensor raycasting, archive decompression and truth scoring outside that boundary.

4. Executable knowledge, constraints and evidence

4.1. Typed representation and applicability

Define the operating knowledge structure as

$$\mathcal{K} = (\mathcal{V}, \tau, \mathcal{R}, \sigma, \Gamma), \tag{6}$$

where $\mathcal{V}$ contains entities, τ assigns their types, $\mathcal{R}$ contains typed relations, σ stores immutable specifications and fingerprints, and Γ contains executable predicates. Types are Source, Version, Profile, Service, Policy, Predictor, EventCard and Request. The dependency subgraph is directed and acyclic; ordered revision is maintained by the source transaction. This concrete representation uses dictionaries, a dependency graph and monitored state, without an ontology language or learned knowledge-graph embedding.

The representation distinguishes three epistemic roles. Correspondence counts, residuals and motion increments are measured observations. Sensor noise settings, geometric identity and service parameters are declared configurations. Equality of deployment and calibration distributions is an assumption. A metadata match checks the second role; it cannot establish the third or detect hidden distribution shift.

A card is $c = (g, a, \pi, e, n, k, K, \beta, U, \nu)$, where g is a complete population profile, a a processing service, π a complete effective policy, e an event and ν its version dependencies. Schema validation checks finite values, integer counts, exact binomial inversion and the body fingerprint before admitting a card to the trusted registry. Dependencies include the relevant predictor, policy specification, solver, executor, contract implementation, event definition, service, profile, protocol and geometric artifacts. Predictor changes invalidate only dependent policies; global clock changes invalidate every card. Fingerprints identify artifact equality in this controlled software setting; they do not provide remote device attestation or cryptographic authentication against a compromised producer.

Table 2: Knowledge entities, executable conditions and consequential decisions.

Entity/relation	Stored information and condition	Execution or evidence consequence
Source; derived-from	Scan fingerprint; all source-prior state and covariance arrays sealed	Revisions must use the same source and prior
Version; revises	Producer-recorded sequence, iteration, payload seal and rollback flag	Ordered replacement; no resurrection after rollback
Profile; applicable-under	Whole sampling mixture and geometric artifact	Restrict refinement; refuse unmatched population evidence
Service; executes-with	Queue, load, deadline, budget, clock and same-tick order	Reserve sender work; compute receiver availability
Policy/Predictor; depends-on	Frozen rule specification, model and implementation hashes	Admit the executed policy; invalidate affected cards after change
EventCard; supports	Defined event, n, k, K, β, U, calibrated profile/service	Select only admissible event requirements
Request; authorized-by	Pre-sensing task, finite allowance and selected-card seals	Commit a policy; attach a matching population statement or refuse

4.2. Exogenous task selection and commitment

A request $R = (g, a, \mathcal{E}, \delta)$ is declared before its scan is opened. The service specifies D, B, α; $\mathcal{E}$ is one event or the two marginal events. With frozen catalogue Π_0, define

$$\Pi(R) = \{\pi \in \Pi_0 : \mathrm{match}(g, a, \pi, \nu) \ \wedge \ U_{g,a,\pi,e} \le \delta \text{ for every } e \in \mathcal{E}\}. \tag{7}$$

The selector chooses

$$\pi^*(R) = \arg\min_{\pi \in \Pi(R)} (\overline{L}_{g,a,\pi} + \lambda_{\mathrm{sel}} \overline{W}_{g,a,\pi}), \tag{8}$$

with policy-ID tie-breaking. Empty sets return `REFUSED`. Calibration estimates may determine the choice because all bounds are simultaneous. No scan quality, confirmation outcome or future error enters selection. The selected policy remains fixed across its declared population; per-scan switching between calibrated policies would define a different policy needing its own calibration.

The selector emits a witness containing the request, chosen policy, card seals, event bounds and active dependency snapshot. A trusted precommit copies it before source acquisition. Binding the actual source changes its phase from `PRECOMMITTED` to `SOURCE_BOUND`; subsequent request or policy replacement is rejected. A new task requires a new exogenous commitment. This rule prevents a bound for one population-level policy from being attached to a favorable scan-selected alternative.

4.3. Action constraints and lifecycle enforcement

Time and profile constraints affect the numerical candidate set. The time predicate removes forecast caps whose estimated availability exceeds D. It accounts for the new candidate's own replay but omits previously accumulated receiver work; remaining solve cost is also a conditional mean. It is therefore an optimistic screen rather than a deadline guarantee. The executed installation rule in Eq. (5) includes accumulated receiver work, and event calibration uses that actual modeled installation. The profile predicate caps refinement at four iterations when declared noise exceeds two, source position standard deviation exceeds 0.061 m, or the geometry was excluded from predictor fitting. Both predicates were fixed on development evidence. They provide bounded fallback behavior, not a proof that mismatch has been detected or corrected. The common hard-budget reservation applies to every policy independently of these two predicates.

Each produced version is registered by the trusted producer with its sequence, iteration, rollback flag and payload seal. Before installation, the receiver checks the source/prior/data identities, current dependency values, committed policy, configuration, producer record, sequence and iteration order, rollback semantics, causal replay time, finite clock and sender work. Checking both the incoming payload and the producer record prevents jointly rewriting a payload and its advertised checksum in the tested trust model. A rejected

packet is not installed. A valid late numerical correction may still install after an observation deadline, but its observation statement is expired.

Statistical attachment is an additional operation. It requires the matching requested event and card, current source/version/payload, assessment instant, allowable risk and active dependencies. The attachment identifies an unconditional *policy/population event bound*; it is not a confidence score for this pose. An installed rollback remains part of the policy's calibrated behavior and is not itself a malformed-history fault.

The source-scoped history monitor addresses a lifecycle gap: a valid later packet must not restore a statement after an invalid attempt has changed the execution's evidence status. Scope state persists across ledger/plan reconstruction within the trusted registry's lifetime; process restart requires restoring that state or withholding attachment. For trusted source-execution scope s, it maintains

$$M_{s,0} = 1, \qquad M_{s,j+1} = M_{s,j} \wedge C_{s,j}, \qquad A^{\text{issued}}_{s,j} = A^{\text{candidate}}_{s,j} \wedge M_{s,j+1}, \tag{9}$$

Here C is the original operational receiver check. Every receipt reads the updated latch after that check; earlier receipt objects in the trusted ledger are marked revoked. This is local service state, not a claim of network revocation notification. The full representation revokes a source-specific claim child of the reusable plan; the procedural comparator independently maintains a monotone Boolean. Earlier receipts receive revocation records, and later receipts return `PROVISIONAL` with an empty upper bound. The operational plan is preserved, so later valid numerical installation is unaffected. Scope comes from the trusted execution context, even if a packet falsely names another source. Ordinary admission refusal and scheduled statement expiry do not trip this latch.

This monitor detects the specified invalid attempts. It does not detect an unobserved missing packet, an undeclared physical change or a malicious trusted producer. Such conditions lie outside the canonical execution/population assumptions. The monitor was sealed as an explicitly disclosed attachment amendment after numerical freeze F0 and before selection freeze F1; it preserves the numerical clock and event map (Section 6). Its actual CPU is measured rather than claimed to have been characterized by the earlier pilot fit.

4.4. Task feedback and a fair procedural alternative

The service returns a numerical pose plus readiness and one of attached, provisional or refused evidence states. A consumer can request a different deadline/budget, wait for a new exogenous source, or initiate offline recalibration for a changed profile. It cannot manufacture a valid certificate by relabelling metadata. In complete-route experiments, the population is deliberately distinct: admission refuses episode evidence and the service continues explicitly provisional localization with a descriptive nearest-profile recommendation.

The strongest comparator, `TaskAwareFlatValidated`, has the same catalogue, calibration costs, event requirements, risk allowances, budgets, precommit, source information and producer records. Its independently coded conjunction implements all current-version and history checks without the dependency graph. Equivalence is a meaningful outcome: it would show that executable semantics, rather than graph storage alone, cause the effect. We also test stripped checks as mechanism ablations, clearly separated from this fair competitor. Numerical accuracy, task feasibility and incorrect evidence attachment therefore have distinct denominators and conclusions.

5. Retained numerical execution and calibrated policy family

5.1. Registration and correlated checkpoints

We preserve the A19/A20 robust point-to-plane solve against a fixed source prior. For $d = x \boxminus x_s^-$,

$$\Phi_s(x) = d^\top (P_s^-)^{-1} d + \sigma^{-2} \left[\sum_{i \in \mathcal{I}(x)} \rho(r_i(x)) + (n - |\mathcal{I}(x)|)\rho(r_{\text{out}}) \right]. \tag{10}$$

Huber scale is 0.0625 m, $\sigma = 0.025$ m and unmatched residual $r_{\text{out}} = 0.8$ m. The unmatched term prevents improvement by discarding difficult correspondences. The solve uses at most 96 deterministically thinned

points and 25 iterations, with backtracking fractions $1, 1/2, 1/4, 1/8, 1/16$. Checkpoints occur at iterations $1, 2, 4, 8, 16, 25$ or termination. Each curvature covariance is constructed from the same prior precision,

$$P_s^{(j)} = \mathrm{PSD}\left[(G_j^\top (P_s^-)^{-1} G_j + H_j^\top \Omega_j H_j)^{-1}\right], \tag{11}$$

including rotation perturbation Jacobians. It is a local curvature approximation, not an empirically calibrated error covariance.

An eligible candidate requires a descending step, at least 12 pairs, clipped residual RMS below 0.065 m and more than 60% of residuals within 0.10 m. Final acceptance additionally requires translation and orientation steps below 0.001 m and 0.0005 rad. An interrupted eligible candidate may be published without final convergence. Continuation retains the iterate, prior precision and computational prefix. A final rejection after transient publication restores the original source prior through the same version/replay interface.

5.2. Common predictors and module interventions

The retained CART and random forest use the same 1,120 source-grouped development inputs, with 926 training and 194 validation sources. They are not refitted in this revision. CART has depth seven and minimum leaf size 20; the forest averages 64 depth-eight trees with minimum leaf size 12. Inputs are causal prior uncertainty, weakest scaled pose-information eigenvalue, residual/inlier measures, step sizes, objective ratio, iteration, pair count, displacement and declared noise. Aircraft identity, source truth, future motion and true error are excluded.

For reachable cap $a \in \{2, 4, 8, 16, 25\}$, the predictor supplies terminal MSE $\widehat{v}_{ja}$, development trajectory-event frequency $\widehat{r}_{ja}$ and remaining work $\widehat{c}_{ja}$. Current-candidate and source-prior MSE predictions govern publication. Effective terminal labels account for ineligible/rejected completion and prior rollback. The endpoint forecasts are heuristic; their event frequencies are not risk certificates. With constrained candidate set $\mathcal{A}_j$,

$$\widehat{a}_j = \arg\min_{a \in \mathcal{A}_j} \{T \max(\widehat{v}_{ja}, 0) + \lambda \max(\widehat{c}_{ja}, 0) + \omega \,\mathrm{clip}(\widehat{r}_{ja}, 0, 1)\}, \tag{12}$$

where $\lambda \in \{0.3, 1, 3\}$ m^2 and $\omega = 0.002$ m^{2}s. Forecast work retains its native development-label scale as a mean proxy; actual experiment availability and risk labels use the frozen operation clock. Matched variants use exactly the same forecasts and prices. At iteration two or later, selection of an already reached cap stops the job. Empty deadline-feasible sets and the profile cap may also stop it. Eligible interim candidates publish when their predicted MSE improves on the prior; eligible interrupted terminal candidates publish as well.

The 22-policy catalogue contains contract-CART (KG), FlatCART, FlatRF and ContractRF at all three prices; Fixed2, Fixed4, Fixed8, Fixed16, Final, Residual, seeded Random2or4 and OldRAVC; and price-one CART/RF time-only interventions. The name KG is retained for trace continuity, without implying a learned knowledge-graph model. Flat predictors omit time/profile guards; time-only variants add only time; KG/ContractRF add time and profile. Evidence-match and full-lifecycle layers then operate on the same numerical trace. This sequence distinguishes action changes from statement changes. All methods receive the common budget wrapper, inputs, service and acquisition/replay semantics.

OldRAVC retains the earlier six-output CART (480 training/120 validation inputs, depth six). It forecasts current/final MSE, their trajectory-event frequencies, remaining CPU and current-minus-prior MSE. An eligible candidate publishes if its forecast event frequency is at most 0.30 and its predicted MSE improves on the prior. From iteration two, an eligible candidate stops and publishes if its forecast event frequency is at most 0.30 and its predicted four-second MSE gain is no greater than remaining-work cost with price 1 m^2. Final acceptance follows the common solver. Unlike the new CART/RF features, this legacy model retains the binary C172 identity feature; the unfitted geometry uses the non-C172 value. Residual publishes an eligible checkpoint and stops at the first eligible checkpoint from iteration two. Random2or4 chooses cap four with frozen development continuation probability 0.4654427646, otherwise cap two, using a deterministic SHA-256 seed coin. Fixed caps publish an eligible reached cap, whereas Final waits for solver termination. Budget interruption can alter each nominal cap.

Table 3: One guarded source execution. All checks use causal inputs or declared specifications.

1	Validate the exogenous task and select a feasible policy/card set; refuse an empty catalogue and retain the propagated prior.
2	Precommit the plan, bind the actual scan and immutable joint prior, and register their seals.
3	Reserve the next stage under the common budget; execute only its new ICP prefix and checkpoint features.
4	Apply the matched predictor and time/profile predicates; stop, continue or produce a sealed candidate.
5	Validate the received version against producer records and active dependencies; reject malformed attempts and latch the source's claim status.
6	Replace the source version and replay acquired motion; include checking and replay in the execution ledgers.
7	Issue only a matching, unexpired population-event receipt from the source-scoped attachment layer.
8	Honor final rejection/rollback; report pose, readiness and evidence status to the task consumer.

5.3. Exact finite-family calibration

For each fixed profile, service, policy and event, k of n independent input seeds produce failures. With $\beta = 0.05$ and

$$K = 22 \times 2 \times 4 \times 3 = 528, \qquad U = \begin{cases} 1, & k = n, \\ \mathrm{Beta}^{-1}(1 - \beta/K; k+1, n-k), & k < n, \end{cases} \tag{13}$$

we store one card per combination. Trajectory, observation and union use their own binary counts on the same input, without multiplying the independent sample size. There are 4,096 calibration seeds per profile. Same-input correlations across methods, services and events are permitted by the simultaneous argument.

All 96 profile/service/task/allowance requests are selected and sealed at F1 before confirmation generation. Requiring both marginals checks two cards; requiring union checks its directly calibrated card. The primary allowance is 0.15; 0.10 and 0.20 describe a frozen feasibility grid. Prefix sample-size and confidence analyses diagnose margin sensitivity and do not change a deployed plan. A card with a barely positive margin remains admissible but is reported as fragile rather than described as robust.

OpenAI ChatGPT/Codex (GPT-6, developer OpenAI) assisted research-program and plotting-code development, computational analysis and exact schematic code. Archived programs produce the numerical observations from the specified geometric inputs; the figure scripts regenerate data plots and source/version schematics. The release records the actual assistance and authors must review and accept responsibility for the final content before submission.

6. Properties supporting the execution and evidence interface

The results below concern source consistency, exposure and the scope of a statistical statement. They do not assign an optimality guarantee to the learned endpoint heuristic. Earlier finite decision and scalar deployment models are retained in the supplement.

Proposition 1 (Source replacement)**.** *Assume all candidates of one source use its immutable scan/prior, publication leaves the retained solve unchanged, and no independent measurement update interleaves with the source job. Replacing an intermediate version with the final candidate and applying Eq. (2) gives the same live state and covariance as delivering that final candidate alone at the same installation time. A final prior rollback has the same property.*

Proof. The final candidate is the same deterministic function of scan, prior and executed prefix in both schedules. At final delivery both receivers assign the replay of that same candidate using the same acquired motion increments. The replay begins from the same covariance as well as state. No intermediate candidate contributes a second likelihood factor. □

The premise is why the receiver replaces a source instead of recursively fusing checkpoints. Cold-solve and live-prefix audits test the retained implementation; the property does not assert unbiased intermediate ICP error.

Proposition 2 (Delivery exposure)**.** *Consider two schedules with the same source candidates, exogenous motion and aligned final installation τ_f. One publishes an intermediate candidate at $0 \le \tau_c < \tau_f \le T$; the other holds it. If e_0 is the old-prior error and e_c the replayed candidate error, then*

$$\mathbb{E}[L_{\text{hold}} - L_{\text{publish}}] = \int_0^T \mathbb{E}\big[\mathbf{1}\{\tau_c \le t < \tau_f\}\big(\|e_0(t)\|^2 - \|e_c(t)\|^2\big)\big]\, dt. \tag{14}$$

Proof. Before τ_c the live estimates coincide, and after τ_f they coincide by Proposition 1. Subtract the loss integrals pathwise and exchange integration and expectation under integrability. Deterministic delivery times reduce the expression to an integral over $[\tau_c, \tau_f)$. For multiple publications, use the actual live candidate on each interval. □

An eligible residual alone does not determine the sign. Under linear propagation with common independent future noise, the difference contains the actual source error covariance and squared-mean differences; the curvature matrices need not equal those covariances. Publication also pays replay work. The experimental held-publication intervention recomputes timing after removing earlier replay and can change final installation, so its empirical contrast includes that additional effect.

Theorem 3 (Simultaneous population-event bounds)**.** *Freeze the K profile/service/policy/event combinations independently of calibration outcomes. For each combination, assume independent, identically distributed complete calibration inputs from its stated deployment mixture, including any independent policy randomization, and keep its entire effective execution/event map fixed. With Eq. (13), probability at least $1-\beta$ over calibration gives $r_{g,a,\pi,e} \le U_{g,a,\pi,e}$ simultaneously for every combination. On this confidence event, any calibration-dependent selection from Eq. (7) satisfies its requested population-event allowances.*

Proof. A fixed combination has a binomial failure count. Exact one-sided inversion has undercoverage at most β/K. A union bound over the fixed combinations gives simultaneous coverage. On that event all bounds hold, including those of a policy selected using calibration cost and event counts. Independence across policies, services, events or sampled instants is unnecessary. □

The reproducible Random2or4 comparator obtains its cap from a seed hash. Its binomial interpretation assumes that the seed-derived coin is an independent draw in the complete-input model. Conditioning instead on a fixed heterogeneous cap assignment does not yield the same iid binomial model; that interpretation would require a different bound. All simulator random streams share the usual ideal independent pseudorandom-stream modeling assumption.

Confidence $1-\beta$ concerns uncertainty in population risk; δ concerns an episode event. The two probabilities differ. A union card calibrates $E_{\text{tr}} \cup E_{\text{obs}}$ directly and may differ from both marginal decisions. For M deployment episodes, the generic mission bound is only $\min(1, M\delta)$ without further structure. Neither a route certificate nor subgroup/scan-conditional risk follows from an episode card. Declared configuration matching cannot replace the distribution assumption.

Proposition 4 (Attachment noninterference and history refusal)**.** *Let $B(X)$ be a frozen canonical execution and let $\mathcal{P}$ project it onto numerical decisions, produced/installed versions and ticks, replay/rollback order, deterministic work, loss, readiness and the three events. Suppose an attachment observer calls the original receiver check and installation with identical arguments, returns the original validation result unchanged, alters only separate claim state and source-specific claim nodes, and never feeds its native timing into the frozen work clock. Then*

$$\mathcal{P}(W(B(X))) = \mathcal{P}(B(X)). \tag{15}$$

For canonical valid histories, issued receipts equal the original attachment candidates. After any monitored invalid attempt in a source scope, Eq. (9) permanently removes that scope's upper bound, while a valid later numerical version may still install.

Proof. Each original validation result and each permitted installation is preserved, so induction over the original sequence preserves its numerical/clock projection. Claim updates modify no state in that projection.

Valid histories keep $M = 1$. A failed check sets $M = 0$; the conjunction cannot subsequently restore it. Revocation is scoped to a claim child, leaving the reusable operational plan unchanged. □

The canonical binary event is consequently unchanged for every calibrated combination, so its original risk bound transfers without adding a new family member. This argument does not certify the faulty-history population or the risk conditional on receiving a remaining authorized receipt. Faulted sources are not removed from calibration denominators. The amendment's actual native CPU is separately measured; its reservation is a frozen work-clock convention, not a measured worst-case service cost. If monitoring changes numerical installation or modeled availability, Eq. (15) fails and recalibration is required.

The source-history monitor covers detected invalid attempts rather than all possible trace faults. Undetected omissions, compromised trusted code, hidden distribution changes and interleaved external updates remain explicit failure conditions. Selective dependency invalidation is an implementation mechanism, not a new probabilistic theorem. The stronger procedural implementation can enforce the same semantics, which is why representation and numerical gains are assessed separately.

7. Extending localization to inspection outputs

The service in Sections 3–6 remains the numerical foundation. Its state, registration objective, source replacement, replay and computational policies are retained. The additional experiment exposes three consumer tasks: acquiring diagnostically usable synthetic pixels, associating them with the source version available at capture, and delivering a report within declared limits. These outputs test the operating contract beyond the localization proxy in Eq. (4); they do not replace the localization experiments or redefine their events.

The new catalogue contains Fixed2, Fixed4, Final, FlatCART, FlatRF, KG1, ContractRF and OldRAVC, with the unchanged fitted predictors, prices and common budget wrapper. One common solver prefix is actually executed per new input, and each policy/service wrapper consumes only the checkpoints it would have revealed. Its component timing is a paired controlled-prefix ledger; the complete-route timings in Section 12 remain separately measured online executions.

7.1. Actual raster and diagnostic target processing

A prescribed nominal route and prior CAD mesh plan up to 15 face/barycentric target addresses before stochastic map displacement and sensing. A synthetic gimbal aims at a prior-CAD patch. Targets remain the same across the paired ROI intervention. Raycasting against the perturbed geometric scene creates RGB pixels with procedural texture, fixed lighting, projected 25-mm-radius diagnostic landmarks, an exposure-blur surrogate and Gaussian intensity noise. A nearest-palette decoder estimates landmark pixel centers using only the image and known landmark colors. Ground truth is used for scene generation and offline correctness labels, not for decoding or online numerical policy choice. This is a diagnostic synthetic landmark task, not crack detection or a new real-camera experiment.

At a target with range d and absolute ray/normal incidence γ, the defined geometric sampling density is $g = d/(f_{\mathrm{px}}\gamma)$. Fixed-target quality uses the maximum GSD and motion/exposure blur across the preplanned addresses, including targets outside the current ROI. Correctly acquired target coverage is scored from actual decoded pixels. The capture-time geotag projects the CAD targets using the causally installed localization state. Its pixel discrepancy and metric landmark displacement are separately scored. An absent positive source version fails the readiness requirement; a later update cannot retroactively count as capture-time ready.

Image capture occurs at an independent, before-sensing sampled tick $c \in \{0.1, 0.2, 0.3\}$ s. Report delay and image age are distinct:

$$t_{\mathrm{report}} = \max\{t_{\mathrm{first\ positive}}, c + 0.05 + \alpha w_{\mathrm{camera}}\}, \qquad a_{\mathrm{image}} = t_{\mathrm{report}} - c. \tag{16}$$

The camera clock characterizes the executed *virtual raster producer plus decoder*, not a physical camera's capture latency. Its excluded-pilot median is frozen separately for each ROI. The same declared load

multiplier is used across methods. Native raster generation, decoding and localization components are reported separately; their sum is a mixed-boundary virtual workload, not embedded online CPU or worst-case timing. This narrow timing model is part of the certified simulation event and cannot be transferred directly to physical inspection.

8. Typed engineering tasks and evidence transfer

8.1. Knowledge objects and trusted roles

We extend the retained structure $\mathcal{K} = (\mathcal{V}, \tau, \mathcal{R}, \sigma, \Gamma)$ with Quantity, Requirement, CompiledEvent, ProducerComponent and TransferWitness. Quantities carry a dimension and canonical unit; requirements reference quantities and admissible intervals. Relations include *measured-by*, *depends-on*, *compiled-to*, *covered-by* and *calibrated-on*. Immutable specifications identify the source, complete policy, population, event and calibration manifests. Executable predicates check units, event containment, component dependencies and card validity. The implementation uses typed records and a dependency specification rather than OWL or a learned graph embedding.

Observed pixels and measured motion are data. ROI, exposure, focal length, budget and the named population are declared configurations. Equality of deployment and calibration distributions is an assumption. The interface keeps these roles distinct: a successful configuration check cannot establish the distribution assumption.

The GSD value is stored in meters per pixel, with pixel treated as a discrete sampling index; its threshold conversion is between length units at that fixed sampling definition. Pixel-domain errors remain dimensionally distinct from metric errors. The compiler rejects incompatible units, unknown quantities, Boolean thresholds, nonfinite thresholds and empty intervals. Missing required outputs or nonfinite measured/scored values fail the event rather than satisfy a one-sided inequality.

8.2. Requirement compilation and pointwise coverage

Let $z_{p,j}(X)$ be quantity j produced under complete producer p on input X. A requirement R defines the admissible set

$$S_R = \{z : \ell_{R,j} \le z_j \le u_{R,j}, \quad j \in J_R\}, \qquad E_{p,R} = \{z_p(X) \notin S_R\}. \tag{17}$$

Absent lower or upper bounds are represented as unbounded intervals, while nonfinite outputs are explicitly outside S_R. An anchor A covers request R when $J_R \subseteq J_A$ and, for every requested quantity,

$$\ell_{A,j} \ge \ell_{R,j}, \qquad u_{A,j} \le u_{R,j}. \tag{18}$$

The compiler records each interval comparison as a witness. Consequently $S_A \subseteq S_R$ and $E_{p,R} \subseteq E_{p,A}$. Dropping an acquisition-quality requirement can therefore produce a covered *partial service*; it cannot be advertised as satisfying the original complete inspection task. Adding a new required quantity or tightening an interval can require renewal.

The report event combines the required acquisition, association and timing violations using OR on the same input. Its calibration is a direct joint-event calibration. Two passing marginal cards are not presented as a passing joint card.

8.3. Event-specific dependencies under producer changes

Each quantity has a frozen implemented dependency set D_j. The requested event's closure is $D_R = \bigcup_{j \in J_R} D_j$. A component snapshot ν_p defines the capsule

$$v_{p,R} = H(\{(d, \nu_p(d)) : d \in D_R\}). \tag{19}$$

The capsule is a compact identity for a specified dependency projection. Its validity follows from the implemented data flow and trusted frozen code, not from hash equality alone. Transfer from producer p to p' requires that the requested quantities be identical functions of the same complete input: $z_{p',j}(X) = z_{p,j}(X)$ for $j \in J_R$. Matching dependency snapshots are the executable check for that narrowly specified condition.

Table 4: Engineering quantities and the decisions they support. All task thresholds are synthetic study specifications, not aircraft inspection or clearance standards.

Quantity	Unit	Interpretation and dependency
Fixed-target GSD	m/pixel	Sampling density at preplanned CAD addresses; focal length, target geometry and incidence
Exposure blur	pixel	Declared motion/exposure surrogate at the same targets
Target coverage	fraction	Correctly acquired diagnostic landmarks divided by planned targets; raster, ROI and decoder
Reprojection error	pixel	Causal estimated target projection versus decoded image landmark
Association error	m	Estimated CAD landmark displacement from its simulated physical counterpart
Localization readiness	Boolean	Positive, causally installed source version at image capture
Report delay; image age	s	Delivery time from source acquisition; delivery time minus image capture

A wider raster ROI changes coverage, pixel associations and the declared camera-work clock. It does not change geometric GSD at the same preplanned target addresses when pixel focal length and target geometry remain fixed. A GSD-only or fixed-target optical request can thus retain evidence through the verified projection; a complete image/report requirement generally cannot. Changing focal length or the target planner invalidates this optical projection. Deadline edits that affect capture, exposure, solver actions or processor scheduling change the producer and cannot be disguised as consumer-only relaxations.

The card binds the anchor event, old producer capsule, named population, n, k, allocated error budget, exact upper bound and complete calibration-manifest lineage. Invariant pooled cards identify both independent source blocks. Producer contexts are generated from the trusted frozen protocol; received metadata cannot rewrite the old context to manufacture a transfer witness. The retained source/prior sealing, causal version replacement and history refusal govern numerical attachment separately.

8.4. Admission, renewal and the fair procedural implementation

Before sensing, a request fixes its population, service, compiled event and risk allowance δ. A candidate policy is eligible if a valid applicable card covers the request and has $U \le \delta$. The selector minimizes the same calibration objective $\overline{L} + \lambda_{\mathrm{sel}}\overline{W}$, with $\lambda_{\mathrm{sel}} = 1\ \mathrm{m}^2$, and policy-ID tie-breaking. No confirmation label or observed current-image quality chooses the policy or anchor. An empty set refuses the statistical task service; refused requests remain visible in service-support denominators.

`ContractCover` uses explicit containment witnesses and event capsules. `ProceduralCoverValidated` independently implements the complete interval comparisons and dependency checks with the same quantities, cards, caches and objective. `DirectRecertCached` evaluates each predeclared requested event on applicable cached calibration records; it receives invariant pools whenever the same dependency proof permits them. `ExactCard` is an exact-anchor matching control. The latter is a mechanism ablation rather than the primary competitive baseline. Cold preparation, first updates and repeated lookups have separate accounting, because a warmed direct-renewal table may be faster.

9. Conditions for evidence reuse

The source-replacement, delivery-exposure and attachment properties in Section 6 remain applicable under their stated assumptions. The following propositions specify the additional task-event interface. They apply to a trusted frozen program and a stated population; they do not establish physical safety, detection of hidden drift or a new optimality guarantee for the learned numerical policy.

For a fixed binary anchor event, let k of n independent complete calibration inputs fail. With family error β and reserved family size K, store the exact one-sided bound [22]

$$U(k,n) = \begin{cases} 1, & k = n, \\ \mathrm{Beta}^{-1}(1-\beta/K; k+1, n-k), & k < n. \end{cases} \tag{20}$$

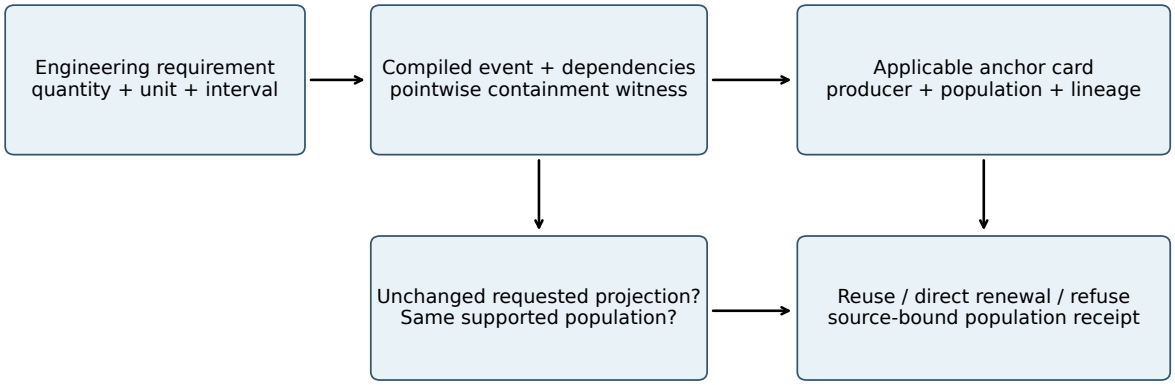


Figure 2: Extension of the operating-contract interface to changing inspection requirements. Event containment and an invariant dependency projection are distinct checks; metadata alone cannot establish distribution equality.

The implementation evaluates the inverse survival function to avoid subtractive loss at a small allocated error probability. Validation checks integer counts, the exact numerical inversion, event identity and manifest lineage.

Proposition 5 (Uniform coverage of a requirement closure)**.** *Freeze the anchor producer/policy/population combinations independently of calibration outcomes. Assume iid complete calibration inputs and the same deployment distribution and event map. With probability at least* $1-\beta$ *over calibration, every stored anchor risk is at most its bound in Eq.* (20)*. On this confidence event, for every requirement* R *covered pointwise by any such anchor* A, $\Pr(E_{p,R}) \le U_{p,A}$*. This conclusion is simultaneous over the entire containment closure, including requirements not individually evaluated on calibration records.*

Proof. For each fixed anchor the binomial inversion has undercoverage at most β/K. A union bound over the reserved finite card family establishes simultaneous anchor coverage, without requiring independence across policies or events. Equation (18) gives $E_{p,R} \subseteq E_{p,A}$ pathwise. Taking probabilities on the simultaneous confidence event establishes every covered requirement bound. No union bound over those derived requirements is needed. □

Policy selection using calibration objectives and valid simultaneous bounds is permitted. The selected complete policy remains fixed across the declared population for that before-sensing request. The confidence event does not make the bound conditional on observed image quality or on receiving a particular pose.

Proposition 6 (Transfer through an invariant requested projection)**.** *Let an old producer* p *have a valid anchor bound* $U_{p,A}$*. Suppose* A *covers* R*, the complete-input population is unchanged, and the implemented requested quantities satisfy* $z_{p',j}(X) = z_{p,j}(X)$ *for all* $j \in J_R$ *and all supported complete inputs. Then* $\Pr(E_{p',R}) \le U_{p,A}$ *on the same confidence event, even if producer* p' *changes quantities not required by* R*.*

Proof. Requested-projection equality implies $E_{p',R} = E_{p,R}$, including the stated nonfinite-output semantics. Pointwise coverage implies $E_{p,R} \subseteq E_{p,A}$. Combining these two relations with the old anchor bound proves the result. □

The premise is a functional invariance condition, stronger than merely matching metadata. Our implementation checks a frozen, inspected dependency projection and tests paired outputs for the predeclared ROI intervention. It does not infer general distribution invariance from finitely many passing samples. Changing an omitted component is permissible only within the implemented functional model; an undeclared physical coupling invalidates that interpretation. Pooling independent calibration draws from two such invariant producers is valid for that event only, and both raw-manifest identities are retained.

9.1. Why adaptive anchor switching needs another guarantee

Two events can each have risk 0.10 while their union has risk 0.20. For example, let disjoint sets of inputs trigger the two events, and choose the corresponding unfavorable event after observing the input. A marginal certificate for each event does not bound the selected event by 0.10. The same issue affects per-image policy or anchor switching. A common covering event, a directly calibrated switched policy, or an applicable union bound is needed. The studied selector commits before opening the source and does not make that switch.

9.2. Applicability and refusal

A request without a valid covering card or successful renewal is refused. A malformed source or a detected invalid version attempt invokes the retained source-history refusal mechanism. A request that changes capture, execution budget or scheduling cannot reuse an old card solely because a textual deadline is relaxed. Unknown operating distributions remain unsupported. Nor does an episode statement imply a route statement: without additional structure, M episodes with individual allowance δ yield at most the generic union bound $\min(1, M\delta)$. These conditions delimit the engineering service rather than hide its unsupported regions.

10. Localization and route experimental design

10.1. Freezes, populations and independent units

The localization evidence block uses protocol `A20-AEI-R8-prospective-2`. F0 froze numerical methods, sensor/policy implementations, predictors, maps, route templates and the characterized service clock before final input generation (2026-10-11 19:07:18 UTC). A source-history attachment amendment was separately sealed before F1 or confirmation generation. Its first version at 19:33:16 UTC was superseded after independent review identified a procedural latch reset on reconstruction; the final version preserves the source scope across reconstruction and tests legal rollback. All intermediate versions and their hashes are archived. The final amendment changes only issuance semantics; 16,896 matched pilot paths and 5,632 policy/service paths from the first completed calibration chunk passed automated numerical/clock/event projection comparison. These comparisons emitted equality counts and hashes rather than performance summaries used to choose behavior. F1 freezes all calibration cards and request plans, and a separate binding sidecar seals F1 to the final attachment amendment, before confirmation/stress inputs are opened. The hashes and execution ledger support local chronology; they are not an externally registered protocol.

The retained 1,120-source fitting set has separate training and validation groups. The 48 new pilot sources are excluded from inference. This localization study contains 8,192 calibration, 4,096 confirmation and 1,536 unsupported stress inputs: 13,824 unique seeds. Each input is replayed across 22 policies and four services; these 1,216,512 controlled outcomes are paired executions, not independent samples. Integrated confirmation adds repeated task/validator executions on the same 4,096 confirmation inputs and adds no statistical sample size.

Nominal calibration and confirmation draw uniformly from the B767/C172 identities, prior position standard deviations $\{0.015, 0.03, 0.06\}$ m, noise multipliers $\{1, 2\}$ and shape levels $\{0, 1, 2\}$. Each independent seed chooses a source frame uniformly from a retained prescribed route, excluding the first/last 100 frames. Map translation and rotation perturbations have standard deviations 0.025 m and 0.001 rad. The procedural airframe has different dimensions and surfaces and is excluded from all predictor fitting. Its independent calibration/confirmation uses the same prior/noise/source sampler and a distinct profile. Calibrating an unfitted geometry assesses transfer of a predictor with newly matched evidence, not zero-shot risk certification.

Stress inputs separately impose removal of a uniformly oriented 2.2-rad azimuth sector, retention of a 0.5-rad sector about the measured median azimuth, prior deviations 0.08/0.12 m, or a new 0.06-m normal map warp. Their profiles lack primary cards. Numerical best-effort results remain descriptive and their evidence status is refused/provisional. Range overlap alone does not grant applicability. Metadata verifies the declared configuration and does not perform OOD detection.

Table 5: Frozen processing services shared by every method. B caps the registration stage; total work also includes the common front end, receiver and stream.

Service	Load α	Deadline D (s)	Stage budget B (ms)
Relaxed	10	0.5	20
Standard	20	0.3	12
Tight	40	0.2	6
Contended	60	0.3	12

Table 6: Research questions and evidence units. All interventions use matched inputs and retain null/adverse outcomes.

Experiment	Question and controlled comparison	Evidence
A	Flat forecast → time → time/profile → evidence-match → lifecycle; matched model, price and budget	Action changes and accuracy/work versus incorrect attachments
B	Requested-event selection and refusal; Full versus task-aware calibrated validated Flat	Frozen feasibility, selected policies, readiness and admission/receipt coverage
C	Certificate stability rather than threshold passing	Exact U, margin $\delta - U$, nested n, confidence and service sensitivity
D	Predictor transfer to unfitted geometry and specified difficult populations	Separate confirmation profile and unsupported stress results
E	Binding time and operating-profile constraints	Same-price CART/RF module interventions, guard rates and rejected refinements
F	Complete continuous routes and integrated cost	Geometry/condition strata, tails, timely corrections, drops and policy switches
G	Concentration and extreme failures	Paired loss distributions, top-two deletion, largest-5% loss and failure taxonomy

10.2. Seven experiments and fair attribution

The fair same-task selector includes all 22 effective policies and uses the same cards, allowance, calibration objective and exogenous requests as Full. Fixed2, Fixed4, Final, FlatCART, FlatRF, ContractRF and OldRAVC are always reported. A trajectory-only selector is a diagnostic of changing the task requirement, not the main competitive baseline. Evidence-match and lifecycle ablations preserve the predictor and numerical trace; their software-fault denominators are distinct from geometric inputs. Deterministic fixtures validate malformed cases and are explicitly excluded from calibration counts.

10.3. Inference, sensitivity and tails

The primary interval family was frozen before calibration: standard service, two confirmation profiles, four contrasts (Full minus validated Flat for the union request at $\delta = 0.15$; KG1 minus FlatCART, FlatRF and Fixed2), and two metrics (loss and observation failure), giving 16 intervals. Refused union plans retain the source prior, so their outcomes stay in the sample. We use 32,000 paired seed-bootstrap replicates with seed 2026101208, reporting pointwise 95% and Bonferroni-adjusted percentile intervals. These are approximate sampling intervals, distinct from the exact simultaneous CP bounds. No interval is assigned to repeated executions as if they were independent sources.

All other service, subgroup, Pareto and route summaries are descriptive. Calibration sensitivity uses ordered nested prefixes $n \in \{128, 256, 512, 1024, 2048, 4096\}$, confidence 0.90/0.95/0.99 and allowance 0.10/0.15/0.20 with the same family size. It does not reselect a policy, stop data collection early or replace F1. Tail summaries include 95th/99th percentiles and mean of the largest 5%. Removing the two largest paired contributions diagnoses influence and does not define a revised efficacy estimate or delete unfavorable observations.

10.4. Continuous routes and provenance

The route block contains three geometries, three conditions and four independent stochastic replicates: 36 inputs, each 600 s at 10 Hz with two-second scan opportunities. Twelve methods give 432 paired executions, or 72 simulated route-hours. B767/C172 trajectories traverse the original 1,980-s prescribed paths rescaled continuously to 600 s, without cyclic endpoint joining. The procedural airframe uses an archived analytic elliptical orbit. The paths are imposed, so this experiment measures a localization service rather than a controller whose actions respond to pose error.

Ordinary routes use the standard service. Contention and geometric-stress routes use an exogenous repeating standard/tight/contended schedule. Stress adds larger map/prior errors and specified occlusion/degeneracy windows. All methods use the same realization and single-source queue. Full and validated Flat refuse episode-to-route evidence and execute identical explicitly provisional recommendations. Native route CPU times the whole online loop, including frontend, registration/features, forecasts, dispatch, seals, validation, replay and coordination. Model/registry startup, raycasting, archive access and scoring are identified outside that online boundary.

The B767/C172 geometric artifacts come from the pinned, licensed FlightGear models [31, 32]; sensor, perturbation, motion and load models are documented in the source release. Four original physical-platform photographs and five supplied simulation views are retained in Figs. 3 and 4. Photographs establish operating context, not new measured localization results. Earlier A19/A20 inputs, 2,680 later episodes and 81 executions on nine route inputs remain separate preserved studies in the supplementary material.

a Laboratory platform



b Platform side view



c Aircraft field context



d Aircraft field context (portrait)



Figure 3: All four original platform photographs: laboratory integration, side integration, aircraft field setting and the under-fuselage view. Full original aspect ratios and pixels are retained. These qualitative views do not establish the localization errors or processor latencies measured in the synthetic experiments.



Figure 4: Simulation views of quadruped aircraft inspection: (a) exterior approach; (b) forward underside; (c) elevated airframe overview; (d) landing-gear proximity; (e) under-wing and fuselage proximity. These five supplied views illustrate deployment geometry. They are shown uncropped, with their original aspect ratios and no pixel retouching. Quantitative localization results use the separately archived geometric sensor and replay inputs.

11. Prospective design and reproducibility

11.1. Two studies, freezes and independent units

Study A uses a 192×144 raster; the predeclared Study B intervention uses 288×216 at the same 1,800-pixel focal length and 6-ms exposure. Wider ROI therefore changes the set of acquired pixels and virtual production cost while preserving geometric GSD at the same target addresses. B uses independent input seeds and its changed non-invariant events require fresh calibration. Invariant optical events may use the explicitly identified independent A/B calibration pool, available equally to every baseline.

Each study contains 2,048 nominal and 2,048 unfitted-geometry calibration inputs, 1,024 independent confirmation inputs for each population, and 64 inputs in each of four unsupported stress profiles. Thus each study has 6,400 independent inputs and the two studies have 12,800. The 32 policy/service outcomes per input do not increase sample size. Forty-eight unique pilot seeds are excluded; iterative pilot implementations repeat these same seeds. Additional excluded execution fixtures reuse named seeds and do not become calibration observations.

The nominal mixture samples B767/C172 identities, source frames, prior deviations $\{0.015, 0.03, 0.06\}$ m, range-noise multipliers $\{1, 2\}$ and shape levels $\{0, 1, 2\}$. The unfitted procedural airframe is excluded from forecast fitting and receives its own matched evidence. Map translation and rotation perturbations have standard deviations 0.025 m and 0.001 rad. Stress separately removes a 2.2-rad range sector, retains a 0.5-rad sector, increases prior deviation to 0.08/0.12 m, or applies a 0.06-m map warp. Stress profiles have no primary cards and cannot inherit matched-population certification.

Numerical algorithms, camera/task modules, thresholds, seed domains, dependencies and timing were frozen before formal input generation. A disclosed format amendment, still with zero formal inputs, normalized manifest paths and preserved hashed JSON bytes across Git/Windows checkout; it changed no scientific parameter. The archived initial freeze and amendment are retained. All calibration cards and choices for both studies are then sealed before any confirmation generation. These are locally archived prospective records with public GitHub checkpoints, not an independently registered trial.

Windows CPU observations show 15.625-ms quantization. Medians characterize the declared virtual-service clock; distributions of native costs remain reported rather than interpreted as precise embedded component latencies. The historical localization operation clock is preserved independently.

11.2. Requests and fair competitors

The full acquisition task requires GSD at most 20 mm/pixel, blur at most 0.5 pixel and correctly acquired target coverage at least 0.50. Association requires coverage at least 0.50, reprojection at most 30 pixels, metric displacement at most 0.10 m and a positive source version at capture. Full reporting requires the union of these constraints, report delay at most 2 s and image age at most 1.8 s. These are synthetic diagnostic-service specifications.

Eight predeclared variants include coarser GSD, larger tolerated blur, explicitly partial coverage, a further relaxed partial request, stricter requirements, later reporting and a single-component service. Full, partial and single-component events form the anchor set. The entire matrix is retained; removing requirements produces a different service, not success on the full task. The primary allowance is 0.15, with 0.10/0.20/0.25 secondary settings.

The reserved simultaneous budget is $\beta = 0.05$, $K = 4,608$, covering both studies, populations, numerical policies, services and the predeclared event families. Unused reserve is not reassigned after results are seen. Every method uses the same per-card allocation, applicable records, invariant pool, calibration objective and request cache. Direct renewal evaluates the actual requested binary event; it may support more requests than an available anchor closure. Procedural coverage implements the same complete semantics as the contract. Exact-card matching is an explicitly limited control.

11.3. Evaluation and preservation

We separately report configured service support, refusal, conditional confirmation failure, incorrect applicability, certificate margin, cold record evaluation, preparation and repeated-query cost. Refused

Table 7: Shared numerical services and new virtual camera clock. Camera cost is additional to the retained numerical budget and defines Eq. (16); it is not physical camera latency.

Service	Load α	Numerical deadline (s)	Stage budget (ms)
Relaxed	10	0.5	20
Standard	20	0.3	12
Tight	40	0.2	6
Contended	60	0.3	12
A: raster 46.875 ms; decoder 15.625 ms; total 62.5 ms			
B: raster 78.125 ms; decoder 46.875 ms; total 125 ms			

requests contribute zero supported service and remain in every configuration-count denominator; no successful task-event sample is invented for an unexecuted refused policy. Numerical error and work are reported for all eight producers and separately for authorized selections. Same-source pairing and population-stratified summaries prevent repeated queries from becoming independent observations.

Native source arrays, measured increments, every executed solver checkpoint, RGB/depth rasters, decoded landmarks and publication/installation traces are retained with hashes. Continuation verifies raw input archives, not only result tables. Complete confirmation repetition spans four services; its row count measures executed queries, not evidence sample size. Historical A19/A20/R8 source, 36 R8 route inputs/432 executions, four original photographs and five supplied simulation views remain intact. No new physical trial or route-level task certificate is asserted.

12. Localization and complete-route results

12.1. What the contract changes: actions and evidence

The experiment separates three effects. First, a learned policy changes how much ICP work is executed and when a source version becomes available. Second, requested-event selection chooses one complete calibrated policy before sensing. Third, evidence predicates decide whether its population bound remains applicable to an installed source version. A representation-specific accuracy gain would require a difference from a procedural implementation with the same semantics.

At relaxed and standard services, KG1, CART_Time and FlatCART have exactly the same stopping, publication and numerical/event outcomes on both confirmation profiles. The full graph and independently validated procedural selector have identical decisions, numerical events and issued receipts on all 32 primary-allowance (0.15) contexts, with 2,048 shared inputs per profile. The 16 primary interval family retains these exact zeros (Fig. 7). These results attribute the standard-service accuracy improvement to the learned computation policy, rather than to graph storage or inactive constraints.

The time predicate does bind under contention: it changes the CART stopping endpoint on every input in both confirmation profiles. Its shorter execution reduces total work and some observation failures, while increasing integrated trajectory loss. Under the tight service the common hard-budget reservation already stops all compared refinements early, so the additional time predicate changes no endpoint. The declared profile predicate fires for unfitted geometry and larger priors, but adds no numerical change beyond the time/budget controls in this study. Firing a rule and causing a different decision are distinct quantities; all module counts, including these null effects, are retained. For the nominal confirmation profile, adding time screening changes mean loss by +0.005094 m^2s, total work by -3.600 ms and observation failure by -1.660 percentage points. This is a service-dependent trade-off, not uniformly better localization.

For the unfitted confirmation profile, adding time screening changes mean loss by +0.004179 m^2s, total work by -3.583 ms and observation failure by -1.904 percentage points. This is a service-dependent trade-off, not uniformly better localization.

Evidence matching and history enforcement act on different outcomes. An incorrect attachment means a violation of the stated applicability protocol; it does not mean that the injected case has experimentally

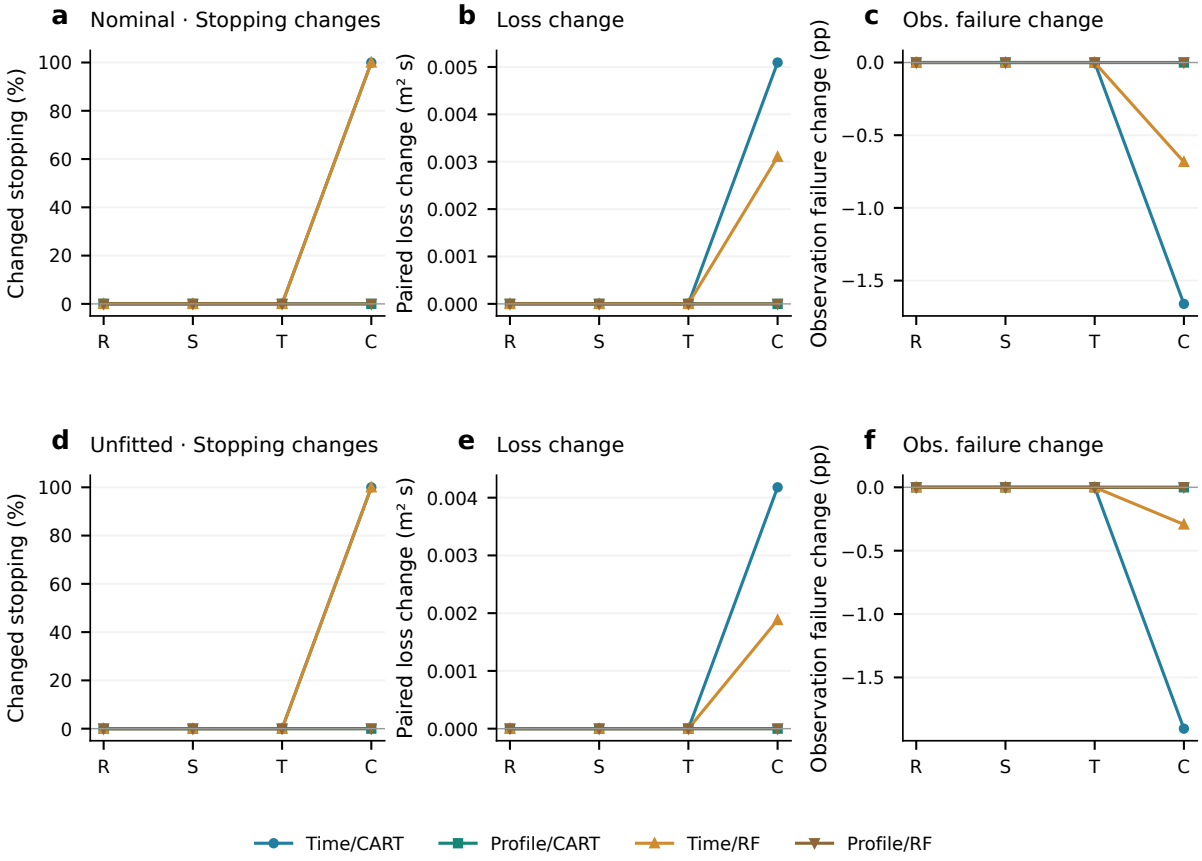


Figure 5: Matched numerical-module interventions on all confirmation inputs. R/S/T/C denote relaxed/standard/tight/contended. Time/CART and Time/RF add the same time predicate to their Flat predictors; Profile adds the same declared-profile predicate afterward. Curves are paired descriptive means/counts. Profile effects are zero even where the predicate fires. No source is removed.

demonstrated population risk above its bound. In the fault fixtures, numerical noninterference can leave risk unchanged while the declared protocol still suspends the statement. Sixteen constructed applicability violations use the actual frozen F1 cards, accompanied by two valid controls including legal rollback. With stripped checks, incorrect attachments number 16; metadata/evidence matching reduces this to four, current-version checking to two, and the source-history latch to zero. The fully validated procedural comparator also has zero incorrect attachments and accepts both valid controls. These are deterministic software cases, not a measured stochastic fault rate or a proof about an arbitrary faulty population. The wider preflight/audits check cold solves, live prefixes, forged payload/checksum combinations, stale dependencies, reconstructed scopes, and rollback. Claims are withdrawn while later valid numerical installation remains available. A concrete request chain uses the unfitted profile and standard service at allowance 0.10. The observation request admits ten policies and selects OldRAVC, with $U = 0.09994596$; trajectory, both-marginal and union requests are refused. Its margin is only 0.00005404. Thus the task changes evidence eligibility and refusal, not necessarily the selected numerical policy among feasible tasks. The dependency fixtures in Table 8 make the applicable set traceable to the changed artifact while preserving unrelated cards. Source-version and history checks then govern attachment to the actual installation. These outcomes support inspectable consistency semantics, not a measured maintenance-effort advantage over validated Flat.

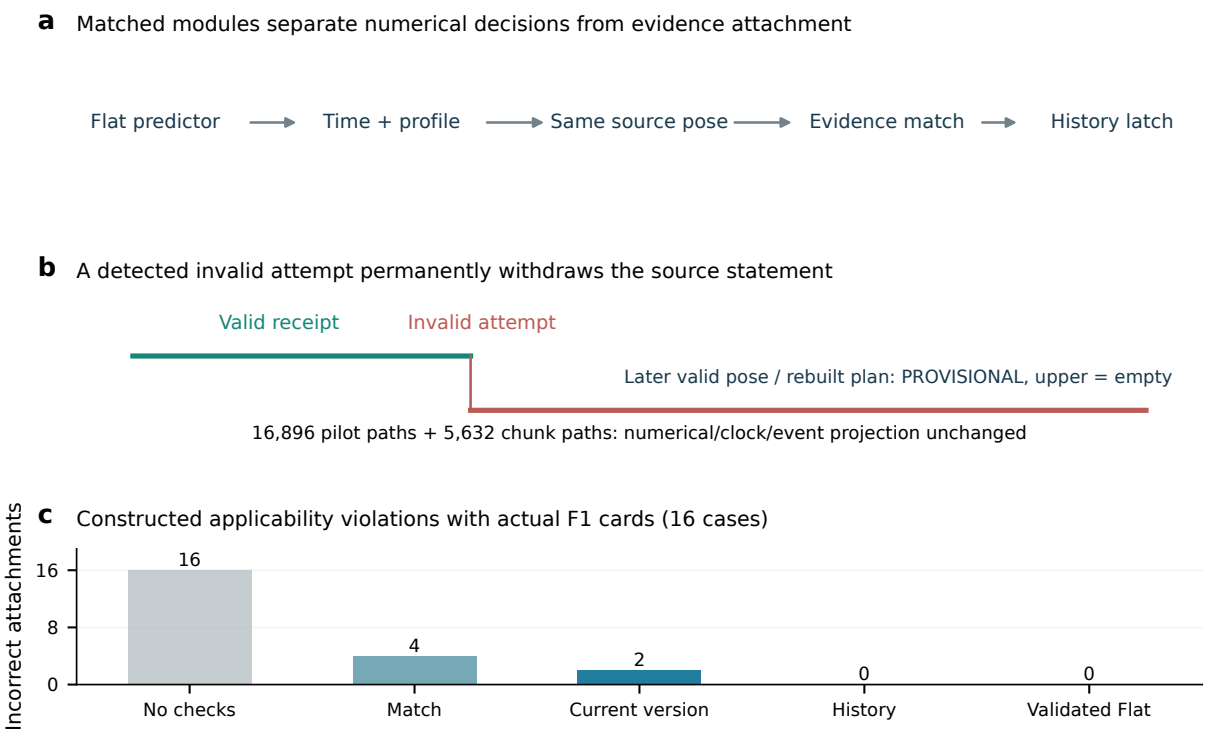


Figure 6: Numerical and applicability mechanisms have different endpoints. (a) Matched prediction/action modules are followed by evidence/lifecycle checks. (b) A detected invalid attempt permanently removes the same source scope's statement; reconstructed plans do not reset it. (c) Incorrect attachments in 16 constructed invalid cases using real F1 cards. Two normal controls pass every layer. Stripped checks are mechanism ablations; validated Flat is the primary fair competitor. The schematic and exact audit chart were produced by Python code assisted by ChatGPT/Codex (GPT-6).

Table 8: Selective evidence lifetime in excluded software fixtures. One active dependency changes per row; the registry contains the same 528 cards. Counts concern applicability, not new population risk observations. Complete procedural validation can implement the same semantics.

Changed dependency	Revoked cards	Unaffected cards
forecast:rf	168	360
artifacts:nominal	264	264
event:union	176	352
service:standard	132	396
clock	528	0

12.2. Same-service localization and the strongest fair control

Table 9 keeps the competitive fixed, learned and old policies under the identical standard service, including shared stage budget and load. The Full rows execute the F1 union-request selection and include actual dispatch/claim overhead; the controlled rows charge the selected executed native prefix plus individually executed components. This component CPU is not the whole-route online CPU reported later. KG1 reduces loss relative to Fixed2 by 15.68% in the nominal profile and 12.61% in the unfitted profile. The corresponding work increases are 16.09% and 16.07%. The same predictor without contracts, FlatCART, obtains exactly the same nominal and transfer numerical results. FlatRF/ContractRF largely choose two iterations and remain close to Fixed2. Fixed4 and Final lower mean loss further while paying more work and, in the nominal profile, losing some deadline availability.

Table 9: Standard-service confirmation. L is in 10^{-3} m^2s; W is total modeled work and CPU is measured component CPU (ms/input); failure columns are percentages. Full and validated Flat select FlatCART3 on nominal inputs and OldRAVC on unfitted inputs. Their risk allowance is 0.15 for the direct union. Every row retains all predetermined inputs.

Method	L	W (ms)	CPU (ms)	Obs. fail	Union fail
Nominal, n=2,048					
Fixed2	13.833	9.221	10.498	7.18	8.64
Fixed4	11.295	12.109	13.450	6.49	7.52
Final	11.295	12.109	13.463	6.49	7.52
FlatCART	11.664	10.705	13.760	5.52	6.84
FlatRF	13.844	9.973	12.817	7.18	8.64
ContractRF	13.844	9.973	12.764	7.18	8.64
OldRAVC	12.199	9.666	11.939	5.42	6.79
KG1	11.664	10.705	13.749	5.52	6.84
Full selector	12.301	9.721	10.289	5.76	7.13
Validated Flat	12.301	9.721	10.183	5.76	7.13
Unfitted, n=2,048					
Fixed2	19.938	9.220	10.525	9.08	10.06
Fixed4	17.350	11.736	13.213	8.54	9.28
Final	17.350	11.736	13.174	8.54	9.28
FlatCART	17.423	10.702	13.801	7.91	8.79
FlatRF	19.936	9.953	12.776	9.08	10.06
ContractRF	19.936	9.953	12.733	9.08	10.06
OldRAVC	17.964	9.781	11.997	8.40	9.03
KG1	17.423	10.702	13.779	7.91	8.79
Full selector	17.964	9.781	10.304	8.40	9.03
Validated Flat	17.964	9.781	10.191	8.40	9.03

12.3. Requested events, refusal and actual issued coverage

The task-aware selector is tested against a competitor that has the same requested events, risk allowance, calibration costs, catalogue and source/history checks. Both produce the same 96 frozen plans. At the primary allowance, 18/32 constructed profile/service/task requests are selected and the remainder refused. This count measures configured catalogue feasibility, not a random field-request success probability.

Relaxed and standard requests admit all four task types. The chosen policy is FlatCART3 for the nominal mixture and OldRAVC for the unfitted mixture. Under contention only the trajectory request is selected; observation, both marginals and direct union are refused. Tight-service requests are all refused. Refusal keeps the source prior, pays its actual monitoring/stream/dispatch costs and counts as observation/union failure. It is not removed from an accuracy denominator. A trajectory-only choice therefore cannot be credited as satisfying an observation request. For selected standard union requests, all nominal sources and 2,047/2,048 unfitted sources issue an applicable receipt. One unfitted source produces no attachable version. A receipt carries a population-event bound and can accompany an inaccurate individual pose; coverage is not

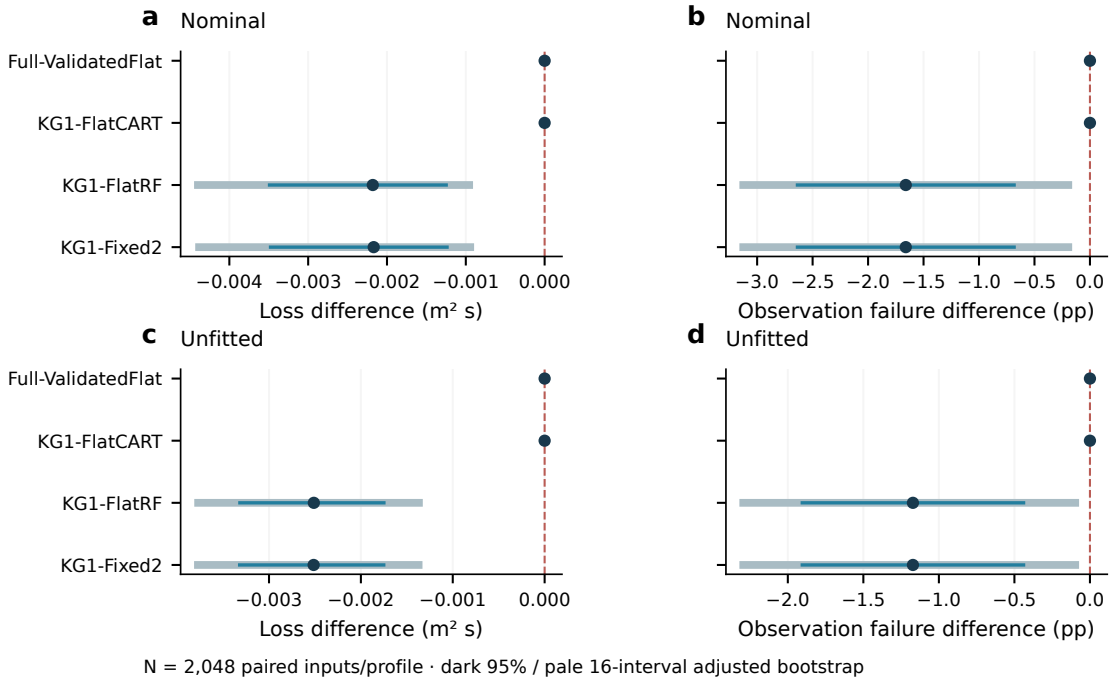


Figure 7: All 16 prespecified paired intervals: 2,048 independent confirmation inputs/profile and 32,000 bootstrap replicates. Dark intervals are pointwise 95%; pale intervals are the 16-interval Bonferroni-adjusted percentile intervals. Exact zero Full–validated Flat and KG1–FlatCART differences remain visible. The intervals are approximate sampling intervals, separate from exact CP calibration.

Table 10: Selected examples from actual integrated confirmation. Success is a timely positive-version correction with error at most 0.1 m; coverage requires at least one valid issued receipt during execution for each requested event. The same rows hold numerically and for receipts in validated Flat.

Profile	Service	Task	Policy	Success (%)	Coverage (%)
Nominal	standard	union	FlatCART3	94.24	100.00
Nominal	contended	trajectory	FlatCART3	49.12	100.00
Nominal	contended	union	Refused	0.00	0.00
Nominal	tight	union	Refused	0.00	0.00
Unfitted	standard	union	OldRAVC	91.60	99.95
Unfitted	contended	trajectory	OldRAVC	17.09	99.95
Unfitted	contended	union	Refused	0.00	0.00
Unfitted	tight	union	Refused	0.00	0.00

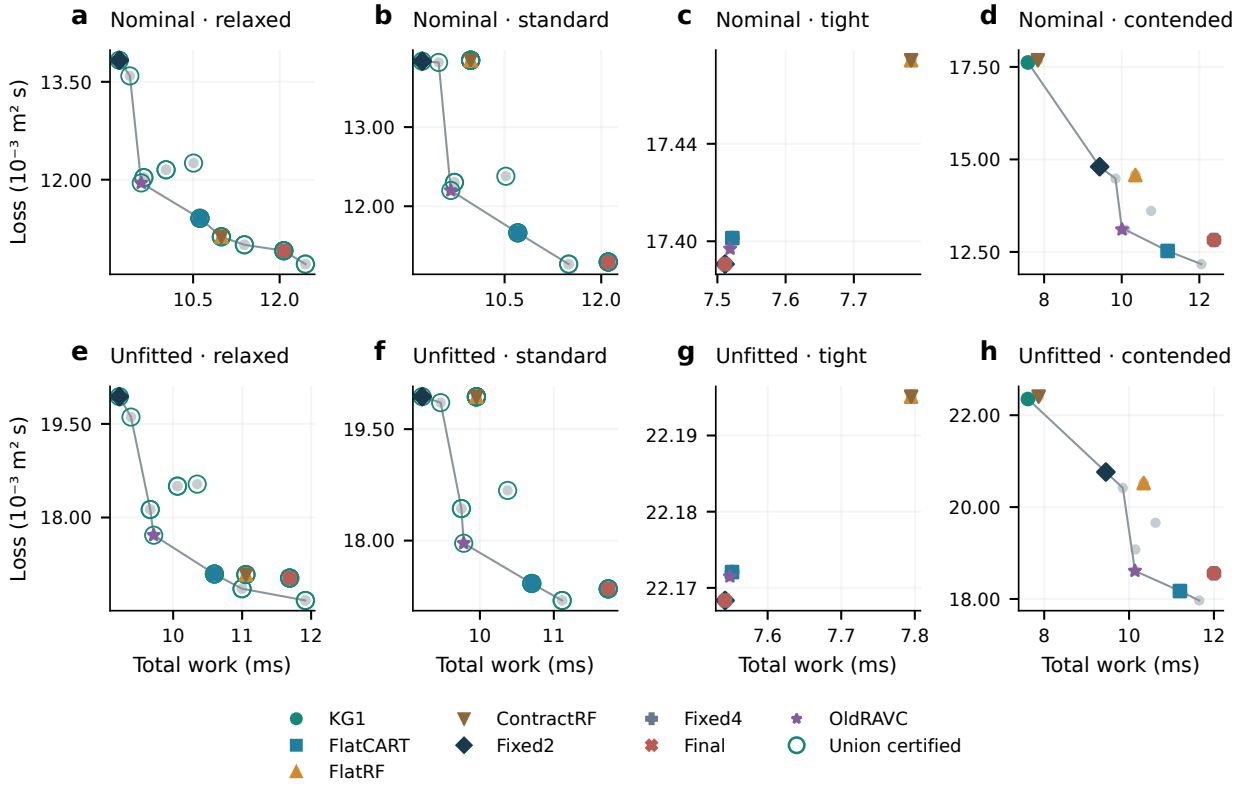


Figure 8: Work–loss trade-offs across all 22 policies, separately for each confirmation profile/service. Grey points retain the full catalogue, coloured markers identify the principal controls, and open green rings mark policies whose frozen direct-union card has $U \leq 0.15$. The grey line joins nondominated means; it is descriptive, not a fitted bound or a confidence region. Coincident methods can overlap. The tight service's common cap explains its small numerical spread.

scan-conditional safety. Observation success, certification feasibility, receipt coverage and false applicability are accordingly reported separately. Within the canonical confirmation executions the two validators have no receipt discrepancies. The software-fault experiment, rather than this geometric denominator, evaluates malformed applicability.

12.4. Certificate margins and sensitivity

Direct union calibration is recomputed on actual trajectory OR observation failures. At standard service, the selected nominal policy has $U_{\cup} = 0.085836$ and the selected unfitted policy has $U_{\cup} = 0.115254$. Their 0.15 margins are 0.064164 and 0.034746. The unfitted contended trajectory card is more fragile: $U_{\mathrm{tr}} = 0.146330$, leaving only 0.003670. At allowance 0.10, the standard OldRAVC observation card has only 0.00005404 margin; it does not justify a broad robust-risk claim.

Figures 10 and 11 show that small samples often certify no policy at this family correction, and that feasibility depends on service and confidence. All 28,512 sensitivity rows retain fixed policies and family size; the displayed prefix/confidence grid does not enjoy an extra simultaneous theorem across the diagnostic grid and does not alter F1. The supplement reports every one of the 528 actual cards. Two passing marginals are never interpreted as a passing joint bound. None of the unsupported stress or route profiles receives a transferred episode certificate.

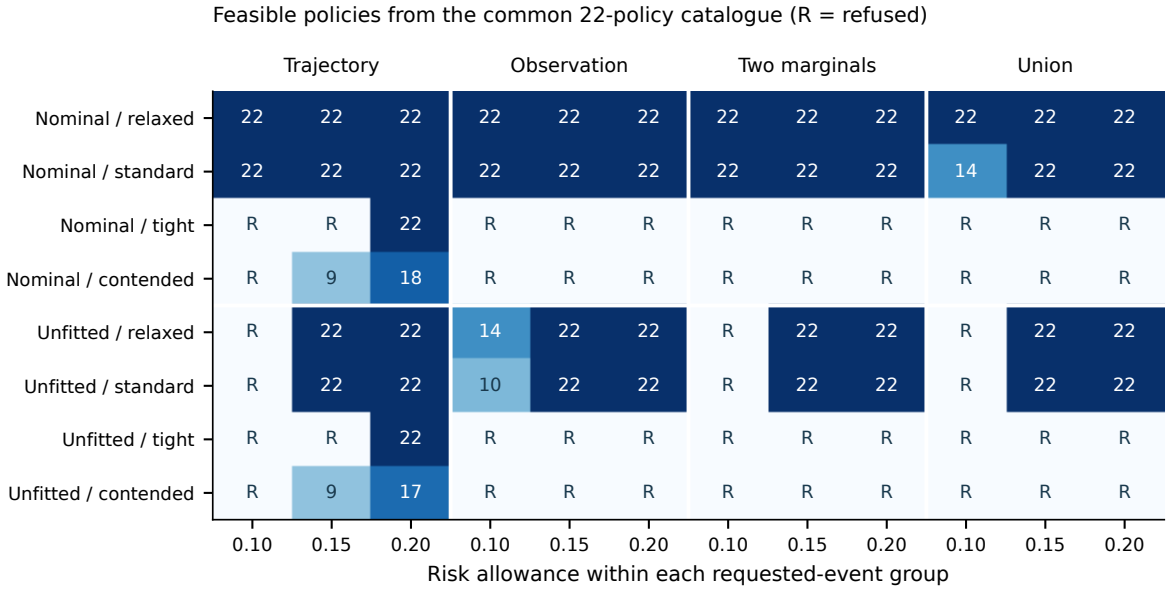


Figure 9: All 96 frozen requests: the number of feasible policies in the identical 22-policy catalogue, for four tasks and three allowances. R indicates an empty catalogue. Two marginals request two distinct cards; Union requests its directly calibrated OR event. Full and validated procedural selection have exactly the same feasible sets.

12.5. Unfitted geometry, stress and concentrated gains

The held-out geometry results use the original unrefitted predictors but independently matched calibration and confirmation. They demonstrate numerical transfer with fresh evidence; they do not demonstrate zero-shot certification. Unsupported occlusion, degeneracy, prior-shift and map-warp populations remain separate and provisional. Their union failure rates at standard service are retained in Table 11, with complete all-method/service statistics in the release CSVs. A deadline screen cannot repair missing geometric information or a poor map. The two largest KG1–Fixed2 contributors account for 27.99% of the nominal net loss gain. Keeping the remaining 2,046 inputs gives a descriptive mean gain of 0.001563 m^2s. The full paired comparison has 442 improved, 374 worsened and 1232 tied inputs; none is deleted from the primary result.

The two largest KG1–Fixed2 contributors account for 10.02% of the unfitted net loss gain. Keeping the remaining 2,046 inputs gives a descriptive mean gain of 0.002265 m^2s. The full paired comparison has 458 improved, 366 worsened and 1224 tied inputs; none is deleted from the primary result.

12.6. Complete-route service performance and measured cost

The 36 localization-study route inputs execute a live estimator rather than reusing independent episode scores. All twelve methods process the same raw scans, measured motion, prior and exogenous load schedule. Figure 13 separates aircraft geometries and ordinary/geometric-stress conditions. The full supplement also includes contention, p95/p99/worst error, failures, readiness, drops, CPU decomposition, work and policy switches.

Fixed2 is an effective ordinary-route choice: it often offers lower CPU, similar or lower error and more timely corrections. Normal routes need only modest refinement, so forecast/dispatch/checking and publication/replay overhead can exceed the gain from adapting a few difficult sources. Geometry and accumulated source errors explain why mean loss improvements on independent episodes do not imply lower long-route RMSE. Contention makes earlier publication useful for deadline readiness, while severe occlusion/map/prior stress produces large error irrespective of source-level authorization. For C172 contention,

Table 11: Unsupported stress, n=384 inputs/stratum at standard service. All entries are descriptive with no applicable episode card. Maximum error is the mean of per-episode maxima, in cm; full tail order statistics are in the release CSVs.

Stress	Policy	L (10^{-3} m^{2}s)	Union fail (%)	Mean max (cm)
occlusion	Fixed2	19.22	24.74	6.28
occlusion	Final	17.92	23.70	5.94
occlusion	FlatCART	17.86	22.40	6.02
occlusion	KG1	17.86	22.40	6.02
degeneracy	Fixed2	21.29	13.02	6.21
degeneracy	Final	15.87	9.64	5.50
degeneracy	FlatCART	17.41	11.46	5.86
degeneracy	KG1	17.41	11.46	5.86
prior_shift	Fixed2	27.34	20.57	7.17
prior_shift	Final	20.87	10.16	5.65
prior_shift	FlatCART	18.78	10.68	5.84
prior_shift	KG1	18.78	10.68	5.84
map_shift	Fixed2	36.43	42.19	9.31
map_shift	Final	35.69	44.27	9.33
map_shift	FlatCART	35.89	43.49	9.32
map_shift	KG1	35.89	43.49	9.32

Table 12: Complete-route descriptive means of four matched realizations/geometry/condition, each 600 s and 299 scan opportunities. CPU is directly measured whole-online work, excluding archive access and truth scoring. Full and validated Flat have identical numeric events; their separately measured CPU can differ. No route card is authorized.

Geometry	Condition	Method	RMSE (cm)	Success (%)	CPU (s)
B767	ordinary	Fixed2	3.806	97.07	2.450
B767	ordinary	KG1	3.706	96.49	2.809
B767	ordinary	Full	3.715	97.24	2.514
B767	contention	Fixed2	3.555	46.99	2.322
B767	contention	KG1	3.543	54.43	2.246
B767	contention	Full	3.531	55.02	2.019
B767	stress	Fixed2	8.185	42.22	2.154
B767	stress	KG1	8.200	55.85	2.207
B767	stress	Full	8.158	56.19	2.300
C172	ordinary	Fixed2	4.787	94.15	2.297
C172	ordinary	KG1	4.832	93.06	2.589
C172	ordinary	Full	4.805	93.81	2.518
C172	contention	Fixed2	5.237	53.01	2.121
C172	contention	KG1	5.341	80.94	2.194
C172	contention	Full	5.234	81.61	2.028
C172	stress	Fixed2	14.488	10.20	2.168
C172	stress	KG1	14.439	11.45	2.198
C172	stress	Full	14.414	11.20	2.221
Unfitted	ordinary	Fixed2	2.997	99.41	2.413
Unfitted	ordinary	KG1	3.018	99.25	2.618
Unfitted	ordinary	Full	3.006	99.25	2.395
Unfitted	contention	Fixed2	3.064	39.21	2.108
Unfitted	contention	KG1	2.993	43.65	2.078
Unfitted	contention	Full	2.994	43.65	1.975
Unfitted	stress	Fixed2	9.665	38.21	2.017
Unfitted	stress	KG1	9.649	46.49	2.147
Unfitted	stress	Full	9.663	45.74	2.211

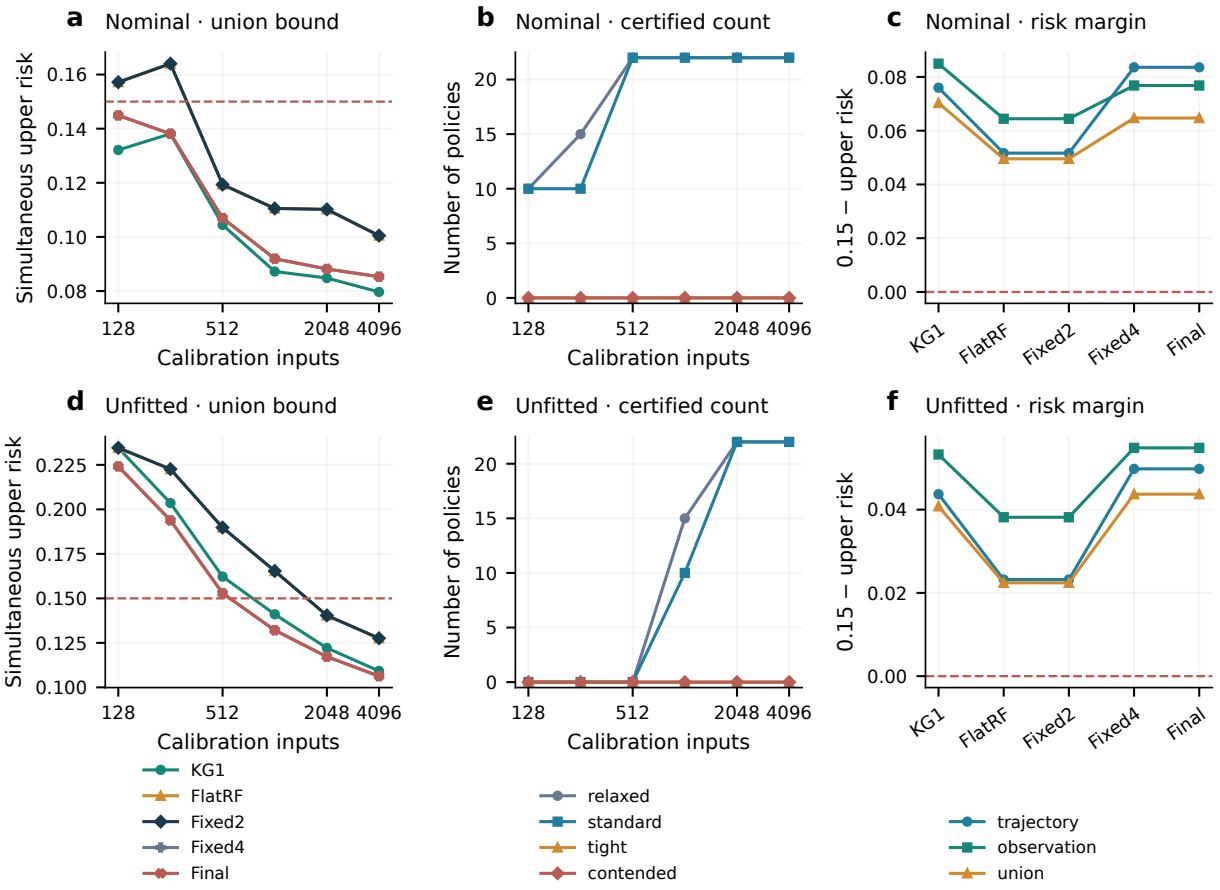


Figure 10: Certificate stability under the common 528-member correction. (a,d) Standard direct-union upper bounds versus calibration size. (b,e) The count of union-certified policies by service at allowance 0.15/confidence 0.95. (c,f) Standard full-sample margins for three separately calibrated events. Nested prefixes are descriptive sensitivity; policy selection is not repeated.

KG1's timely-correction success is 80.94% versus 53.01% for Fixed2, but its RMSE is 5.341 versus 5.237 cm. This deadline benefit does not imply a mean-accuracy advantage. Full's provisional recommendation yields 81.61% success and 5.234 cm RMSE, exactly shared by the task-aware procedural selector.

Full and validated Flat first refuse all episode-to-route attachments, then execute the same explicit provisional recommendation. They switch policy 48 times per contention/stress route under the exogenous task/service schedule; ordinary routes use a fixed recommendation. These switches describe an uncertified route service, not adaptive transfer of an episode theorem.

The provider audit recomputes two entire route fixtures with lazy versus prehydrated raw arrays. Every state/error/capture array is bitwise identical, and all non-CPU job/publication/work/events match. The original lazy NPZ access adds archive-decompression CPU inside the timer; the delivered provider moves that offline cost before the frozen online loop and records it separately. Startup is also outside the online timer. Native online costs are host measurements, not embedded latency. Controlled component CPU, inclusive replay including offline assertions/scoring, and full online-route CPU therefore remain separate ledgers.

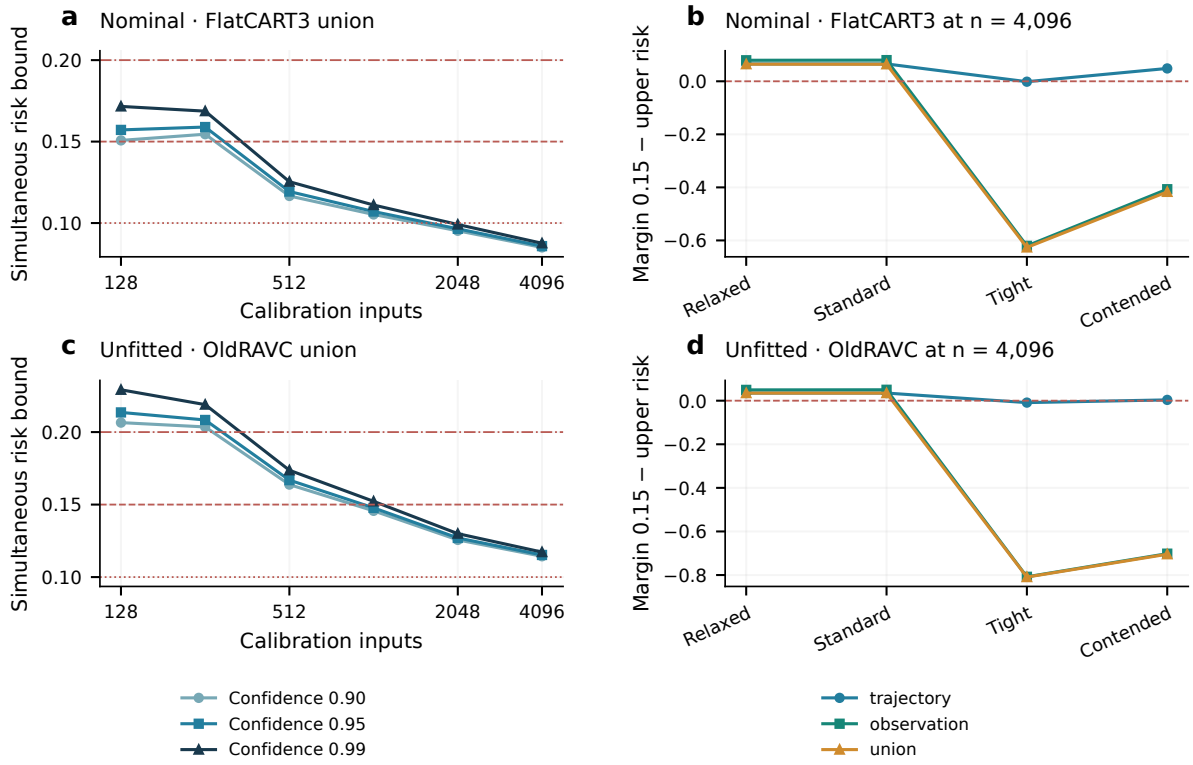


Figure 11: Confidence and failure boundaries for the policies actually chosen at standard service. Left: direct-union bounds at confidence 0.90/0.95/0.99; horizontal reference allowances are 0.10, 0.15 and 0.20. Right: full-sample margins for trajectory, observation and union across the declared services. Negative margins require refusal. The unfitted contended trajectory margin is small even at 4,096 calibration inputs.

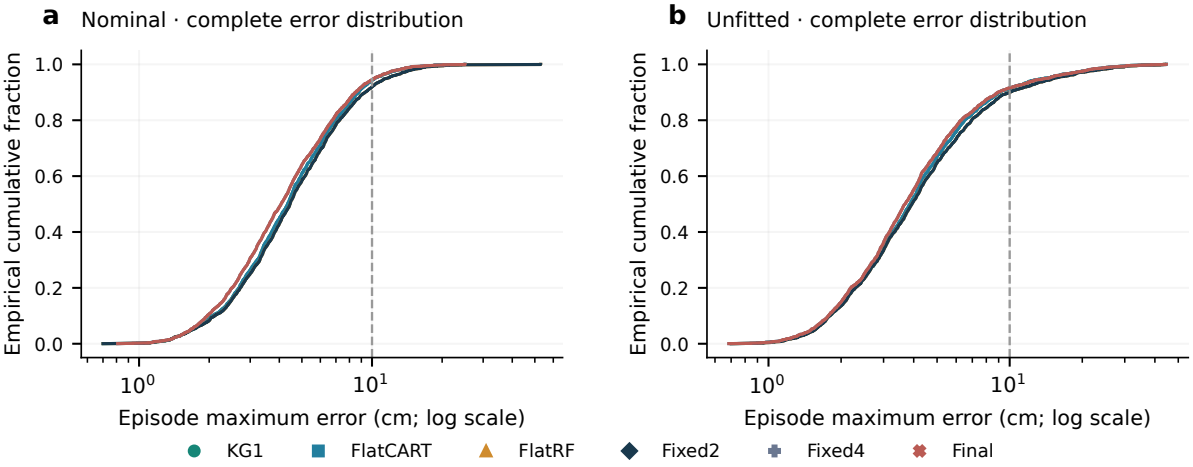


Figure 12: Exact empirical cumulative distributions of all 2,048 confirmation episode maxima/profile at standard service; the error axis is logarithmic and the dashed line is 10 cm. Coincident FlatCART/KG1 and FlatRF/Fixed2 curves are retained. Quantiles, worst errors and largest-5% losses are reported with all observations in the source tables.

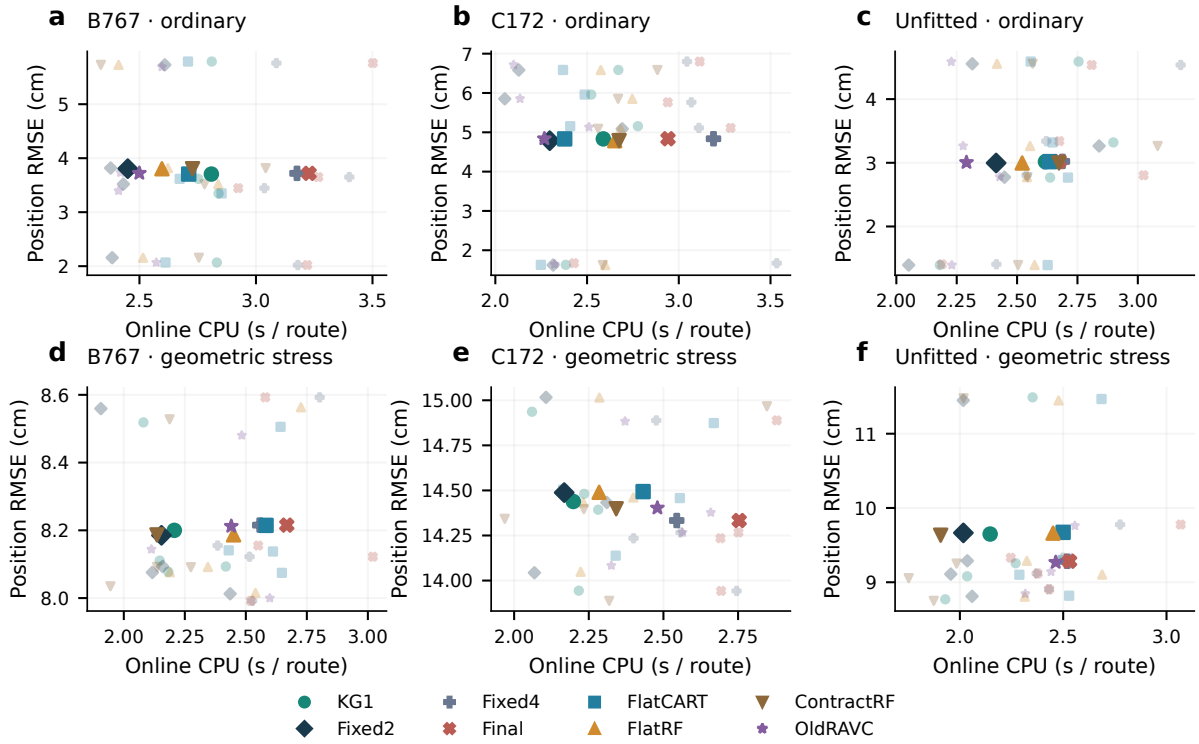


Figure 13: Descriptive work–accuracy route frontiers, separated by geometry and condition. Small markers are all four original route realizations; larger markers are their means. Fixed2 and adverse methods remain visible. The CPU boundary covers the entire online loop. The complete twelve-method/three-condition table is retained in the supplement.

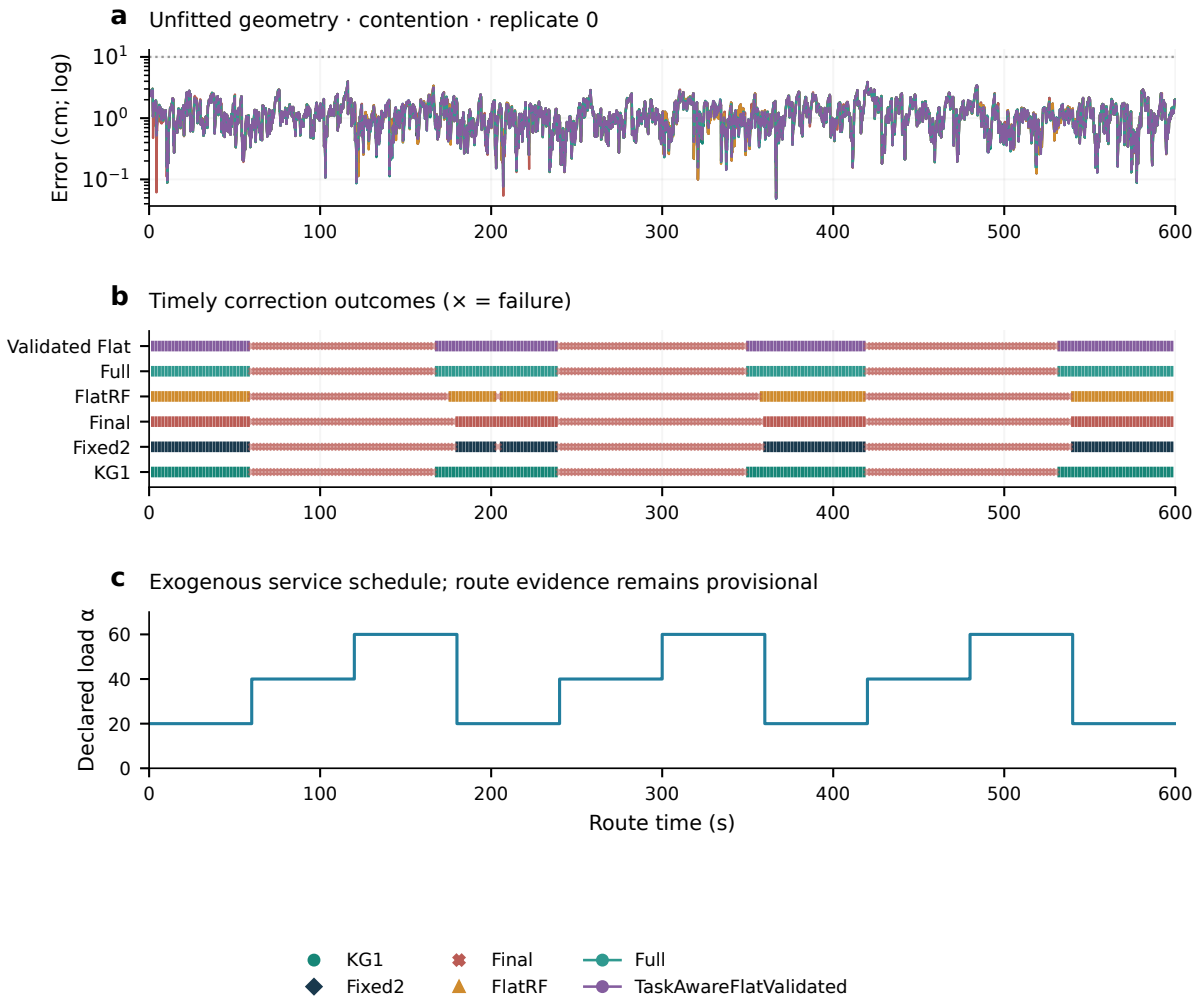


Figure 14: The predeclared unfitted-airframe/contention/replicate-zero route. (a) Continuous positional error, including all 6,000 ticks. (b) Timely positive-version correction success at every opportunity; crosses retain failures. (c) The exogenous processor-load schedule. Full and validated Flat traces overlap exactly. Their route recommendations are provisional and have no episode/mission risk bound.

13. Cross-task requirements and evidence-reuse results

13.1. Configured service support and complete-task limits

The complete catalogue contains 192 task/variant/population/service requests per study and allowance. Figure 15 and Table 13 retain unsupported requests in the denominator. At the primary allowance, the two semantic implementations support 24 requests in A and 26 in B. Direct renewal supports 30 and 32; exact-anchor matching supports 18 and 20. The equality of the contract and complete procedural implementation holds for all 6,144 frozen plans and their repeated confirmation outputs. The semantic layer therefore supplies a transferable interpretation of evidence, but the results do not establish an advantage exclusive to its representation.

Table 13: Primary-allowance configured support. Each denominator retains every task, variant, population and service. Full-task support counts only the original complete requirement.

Study	Method	All requests	Full tasks
A	ContractCover	24/192	0/24
A	ProceduralCover	24/192	0/24
A	DirectRenewal	30/192	0/24
A	ExactCard	18/192	0/24
B	ContractCover	26/192	1/24
B	ProceduralCover	26/192	1/24
B	DirectRenewal	32/192	1/24
B	ExactCard	20/192	1/24

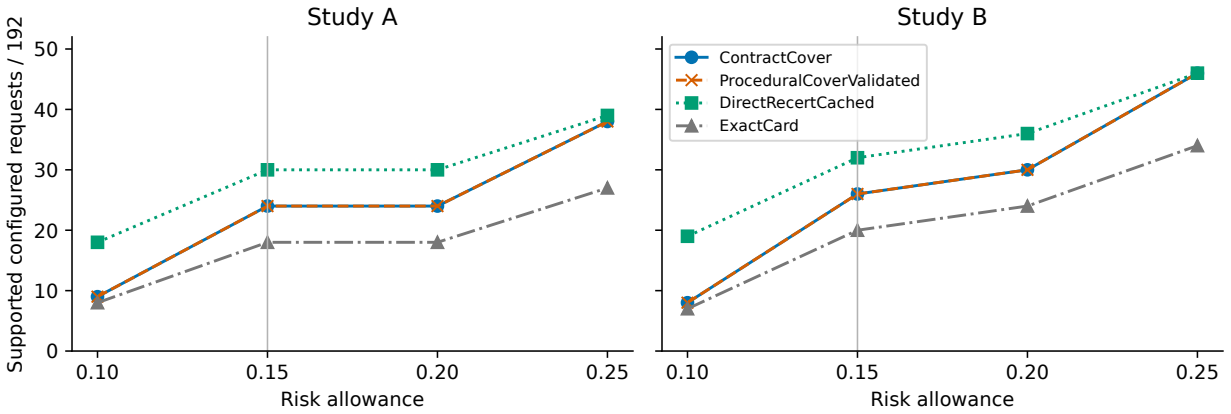


Figure 15: Configured support under the full request matrix, with a common confidence allocation, policy objective and records. The primary allowance is 0.15. Contract and complete procedural curves coincide. Direct renewal retains its additional supported services; exact-card matching is a limited mechanism control. These are configuration counts, not a field-request probability.

At allowance 0.15, no complete acquisition task is certified in either study. The only full-task semantic plan is B/unfitted/relaxed association, using FlatCART with upper bound 0.143973. Its margin is 0.006027, so its acceptance is narrow. Complete reporting remains refused in every population/service cell. Most supported requests are partial or single-component services, and several nominal variants compile to the same event. They must not be described as independent successful tasks or as recovery of the full inspection service.

The wider ROI adds two primary supported configurations, yet its larger virtual production cost limits timely reporting. Secondary allowances expose additional configured support, including B's increase from 26 to 30 at allowance 0.20; changing the allowed risk is not an improvement under the original 0.15 requirement. Figure 16 displays every primary request, including the direct-renewal-only services and the unsupported

tight/contended region. A stronger direct baseline is retained instead of being constrained to the anchor family.

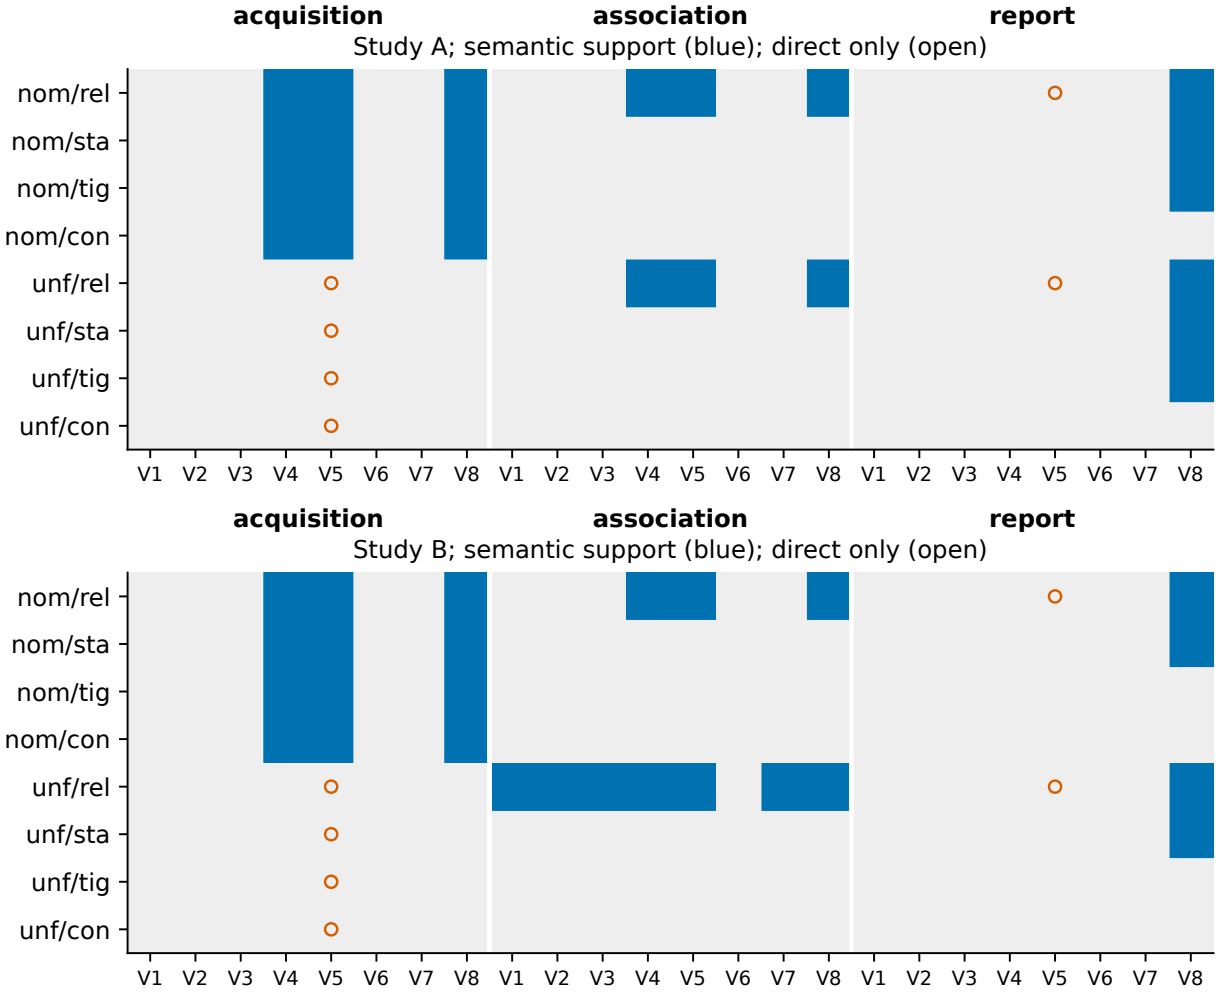


Figure 16: All primary configurations. Each study has eight population/service rows and 24 task/variant columns. V1–V8 denote full, coarser GSD, more blur, partial, partial relaxed, stricter, late report and single component. Blue indicates semantic support; open orange circles retain additional direct-renewal support. Compiled-event duplicates remain visible but do not increase evidence sample size.

13.2. Optical intervention and causal association

Actual rasters are produced by raycasting and decoded without truth coordinates. Figure 17 shows the first preselected excluded pilot under the two ROIs. The 48 paired pilot sources verify identical fixed-target GSD: enlarging the ROI does not change range, focal length or incidence at the planned addresses. It can acquire more targets while leaving the sampling-density requirement unsatisfied. Figure 18 reports the independent confirmation distributions, separated by their calibrated populations. Study A and B confirmation samples use different seeds; their empirical differences are not a paired intervention estimate.

Association uses the numerical version available at capture. A later update cannot repair readiness retrospectively. Report delay includes the raster/decoder virtual-service clock; image age subtracts the independently sampled capture time. This distinguishes acquisition, association and delivery instead of

Table 14: Fixed before-sensing plans and independent confirmation counts; the rows are representative configured services, not independent copies of the source sample. All plans are supplied as CSV.

Study	Pop.	Service	Task	Variant	Policy	U	Confirm. k/n
A	nom	rel	acqui	partial	OldRAVC	0.1472	110/1024
A	nom	rel	acqui	single service	OldRAVC	0.1375	98/1024
A	nom	rel	assoc	partial	FlatCART	0.1494	120/1024
A	nom	rel	assoc	single service	FlatCART	0.1128	82/1024
A	nom	rel	repor	single service	OldRAVC	0.0069	1/1024
A	unf	rel	assoc	partial	FlatCART	0.0733	54/1024
A	unf	rel	assoc	single service	FlatCART	0.0568	39/1024
A	unf	rel	repor	single service	FlatCART	0.0056	1/1024
B	nom	rel	acqui	partial	OldRAVC	0.1391	106/1024
B	nom	rel	acqui	single service	OldRAVC	0.1285	106/1024
B	nom	rel	assoc	partial	FlatCART	0.1095	90/1024
B	nom	rel	assoc	single service	OldRAVC	0.1423	123/1024
B	nom	rel	repor	single service	OldRAVC	0.0080	1/1024
B	unf	rel	assoc	full	FlatCART	0.1440	103/1024
B	unf	rel	assoc	partial	FlatCART	0.0750	43/1024
B	unf	rel	assoc	single service	FlatCART	0.0616	29/1024
B	unf	rel	repor	single service	FlatCART	0.0069	0/1024

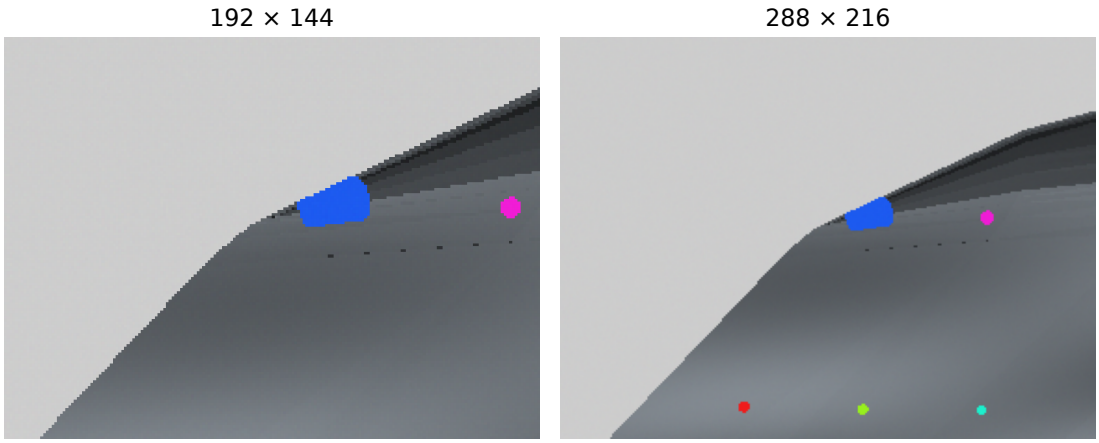


Figure 17: Actual rendered pixels for excluded pilot seed 12000000 under the predeclared ROI intervention. Targets and pixel focal length are fixed. These synthetic diagnostic landmarks illustrate the producer, not aircraft defects or real-camera observations. The same pilot source is used in both panels.

measuring three copies of localization accuracy. The calibration and confirmation tables retain all task quantities and every policy/service outcome, including nonfinite-score failures.

13.3. Certificate stability and transfer boundaries

All 3,072 stored cards have been recomputed from their executed failure counts with the reserved 4,608-family allocation. Cards identify the population, requested or anchor event, complete producer dependencies and raw calibration lineage. Invariant pooled cards use 4,096 independent inputs; other cards use 2,048. The unused reserve is not redistributed.

Figure 19 retains a passing full-association anchor, a component optical anchor and an unsupported full optical event. Smaller nested prefixes frequently lose certification, and even a full-sample passing association card has limited primary margin. Prefix sizes and alternative confidence levels are diagnostic grids; they

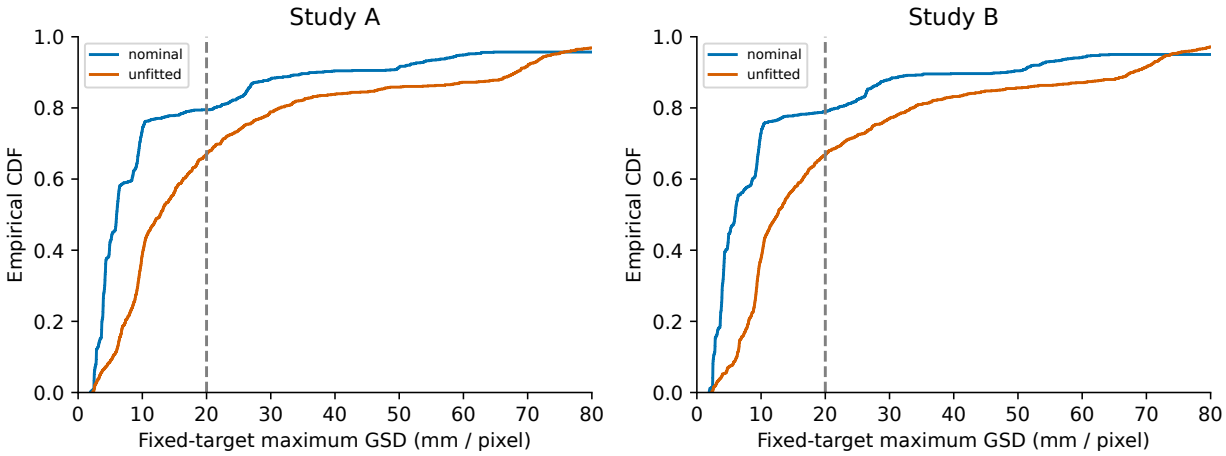


Figure 18: Independent confirmation empirical GSD distributions for the nominal and unfitted populations, with a 20-mm/pixel requirement reference. Fixed-target GSD is a geometric score and includes planned targets outside the acquired ROI. The functional ROI invariance is checked on paired pilots; the formal A/B samples are independent.

do not receive an additional simultaneous guarantee, change F1, or produce renewed confirmation-based selection.

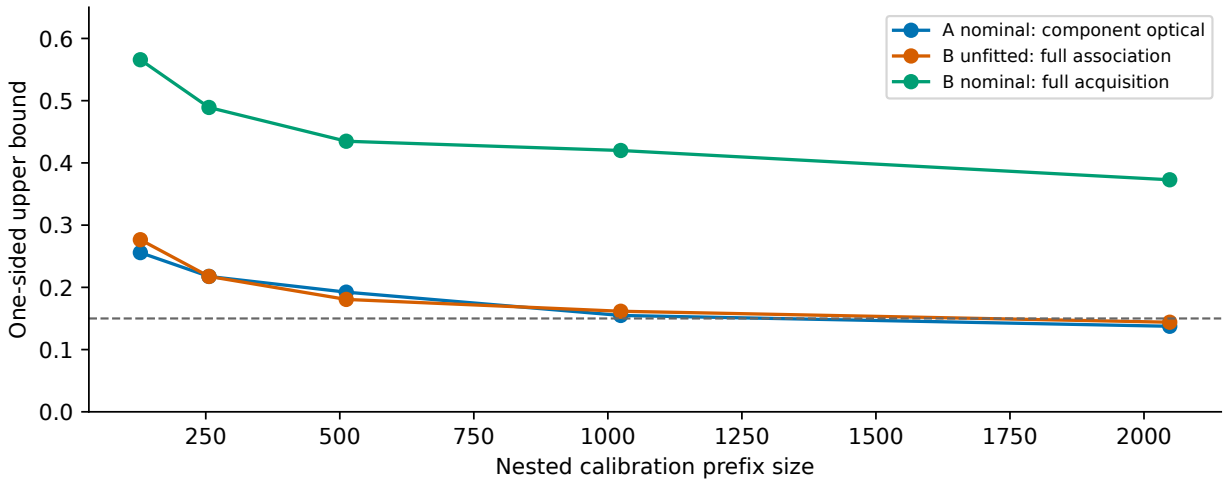


Figure 19: Actual fixed-event failure counts under nested calibration prefixes and the original reserved-family allocation. The 0.15 line is a requirement, not a fitted target. Displayed prefixes do not create independent samples or an extra guarantee over this sensitivity grid. Full-precision counts and confidence settings are supplied as CSV.

Evidence reuse through the ROI change is permitted only for the implemented invariant requested projection. It does not certify new coverage, association or delivery functions by attaching an unchanged optical capsule. Seventy-two excluded provider-change fixtures verify conservative invalidation after capture, motion or geometry provider edits. Thirty-two malformed receipt fixtures produce no incorrect authorization, maintain refusal across reconstructed gates, and admit independent trusted successors. These deterministic software fixtures demonstrate the stated applicability rules, not a probabilistic fault rate or detection of unknown physical drift.

The source-bound receipt observer runs against frozen plans and archived execution records. It binds the trusted source identity, source seal, population, study, policy, compiled event, plan and card. This is

executed attachment bookkeeping after the numerical experiment, rather than an added real-time camera pipeline. Its measured cost is reported separately. The source/prior/version enforcement inside the retained localization executor remains a different, actually executed component.

13.4. Executed update and cache costs

Table 15: Executed computation diagnostics with equally preloaded records and event-identity deduplication. Cold event preparation is the median of three trials; the first batch contains 384 primary queries. Warm time is per shared-cache lookup. These are not developer-effort or embedded worst-case measurements.

Method	Cards	Record visits	Prep. (s)	First batch (s)	Warm (μs)
ContractCover	1,152	2,490,368	0.179	6.408	0.091
ProceduralCover	1,152	2,490,368	0.176	6.225	0.111
DirectRenewal	2,560	5,373,952	0.365	9.991	0.098
ExactCard	1,152	2,490,368	0.186	8.747	0.103

With event-identity deduplication available to every method, the anchor methods prepare 1,152 unique cards and the direct method prepares 2,560. Their record visits are 2,490,368 and 5,373,952 respectively, a 53.66% reduction for anchor reuse. This is a trade-off: less event re-evaluation supports fewer configured requests. The complete procedural method obtains the same reduction. Preparation wall time is measured on equally preloaded records; disk reads, numerical producer execution and human development are outside this comparison.

The first 384-request batch separately includes numeric-card validation and plan search. Every method then receives the same request dictionary cache. Warm lookups require no record rescoring, and their small timing differences are not treated as a scientifically exclusive speed advantage. Known direct-event duplicates are cached as well. JSON arrays are restored to the declared immutable context tuple fields before procedural re-query, so serialization does not artificially reject that baseline. All re-queried plans reproduce F1.

13.5. Numerical trade-offs, geometry and retained routes

Figure 20 retains all eight numerical policies, separated by B767, C172 and the unfitted model. The Pareto boundary is descriptive. Fixed2 is kept wherever its work or error trade-off is favorable; a representation claim does not remove a competitive fixed strategy. Complete numerical summaries include timely positive-version success, mean error, mean episode-tail error, 95th percentile of episode maxima, work, publications and native components. Population calibration remains on the frozen mixture, so the model-separated descriptive tables do not imply separately calibrated conditional certificates.

Unsupported occlusion, degenerate range sectors, larger priors and map warps receive no transferred population card. All 512 stress inputs are retained as descriptive evidence. The preserved R8 study additionally contains 36 complete-route inputs and 432 executions. Ordinary routes can favor Fixed2; C172 contention can improve KG1 timely success while worsening its RMSE. These archived route observations are not rerun or renamed as new R9 evidence. They do not certify a route-level image/report event. The original platform photographs and simulation views are included in Section 10; the route comparisons and continuous traces are reported in Section 12. The supplementary material retains the complete all-method route tables.

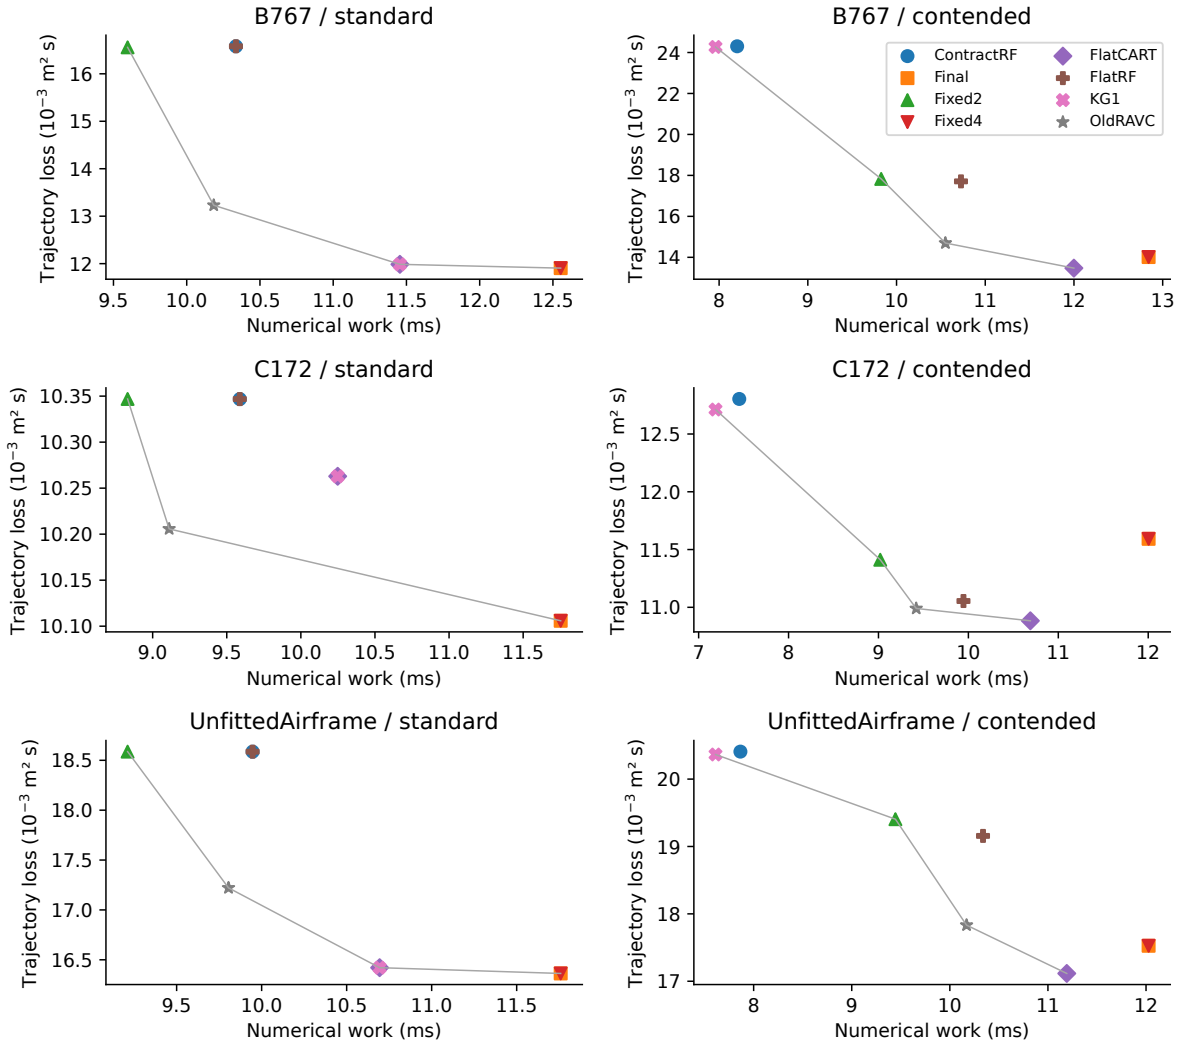


Figure 20: Study B confirmation numerical work–loss means, separately for each geometry at standard and contended services. All eight policies, including Fixed2, remain visible. Camera work is common across policies in each panel and omitted from the horizontal axis only to expose numerical scheduling trade-offs. Full total-work values are supplied. Nondominated means are not confidence bounds.

14. Discussion

14.1. Engineering knowledge contribution and its measured boundary

The interface turns engineering requirements into executable eligibility, commitment, source execution and evidence-lifetime checks. Its strongest supported contribution is an explicit, testable connection from a task event to the provenance and applicability of its numerical service. It distinguishes a usable late pose from an expired observation statement, a trajectory request from a union request, and a clean later version from a source history that has lost evidence status. Those differences matter to engineering consumers even when pose accuracy does not change.

The fair procedural control is decisive: it reproduces every reported numerical and authorization result. Thus the graph representation is not demonstrated to provide superior numerical decisions, risk bounds or exclusive rejection capability. The matched profile ablation is also redundant in this study. Typed dependency storage provides an inspectable common representation and selective invalidation, but these tests do not

establish reduced engineering maintenance effort, operator error or development cost relative to a complete procedural implementation. Such lifecycle/usability outcomes would require their own experiment. The method is a contract-mediated localization/evidence service; it is not a newly demonstrated digital twin or general knowledge-graph reasoning algorithm.

This position also respects prior contract-based anytime control and finite-family risk calibration. Source replacement/replay connects those established ingredients to correlated revisions and event-specific evidence lifetime. The exposure identity explains a possible benefit of early publication; it neither guarantees that every eligible version is better nor eliminates the cost of installation. The current mean-work screen can be optimistic, so direct event calibration applies to the complete actual modeled execution rather than to a predicted deadline.

14.2. When adaptation is worth its cost

Relaxed/standard independent episodes reward the CART policy for recognizing some useful refinements. Those gains survive the new confirmation set and top-two influence diagnostic, while coming with more work than Fixed2. Under contention, time screening exchanges integrated loss for earlier availability. The common tight budget makes its additional predicate redundant. Ordinary routes frequently favour Fixed2, because modest difficulty offers little return on learned forecasting and extra publications. Strong map/geometry/prior degradation remains a numerical failure region; refusing an unsupported statement does not fix a pose.

These regions argue for retaining fixed policies inside the task-aware catalogue, not deleting inconvenient controls. The calibration selector may choose an older or Flat policy. Its mean calibration objective can also choose a trade-off that is not optimal on a finite confirmation sample. Simultaneous event bounds justify eligibility under the stated model; they do not prove that the selected policy has minimum true loss or the best hardware deployment cost.

14.3. Reliability of the evidence

The new protocol separates development/validation, excluded pilot characterization, calibration, fresh confirmation and unsupported stress. It preserves every seed and counts shared outcomes as paired. Numerical F0, pre-F1 claim amendment, F1 and binding records expose the actual revision chronology. The source-history amendment was made after some calibration execution and before F1; it was limited to attachment semantics, with an explicit projection theorem and conformance audit, rather than concealed as a new initial freeze. Two missing index records were recovered on their original seeds with exact raw-array/file equality. Their recovered CPU metadata is a new measurement. Local manifests are consistency evidence rather than external preregistration or protection from a malicious investigator.

Exact CP statements concern iid complete draws from fixed declared mixtures, conditional on the frozen service clock/predictors/artifacts and ideal simulator random streams. The finite family permits calibration-dependent selection, but the remaining receipt-conditioned subset, individual geometry subgroup and dependent route population have no derived conditional guarantee. Small margins, particularly the contended unfitted trajectory card and the 0.10 observation diagnostic, remain visible. Sensitivity grids are descriptive. Metadata matching certifies neither the physical sampling law nor unknown-distribution detection.

14.4. Integration and deployment conditions

The live implementation executes selection, precommit, retained computation, publication, replacement, causal replay and applicability checks. The guarded confirmation driver additionally executes source-history issuance in both implementations. Whole routes refuse transferred evidence and continue explicit provisional service; they do not test a physical feedback controller, online recalibration or a detector of hidden operating changes. Source scopes persist within the trusted registry lifetime; a restart requires restoration or attachment refusal. Producer/code trust, finite payload verification and current-dependency validation are required. Serialized receipt snapshots require consumer revalidation after dependency changes; no remote revocation notification is implemented.

The operation clock is a frozen mean-cost simulation, and the hard sender cap holds only in that normalized model. Added observer CPU is measured, with complete-route online costs separated from inclusive program replay and metadata microbenchmarks. Future physical deployment needs platform-specific service characterization and independent population calibration. The four original photographs and five supplied simulation views preserve engineering context without supplying missing physical performance measurements.

14.5. What the task extension adds

The new evidence concerns three kinds of engineering decisions. A consumer-only requirement relaxation can inherit an anchor bound when the complete failure event is pointwise covered. A producer edit can retain that bound only for a proven invariant requested projection. A remaining request requires direct renewal or refusal. The domain quantities, units, source lineage and dependency witnesses make these decisions inspectable. This is stronger than checking whether a stored card's label matches a request, but it is also implementable by a complete procedural system.

The strongest procedural comparator demonstrates that fact. It is given all dependency knowledge, event comparisons, records and caches and reproduces the contract's authorization and numerical outputs. Accordingly, the independent value shown here belongs to *explicit executable semantics*, rather than a graph data structure. The interface centralizes the interpretation and produces a checkable witness; no experiment establishes that engineers maintain it faster, that a graph database is required, or that generic programming cannot achieve it. Change reasoning and interval refinement already exist in engineering informatics. Our claim is their concrete integration with finite-sample event evidence and the measured inspection trade-offs, not invention of those general tools.

Direct renewal is also a serious competitor. It requires more event-record evaluations but supports additional requests and can cache subsequent queries. Semantic closure is useful when applicable anchors already exist and repeated relaxations matter; direct renewal is useful when sufficient applicable raw outputs exist or the anchor bound is conservative. An engineering implementation should permit both. Restricting the direct baseline's old-card access would weaken that comparison; the pre-confirmation parity amendment removes that restriction and preserves its prior supported services.

The ROI experiment demonstrates selective transfer rather than complete task recovery. A geometric optical quantity can remain invariant while target coverage and delivery cost change. The full reporting service remains uncertified at the primary allowance. Relaxing risk or deleting quality requirements defines a different service; the paper reports such alternatives explicitly instead of treating them as improvements to the original request. Fixed2's retained numerical trade-offs likewise prevent an unsupported claim of universal system-level superiority.

External validity remains limited. Synthetic palette landmarks are diagnostic targets, not natural surface defects. The virtual producer uses prescribed trajectories, declared perturbations and a frozen camera-work clock. Native CPU observations are quantized and depend on a desktop environment; they do not characterize an embedded camera's real-time operation. Real deployments can contain unmodeled lighting, texture, exposure-control, scheduling and mechanical couplings that invalidate a dependency projection. A metadata match cannot reveal such changes. New matched calibration, physical evidence and a suitable distribution-monitoring mechanism would be required before claiming physical reliability.

The three task families share one geometric source and executor. They establish a broader executable consumer interface than localization alone, but do not establish generalization to unrelated engineering domains. Deterministic malformed-source fixtures test specified refusal logic, not adversarial robustness in an open system. Complete-route performance remains historical descriptive evidence without mission-level task certification. These limitations are substantive: the study improves the evidence interpretation and cross-task validation, while the representation's broad originality and application reach remain questions for peer review.

15. Conclusion

Executable operating contracts connect aircraft-inspection requirements, anytime localization and the evidence applicable to the pose consumed by a task. The retained service combines an explicit joint state, budgeted registration prefixes, source-version replacement, causal replay and source-scoped evidence lifetime. Its controlled and complete-route experiments establish computation–accuracy–deadline trade-offs while retaining cases in which Fixed2 is preferable. The CART gains are shared by FlatCART, and the complete procedural control reproduces the contract's authorization results.

The additional task interface compiles image-acquisition, capture-time association and report requirements into events. Pointwise containment permits evidence reuse; a producer change permits transfer only through an invariant requested projection. Two further studies show fewer calibration-record evaluations for anchor reuse, shared by the complete procedural implementation, while cached direct renewal supports more configured requests. At allowance 0.15, complete reporting remains unsupported. These results extend the original localization work with auditable evidence semantics and explicit service limits; they do not establish a representation-exclusive numerical gain, a mission certificate or a physical safety guarantee. Improving complete-task feasibility and demonstrating broader engineering value remain the next research steps.

Evidence and applicability boundary

The localization study contains 13,824 distinct synthetic episode inputs: 8,192 calibration, 4,096 confirmation and 1,536 unsupported stress inputs. Forty-eight additional pilot inputs are excluded from inference. Repeated policy, service and task executions add no independent sample size. The 36 complete-route inputs yield 432 executions and carry no episode-to-mission certificate. The operation clock and contention factors are declared simulation services; native CPU ledgers have explicitly different controlled and whole-online-route boundaries. Cards concern unconditional frozen-policy/population events, assume independent source draws and matched deployment distributions, and do not provide scan-conditional risk, OOD detection, physical safety or embedded worst-case timing. The attachment amendment preserves numerical/clock/event traces and withholds statements after detected invalid attempts. Original photographs and supplied simulation images are qualitative context. The separately generated inspection-task studies add 12,800 inputs (8,192 calibration, 4,096 confirmation and 512 unsupported stress), with a distinct reserved family of 4,608. Their 409,600 policy/service outcomes and 6,291,456 repeated requests add no sample size. Neither study family is pooled with the localization evidence to claim stronger confidence. No new physical robot localization experiment is reported.

Funding

This work was supported by the Civil Aviation Safety Capacity Building Fund Project (RJ2025073), "Pilot-scale development of civil aircraft walk-around inspection and on-wing aero-engine cleaning equipment."

Data and code availability

The reproducibility release contains the frozen prospective protocol, all synthetic input seeds and raw arrays, native solver/predictors, policy and service specifications, calibration/confirmation/stress outcomes, complete route inputs and executions, event cards, attachment-amendment history, execution and asset hashes, analysis and vector-figure scripts, and editable publisher source. Original A19/A20 releases, four original platform photographs, five supplied simulation views and the earlier 2,680-input/81-execution study remain preserved separately. No new physical localization dataset is asserted.

Declaration of generative AI and AI-assisted technologies

OpenAI ChatGPT/Codex (GPT-6) assisted research-code development and reconstruction, computational analysis, manuscript drafting and revision, literature organization, and code for exact schematics and data visualizations. Numerical observations were produced by the archived geometric simulation and executed localization code. The authors must review the work and confirm responsibility before submission.

References

[1] R. Wang, A. B. Nellippallil, G. Wang, Y. Yan, J. K. Allen, F. Mistree, A process knowledge representation approach for decision support in design of complex engineered systems, Advanced Engineering Informatics 48 (2021) 101257. doi:10.1016/j.aei.2021.101257.
URL https://www.sciencedirect.com/science/article/pii/S1474034621000124

[2] J. Hao, L. Zhao, J. Milisavljevic-Syed, Z. Ming, Integrating and navigating engineering design decision-related knowledge using decision knowledge graph, Advanced Engineering Informatics 50 (2021) 101366. doi:10.1016/j.aei.2021.101366.
URL https://www.sciencedirect.com/science/article/pii/S1474034621001191

[3] C. Su, Q. Jiang, Y. Han, T. Wang, Q. He, Knowledge graph-driven decision support for manufacturing process: A graph neural network-based knowledge reasoning approach, Advanced Engineering Informatics 64 (2025) 103098. doi:10.1016/j.aei.2024.103098.
URL https://www.sciencedirect.com/science/article/pii/S1474034624007493

[4] A. Benveniste, B. Caillaud, D. Nickovic, R. Passerone, J.-B. Raclet, P. Reinkemeier, A. Sangiovanni-Vincentelli, W. Damm, T. A. Henzinger, K. G. Larsen, Contracts for system design, Foundations and Trends in Electronic Design Automation 12 (2–3) (2018) 124–400. doi:10.1561/1000000053.
URL https://www.nowpublishers.com/article/Details/EDA-053

[5] Y. V. Pant, H. Abbas, K. Mohta, R. A. Quaye, T. X. Nghiem, J. Devietti, R. Mangharam, Anytime computation and control for autonomous systems, IEEE Transactions on Control Systems Technology 29 (2) (2021) 768–779. doi:10.1109/TCST.2020.2979388.
URL https://ieeexplore.ieee.org/abstract/document/9051687

[6] R. Aldana-López, R. Aragüés, C. Sagüés, Latency vs precision: Stability preserving perception scheduling, Automatica 155 (2023) 111123. doi:10.1016/j.automatica.2023.111123.
URL https://www.sciencedirect.com/science/article/pii/S0005109823002832

[7] S. Russell, E. Wefald, Principles of metareasoning, Artificial Intelligence 49 (1–3) (1991) 361–395. doi:10.1016/0004-3702(91)90015-C.
URL https://www.sciencedirect.com/science/article/abs/pii/000437029190015C

[8] S. Zilberstein, Using anytime algorithms in intelligent systems, AI Magazine 17 (3) (1996) 73–83. doi:10.1609/aimag.v17i3.1232.
URL https://ojs.aaai.org/aimagazine/index.php/aimagazine/article/view/1232

[9] N. Hay, S. Russell, D. Tolpin, S. E. Shimony, Selecting computations: Theory and applications, in: Proceedings of the Twenty-Eighth Conference on Uncertainty in Artificial Intelligence, Vol. R10 of Proceedings of Machine Learning Research, PMLR, 2012, pp. 344–353.
URL https://proceedings.mlr.press/r10/hay12a.html

[10] B. Ghosh, S. Chinchali, P. S. Duggirala, Interpretable trade-offs between robot task accuracy and compute efficiency, in: 2021 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), IEEE, 2021, pp. 5364–5371. doi:10.1109/IROS51168.2021.9636580.
URL https://ieeexplore.ieee.org/document/9636580/

[11] A. H. Sifat, B. Bharmal, H. Zeng, J.-B. Huang, C. Jung, R. K. Williams, Towards computational awareness in autonomous robots: an empirical study of computational kernels, Complex & Intelligent Systems 9 (6) (2023) 6269–6295. doi:10.1007/s40747-023-01059-7.
URL https://link.springer.com/article/10.1007/s40747-023-01059-7

[12] P. Besl, N. D. McKay, A method for registration of 3-D shapes, IEEE Transactions on Pattern Analysis and Machine Intelligence 14 (2) (1992) 239–256. doi:10.1109/34.121791.

[13] Y. Chen, G. Medioni, Object modelling by registration of multiple range images, Image and Vision Computing 10 (3) (1992) 145–155. doi:10.1016/0262-8856(92)90066-c.

[14] A. Segal, D. Haehnel, S. Thrun, Generalized-ICP, in: Robotics: Science and Systems V, 2009. doi:10.15607/rss.2009.v.021.

[15] F. Pomerleau, F. Colas, R. Siegwart, A Review of Point Cloud Registration Algorithms for Mobile Robotics, Foundations and Trends in Robotics 4 (1) (2015) 1–104. doi:10.1561/2300000035.

[16] A. Censi, An accurate closed-form estimate of ICP's covariance, in: Proceedings 2007 IEEE International Conference on Robotics and Automation, 2007, pp. 3167–3172. doi:10.1109/robot.2007.363961.

[17] S. Bonnabel, M. Barczyk, F. Goulette, On the covariance of ICP-based scan-matching techniques, in: 2016 American Control Conference (ACC), 2016, pp. 5498–5503. doi:10.1109/acc.2016.7526532.

[18] M. Brossard, S. Bonnabel, A. Barrau, A New Approach to 3D ICP Covariance Estimation, IEEE Robotics and Automation Letters 5 (2) (2020) 744–751. doi:10.1109/lra.2020.2965391.

[19] Y. Bar-Shalom, Update with out-of-sequence measurements in tracking: Exact solution, IEEE Transactions on Aerospace and Electronic Systems 38 (3) (2002) 769–777. doi:10.1109/TAES.2002.1039398.

[20] I. Vizzo, T. Guadagnino, B. Mersch, L. Wiesmann, J. Behley, C. Stachniss, KISS-ICP: In Defense of Point-to-Point ICP – Simple, Accurate, and Robust Registration If Done the Right Way, IEEE Robotics and Automation Letters 8 (2) (2023) 1029–1036. doi:10.1109/lra.2023.3236571.

[21] W. Xu, Y. Cai, D. He, J. Lin, F. Zhang, FAST-LIO2: Fast Direct LiDAR-Inertial Odometry, IEEE Transactions on Robotics 38 (4) (2022) 2053–2073. doi:10.1109/tro.2022.3141876.

[22] C. J. Clopper, E. S. Pearson, The use of confidence or fiducial limits illustrated in the case of the binomial, Biometrika 26 (4) (1934) 404–413. doi:10.1093/biomet/26.4.404.

[23] A. N. Angelopoulos, S. Bates, E. J. Candès, M. I. Jordan, L. Lei, Learn then test: Calibrating predictive algorithms to achieve risk control, The Annals of Applied Statistics 19 (2) (2025) 1641–1662. doi:10.1214/24-AOAS1998.
URL https://projecteuclid.org/journals/annals-of-applied-statistics/volume-19/issue-2/Learn-then-test--Calibrating-predictive-algorithms-to-achieve-risk/10.1214/24-AOAS1998.full

[24] A. N. Angelopoulos, S. Bates, A. Fisch, L. Lei, T. Schuster, Conformal risk control, in: The Twelfth International Conference on Learning Representations, 2024.
URL https://proceedings.iclr.cc/paper_files/paper/2024/hash/f3549ef9b5ff520a7e41ff3cc306ab2b-Abstract-Conference.html

[25] D. Prinster, C. Fannjiang, J. W. Park, K. Cho, A. Liu, S. Saria, S. D. Stanton, Conformal policy control, in: Proceedings of the 43rd International Conference on Machine Learning, Vol. 306 of Proceedings of Machine Learning Research, PMLR, 2026, pp. 99772–99824.
URL https://proceedings.mlr.press/v306/prinster26a.html

[26] U. Mehmood, S. Sheikhi, S. Bak, S. A. Smolka, S. D. Stoller, The black-box simplex architecture for runtime assurance of autonomous CPS, in: NASA Formal Methods, Vol. 13260 of Lecture Notes in Computer Science, Springer, 2022, pp. 231–250. doi:10.1007/978-3-031-06773-0_12.
URL https://link.springer.com/chapter/10.1007/978-3-031-06773-0_12

[27] H. Wang, V. Thomson, C. Tang, Change propagation analysis for system modeling using semantic web technology, Advanced Engineering Informatics 35 (2018) 17–29. doi:10.1016/j.aei.2017.11.004.

[28] L. Petnga, M. Austin, An ontological framework for knowledge modeling and decision support in cyber-physical systems, Advanced Engineering Informatics 30 (1) (2016) 77–94. doi:10.1016/j.aei.2015.12.003.

[29] L. Ma, T. Hartmann, A proposed ontology to support the hardware design of building inspection robot systems, Advanced Engineering Informatics 55 (2023) 101851. doi:10.1016/j.aei.2022.101851.

[30] T. D. Barfoot, P. T. Furgale, Associating Uncertainty With Three-Dimensional Poses for Use in Estimation Problems, IEEE Transactions on Robotics 30 (3) (2014) 679–693. doi:10.1109/tro.2014.2298059.

[31] FlightGear 767-300 contributors, Boeing 767-300 visual model, GitHub repository, revision 2afcefc662fa815fd3a369d23433dddd337e646c (2016).
URL https://github.com/FGMEMBERS/767-300

[32] FlightGear C172P contributors, C172P common visual mesh, GitHub repository, Models/c172-common.ac, blob 8943150251ba772e13ca329629440e88e3f33e84.
URL https://github.com/c172p-team/c172p