


xD

5DM
Manual
1.1 en

- preliminary -

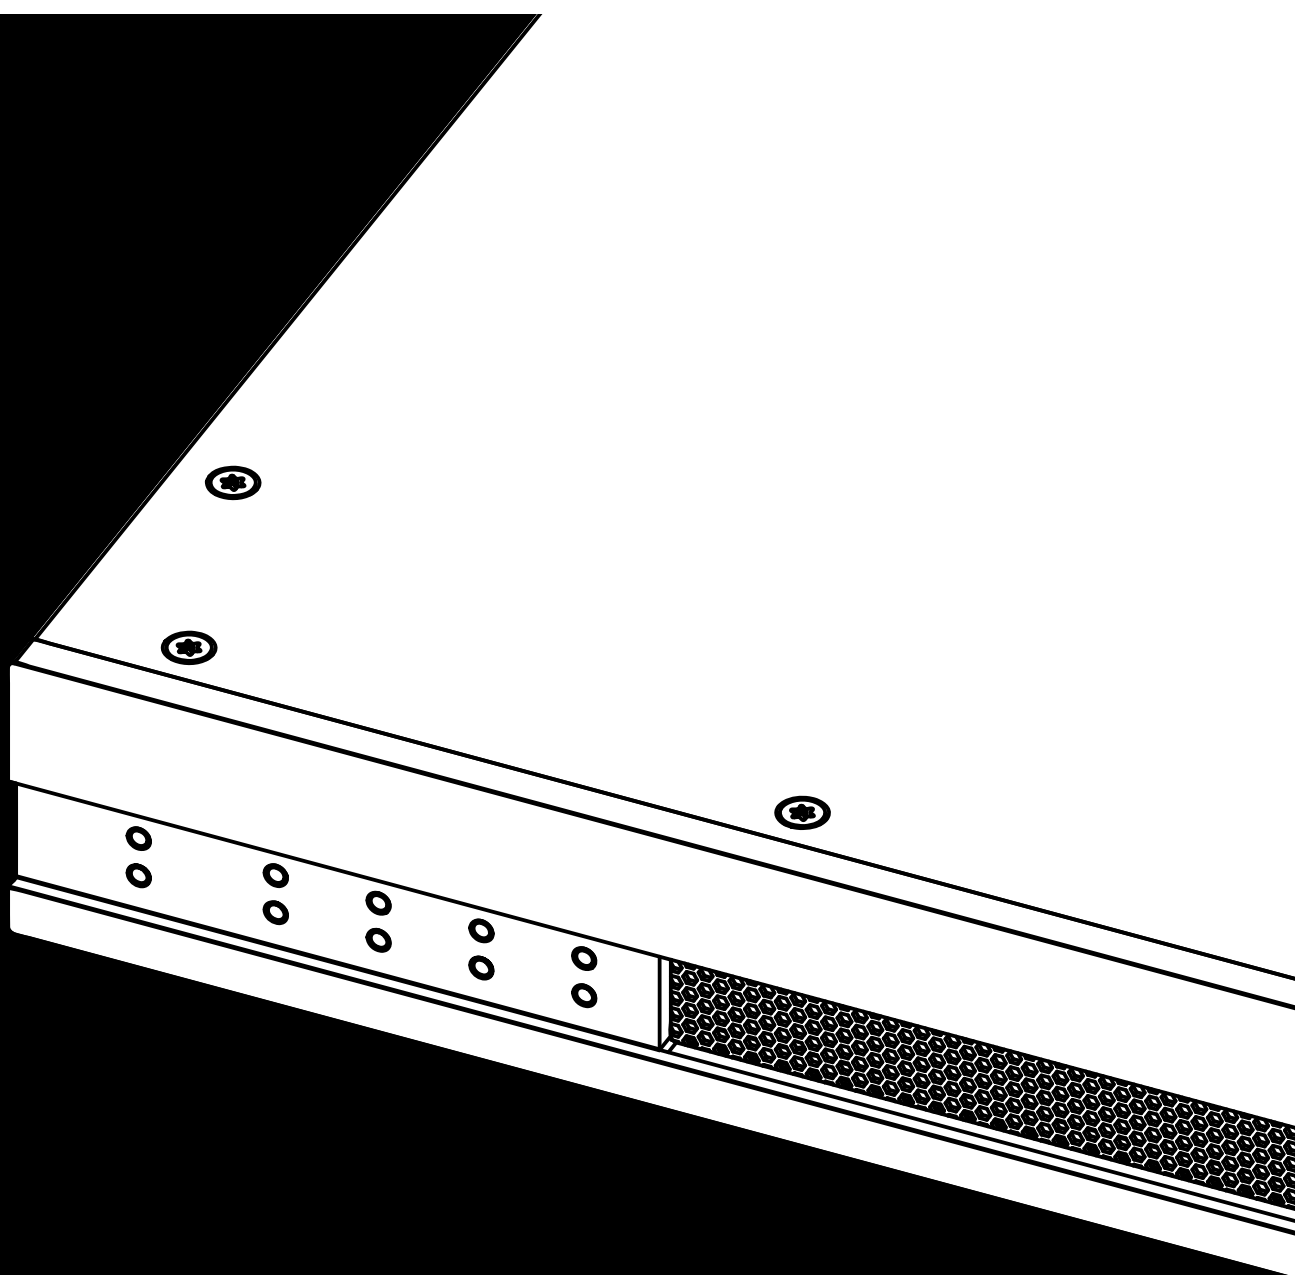

Notes on document version

Version 1.1:

Preliminary edition.

General information

5DM Manual - preliminary -

Version: 1.1 en, 01/2026, D2767.EN .01

Copyright © 2026 by d&b audiotechnik GmbH & Co. KG; all rights reserved.

Keep this document with the product or in a safe place so that it is available for future reference.

We recommend you to regularly check the d&b website for the latest version of this document.

When reselling this product, hand over this document to the new owner.

If you supply d&b products, please draw the attention of your customers to this document. Enclose the relevant documents with the systems. If you require additional documents for this purpose, you can order them from d&b.

d&b audiotechnik GmbH & Co. KG
Eugen-Adolff-Str. 134, D-71522 Backnang, Germany
T +49-7191-9669-0, F +49-7191-95 00 00
docadmin@dbaudio.com, www.dbaudio.com

Explanation of graphical symbols



The lightning symbol within a triangle is intended to alert the user to the presence of uninsulated "dangerous voltages" within the unit's chassis that may be of sufficient magnitude to constitute a risk of electric shock to humans.




The exclamation point within a triangle is intended to alert the user to the presence of important operating and service instructions in the literature accompanying the product.

Before using this product, carefully read the applicable items of the following safety instructions.

1. Keep these instructions for future reference.
2. Read these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. **WARNING!** To reduce the risk of fire or electric shock:
 - Do not expose this unit to rain or moisture.
 - Keep water or other liquids away from the unit.
 - Do not place liquid filled containers, for example beverages, on top of the unit.
 - Do not operate the unit while it is wet or standing in liquid.
6. Always operate the unit with the chassis ground wire connected to the electrical safety earth.
Do not defeat the safety purpose of a grounding-type plug. A grounding-type plug has two blades and a third grounding prong. The third prong is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
7. Do not use this unit if the power cord is damaged or frayed. Protect the power cord from being walked upon or pinched, particularly at the plugs and the point where it exits from the apparatus.
8. The unit is intended for use in a 19" rack. Follow the mounting instructions. When a rack on wheels is used, exercise caution when moving the loaded rack to avoid injury from tipping over.
9. Unplug this apparatus during lightning storms or when unused for long periods of time.
10. Never connect an output pin to any other amplifier input or output pin or to the earth (ground). This may damage the unit or lead to electric shock.
11. Lay all cables connected to the unit carefully so that they cannot be crushed by vehicles or other equipment and that no one can either step on them or trip over them.
12. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way such as:
 - Power-supply cord or plug is damaged.
 - Liquid has been spilled into the unit.
 - An object has fallen into the unit.
 - The unit has been exposed to rain or moisture.
 - The unit does not operate normally.
 - The unit was dropped or the chassis is damaged.
 - Do not remove top or bottom covers. Removal of the covers will expose hazardous voltages. There are no user serviceable parts inside and removal may void the warranty.
13. Use the mains plug as the disconnecting device and keep it readily accessible. If the mains plug is not readily accessible due to mounting in a 19" equipment cabinet, then the mains plug for the entire rack must be readily accessible.
14. An experienced user must always supervise the equipment, especially if inexperienced adults or minors are using the equipment.

1	Intended use.....	5
1.1	Loudspeaker types.....	5
2	Scope of supply.....	6
3	Technical specifications.....	8
3.1	Current/power draw and thermal dissipation.....	10
4	Overview.....	12
4.1	Connections.....	12
4.2	Controls and indicators - User interface.....	12
5	Start-up.....	13
5.1	Rack mounting and cooling.....	13
5.2	Connections.....	15
5.2.1	Mains connection.....	15
5.2.2	Analog audio inputs/link connectors.....	16
5.2.3	ETH1/ETH2 - Milan™.....	16
5.2.4	OUTPUTS.....	17
5.2.5	GPI/DC (Hardware description).....	18
5.2.6	FAULT.....	18
5.3	Controls and indicators.....	19
5.3.1	Mains power switch.....	19
5.3.2	RESET (System reset).....	19
5.3.3	Status indicators (LEDs).....	20
6	Service/Maintenance and care.....	21
6.1	Service.....	21
6.2	Maintenance and care.....	21
7	Manufacturer's declarations.....	22
7.1	Declaration of Conformity.....	22
7.2	WEEE Declaration (Disposal).....	22
7.3	Licenses and Copyright.....	22

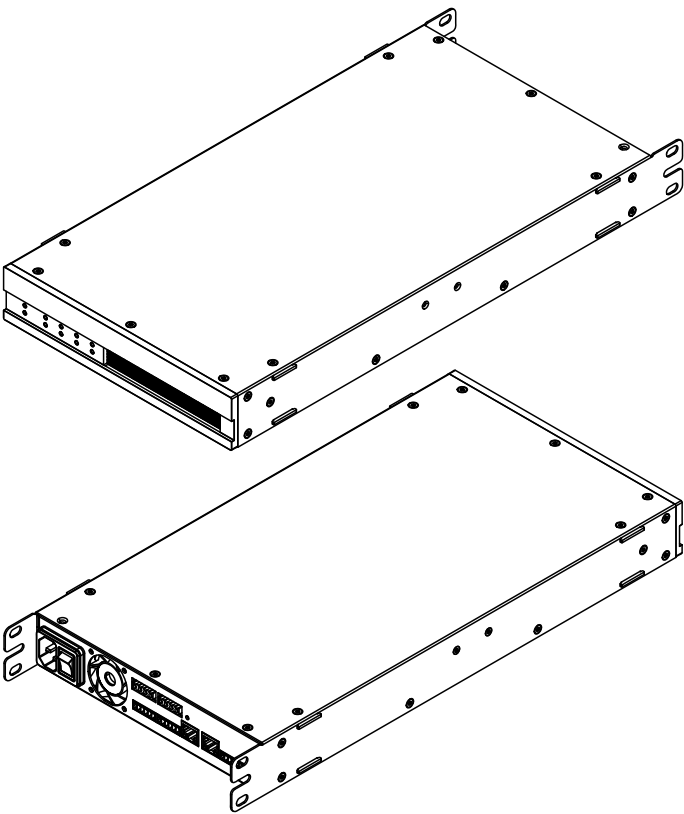

The d&b 5DM is a Milan™ enabled four channel amplifier, designed for installation purposes and intended to be used with applicable d&b loudspeakers. A LINEAR setup is available allowing the amplifier to be used as a linear installation power amplifier.

NOTICE!

The device complies with the electromagnetic compatibility requirements of EN 55032:2019 (product family standard for audio, video, audio-visual and entertainment lighting control apparatus for professional use) for the environment Class B (residential).

Acoustic interferences and malfunctions may occur if the unit is operated in the immediate vicinity of high-frequency transmitters (e.g. wireless microphones, mobile phones, etc.). Damage to the device is unlikely, but cannot be excluded.


1.1 Loudspeaker types

The maximum number of cabinets driven by each channel varies depending on their nominal impedance. It can be found in the respective loudspeaker manual and also in the data section of each loudspeaker product page on the d&b website at www.dbaudio.com.

The minimum recommended impedance per channel is 4 ohms.

Nom. impedance	Cabinets per channel
4 Ω	1
8 Ω	2
12 Ω	3
16 Ω	4
20 Ω	5

A list of d&b loudspeakers supported by the amplifier is included in the Release notes of the amplifier firmware. The latest version can be found on the related product page of the d&b website at www.dbaudio.com.

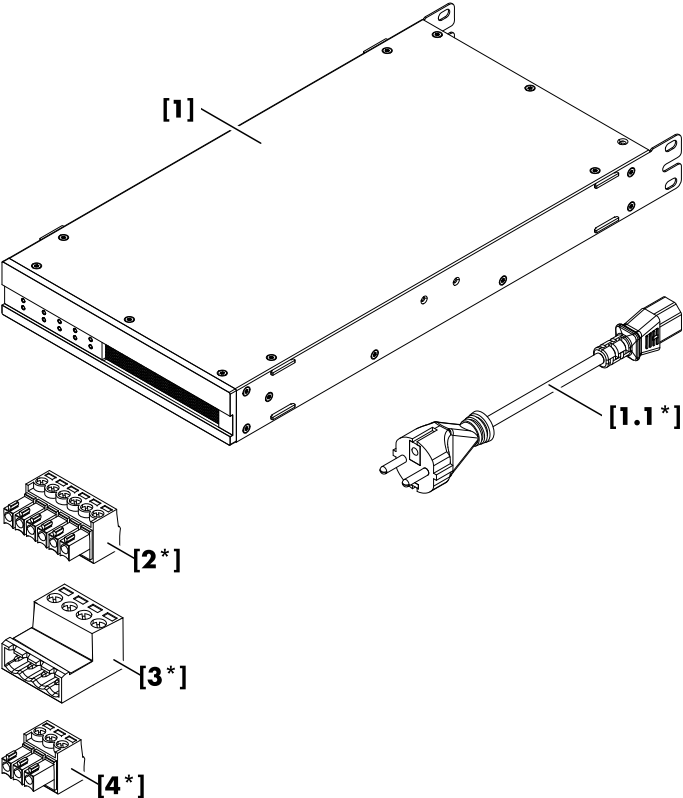


*Euroblock: Similar illustrations, not in scale


Before starting up the device, please verify the shipment for completeness and proper condition of the items.
If there is any sign of obvious damage to the unit and/or the power cord, do not operate the unit and contact your local dealer from whom you received it.

Pos.	Qty.	d&b Code	Description
[1]	1	Z2885	d&b 5DM Amplifier.
Including:			
[1.1*]	1	Z2611.xxx	Power cord (specific to country*).
[2]	3		6-pin Euroblock female: - Intended for the analog input connector sockets and the GPI connector socket. - Connector type: Euroblock 3.5 mm.
[3]	2		4-pin Euroblock male: - Intended for the speaker OUTPUTS connector sockets. - Connector type: Euroblock 5.08 mm.
[4]	1		3-pin Euroblock female: - Intended for the FAULT connector socket. - Connector type: Euroblock 3.5 mm.
		D2767.EN .01	d&b 5DM Manual.


* Mains plug types and associated standards




Z2611.001
3-pin Schuko
CEE 7/7




Z2611.011
3-pin UK
BS 1363A




Z2611.021
3-pin U.S.
NEMA 5-15P




Z2611.041
3-pin Japan
NEMA 5-15P




Z2611.051
3-pin South Korea
KS C8305




Z2611.081
3-pin Australia
AS 3112




Z2611.071
3-pin China
GB 2099




Z2611.031
3-pin Switzerland
SEV 1011




Z2611.121
3-pin South Africa
SANS 164-1



Z2611.061
3-pin Argentina
IRAM 2073




Z2611.111
3-pin Brazil
NBR 14136



Z2611.131
3-pin India
IS 1293

Note: Plugs are similar illustrations, not in scale

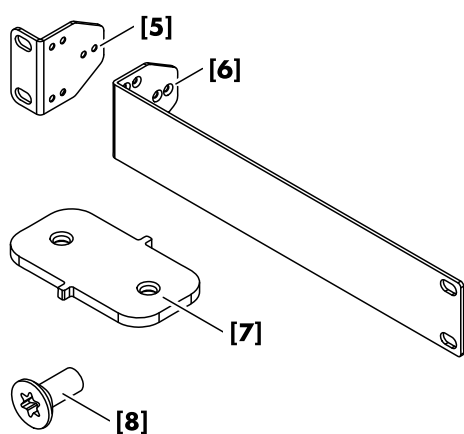**Rack mount kit**

A dedicated rack mount kit, allowing various mounting options is included with the device.

Please also refer to ⇒ Chapter 5.1 "Rack mounting and cooling" on page 13.

Pos.	Qty.	d&b Code	Description
[5]	2		Rack ears.
[6]	1		19" Adapter (Bridge).
[7]	4		Connector plates.
[8]	10		Countersunk torx (#TX10) screws M3 x 5 Tuflock.

Operating conditions

Operating temperature (*continuous/**short-term)	
.....	-10 °C ... +40*/+50** °C (+14 °F ... +104*/+122** °F)
Storage temperature	 -20 °C ... +70 °C (-4 °F ... +158 °F)
Humidity (rel.), non-condensing	 < 70 %

Power supply

Wide range switched mode power supply with active Power Factor Correction (PFC).

Mains connector	 IEC-60320 C14
Rated mains voltage	 100 - 240 V, 50 - 60 Hz
Rated mains current	 5.7 A - 2.4 A
Mains fuse	 internal

Protection circuits

Mains and power supply: Overvoltage, inrush current limiter, internal fuse.

Output: Overcurrent, DC offset, HF voltage limiter, pop-noise suppression.

Cooling: Temperature-dependent fan, self-resetting overtemperature protection.

Power consumption (typical values)

Standby	 5 W
Idling	 50 W
Peak output	 550 W

OUTPUTS A/B/C/D	 2 x 4-pin Euroblock female
Maximum output voltage/current	 120 V _{peak} /20 A _{peak}
Output power rating EIA-426B noise CF 12 dB	 4 x 600 W/8 Ω
.....	 4 x 600 W/4 Ω
Sinus 1 kHz, long term, +40 °C (+104 °F)	 4 x 37.5 W/4 Ω
Frequency response (-1 dB, Linear mode)	 35 Hz - 20 kHz
Gain (Linear mode @ 0 dB)	 31 dB

Output noise/Dynamic range

Output noise (BW 20 kHz)/dynamic range (BW 20 kHz, reference 120 V _{pk})	
Analog input, unweighted	 330 μV _{RMS} /108 dB
Analog input, A-weighting	 240 μV _{RMS} /111 dB
Milan™ input, unweighted	 <u>-tbd-</u> μV _{RMS} / <u>-tbd-</u> dB
Milan™ input, A-weighting	 <u>-tbd-</u> μV _{RMS} / <u>-tbd-</u> dB

THD+N / Crosstalk

THD+N (unweighted, 20 - 20 kHz)	
4x 75 W/8 ohms	 < -60 dB/0.1 %
4x 75 W/4 ohms	 < -60 dB/0.1 %
Crosstalk (20 - 20 kHz)	 < -50 dB
.....	 4x 75 W into 4 Ω

Analog inputs/link

INPUT A1 - A4	 3-pin Euroblock male
Pin assignment	 (↓) GND, neg., pos.
Input impedance	 15 kΩ, electronically balanced
CMRR @ 100 Hz/1 kHz / 10 kHz	 > 54/> 54/> 50 dB
Maximum input level (balanced/unbalanced)	 +18/+12 dBu
Input level @ 0 dBFS	 +27.3 dBu

Milan™

Device type	 Endstation
Input channel streams	 2 streams with up to 8 channels @ 48/96 kHz
Redundancy	 no
Routable Milan™ inputs	 M1-M4

Digital Signal Processing

Time to tone (Off)	 < 6 sec.
Conversion	 48 kHz
Latency analog/Milan™ input (48 kHz)	 1.1/ <u>-tbd-</u> ms
Equalizer	 user definable 8-band equalizer
.....	 Filter types: PEQ/Notch/HiShlv/LoShlv/Asym
Delay	 1.1 - 300 ms
Frequency generator	 Pink noise or Sine wave 10 Hz - 20 kHz

Network

Connector type	 2 x RJ45
Switch	 integrated 2-port, 1 Gbit/s
ETH1	 Single cable mode: OCA, Milan™
ETH2	 Single cable mode: no functionality
.....	 Split mode: Milan™

GPI	 4
High-level	 7 ... 30 VDC
Low-level	 0 ... 5 VDC
Input impedance	 100 kOhms
Connector type	 1 x 6-pin Euroblock 3.5 mm male
Pin assignment	 GND (↓), GPIs 1 - 4, DC
DC	 12 VDC, 50 mA

FAULT	 NO - Normally Open NC - Normally Closed
.....	 1 x 3-pin Euroblock 3.5 mm male

Controls and indicators

Controls

POWER Mains power switch (rear panel)
RESET Recessed push-button (rear panel)

Indicators


POWER Power indicator (green)
Data Data stream indicator (yellow)
Mute A/B/C/D Channel mute indicator (red)
..... Channel/Device error indication (red)
ISP A/B/C/D Input Signal Present indicator (green)
GR A/B/C/D Gain Reduction indicator (yellow)
OVL/Error A/B/C/D Overload/Error indicator (red)

Fan noise emission

Rack mounted, measured on axis, 1 m (3.3 ft) to front panel, A-weighting.
Max. RPM 42 dB(A)
..... Ambient temperature 23 °C/73.4 °F

Dimensions and weight

Height x Width x Depth * 1 RU x 9.5" x 405 mm (16")
..... * with rack ears 435 mm (17.1")
Weight 4.6 kg/10 lb

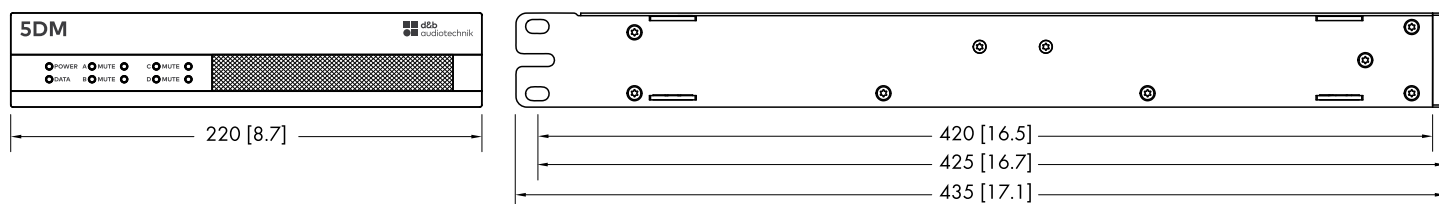

5DM enclosure dimensions in mm [inch]

* Audio power output – Measurement references:

All data is valid for 23 °C (73.4 °F) ambient temperature and 230 VAC/50 Hz mains supply.
The power rating of noise signals is defined as the maximum of the instantaneous output power divided by a factor of two.

The power of burst signals refers to the power during the "on" period.
The duration of the peak output of a sine wave signal is defined at a drop of 0.5 dB/10% relative to the maximum output power.

EIA-426B noise			
Crest factor	Load	Power rating	Power average
12 dB	4 ohms 8 ohms	4 x 600 W 4 x 600 W	4 x 75 W 4 x 75 W
9 dB	4 ohms 8 ohms	4 x 350 W 4 x 350 W	4 x 87.5 W 4 x 87.5 W
6 dB	4 ohms 8 ohms	4 x 175 W 4 x 175 W	4 x 87.5 W 4 x 87.5 W
1 kHz burst			
On/off time	Load	Power single channel	Power all channels
20 ms/0 dB 480 ms/-20 dB	4 ohms 8 ohms	1 x 800 W 1 x 600 W	4 x 250 W 4 x 250 W
200 ms/0 dB 600 ms/-20 dB	4 ohms 8 ohms	1 x 600 W 1 x 600 W	4 x 180 W 4 x 190 W
1 kHz sine wave			
Channels used	Load	Max. output power	Duration of max. output
1	4 ohms 8 ohms	1 x 600 W 1 x 600 W	1200 ms 1600 ms
4	4 ohms 8 ohms	4 x 600 W 4 x 600 W	7 ms 7 ms

Measurement references

For all noise signals, the values are measured at the maximum level just before any amplifier limiter activity (no Gain Reduction).

Noise CF 12 dB: Noise signal according to EIA-426-B with a crest factor of 12 dB.

This represents the use case of live music or less compressed recorded music.

Noise CF 9 dB: Noise signal according to EIA-426-B with a crest factor of 9 dB.

This represents the use case of music with medium compression.

3.1 Current/power draw and thermal dissipation

Noise CF 6 dB: Noise signal according to EIA-426-B with a crest factor of 6 dB.

This represents the use case of heavily compressed music.

Sine wave (100 ms): 1 kHz sine wave signal, 0 dBFS input level and a duration of 1 s.

The RMS current value is calculated over a 100 ms time window. This window is stepped in increments of 10 ms over the recording. The resulting value is the highest current within a window of 100 ms.

230 V AC / 50 Hz / 0.5 Ω Source impedance - all channels driven								
State	Load [ohms]	Mains current [A RMS]	Power factor	Input power [W]	Output power [W]	Power loss [W]	BTU/hr	kCal/hr
Standby	-	0.1	0.17	4	-	4	14	3
AutoWakeup	-	0.1	0.19	5	-	5	17	4
Idling	-	0.4	0.6	49	-	49	167	42
Noise CF 12 dB	8 ohms 4 ohms	1.9 2.1	0.92 0.92	410 450	300 300	110 150	375 512	95 129
Noise CF 9 dB	8 ohms 4 ohms	2.2 2.4	0.93 0.94	475 520	350 350	125 170	426 580	108 146
Noise CF 6 dB	8 ohms 4 ohms	2.2 2.4	0.94 0.95	475 525	350 350	125 175	426 597	108 151
Sinus max. 1 s	8 ohms 4 ohms	4.4 5.3	- -	- -	- -	- -	- -	- -

208 V AC / 60 Hz / 0.5 Ω Source impedance - all channels driven								
State	Load [ohms]	Mains current [A RMS]	Power factor	Input power [W]	Output power [W]	Power loss [W]	BTU/hr	kCal/hr
Standby	-	0.1	0.17	4	-	4	14	3
AutoWakeup	-	0.1	0.19	5	-	5	17	4
Idling	-	0.5	0.52	49	-	49	167	42
Noise CF 12 dB	8 ohms 4 ohms	2.1 2.3	0.93 0.93	410 450	300 300	110 150	375 512	95 129
Noise CF 9 dB	8 ohms 4 ohms	2.4 2.7	0.94 0.95	475 520	350 350	125 170	426 580	108 146
Noise CF 6 dB	8 ohms 4 ohms	2.4 2.7	0.95 0.95	480 525	350 350	130 180	444 614	112 155
Sinus max. 1 s	8 ohms 4 ohms	5.2 5.6	- -	- -	- -	- -	- -	- -


120 V AC / 60 Hz / 0.2 Ω Source impedance - all channels driven

State	Load [ohms]	Mains current [A RMS]	Power factor	Input power [W]	Output power [W]	Power loss [W]	BTU/hr	kCal/hr
Standby	-	0.1	0.36	4	-	4	14	3
AutoWakeup	-	0.1	0.39	5	-	5	17	4
Idling	-	0.6	0.71	48	-	48	164	41
Noise CF 12 dB	8 ohms 4 ohms	3.7 4.1	0.95 0.95	425 460	300 300	125 160	426 546	108 138
Noise CF 9 dB	8 ohms 4 ohms	4.3 4.7	0.96 0.96	485 535	350 350	135 185	461 631	116 159
Noise CF 6 dB	8 ohms 4 ohms	4.3 4.7	0.97 0.97	490 540	350 350	140 190	478 648	120 163
Sinus max. 1 s	8 ohms 4 ohms	10.2 10.4	- -	- -	- -	- -	- -	- -

100 V AC / 60 Hz / 0.2 Ω Source impedance - all channels driven

State	Load [ohms]	Mains current [A RMS]	Power factor	Input power [W]	Output power [W]	Power loss [W]	BTU/hr	kCal/hr
Standby	-	0.1	0.42	4	-	4	14	3
AutoWakeup	-	0.1	0.46	5	-	5	17	4
Idling	-	0.6	0.77	48	-	48	164	41
Noise CF 12 dB	8 ohms 4 ohms	4.5 5.0	0.95 0.95	430 470	300 300	130 170	444 580	112 146
Noise CF 9 dB	8 ohms 4 ohms	5.2 5.7	0.96 0.96	495 545	350 350	145 195	485 665	125 168
Noise CF 6 dB	8 ohms 4 ohms	5.2 5.7	0.97 0.97	500 550	350 350	150 200	512 682	129 172
Sinus max. 1 s	8 ohms 4 ohms	10.5 11.5	- -	- -	- -	- -	- -	- -

4.1 Connections

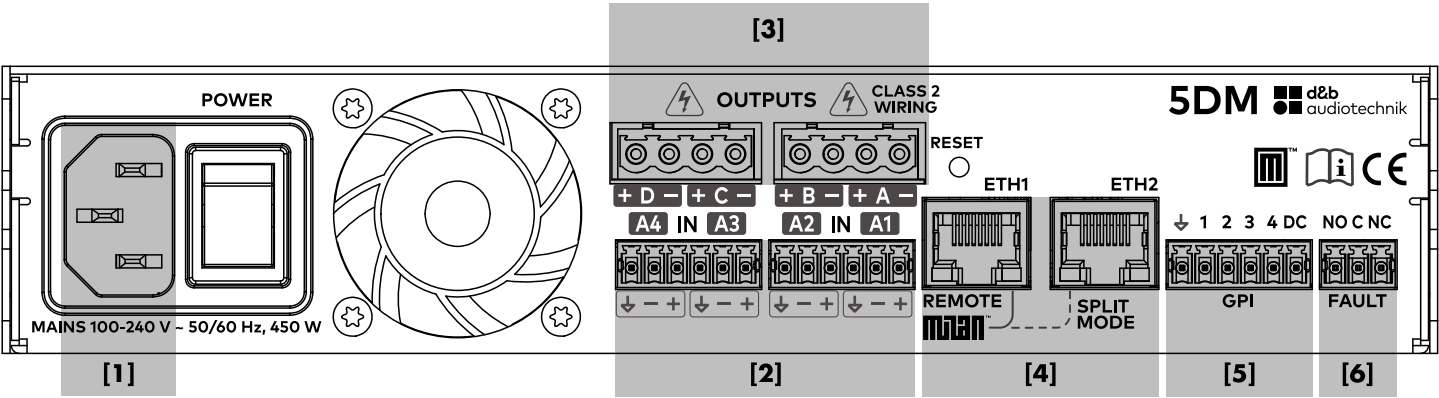


- [1] Mains connector socket.
Refer to ⇒ Chapter 5.2.1 "Mains connection" on page 15.
- [2] Audio INPUT connectors (analog).
Refer to ⇒ Chapter 5.2.2 "Analog audio inputs/link connectors" on page 16.

[3] Output connectors.
Refer to ⇒ Chapter 5.2.4 "OUTPUTS" on page 17.
- [4] ETH1/ETH2 - Milan™.
Refer to ⇒ Chapter 5.2.3 "ETH1/ETH2 - Milan™" on page 16.


[5] GPI/DC connector.
Refer to ⇒ Chapter 5.2.5 "GPI/DC (Hardware description)" on page 18.

[6] FAULT connector.
Refer to ⇒ Chapter 5.2.6 "FAULT" on page 18.

4.2 Controls and indicators - User interface

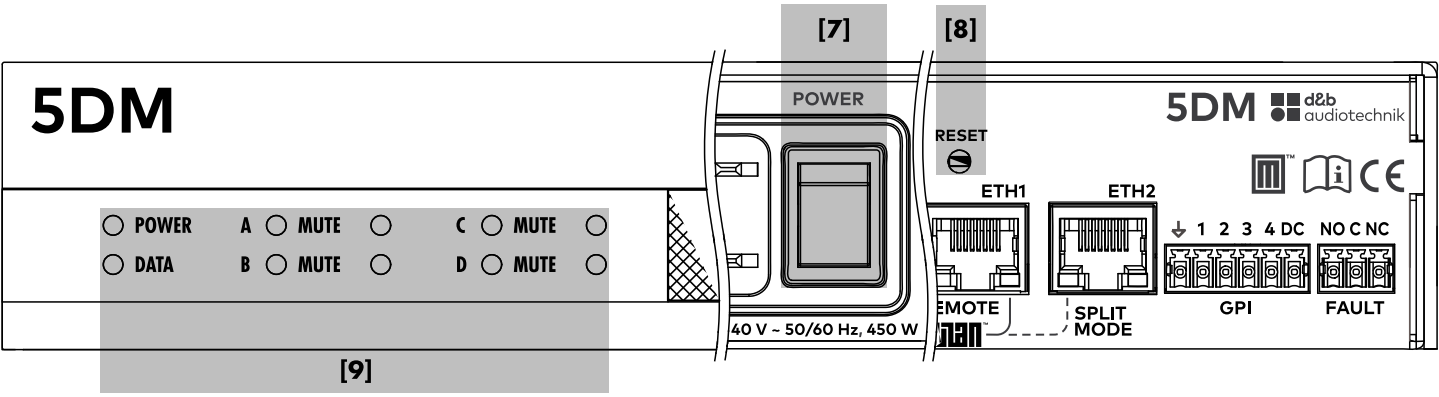

- [9] Status indicators
Refer to ⇒ Chapter 5.3.3 "Status indicators (LEDs)" on page 20.
- [7] POWER
Main power switch
Refer to ⇒ Chapter 5.3.1 "Mains power switch" on page 19.
- [8] RESET
Refer to ⇒ Chapter 5.3.2 "RESET (System reset)" on page 19.

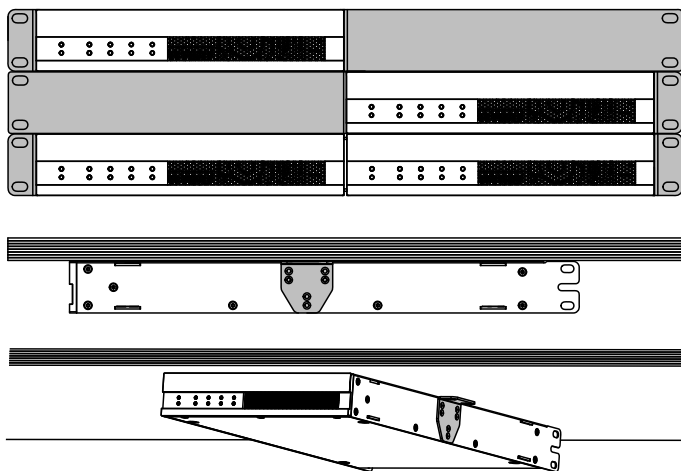


5.1 Rack mounting and cooling

Rack mounting kit

The enclosed rack mounting kit allows for various mounting options:

- Single device into 9.5" racks or cabinets or either left or right into 19" racks or cabinets.
- Two devices side-by-side into 19" racks or cabinets.
- Single device underneath tables or any other suitable surfaces.

When mounting the device into racks or cabinets, the rack ears allow for two options:

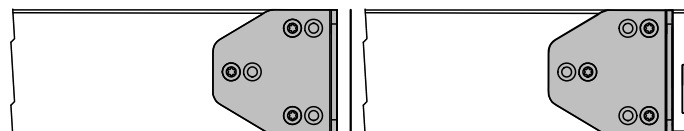

Flat

Offset

Mainly intended for mounting above or underneath d&b installation amplifiers.

Joining two devices

Tools required: Screw driver torx #TX10.

1. On both devices first remove the rubber covers at the inner sides of the devices at the top/bottom, front and rear.
2. On one device (no matter which one) attach the connector plates [7].
 - ↳ Ensure the countersinks faces to the top.
3. Join the devices together.
4. Reattach the remaining screws of the second device at the top/bottom, front and rear.


Rack mounting

NOTICE!

When mounting the device into 19" equipment racks or cabinets, it is strongly recommended that you:

- **Always** fix the device at its **front AND rear rack ears** using appropriate rack mounting screws and U-washers, as shown in the graphic opposite.
- Alternatively use shelves fixed to the inner sides of the equipment rack or cabinet.

When specifying a rack or cabinet, be sure to allow extra depth (150 mm / 6" is usually sufficient) to accommodate the cables and connectors at the rear of the device.

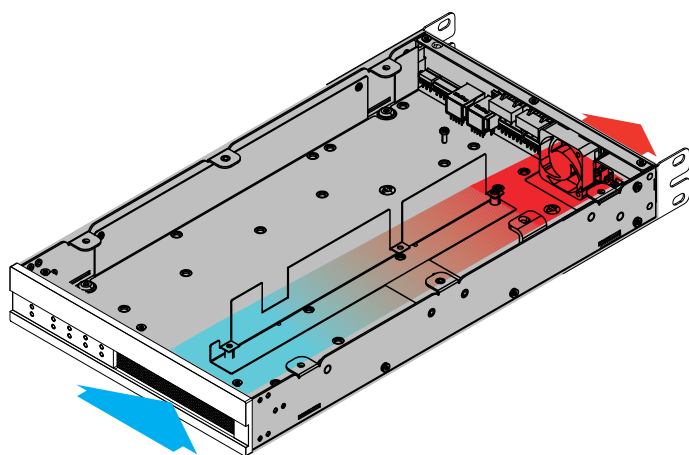


Cooling

Thermal conditions are a vital factor to ensure operational safety of the power amplifiers. The amplifier is equipped with an internal fan that draws cool air from the front into the housing and channel the warm air towards the back of the device.

- Please ensure that adequate cool airflow is provided.
- Do not block or cover the front panel air intake or the vents on the rear panel.
- If the amplifiers are installed in sealed cabinets (e.g. in fixed installations), use additional fan modules with filters that can be easily replaced without opening the sealed cabinets.
- Do not rack up the amplifiers together with other devices producing additional heat with opposing airflow.

5.2 Connections

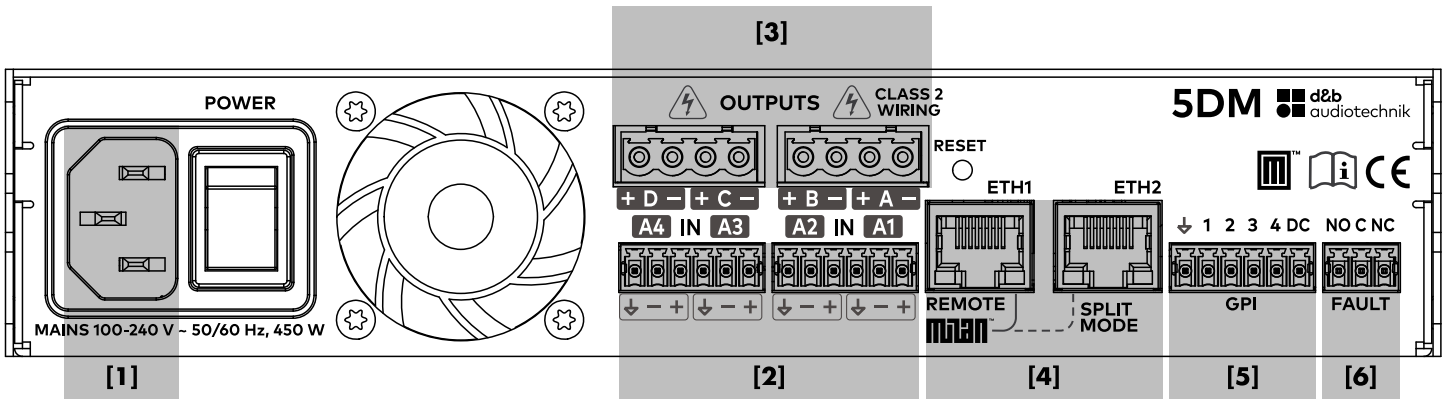

5.2.1 Mains connection



WARNING!

Potential risk of electric shock or fire.

The device is a protective class 1 unit. A missing earth (ground) contact may cause dangerous voltages in the housing and controls and may lead to electric shock.



- Connect the device to mains power supplies with protective earth only.
- If there is any sign of obvious damage to the power cord and/or mains plug, do not use the power cord and replace it before further use.
- Please ensure the mains connector is accessible at any time to disconnect the device in case of malfunction or danger. If the mains plug is not readily accessible due to mounting in a 19" rack or equipment cabinet, then the mains plug for the entire rack or cabinet must be readily accessible.
- Do not connect or disconnect the mains plug under load.


Before connecting the device to mains voltage, check that the mains voltage and frequency correspond to the specifications on the rating label next to the mains connector socket on the rear panel of the unit.

Mains voltage range:

100 to 240 VAC, 50/60 Hz, 450 W.

A 3-pin IEC-60320 C14 mains connector socket [1] is fitted on the rear panel and an appropriate power cord [1.1] is supplied.



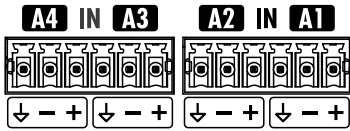

5.2.2 Analog audio inputs/link connectors

IN (A1 - A4)

A 6-pin Euroblock connector (male) is provided for each analog input pair to accept the supplied 6-pin Euroblock connector (female). To feed (link) the input signal on to the next device in the signal chain, the connector can also be used as a cable tap.


Technical specifications

INPUT A1 - A4	3-pin Euroblock male
Pin assignment	(↓) GND, neg., pos.
Input impedance	15 kΩ, electronically balanced
CMRR @ 100 Hz/1 kHz / 10 kHz	> 54/> 54/> 50 dB
Maximum input level (balanced/unbalanced)	+18/+12 dBu
Input level @ 0 dBFS	+27.3 dBu

5.2.3 ETH1/ETH2 - Milan™

NOTICE!

Only **shielded network** cables (**STP**) must be used!

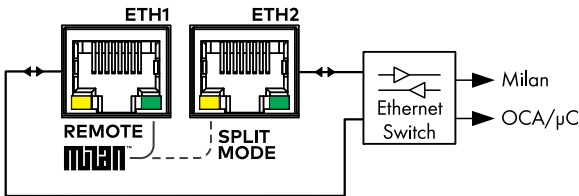

LED indicators

The two LED indicators of the respective connector socket in use indicate the following states:

- Green** Illuminates permanently when the device is connected to an active network and flashes as long as a data stream is transmitted.
- Yellow** Is off when the speed is 100 Mbits and illuminates permanently when the speed is 1 Gbits.

ETH1/ETH2

Two individual Ethernet ports (1 Gbit/s) are provided, enabling standard remote control via the d&b Remote network (OCA/AES70) and SNMP IP addressing (Auto or Manual) as well as Milan™ digital audio networking on one of the connector sockets.

In Single cable mode, it allows star-wiring topology using one cable for both, Milan™ digital audio and d&b Remote network (OCA/AES70) ETH1.

In Split mode, it allows star-wiring topology using d&b Remote network (OCA/AES70) on ETH1 and Milan™ digital audio on ETH2.

The Ethernet port mode is adjustable using the d&b R1 Remote control software.

The device will subscribe to the network with two MAC addresses. IP networking (e.g. using DHCP) for d&b Remote control (OCA/AES70) is available for ETH1 only.

Milan™

The device is Milan™ enabled and accepts two Milan streams each providing eight channels. Four of these 16 (2 x 8) channels can be routed to the signal processing of the 5DM.

Milan™ audio routing is configured using Milan Manager.

Technical specifications

Device type	Endstation
Input channel streams	2 streams with up to 8 channels @ 48/96 kHz
Redundancy	no
Routable Milan™ inputs	M1-M4

5.2.4 OUTPUTS



WARNING!

Potential risk of electric shock or fire.

Risk of electric shock

The amplifier output pins can carry dangerous voltages.

- Only use isolated loudspeaker cables with correctly fitted connectors.
- Never connect an amplifier output pin to any other input or output connector pin or protective earth (ground).
- **Bridge mode is not applicable.**

Risk of fire

To avoid any heating of the output connector terminal (glowing contact), the wires need to be properly fitted to the output connector terminal.

- Only use the enclosed Euroblock 5.08 mm connector terminals.
- Observe the maximum cross-section of 2.5 mm² (AWG 13).
- Ensure all contact screws are properly tightened.
Rated **torque** settings (max): **0.5 N·m**.
- Screw driver size Phillips PH1 (0.6 x 3.5 mm).

The amplifier is equipped with two Euroblock connector sockets (female), one for each pair of amplifier output channels (A/B, C/D).


All pins of both output connectors are hardwired and permanently driven using the following pin assignment.


OUTPUTS A (B, C, D)

+ = Amp A (B, C, D) pos.


– = Amp A (B, C, D) neg.

Note: For further information regarding the applicable output modes for each loudspeaker system, please refer to the relevant loudspeaker manual.

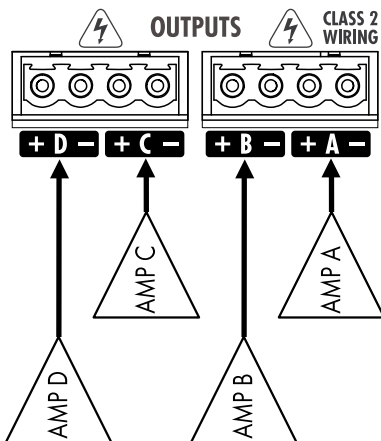



GPI
VCA functionality

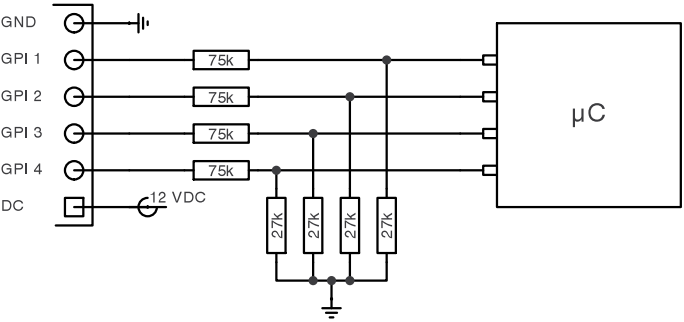

GPI
Schematic circuit diagram

FAULT
Schematic circuit diagram and switching status:
a) Device is On and operating
b) Device is Off or general device error

5.2.5 GPI/DC (Hardware description)

Up to four GPI pins **[5]** (**G**eneral **P**urpose **I**ntput) together with an onboard DC supply (12 VDC, 50 mA) are available as additional digital control lines.

Each GPI provides either level (Hi/Lo active - non-latching) or edge (rising/falling - latching) triggering.

A VCA functionality is incorporated to allow the connection of an external, linear potentiometer (10 kOhms).

Technical specifications

GPI	4
High-level	7 ... 30 VDC
Low-level	0 ... 5 VDC
Input impedance	100 kOhms
Connector type	1 x 6-pin Euroblock 3.5 mm male
Pin assignment	GND (↓), GPIs 1 - 4, DC
DC	12 VDC, 50 mA

5.2.6 FAULT



An additional 3-pin Phoenix Euroblock fault contact **[7]** is provided allowing a general device error to be remotely indicated.

Note:

- The assignment of the corresponding software object is fixed and cannot be changed by the user.
- During a firmware update, the fault contact switches to status **b)**, as shown in the graphic opposite.

NO Normally **O**pen
C Common
NC Normally **C**losed

5.3 Controls and indicators

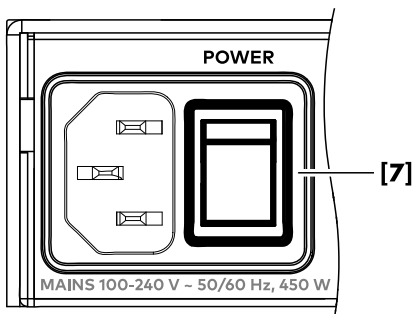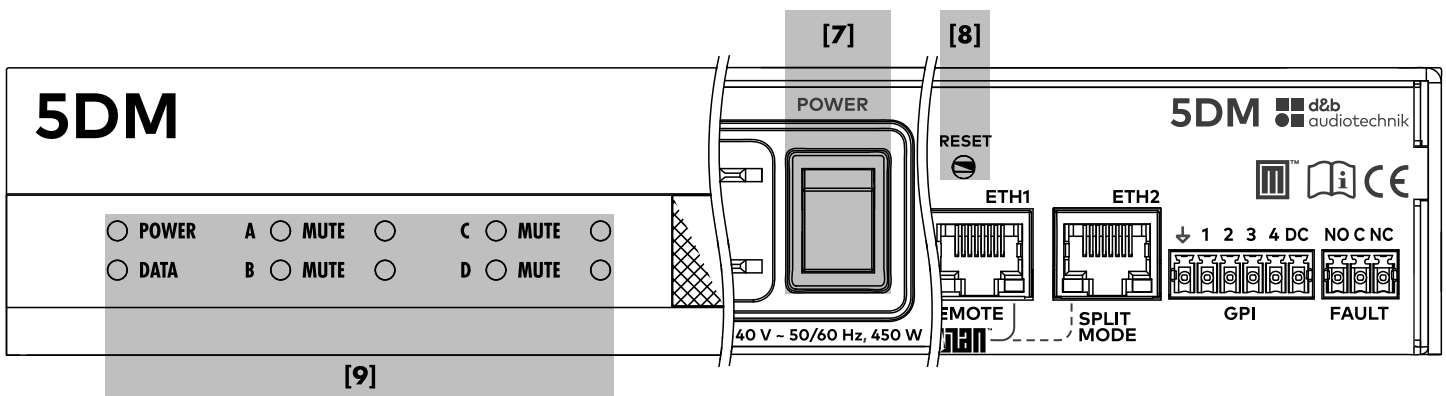

5.3.1 Mains power switch

The on/off rocker switch [7] is located on the left of the rear panel.

OFF Mains isolation is not provided. The internal power supplies are off but stay connected to the mains.

ON The unit is switched on and ready for operation.

5.3.2 RESET (System reset)


A reset button (RESET [8]) is located on the rear panel above the ETH1 network connector.


To prevent accidental system reset, the button is slightly recessed.

To perform a system reset, proceed as follows:

Note: All device settings will be set to factory defaults except for the network and fixed device settings such as AmpPresets. If you execute this procedure, no dialog will be prompted and the reset will start immediately.

1. Switch off the device.
2. Press and hold the «RESET» button using an appropriate pen.
3. While holding the «RESET» button pressed, repower the device.
 - ↳ All LEDs will illuminate red for 1 second while the POWER LED will continue to illuminate green.
4. Release the «RESET» button and briefly press the button again within 2 sec.
 - ↳ The device will reboot.

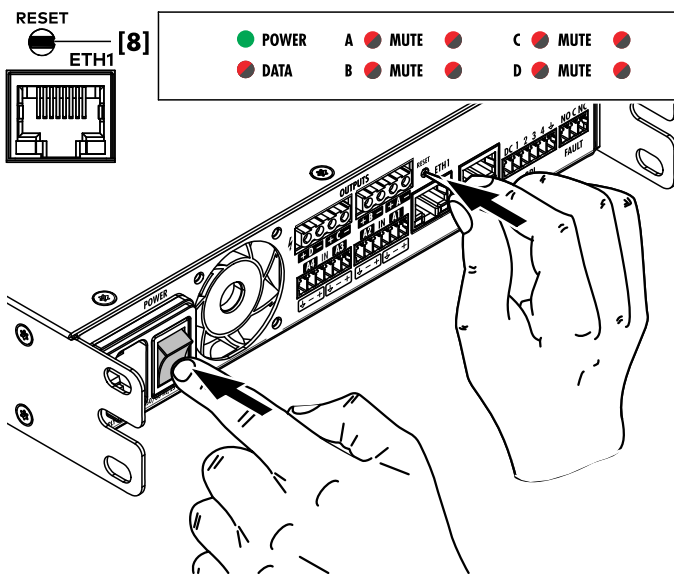

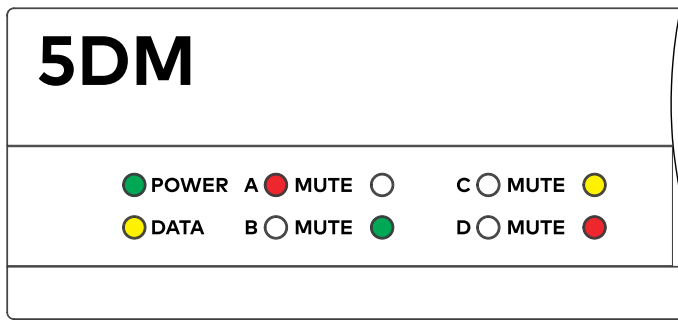

5.3.3 Status indicators (LEDs)

On the bottom left of the front panel the following status LEDs are provided:

POWER



Green: Indicates two states:

- **Permanent:** Power on.
- **Flashing** (): Standby.

DATA



Yellow: Indicates two states:

- **Permanent:** A network cable is connected to one of the ETHERNET (RJ 45) sockets of the device.
- **Flashing:** A data stream is transmitted.

MUTE




Red: Mute status of the respective channel.

In addition these LEDs also acts as Error indicators for either a channel or device error. In the case of an error the LEDs starts flashing according to the following flashing patterns:



Channel error: Single flash of the corresponding Channel mute LED.



Device Error: Double flash of all Channel mute LEDs.

Signal LED



Multi color LED, indicates three states:

- **Off:** No signal present.
- **Green: ISP (Input Signal Present):**
Illuminates when the analog input signal exceeds -30 dBu or when the Milan™ input signal exceeds -57 dBFS.
- **Yellow: GR (Gain Reduction):**
Illuminates when one limiter reduces the signal by a predefined level ($GR \geq 3$ dB)
- **Red: OVL (Overload):**
Illuminates when:
 - any signal within the channel exceeds -2 dBFS.
 - DSP suffers from an internal EQ filter overflow.
 - any limiter causes a gain reduction of 12 dB or more.
 - the output signal is limited to prevent distortion due to output peak current overload.

6.1 Service



CAUTION!

Potential risk of explosion.

The device incorporates a lithium battery which may cause danger of explosion if not replaced correctly.

Refer replacement only to qualified service personnel authorized by d&b audiotechnik.

Do not open the device. No user serviceable parts inside. In case of any damage do not operate the device under any circumstances.

Refer servicing only to qualified service personnel authorized by d&b audiotechnik. In particular if:

- objects or liquids have entered the device.
- the device does not operate normally.
- the device was dropped or the housing is damaged.

6.2 Maintenance and care

During normal operation, the amplifier provides maintenance-free service.

Due to the cooling concept, no dust filters are required. As a result, filter exchange or cleaning the filters is not necessary.



7.1 Declaration of Conformity

This declaration applies to:

d&b Z2885 5DM Amplifier

by d&b audiotechnik GmbH & Co. KG.

All product variants are included, provided they correspond to the original technical version and have not been subject to any later design or electromechanical modifications.

We herewith declare that said products are in conformity with the provisions of the respective directives including all applicable amendments.

Detailed and applicable declarations are available on request and can be ordered from d&b or downloaded from the d&b website at www.dbaudio.com.



7.2 WEEE Declaration (Disposal)

Electrical and electronic equipment must be disposed of separately from normal waste at the end of its operational lifetime.

Please dispose of this product according to the respective national regulations or contractual agreements. If there are any further questions concerning the disposal of this product, please contact d&b audiotechnik.


WEEE-Reg. -Nr. DE: 13421928


7.3 Licenses and Copyright

A list of the components and a full-text version of all licenses and copyrights can be accessed using the amplifier's Web Remote interface.

⇒ Selecting the d&b logo at the top left of the «Web Remote» interface page allows access to the «Licenses and Copyright» information page.

This page provides an overview of the open source software used in this product. As required by the GPL and LGPL licenses, we will send you a copy of the used source code on request. If you would like to obtain a copy, please contact us by mail to: software.support@dbaudio.com

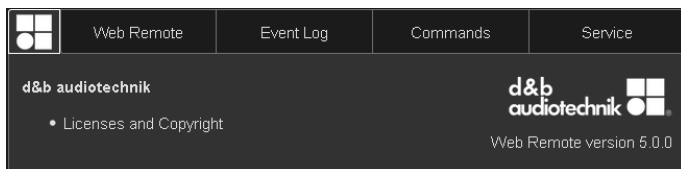



- preliminary -

