


Datasheet — TIGRA



Line Array



TIGRA dimensions

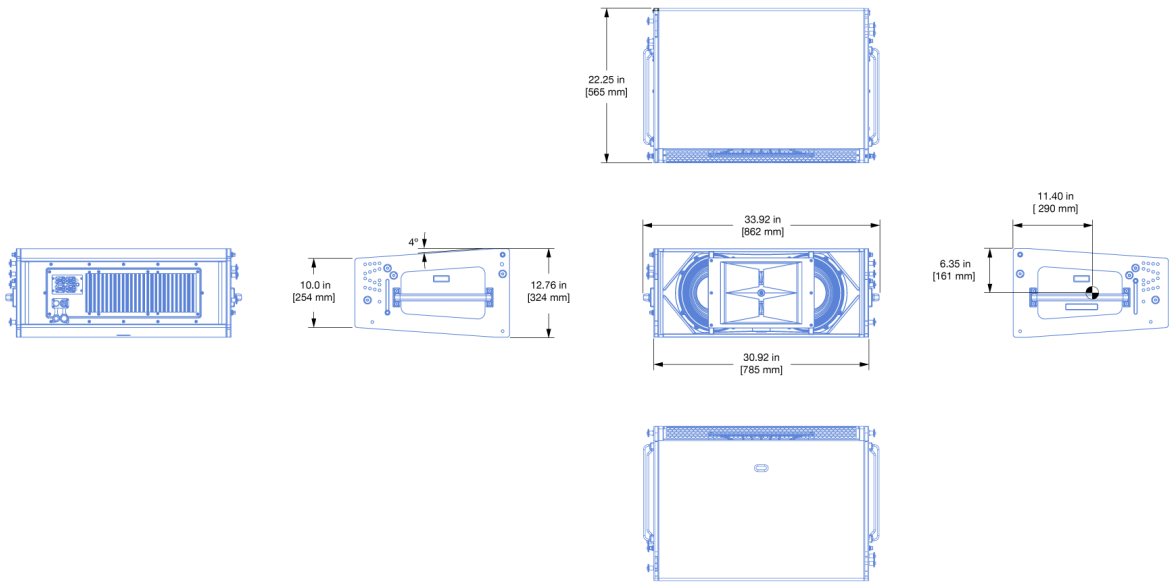

TIGRA specifications

ACOUSTICAL ¹	TIGRA-L	TIGRA-W
Operating frequency range	55 Hz – 16 kHz	

Maximum sound level ²	146 dB	145 dB
AES75 maximum linear sound levels	122 dBz, 140.5 dBzpk, with an RMS input level of +4 dBV	121 dBz, 139.5 dBzpk, with an RMS input level of +3 dBV
COVERAGE ³		
Horizontal coverage	85°	110°
PHYSICAL		
Dimensions	W: 33.92 in (862 mm) x H: 12.76 in (324 mm) x D: 22.25 in (565 mm)	
Weight	120 lbs (54 kg)	
Enclosure	Premium multi-ply birch, slightly textured black finish	
Protective grille	Powder-coated, stamped steel	
Rigging	End frames with captive GuideALinks secured with 0.375 x 0.75 inches quick-release pins that allow 0.5°– 10° splay angles; detachable side handles	
IEC ingress protection rating (IP rating)	IP55, when connected to cables terminated with Neutrik powerCON® TRUE1 cable connectors	
AC POWER		
Connector	Neutrik powerCON® TRUE1 Chassis Connector NAC3PX-TRUE1 sealed power connector for harsh and demanding environments	
Operating voltage range	100-240V~, 50-60Hz	
POWER CONSUMPTION		
Maximum long-term continuous power (>10 sec)	550 W	

Maximum burst power (<1 sec)	1270 W
Idle power	50 W
ANALOG AUDIO INPUT ⁴	
Connector	Neutrik XLR 3-pin TOP (True Outdoor Protection) airtight female input with male loop output with captive sealing caps
Input level	The source must be capable of producing +24 dBu into 50 Ω to achieve the maximum peak SPL over the loudspeaker's operating bandwidth.
DIGITAL AUDIO INPUT⁴	
Connector	Two Neutrik RJ45 etherCON TOP (True Outdoor Protection) airtight network inputs with captive sealing caps
Digital format	Milan AVB
MONITORING	
Telemetry	Loudspeaker Remote Product Monitoring (RPM) telemetry is transmitted via the Ethernet port, and displayed in software.
TRANSDUCERS	
Low-frequency	Two 10-inch long-excursion cone drivers
High-frequency	One 4-inch diaphragm compression driver coupled to a horn

Notes

1. Loudspeaker system predictions for coverage and SPL are available in Meyer Sound's MAPP 3D system design tool.
2. The maximum sound level is the L_{peak} measured using burst noise.

3. The TIGRA 2-way loudspeaker has a unique placement of low-mid transducers and a computationally optimized high horn, creating a directional loudspeaker with a controlled pattern for the full frequency range. Arrays of six units and longer functionally create a cardioid polar pattern, which remains consistent at all SPL levels, including when pushed into limiting, and does not require any user settings.
4. Both analog and digital audio inputs are provided as standard.



Meyer Sound Laboratories, Inc.
2832 San Pablo Avenue
Berkeley, CA 94702

+1 510 486.1166
meyersound.com/contact
meyersound.com

Datasheet — TIGRA
PN: 04.336.04.02 B 2606
Copyright © 2026
All Rights Reserved