

The XSLi8 loudspeaker



The XSLi8 is an installation-specific line array loudspeaker for small to medium-scale sound reinforcement applications. It also serves as a supplement to other SL-Series systems for fill and/or delay purposes. The cabinets can be flown in vertical columns producing an 80° constant directivity dispersion pattern in the horizontal plane.

The cabinet is a 3-way designs, housing 2 x 8" neodymium forward LF drivers, 2 x 6.5" neodymium side firing LF drivers, one horn-loaded 6.5" MF driver and 2 x 1" exit HF compression drivers with 2" coils mounted to a dedicated wave shaping device. The cylindrical wave segments of each cabinet couple without gaps and sum up coherently. Splay angles between adjacent cabinets can be set in the range from 0° to 14° in 1° increments.

The cabinet is driven by two channels of the applicable d&b amplifier which provides dedicated processing functions for the front LF and passively crossed-over side LF and MF/HF sections.

All components are arranged symmetrically around the center axis of the cabinet to produce a perfectly symmetrical dispersion pattern. This setup allows for a very smooth crossover design with a well defined overlap of adjacent frequency bands resulting in a very consistent and accurate horizontal dispersion.

Due to the arrangement of the forward and sideward LF drivers in combination with their processing functions, the directivity is maintained across the entire frequency range.

The frequency response extends from 60 Hz to above 18 kHz.

The cabinet enclosure is injection molded (ABS polycarbonate) and has an impact and weather protected 2K finish. The front and side panels of the cabinet incorporates a rigid metal grill backed by an acoustically transparent and water repellent fabric.

Each side panel incorporates a slot that accepts dedicated lifting pins (T-handles). During setup, these pins serve as a temporary lifting aid and can be inserted and locked when needed.

d&b amplifiers

The d&b audiotechnik loudspeaker range is designed exclusively for operation with d&b amplifiers. These provide power as well as comprehensive control and protection functions tailored to achieve the performance, reliability and longevity associated with the d&b system approach.

System data


Frequency response (-5 dB standard)	60 Hz - 18 kHz
Frequency response (-5 dB CUT mode)	90 Hz - 18 kHz
Frequency response (-10 dB standard, IEC60268)	55 Hz - 20 kHz
Frequency response (-10 dB CUT mode, IEC60268)	68 Hz - 20 kHz
Max. sound pressure (1 m, free field, broadband signal IEC60268)	
With 30D	138 dB
With D90/D80/D40/40D	141 dB
4x XSLi8 (far field, scaled to 1 m)	
with D90/D80/D40/40D	153 dB

Loudspeaker data

Nominal impedance front LF	8 ohms
Nominal impedance side LF/MF/HF	8 ohms
Power handling capacity front LF (RMS/peak 10 ms)	
	400/1200 W
Power handling capacity side LF/MF/HF (RMS/peak 10 ms)	
	300/850 W
Nominal horizontal dispersion angle	80°
Splay angle setting	0 ... 14° (1° increment)
Components	
	2 x 8" front LF driver
	2 x 6.5" side LF driver
	(2x 10.3" total equivalent* LF driver size)
	1 x 6.5" MF driver
	2 x 1" exit compression driver with 2" coil
	Passive crossover network
Connections	NLT4 F/M
Pin assignment	1+: Front LF+/1 -: Front LF-
	2+: Side LF/MF/HF+/2 -: Side LF/MF/HF-
Phoenix option	Phoenix socket (Type: DFK PC 4/4 GF)
	Phoenix plug (Type: SPC 5/4)
Weight	39 kg (86 lb)

* Calculated equivalent diameter of coherent addition of front and side radiating LF drivers.

The XSLi8 loudspeaker

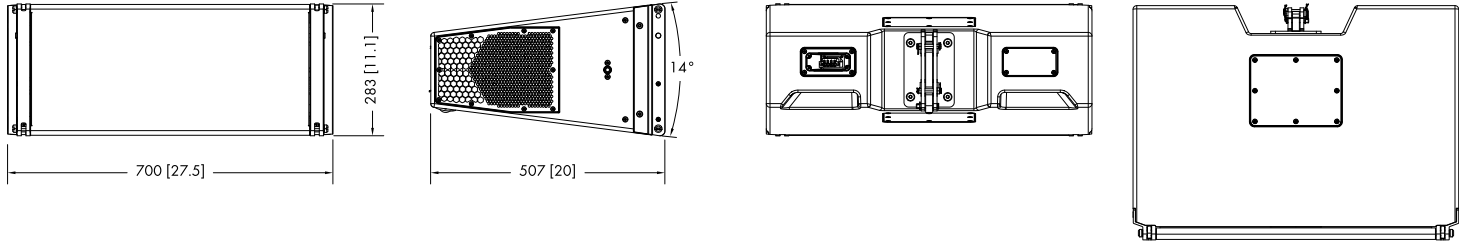

XSLi8 cabinet dimensions in mm [inch]

Applications

- Small and medium scale sound reinforcement applications
- Houses of Worship
- Theaters
- Clubs and live music venues

Features and benefits

- Constant directivity behavior over the entire operating range using cardioid techniques in the lower range
- Exceptional broadband headroom
- Rigging hardware enables either vertical arrays of TOP cabinets or mixed arrays with SUB cabinets on top of the array
- Requires only two amplifier channels; one channel drives the front facing LF drivers, while the other amplifier channel drives the passively crossed over side firing LF drivers, the MF section and two HF drivers
- ArrayProcessing optimizes the level and tonal balance over the complete audience listening area
- For short arrays where ArrayProcessing is not required, two XSLi loudspeakers can be linked and driven in the Line/Arc mode
- Custom solutions available (on request)
- Dedicated custom variants for either special color (SC), weather resistant (WR), stadium variant (SVS) or sea water resistant (SWR) options

Architectural specifications

The loudspeaker system shall consist of two forward 8" LF neodymium drivers in a vented enclosure radiating to the front, two sideward 6.5" LF neodymium drivers, one hornloaded 6.5" midrange driver and two coaxially mounted 1" exit compression drivers with 2" voicecoils coupled to a waveshaping device.

The loudspeaker system shall be 3-way, actively driven between the forward LF drivers and the sideward LF driver with mid/high sections. Passive crossovers shall be used between the sideward LF driver and the mid/high sections.

The total equivalent front facing LF driver size shall be 2x 10.3".

The loudspeaker shall only be operated by a dedicated, compatible controller amplifier.

The loudspeaker shall produce a cylindrical wave segment suitable for use as an element in a line array and maintain an extremely accurate horizontal dispersion pattern of 80° over its entire operating bandwidth. The enclosure shall be injection molded (ABS polycarbonate) with an impact resistant and weather protecting 2K finish. The cabinet front and side shall be protected by a perforated steel grill backed with acoustically transparent and water repellent fabric.

Each side panel shall incorporate a slot while on the rear two slots shall be provided to accept dedicated lifting pins (T-handles) acting as a temporary lifting aid during setup.

The cabinet shall incorporate a three point rigging system for the assembly of vertical line source arrays of up to 12 cabinets in connection with a dedicated mounting frame.

The power handling of the forward LF section shall be 400/1200 W while the power handling of the sideward LF drivers and MF/HF section shall be 300/850 W (RMS/peak 10 ms).

The frequency response (-5 dB) measured on axis shall extend from 60 Hz - 18 kHz.

Maximum sound pressure level (SPLmax peak/1 m/free field) of single cabinet shall be at least 141 dB while maximum sound pressure level (SPLmax far field, scaled to 1 m) of 4 modules shall be at least 153 dB.

The horizontal dispersion shall be 80°, while the vertical splay angle shall be adjustable in a range of 0° - 14° in 1° increments.

The connection panel on the back shall be recessed and fitted with speakON NLT4 F/M sockets. A 4-pin Phoenix Euroblock connector option shall be available upon request.

The dimensions (W x H x D) shall not exceed 700 x 283 x 507 mm (27.5" x 11.1" x 20") and shall weigh no more than 39 kg (86 lb).

The loudspeaker shall be the XSLi8 by:
d&b audiotechnik GmbH & Co. KG.