




Straight Single Clapper Two Way Inlets

BH-1 (86A)(S201B)

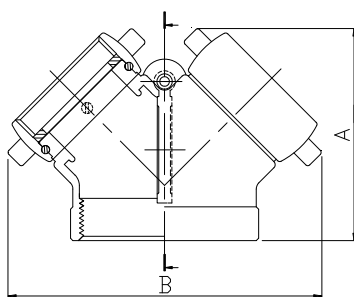

An exposed auxiliary inlet connection with 500G.P.M.inlet capacity to supplement fire protection water supply. Exposed design provides an economical method of satisfying Fire Dept. inlet requirements.


Standard equipment:

Cast brass two-way inlet body only with single swing clapper and pin or rocker lug hose thread swivel; angle NPT outlet connection.

Branding:"AUTO SPKR"

Optional Finishes:

RB-Rough Brass
PB-Polished Brass
RC-Rough Brass Plated
PC-Polished Chrome Plated




CERTIFICATIONS	a	b
UL FM	4"	2½"

	4" x 2½"
A	5-33/64"
B	8-5/64"

90° Single Clapper Two Way Inlets

BH-2 (86B)(S202D)

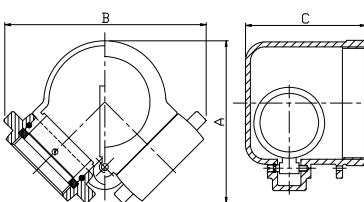

An exposed auxiliary inlet connection with 500G.P.M inlet capacity to supplement fire protection water supply. Exposed design provides an economical method of satisfying Fire Dept. inlet requirements.

Standard equipment:

Cast brass two-way inlet body only with single swing clapper and pin or rocker lug hose thread. swivel ; angle NPT outlet connection.

Branding:"AUTO SPKR"

Optional Finishes:

RB-Rough Brass
PB-Polished Brass
RC-Rough Brass Plated
PC-Polished Chrome Plated



CERTIFICATIONS	a	b
UL FM	4"	2½"

	4" x 2½"
A	6-5/16"
B	7-11/16"
C	4-3/4"