

ADJUSTABLE SWIVEL RING HANGERS



FUNCTION: Designed for the suspension of non-insulated stationary pipe lines. The knurled insert nut that allows a vertical adjustment after installation, is tapped to NFPA reduced rod size standards. Fig. 141F has a layer of felt which separates the pipe from the hanger to reduce vibration and sound.

APPROVALS: Underwriters' Laboratories listed and Factory Mutual approved Fig. 141 $\frac{3}{4}$ " to 8" sizes only. Complies with Federal Specification A-A-1192A (Type 10), Manufacturers' Standardization Society SP-69 (Type 10) and NFPA standards for reduced rod sizes.

ORDERING: Specify pipe size and figure number.

Pipe Size	Rod Size A	B	Adj. C	D	E	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
$\frac{1}{2}$	$\frac{3}{8}$	$1\frac{7}{8}$	$1\frac{7}{16}$	$2\frac{3}{4}$	$3\frac{1}{16}$	300	.09
$\frac{3}{4}$	$\frac{3}{8}$	$1\frac{11}{16}$	$1\frac{1}{8}$	$2\frac{1}{2}$	$3\frac{1}{16}$	300	.10
1	$\frac{3}{8}$	$1\frac{5}{8}$	1	$2\frac{1}{2}$	$3\frac{3}{16}$	300	.10
$1\frac{1}{4}$	$\frac{3}{8}$	$1\frac{15}{16}$	$1\frac{1}{16}$	$2\frac{13}{16}$	$3\frac{9}{16}$	300	.10
$1\frac{1}{2}$	$\frac{3}{8}$	$2\frac{1}{8}$	$1\frac{1}{16}$	$3\frac{1}{8}$	$3\frac{7}{8}$	300	.11
2	$\frac{3}{8}$	$2\frac{7}{16}$	$1\frac{1}{8}$	$3\frac{5}{16}$	$4\frac{3}{8}$	300	.12
$2\frac{1}{2}$	$\frac{3}{8}$	$2\frac{3}{4}$	$1\frac{1}{4}$	$3\frac{11}{16}$	5	525	.25
3	$\frac{3}{8}$	$2\frac{7}{8}$	$1\frac{1}{8}$	$3\frac{3}{4}$	$5\frac{5}{16}$	525	.30
$3\frac{1}{2}$	$\frac{3}{8}$	$3\frac{3}{8}$	$1\frac{3}{8}$	$4\frac{5}{16}$	$6\frac{5}{16}$	525	.33
4	$\frac{3}{8}$	$3\frac{7}{8}$	$1\frac{1}{2}$	$4\frac{1}{2}$	7	650	.41
5	$\frac{1}{2}$	$4\frac{5}{8}$	$1\frac{5}{8}$	$5\frac{5}{8}$	$8\frac{3}{8}$	1000	.58
6	$\frac{1}{2}$	$5\frac{5}{8}$	$2\frac{1}{4}$	$6\frac{1}{2}$	$9\frac{13}{16}$	1000	.92
8	$\frac{1}{2}$	$6\frac{13}{16}$	$2\frac{7}{16}$	$7\frac{15}{16}$	$12\frac{1}{4}$	1000	1.16

Note: If ordering Fig. 141F felt lined hangers for pipe sizes of $3\frac{1}{2}$ " or under, order the next largest size to allow for the thickness of the felt lining.

FUNCTION: Designed for the suspension of non-insulated stationary pipe lines. The knurled insert nut, allows for vertical adjustment after installation. Fig. 151F has a layer of felt which separates the pipe from the hanger to reduce vibration and sound.

APPROVALS: Underwriters' Laboratories listed and Factory Mutual approved Fig. 151 $\frac{3}{4}$ " to 8" sizes only. Complies with Federal Specification A-A-1192A (Type 10), and Manufacturers' Standardization Society SP-69 (Type 10).

ORDERING: Specify pipe size and figure number.


Pipe Size	Rod Size A	B	Adj. C	D	E	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
$2\frac{1}{2}$	$\frac{1}{2}$	$2\frac{3}{4}$	$1\frac{1}{4}$	$3\frac{11}{16}$	$5\frac{1}{8}$	600	.32
3	$\frac{1}{2}$	$3\frac{1}{8}$	$1\frac{1}{8}$	4	$5\frac{7}{8}$	600	.35
$3\frac{1}{2}$	$\frac{1}{2}$	$3\frac{5}{8}$	$1\frac{1}{2}$	$4\frac{5}{16}$	$6\frac{5}{8}$	600	.39
4	$\frac{5}{8}$	$3\frac{7}{8}$	$1\frac{1}{4}$	$4\frac{15}{16}$	$7\frac{1}{8}$	1000	.43
5	$\frac{5}{8}$	$4\frac{3}{8}$	$1\frac{3}{8}$	$5\frac{5}{8}$	$8\frac{1}{2}$	1000	.65
6	$\frac{3}{4}$	$5\frac{5}{16}$	2	$6\frac{11}{16}$	$10\frac{1}{8}$	1250	1.06
8	$\frac{3}{4}$	$6\frac{15}{16}$	$2\frac{5}{8}$	$8\frac{5}{16}$	$12\frac{7}{8}$	1250	1.24

Note: If ordering Fig. 151F felt lined hangers for pipe sizes of $3\frac{1}{2}$ " or under, order the next largest size to allow for the thickness of the felt lining.

Fig. 141 & 141F NFPA SWIVEL RING HANGER

Fig. 141 PRE-GALVANIZED

Fig. 141F PRE-GALVANIZED
WITH FELT LINING


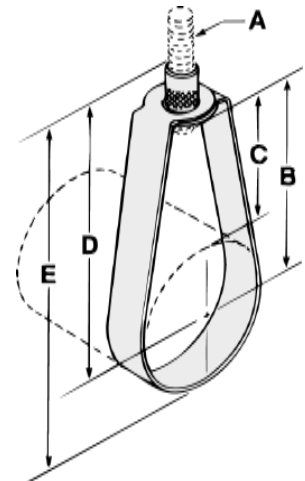


MATERIAL: Low carbon steel

Fig. 151 & 151F SWIVEL RING HANGER

Fig. 151 PRE-GALVANIZED

Fig. 151F PRE-GALVANIZED
WITH FELT LINING

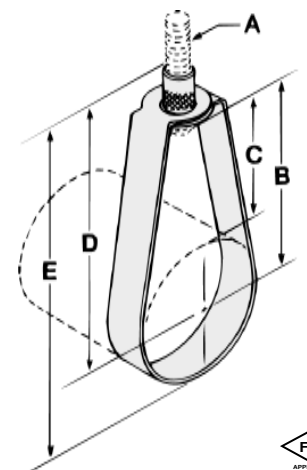

MATERIAL: Low carbon steel