




# THREADED ACCESSORIES

**Fig. 10  
THREADED STUDS**

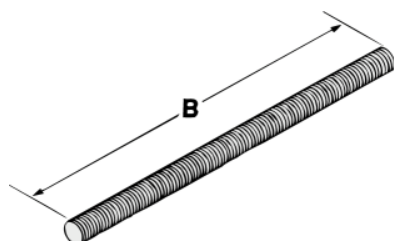

**FUNCTION:** Designed for use in pipe hanger assembly.

**MATERIAL:** Low carbon steel

**FINISH:** Plain


**ORDERING:** Specify rod size, length (B) and figure number.

| Rod Size               | Max. Rec. Load/lbs. |       | Wt. Per Inch/lbs. |
|------------------------|---------------------|-------|-------------------|
|                        | 650°F               | 750°F |                   |
| $\frac{3}{8} \times B$ | 610                 | 540   | .02               |
| $\frac{1}{2} \times B$ | 1130                | 1010  | .04               |
| $\frac{5}{8} \times B$ | 1810                | 1610  | .07               |
| $\frac{3}{4} \times B$ | 2710                | 2420  | .11               |
| $\frac{7}{8} \times B$ | 3770                | 3360  | .14               |

Available in stainless steel. To order, specify 304 or 316 and add suffix SS to figure number. Price on request.

**Fig. 15 & 15L  
MACHINE THREAD  
HANGER ROD**

**Fig. 15** RIGHT-HAND THREADS  
**Fig. 15L** RIGHT- AND LEFT-HAND THREADS

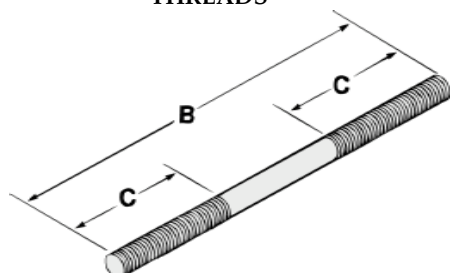

**FUNCTION:** Designed for use in pipe hanger assembly.

**MATERIAL:** Low carbon steel

**FINISH:** Plain


**ORDERING:** Specify rod size, length (B) and figure number.

| Rod Size               | Thread Length C | Max. Rec. Load/lbs. |       | Wt. Per Inch/lbs. |
|------------------------|-----------------|---------------------|-------|-------------------|
|                        |                 | 650°F               | 750°F |                   |
| $\frac{3}{8} \times B$ | $2\frac{1}{2}$  | 610                 | 540   | .03               |
| $\frac{1}{2} \times B$ | $2\frac{1}{2}$  | 1130                | 1010  | .06               |
| $\frac{5}{8} \times B$ | $2\frac{1}{2}$  | 1810                | 1610  | .09               |
| $\frac{3}{4} \times B$ | 3               | 2710                | 2420  | .13               |
| $\frac{7}{8} \times B$ | $3\frac{1}{2}$  | 3770                | 3360  | .17               |
| $1 \times B$           | 4               | 4960                | 4420  | .22               |

Available in stainless steel. To order, specify 304 or 316 and add suffix SS to figure number. Price on request.

**Fig. 20 & 21  
CONTINUOUS  
THREADED ROD**

**Fig. 20\*** PLAIN  
**Fig. 21** ELECTRO-GALVANIZED

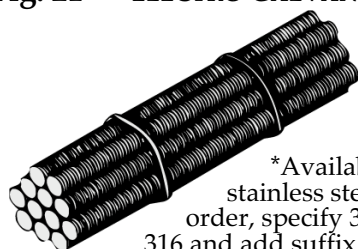

\*Available in stainless steel. To order, specify 304 or 316 and add suffix SS to figure number. Price on request.

**FUNCTION:** Useful in applications where stud lengths cannot be predetermined.

**MATERIAL:** Low carbon steel

**ORDERING:** Specify rod size, length and figure number.

| Rod Size          | Packaging Feet Per Bundle |        |        | Max. Rec. Load/lbs. |       | Wt. Per Foot/lbs. |
|-------------------|---------------------------|--------|--------|---------------------|-------|-------------------|
|                   | 6 ft.                     | 10 ft. | 12 ft. | 650°F               | 750°F |                   |
| $\frac{1}{4}$ -20 | 300                       | 500    | 600    | 240                 | 210   | .12               |
| $\frac{3}{8}$ -16 | 150                       | 200    | 240    | 610                 | 540   | .29               |
| $\frac{1}{2}$ -13 | 72                        | 120    | 144    | 1130                | 1010  | .54               |
| $\frac{5}{8}$ -11 | 48                        | 80     | 96     | 1810                | 1610  | .83               |
| $\frac{3}{4}$ -10 | 30                        | 50     | 60     | 2710                | 2420  | 1.25              |
| $\frac{7}{8}$ -9  | 24                        | 40     | 48     | 3770                | 3360  | 1.65              |
| 1-8               | 12                        | 20     | 24     | 4960                | 4420  | 2.25              |