



Level



Pressure



Flow



Temperature



Liquid Analysis



Registration



Systems Components



Services



Solutions

Technical Information

Deltabar S PMD70/75, FMD76/77/78

Differential pressure transmitter
with ceramic and silicon sensors

Overload-resistant and function-monitored, Communication via
HART, PROFIBUS PA or FOUNDATION Fieldbus



Application

The Deltabar S differential pressure transmitter is used for the following measuring tasks:

- Flow measurement (volume or mass flow) in conjunction with primary elements in gases, vapours and liquids
- Level, volume or mass measurement in liquids
- Differential pressure monitoring, e.g. of filters and pumps
- International usage thanks to a wide range of approvals



Your benefits

- Very good reproducibility and long-term stability
- High reference accuracy: up to $\pm 0.075\%$, as PLATINUM version: $\pm 0.05\%$
- Turn down 100:1, higher on request
- Used for flow and differential pressure monitoring up to SIL 3, certified to IEC 61508 by TÜV SÜD
- HistoROM®/M-DAT memory module
- Function-monitored from the measuring cell to the electronics
- Continuous modularity for differential pressure, hydrostatic and pressure (Deltabar S, Deltapilot S, Cerabar S), e.g.
 - replaceable display
 - universal electronics for pressure and differential pressure
- Quick commissioning thanks to quick setup menu
- Easy and safe menu-guided operation on-site, via 4...20 mA with HART, via PROFIBUS PA or via FOUNDATION Fieldbus
- Extensive diagnostic functions






Table of contents

Function and system design	4
Device selection	4
Overview of diaphragm seal FMD78	5
Measuring principle	7
Flow measurement	8
Level measurement (level, volume and mass)	9
Communication protocol	9
Human interface	10
On-site display (optional)	10
Operating elements	11
HistoROM®/M-DAT (optional)	12
Functional Safety SIL/IEC 61508 Declaration of conformity (optional)	12
On-site operation	12
Handheld terminals – HART	12
Handheld terminal DXR375 – FOUNDATION Fieldbus	12
FieldCare	13
Remote operation – FOUNDATION Fieldbus	13
Commubox FXA291	13
ToF Adapter FXA291	13
Input	14
Measured variable	14
Measuring range	14
Explanation of terms	15
Output	16
Output signal	16
Signal range – 4...20 mA HART	16
Signal on alarm	16
Load – 4...20 mA HART	16
Resolution	16
Dynamic behavior current output	17
Dynamic behavior HART	17
Dynamic behavior PROFIBUS PA	18
Dynamic behavior FOUNDATION Fieldbus	19
Damping	19
Power supply	20
Electrical connection	20
Supply voltage	22
Current consumption	22
Cable entry	22
Cable specification	22
Residual ripple	22
Influence of power supply	22
Performance characteristics – general	23
Reference operating conditions	23
Long-term stability	23
Influence of the installation position	23
Vibration effects	23
Performance characteristics – metallic diaphragms	24
Reference accuracy – PMD75, FMD77, FMD78	24
Total performance – PMD75	24
Total Error	24
Warm-up period – PMD75, FMD77, FMD78	25
Influence of the operating pressure on zero point and span – PMD75, FMD77, FMD78	25
Thermal change of the zero output and the output span – PMD75	25
Performance characteristics – ceramic diaphragms	26
Reference accuracy – PMD70, FMD76	26
Total performance – PMD70, FMD76	26
Total Error	26
Warm-up period – PMD70, FMD76	26
Influence of the operating pressure on zero point and span – PMD70, FMD76	26
Thermal change of the zero output and the output span – PMD70, FMD76	26
Operating conditions (Installation)	27
General installation instructions	27
Measuring arrangement	27
Heat insulation – FMD77	28
Wall- and pipe-mounting	28
"Separate housing" version	29
Turn the housing	29
Oxygen applications	30
Ultra pure gas applications	30
Diaphragms for materials with hydrogen build-up (Gold-Rhodium coating)	30
Operating conditions (Environment)	31
Ambient temperature range	31
Storage temperature range	31
Degree of protection	31
Climate class	31
Vibration resistance	31
Electromagnetic compatibility	31
Oversupply protection (optional)	31
Operating conditions (Process)	32
Process temperature limits	32
Process temperature range, seals	32
Pressure specifications	33
Mechanical construction	34
Housing dimensions T14, optional display on the side	34
Housing dimensions T15, optional display on the top	34
Housing dimensions T17, optional display on the top	34
Process connections PMD70 with ceramic measuring diaphragms	35
Process connections PMD70 with ceramic measuring diaphragms (continued)	36
Process connections PMD75 with metallic measuring diaphragms	37
Process connections PMD75 with metallic measuring diaphragms (continued)	38
Process connections PMD75 with metallic measuring diaphragms (continued)	39
Process connection FMD76 with ceramic measuring	

diaphragms	40	FMD78 (continued)	79
Process connection FMD76 with ceramic measuring diaphragms (continued)	41	FMD78 (continued)	80
Process connection FMD76 with ceramic measuring diaphragms (continued)	42	Further documentation	81
Process connections FMD77 with metallic measuring diaphragms, low-pressure side	42	Innovation	81
Process connections FMD77 with metallic measuring diaphragms, high-pressure side	43	Field of Activities	81
Process connections FMD77 with metallic measuring diaphragms, high-pressure side (continued)	44	Technical Information	81
Process connections FMD77 with metallic measuring diaphragms, high-pressure side (continued)	45	Operating Instructions	81
FMD78 Basic unit	46	Brief operating instructions	81
Process connection FMD78 with metallic measuring diaphragms	47	Manual for Functional Safety (SIL)	81
Process connection FMD78 with metallic measuring diaphragms (continued)	48	Safety Instructions	81
Process connection FMD78 with metallic measuring diaphragms (continued)	49	Installation/Control Drawings	82
Process connection FMD78 with metallic measuring diaphragms (continued)	50	Overspill protection	82
Process connection FMD78 with metallic measuring diaphragms (continued)	51		
Process connection FMD78 with metallic measuring diaphragms (continued)	52		
"Separate housing" version	54		
Weight	55		
Material	55		
Planning instructions, diaphragm seal systems	57		
Applications	57		
Design and operation mode	57		
Diaphragm seal filling oils	58		
Influence of the temperature on the zero point	59		
Ambient temperature range	61		
Response time	63		
Installation instructions	64		
Certificates and approvals	66		
CE mark	66		
Ex approvals	66		
Marine certificate	66		
Overspill protection	66		
CRN approvals	66		
Pressure Equipment Directive (PED)	66		
Standards and guidelines	66		
Ordering information	67		
PMD70	67		
PMD70 (continued)	68		
PMD75	69		
PMD75 (continued)	70		
PMD75 (continued)	71		
FMD76	72		
FMD76 (continued)	73		
FMD76 (continued)	74		
FMD77	75		
FMD77 (continued)	76		
FMD77 (continued)	77		
FMD78	78		

Function and system design








Device selection



Deltabar S – product family	PMD70	PMD75	FMD76	FMD77	FMD78			
	 P01-PMD70xxx-16-xx-xx-xx-000	 P01-PMD75xxx-16-xx-xx-xx-000	 P01-FMD76xxx-16-xx-xx-xx-000	 P01-FMD77xxx-16-xx-xx-xx-000	 P01-FMD78xxx-16-xx-xx-xx-003			
	With ceramic measuring diaphragms	With metallic measuring diaphragms	With ceramic measuring diaphragms	With metallic measuring diaphragms and diaphragm seal mounted on one side	With metallic measuring diaphragms and capillary diaphragm seals			
Field of application	<ul style="list-style-type: none"> – Flow – Level – Differential pressure 	<ul style="list-style-type: none"> – Flow – Level – Differential pressure 	<ul style="list-style-type: none"> – Level 	<ul style="list-style-type: none"> – Level 	<ul style="list-style-type: none"> – Level – Differential pressure 			
Process connections	<ul style="list-style-type: none"> – 1/4 – 18 NPT – RC 1/4 	<ul style="list-style-type: none"> – 1/4 – 18 NPT – RC 1/4 	<p>Low-pressure side (-):</p> <ul style="list-style-type: none"> – 1/4 – 18 NPT – RC 1/4 <p>High-pressure side (+):</p> <ul style="list-style-type: none"> – DN 80 – DN 100 – ANSI 3" – 4" – JIS 80A – 100A 	<p>Low-pressure side (-):</p> <ul style="list-style-type: none"> – 1/4 – 18 NPT – RC 1/4 <p>High-pressure side (+):</p> <ul style="list-style-type: none"> – DN 50 – DN 100 – ANSI 2" – 4" – JIS 80A – 100A 	<ul style="list-style-type: none"> – Wide range of diaphragm seals, → see page 5, section "Overview of diaphragm seal FMD78" 			
Measuring ranges	from -25...+25 mbar to -3...+3 bar	from -10...+10 mbar to -40...+40 bar	from -100...+100 mbar to -3...+3 bar	from -100...+100 mbar to -16 bar...+16 bar	from -100...+100 mbar to -40...+40 bar			
Overload ¹	on one side: max. 100 bar on both sides: max. 150 bar	on one side: max. 420 bar on both sides: max. 630 bar	on one side: max. 100 bar	on one side: max. 160 bar	on one side: max. 160 bar on both sides: max. 240 bar			
Process temperature range	-20...+85°C (-4...+185°F)	-40...+120°C (-40...+248°F)	-20...+85°C (-4...+185°F)	up to + 400°C (+752°F)	up to +400°C (+752°F)			
Ambient temperature range	-20...+85°C (-4...+185°F)	-40...+85°C (-40...+185°F) ²	-20...+85°C (-4...+185°F)	-40...+85°C (-40...+185°F) ²	-40...+85°C (-40...+185°F) ²			
Ambient temperature range separate housing	-40 to +60°C (-40 to +140°F)							
Reference Accuracy	<ul style="list-style-type: none"> – Up to ±0.075% of the set span – PLATINUM version: up to ±0.05% of the set span 		<ul style="list-style-type: none"> – Up to ±0.075 % of the set span 					
Supply voltage	<ul style="list-style-type: none"> – For non-hazardous areas: 10.5...45 V DC – EEx ia: 10.5...30 V DC 							
Output	4...20 mA with superimposed HART protocol, PROFIBUS PA or FOUNDATION Fieldbus							
Options	<ul style="list-style-type: none"> – High-pressure version up to p_{stat} 700 bar – PMD75, FMD77, FMD78: Gold-Rhodium-coated diaphragm, NACE-compliant materials 							
Specialities (options)	<ul style="list-style-type: none"> – Metal-free measurement with PVDF flange – Available with Deltatop/ Deltaset as flow compact device 	<ul style="list-style-type: none"> – p_{stat} up to 420 bar – Diaphragm: tantalum – Available with Deltatop/ Deltaset as flow compact device 	<ul style="list-style-type: none"> – Abrasion-resistant and corrosion-resistant – No diaphragm-seal temperature effects – Metal-free measurement possible with ECTFE-coated process connection 	<ul style="list-style-type: none"> – For high media temperatures 	<ul style="list-style-type: none"> – Wide range of diaphragm seals 			
	<ul style="list-style-type: none"> – HistoROM®/M-DAT memory module 							

1) dependent on the lowest-rated element, with regard to pressure, of the selected components

2) lower temperature on request


**Overview of diaphragm seal
FMD78**

Design	Diaphr. seal	Connection	Version	Standard	Nominal diameter	Nom. press./Class
Cell	Membrane diaphragm seal (MDM)	DIN cell	 P01-FMD78xxx-04-xx-xx-xx-000	DIN 2501	- DN 50 - DN 80 - DN 100	PN 16 – 400
		ANSI cell		ANSI B 16.5	- 2" - 3" - 4"	150 – 2500 lbs
Threaded connection with separator	Membrane diaphragm seal (MDM)	G	 P01-FMD78xxx-03-xx-xx-xx-010	ISO 228	G 1/2 B	PN 40
		NPT	 P01-FMD78xxx-03-xx-xx-xx-011	ANSI	1/2 NPT	PN 40
Tri-Clamp	Membrane diaphragm seal (MDM)	Clamp	 P01-FMD78xxx-03-xx-xx-xx-005	ISO 2852	- DN 25 (1") - DN 38 (1 1/2") - DN 51 (2") - DN 76.1 (3")	Dependent on the clamp used
	Pipe diaphragm seal (RDM)	Clamp	 P01-FMD78xxx-03-xx-xx-xx-009	ISO 2852	- DN 25 (1") - DN 38 (1 1/2") - DN 51 (2")	Dependent on the clamp used
Hygienic connections	Membrane diaphragm seal (MDM)	Varivent (EHEDG and 3A approval)	 P01-FMD78xxx-03-xx-xx-xx-007		Type N for pipes DN 40 – DN 162	PN 40
		DRD	 P01-FMD78xxx-03-xx-xx-xx-006		DN50 (65 mm)	25 bar
		Sanitary tank spud with 2" extended diaphragm seal	 P01-FMD78xxx-03-xx-xx-xx-008		d = 100 mm	Dependent on the clamp used
		Taper adapter with coupling nut	 P01-FMD78xxx-03-xx-xx-xx-003	DIN 11851	- DN 50 - DN 65 - DN 80	PN 25
		Threaded adapter	 P01-FMD78xxx-03-xx-xx-xx-004	DIN 11851	- DN 50 - DN 65 - DN 80	PN 25

Design	Diaphr. seal	Connection	Version	Standard	Nominal diameter	Nom. press./Class
Flange	Membrane diaphragm seal (MDM)	EN/DIN flange	 P01-FMD78xxx-03-xx-xx-xx-001	EN 1092-1/ DIN 2527	<ul style="list-style-type: none"> - DN 50 - DN 80 - DN 100 	Up to 40 bar
				ANSI B 16.5	<ul style="list-style-type: none"> - 2" - 3" - 4" 	150 lbs and 300 lbs
				B 2220	<ul style="list-style-type: none"> - 50 A - 80 A - 100 A 	10 K
Flange with extended diaphragm seal	Membrane diaphragm seal (MDM)	ANSI flange	 P01-FMD78xxx-03-xx-xx-xx-002	ANSI B 16.5	<ul style="list-style-type: none"> - 3" with 2"/4"/6"/8" extended diaphragm seal - 4" with 2"/4"/6"/8" ext. diaphr. seal 	150 lbs

Measuring principle

Ceramic measuring diaphragms used for PMD70 **Metallic measuring diaphragms used for PMD75, FMD77 and FMD78 and FMD76**

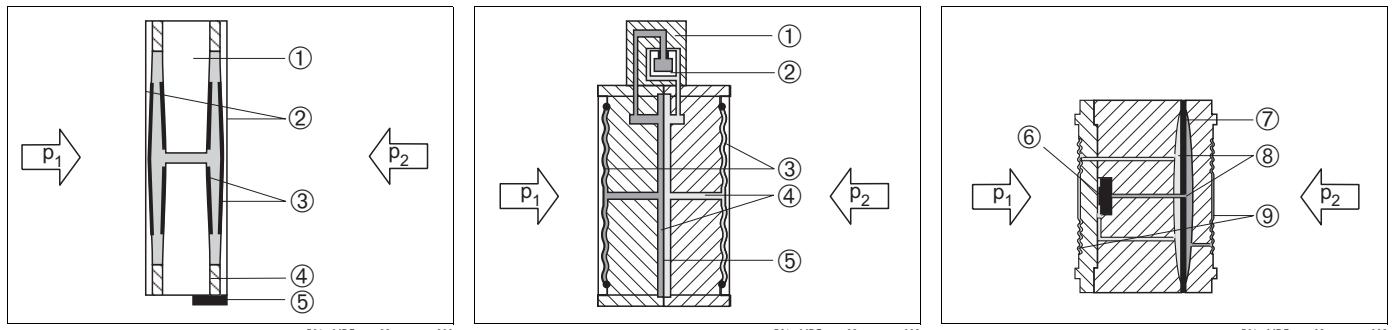

Ceramic measuring cell PMD70 and FMD76

- 1 Meter body
- 2 Diaphragm
- 3 Electrodes
- 4 Glass frit fixes the diaphragm onto the meter body
- 5 Temperature sensor

Metal measuring cell 10 mbar and 30 mbar

- 1 Sensing element
- 2 Silicon diaphragm
- 3 Separating diaphragm
- 4 Filling oil
- 5 Integrated overload protection

Metal measuring cell as of 100 mbar

- 6 Sensing element
- 7 Overload diaphragm/Middle diaphragm
- 8 Filling oil
- 9 Separating diaphragm

Ceramic measuring diaphragms used for PMD70 and FMD76

The ceramic measuring cell is based on the principle of a plate capacitor with an electrode on (1) and a movable electrode on the interior of the diaphragm (3). Standard silicone oil or mineral oil filling oils for this measuring cell.

A differential pressure ($p_1 \neq p_2$) causes a corresponding deflection of both diaphragms. Both capacitance values are converted and are fed to the microprocessor of the transmitter as a digital signal.

Advantages:


- Self-monitoring for diaphragm break or oil loss (constant comparison of the measured temperature with a temperature calculated from the capacitance values)
- Extremely high resistance to aggressive media
- Suitable for vacuums up to 1 mbar_{abs}
- Metal-free versions available
- Second process barrier (Secondary Containment) for enhanced integrity

Metallic measuring diaphragms used for PMD75, FMD77 and FMD78 and FMD76

The separating diaphragms (3/9) are deflected on both sides by the acting pressures. A filling oil (4/8) transfers the pressure to a resistance circuit bridge (semi-conductor technology). The differential-pressure-dependent change of the bridge output voltage is measured and further processed.


Advantages:

- Standard operating pressures: 160 bar and 420 bar
- High long-term stability
- Very high single-sided overload resistance
- Second process barrier (Secondary Containment) for enhanced integrity

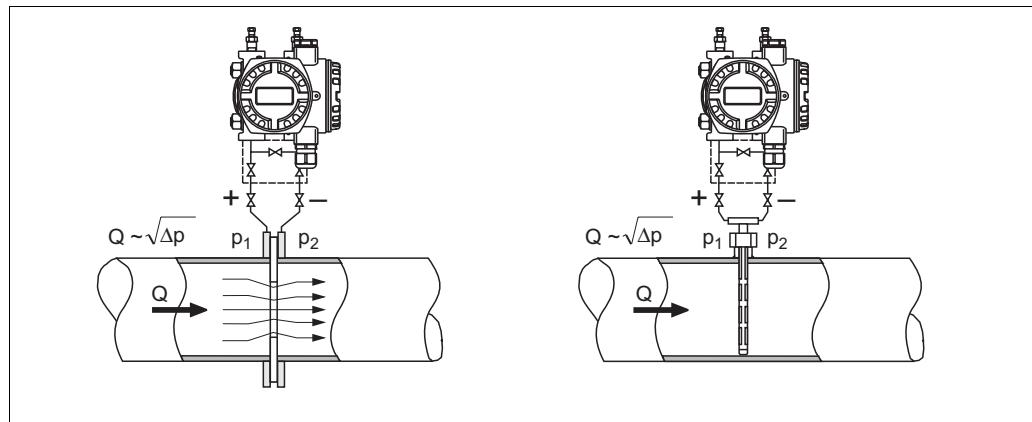Flow measurement**Design and operation mode***Flow measurement with Deltabar S and primary element, left: Orifice plate and right: Pitot tube* Q Flow Δp Differential pressure, $\Delta p = p_1 - p_2$ **Your benefits**

- Choice of four flow modes of operation: volume flow, norm volume flow (European norm conditions), standard volume flow (American standard conditions) and mass flow.
- Choice of diverse flow units with automatic unit conversion.
- A customised unit can be specified
- Low flow cut off: when activated, this function suppresses small flows which can lead to large fluctuations in the measured value.
- Contains two totalizers as standard. One totalizer can be reset to zero.
- The totalizing mode and unit can be individually set for each totalizer. This allows independent daily and annual quantity totalizing.
- With the product families Deltatop and Deltaset, Endress+Hauser is offering two universal and reliable solutions for flow measurement:
 - Deltatop, the compact, ready-to-use flow measuring unit including differential pressure transmitter Deltabar S
 - Deltaset with differential pressure transmitter Deltabar S, the modular flow measuring unit suitable for medium temperatures up to 1000°C (1832°F) and pressures up to 400 bar

Note: For more information about flow measurement with the Deltabar S differential pressure transmitter and orifice plate or pitot tube, see Technical Information TI297P Deltatop/Deltaset.

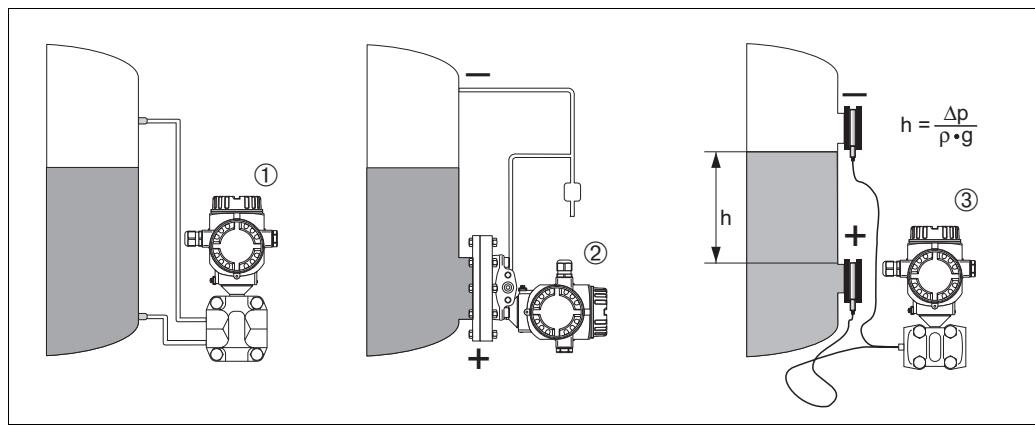Level measurement (level, volume and mass)**Design and operation mode***Level measurement with Deltabar S*

- 1 Level measurement via impulse piping and PMD70
- 2 Level measurement with FMD76
- 3 Level measurement with FMD78
- h Height (level)
- Δp Differential pressure
- ρ Density of the medium
- g Gravitation constant

Your benefits

- Choice of three level operating modes
- Volume and mass measurements in any tank shapes by means of a freely programmable characteristic curve
- Choice of diverse level units with automatic unit conversion
- A customised unit can be specified
- Has a wide range of uses, e.g.
 - for level measurement in tanks with superimposed pressure
 - in the event of foam formation
 - in tanks with agitators or screen fittings
 - in the event of liquid gases
 - for standard level measurement

Communication protocol

- 4...20 mA with HART communication protocol
- PROFIBUS PA
 - The Endress+Hauser devices meet the requirements as per the FISCO model.
 - Due to the low current consumption of $11 \text{ mA} \pm 1 \text{ mA}$
 - up to 9 Deltabar S for EEx ia, CSA IS and FM IS applications
 - up to 32 Deltabar S for all other applications, e.g. in non-hazardous areas, EEx nA, etc.
 - can be operated at one bus segment with installation as per FISCO.
- Further information on PROFIBUS PA, such as requirements for bus system components, can be found in the Operating Instructions BA034S "PROFIBUS DP/PA: Guidelines for planning and commissioning" and in the PNO guideline.
- FOUNDATION Fieldbus
 - The Endress+Hauser devices meet the requirements as per the FISCO model.
 - Due to the low current consumption of $14 \text{ mA} \pm 1 \text{ mA}$
 - up to 7 Deltabar S for EEx ia, CSA IS and FM IS applications
 - up to 30 Deltabar S for all other applications, e.g. in non-hazardous areas, EEx nA, etc.
 - can be operated at one bus segment with installation as per FISCO.
- Further information on FOUNDATION Fieldbus, such as requirements for bus system components can be found in the Operating Instructions BA013S "FOUNDATION Fieldbus Overview".

Human interface


On-site display (optional)

A 4-line liquid crystal display (LCD) is used for display and operation. The on-site display shows measured values, dialog text as well as fault and notice messages in plain text, thereby supporting the user in every stage of operation.

4...20 mA HART and PROFIBUS PA

Functions:

- 8-digit measured value display including sign and decimal point, bar graph for 4 to 20 mA HART as current display or for PROFIBUS PA as graphical display of the scaled value of the AI Block
- Simple and complete menu guidance thanks to separation of the parameters into three levels
- Each parameter is given a 3-digit ID number for easy navigation.
- Option for configuring the display according to individual requirements and desires, such as language, alternating display, display of other measured values such as sensor temperature, contrast setting
- Comprehensive diagnostic functions (fault and warning message, peak-hold indicators, etc.)
- rapid and safe commissioning with the Quick Setup menus

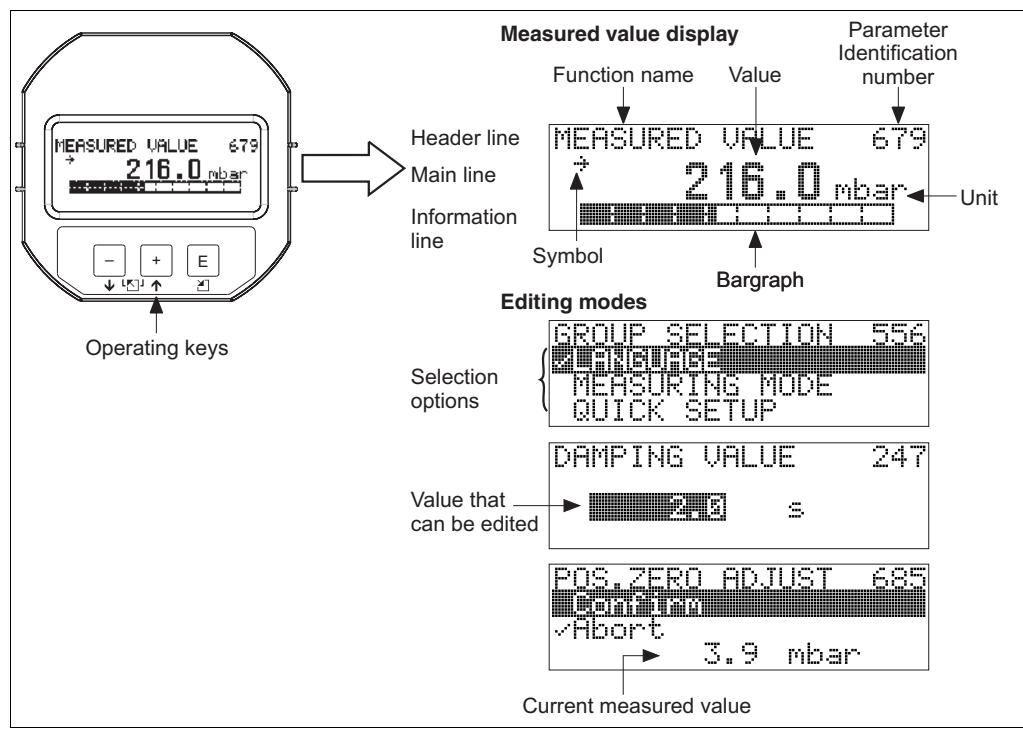


P01-xMx7xxxx-07-xx-xx-xx-001

FOUNDATION Fieldbus

Functions:

- 8-digit measured value display including sign and decimal point, bargraph for current display
- Option for configuring the display according to individual requirements and desires, such as language, alternating display, display of other measured values such as sensor temperature, contrast setting
- Comprehensive diagnostic functions (fault and warning message)

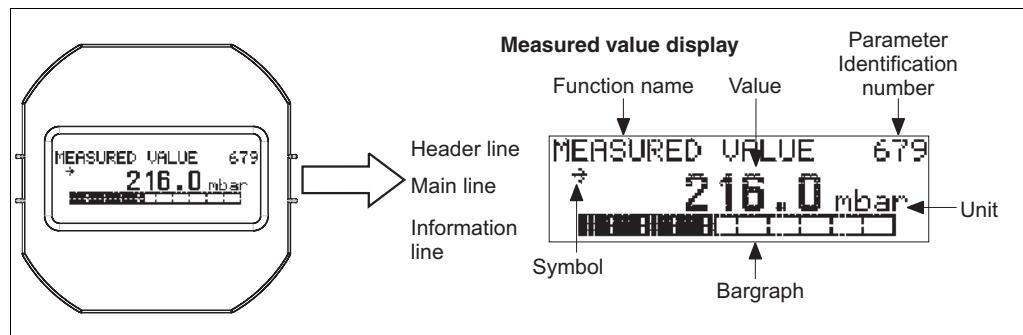


P01-xMD7xxxx-07-xx-xx-xx-001

Operating elements

With regard to T14 and T15 housings, the operating keys are located either outside the device under the protection cap or inside on the electronic insert. In T17 housings, the operating keys are always located inside on the electronic insert.

In addition, devices with an on-site display and a 4 to 20 mA HART or PROFIBUS PA electronic insert have operating keys on the on-site display.

Operating keys on the exterior of the device

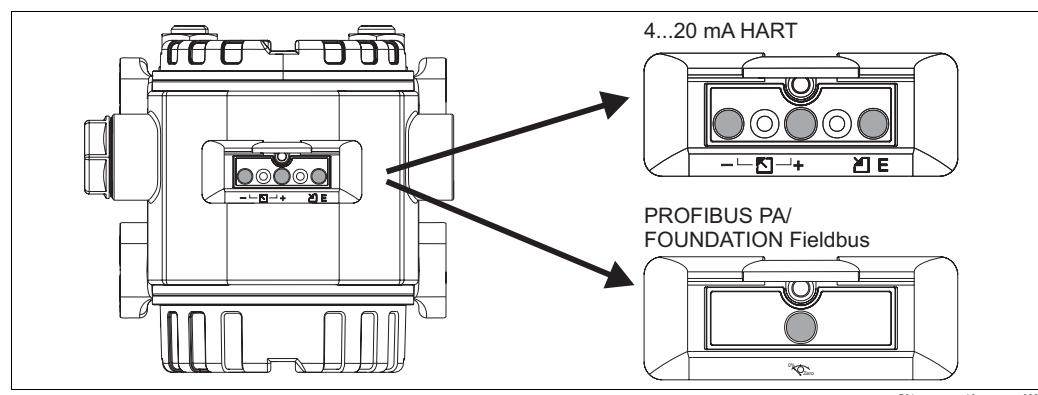


P01-xxxxxxxx-19-xx-xx-xx-038

The operating keys located externally on the device work on the Hall sensor principle. As a result, no additional openings are required in the device. This guarantees:


- Complete protection against environmental influences such as moisture and contamination
- Simple operation without any tools
- No wear.

Operating keys and elements located internally on the electronic insert

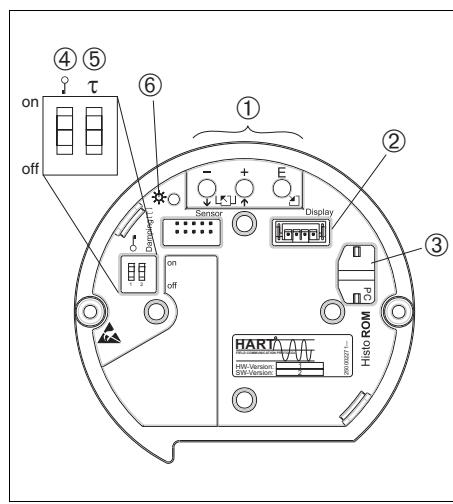


Electronic insert HART

- 1 Operating keys
- 2 Slot for optional display
- 3 Slot for optional HistoROM®/M-DAT
- 4 DIP-switch for locking/unlocking measured-value-relevant parameters
- 5 DIP-switch for damping on/off
- 6 Green LED to indicate value being accepted

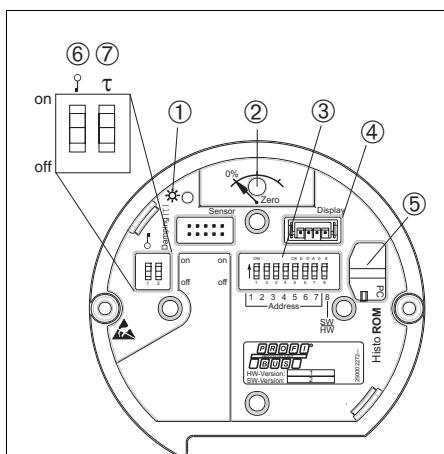

Electronic insert PROFIBUS PA

- 1 Green LED to indicate value being accepted
- 2 Key for position calibration and device reset
- 3 DIP-switch for bus address
- 4 Slot for optional display
- 5 Slot for optional HistoROM®/M-DAT
- 6 DIP-switch for locking/unlocking measured-value-relevant parameters
- 7 DIP-switch for damping on/off

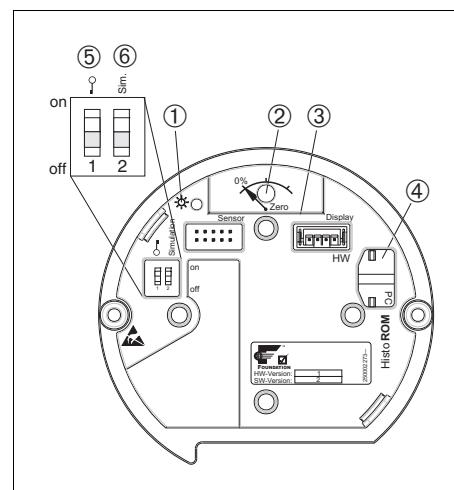

Electronic insert FOUNDATION Fieldbus

- 1 Green LED to indicate value being accepted
- 2 Key for position calibration
- 3 Slot for optional display
- 4 Slot for optional HistoROM®/M-DAT
- 5 DIP-switch for locking/unlocking measured-value-relevant parameters
- 6 DIP-switch for simulation mode on/off

HistoROM®/M-DAT (optional)	HistoROM®/M-DAT is a memory module, which is attached to the electronic insert. The HistoROM®/M-DAT can be retrofitted at any stage (Order number: 52027785).
---------------------------------------	---

Your benefits

- Quick and safe commissioning of the same measuring points by copying the configuration data of one transmitter to another transmitter
- Reliable process monitoring thanks to cyclical recording of pressure and sensor temperature measured values
- Simple diagnosis by recording diverse events such as alarms, configuration changes, counters for measuring range undershoot and overshoot for pressure and temperature as well as user limit overshoot and undershoot for pressure and temperature etc.
- Analysis and graphic evaluation of the events and process parameters via software (contained in scope of supply).

HistoROM®/M-DAT can be ordered via feature 100 "Additional options 1" or feature 110 "Additional options 2" or as spare parts. → See also page 67 ff. A CD with the Endress+Hauser operating program is also included in the scope of delivery.

You can copy data from one transmitter to another transmitter when operating a FOUNDATION Fieldbus device via an FF configuration program. You need the Endress+Hauser FieldCare operating program and the Commubox FXA291 service interface and the ToF Adapter FXA291 to be able to access the data and events saved in the HistoROM®/M-DAT.

Functional Safety SIL/ IEC 61508 Declaration of conformity (optional)	
--	--

The Deltabar S differential pressure transmitters with 4...20 mA output signal have been developed to IEC 61508 standard and have been certified by TÜV SÜD. These devices can be used for flow and differential pressure monitoring up to SIL3.

→ For a detailed description of the safety functions with Deltabar S, settings and characteristic quantities for functional safety, please refer to the "Manual for Safety Manual - Deltabar S" SD189P.

→ For devices with SIL2/IEC 61508 declaration of conformity, see page 68 ff, Feature 100 "Additional option 1" and Feature 110 "Additional option 2", version E "SIL2/IEC 61508, Declaration of Conformity".

On-site operation	Functions 4...20 mA HART and PROFIBUS PA
--------------------------	---

- With on-site display: navigate through the operating menu using three operating keys
- Without on-site display:
 - Position calibration (zero point correction)
 - Setting lower-range value and upper-range value – reference pressure present at device (HART only)
 - Value acceptance indicated by green LED
- Device reset
- Locking and unlocking measured-value-relevant parameters
- Switching damping on and off
- Setting bus address (PROFIBUS PA only)

Functions FOUNDATION Fieldbus

- Position calibration (zero point correction)
- Value acceptance indicated by green LED
- Locking and unlocking measured-value-relevant parameters
- Switching simulation mode on and off

Handheld terminals – HART	
----------------------------------	--

With a handheld terminal, all the parameters can be configured anywhere along the 4...20 mA line via menu operation.

Handheld terminal DXR375 – FOUNDATION Fieldbus	
---	--

With a handheld terminal DXR375, all the parameters can be configured via menu operation.

FieldCare

FieldCare is an Endress+Hauser asset management tool based on FDT technology. With FieldCare, you can configure all Endress+Hauser devices as well as devices from other manufacturers that support the FDT standard. The following operating systems are supported: WinNT4.0, Win2000 and Windows XP.

FieldCare supports the following functions:

- Configuration of transmitters in offline and online operation
- Loading and saving device data (upload/download)
- HistoROM®/M-DAT analysis
- Documentation of the measuring point

Connection options:

- HART via Commubox FXA191 and the RS 232 C serial interface of a computer
- HART via Commubox FXA195 and the USB port on a computer
- PROFIBUS PA via segment coupler and PROFIBUS interface card
- Service interface with adapter Commubox FXA291 and ToF Adapter FXA291 (USB).

Remote operation – FOUNDATION Fieldbus

An FF configuration program is required to integrate a device with "FOUNDATION Fieldbus signal" into an FF network or to set the FF-specific parameters. Please contact your local Endress+Hauser Sales Center for more information.

Commubox FXA291

The Commubox FXA291 connects Endress+Hauser field instruments with CDI interface (= Endress+Hauser Common Data Interface) to the USB interface of a personal computer or a notebook. For details refer to TI405C/07/en.



Note!

For the following Endress+Hauser instruments you need the "ToF Adapter FXA291" as an additional accessory:

- Cerabar S PMC71, PMP7x
- Deltabar S PMD7x, FMD7x
- Deltapilot S FMB70

ToF Adapter FXA291

The ToF Adapter FXA291 connects the Commubox FXA291 via the USB interface of a personal computer or a notebook. For details refer to KA271F/00/a2.

Input

Measured variable	Differential pressure, from which flow (volume or mass current) and level (level, volume or mass) are derived							
--------------------------	---	--	--	--	--	--	--	--

Measuring range PMD75, FMD77, FMD78 (with metallic measuring diaphragms)								
---	--	--	--	--	--	--	--	--

Nominal value [mbar]	Measurement limit		Smallest calibratable span ⁵ [mbar]	MWP ¹ [bar]	Overload ²		Min. operating pressure ³ [mbar _{abs}]	Versions in the order code ⁴	
	lower (LRL) [mbar]	upper (URL) [mbar]			on one side [bar]	on both sides [bar]		PN 160 ⁶	PN 420 ⁶
10 ⁷	-10	+10	0.25	160	160	240	0.1	7B	-
30 ⁷	-30	+30	0.3	160	160	240	0.1	7C	-
100	-100	+100	1/5 ⁸	160	160	240	0.1	7D	-
500	-500	+500	5	160/420 ⁹	160/420	240/630	0.1	7F	8F
3000	-3000	+3000	30	160/420 ⁹	160/420	240/630	0.1	7H	8H
16000	-16000	+16000	160	160/420 ⁹	160/420	240/630	0.1	7L	8L
40000	-40000	+40000	400	160/420 ⁹	"+" side: 160/420 ¹⁰	240/630	0.1	7M	8M

PMD70, FMD76 (with ceramic measuring diaphragms)

Nominal value [mbar]	Measurement limit		Smallest calibratable span ⁵ [mbar]	MWP ¹ [bar]	Overload ²		Min. operating pressure ³ [mbar _{abs}]	Versions in the order code ⁴	
	lower (LRL) [mbar]	upper (URL) [mbar]			on one side [bar]	on both sides [bar]		PN 160 ⁶	PN 420 ⁶
25	-25	+25	0.25	10	10	15	1	7B	
100	-100	+100	1	16	16	24	1	7D	
500	-500	+500	5	100	100	150	1	7F	
3000	-3000	+3000	30	100	100	150	1	7H	

- 1) The MWP (maximum working pressure; MWP = PN) for the measuring device depends on the weakest element of the components selected with regard to pressure, i.e. the process connection (→ see page 34 ff) has to be taken into consideration in addition to the measuring cell (→ see table above). Also observe pressure-temperature dependency. For the appropriate standards and further information, see page 33, "Pressure specifications" section.
- 2) The maximum pressure for the measuring device is dependent on the lowest-rated element, with regard to pressure, of the selected components. → See also page 33, section "Pressure specifications".
- 3) The minimum operating pressure indicated in the table applies to silicone oil under reference operating conditions.
Min. operating pressure at 85°C (185°F) for silicone oil: 10 mbar_{abs}.
FMD77 and FMD78: Min. operating pressure: 50 mbar_{abs}; observe also the pressure and temperature application limits of the selected filling oil on page 58. For vacuum applications, please observe the installation instructions on Page 65 ff.
- 4) Versions in the order code → See also page 70 ff, feature 40 "Nominal range; PN"
- 5) Turn down > 100:1 on request
- 6) PN 160 versions with stainless steel A2 screws, PN 420 versions with stainless steel A4 M12 screws
PN 420 versions for PMD75 only.
- 7) PMD75 only
- 8) minimum span that can be calibrated for PMD75: 1 mbar; minimum span that can be calibrated for FMD77 and FMD78: 5 mbar
- 9) For PMD75 with CRN-approved process connections, the MWP is 315 bar.
- 10) "—" side: 100 bar

Explanation of terms**Explanation of the terms: Turn down (TD), set span and zero based span***Case 1:*

- $| \text{Lower range value} | \leq | \text{Upper range value} |$

Example:


- Lower range value (LRV) = 0 mbar
- Upper range value (URV) = 100 mbar
- Nominal value (URL) = 500 mbar

Turn down:

- $\text{TD} = \text{URL} / | \text{URV} | = 5:1$

set span:

- $\text{URV} - \text{LRV} = 100 \text{ mbar}$
This span is based on the zero point.

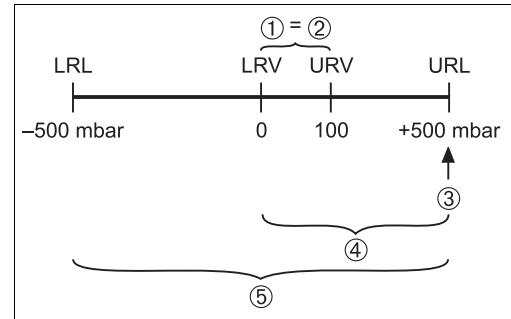*Example: 500 mbar sensor**Case 2:*

- $| \text{Lower range value} | \geq | \text{Upper range value} |$

Example:


- Lower range value (LRV) = -300 mbar
- Upper range value (URV) = 0 bar
- Nominal value (URL) = 500 mbar

Turn down:

- $\text{TD} = \text{URL} / | (\text{LRV}) | = 1,67:1$

set span:

- $\text{URV} - \text{LRV} = 300 \text{ mbar}$
This span is based on the zero point.

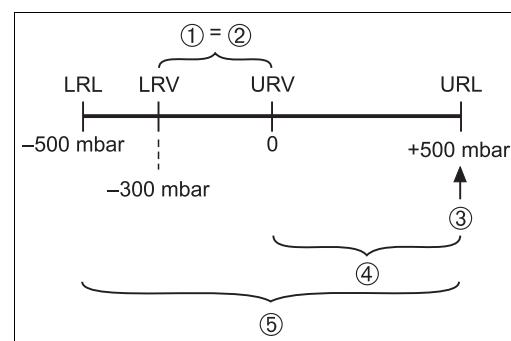*Example: 500 mbar sensor*

1	Set span
2	Zero based span
3	Nominal value $\hat{=}$ Upper range limit (URL)
4	Nominal measuring range
5	Sensor measuring range
LRL	Lower range limit
URL	Upper range limit
LRV	Lower range value
URV	Upper range value

Output

Output signal	<ul style="list-style-type: none"> ■ 4...20 mA with superimposed digital communication protocol HART 5.0, 2-wire ■ Digital communication signal PROFIBUS PA (Profile 3.0) ■ Digital communication signal FOUNDATION Fieldbus
Signal range – 4...20 mA HART	3.8 mA to 20.5 mA
Signal on alarm	<ul style="list-style-type: none"> ■ 4...20 mA HART <ul style="list-style-type: none"> Options: – Max. alarm*: can be set from 21...23 mA – Keep measured value: last measured value is kept – Min. alarm: 3.6 mA * Factory setting: 22 mA ■ PROFIBUS PA: can be set in the Analog Input block, options: Last Valid Out Value, Fsafe Value (factory setting), Status bad ■ FOUNDATION Fieldbus: can be set in the Analog Input Block, options: Last Good Value, Fail Safe Value (factory setting), Wrong Value
Load – 4...20 mA HART	<p>Load diagram, observe the position of the jumper and the explosion protection (→ See also page 22, section "Taking 4...20 mA test signal").</p> <p>P01-xMD7xxxx-05-xx-xx-xx-000</p>


Load diagram, observe the position of the jumper and the explosion protection (→ See also page 22, section "Taking 4...20 mA test signal").

- 1 Jumper for 4...20 mA test signal inserted in "Non-test" position
 - 2 Jumper for 4...20 mA test signal inserted in "Test" position
 - 3 Supply voltage 10,5 (11,5)...30 VDC for 1/2 D, 1 GD, 1/2 GD, FM IS, CSA IS, IECEx ia, NEPSI Ex ia
 - 4 Supply voltage 10,5 (11,5)...45 VDC for device for non-hazardous areas, 1/2 D, 1/3 D, 2 G EEx d, 3 G EEx nA, FM XP, FM DIP, FM NI, CSA XP, CSA Dust-Ex, NEPSI Ex d
- $R_{L\max}$ Maximum load resistance
 U Supply voltage

Note!

When operating via a handheld terminal or via PC with an operating program, a minimum communication resistance of 250 Ω must exist within the loop.

Resolution	<ul style="list-style-type: none"> ■ Current output: 1 μA ■ Display: can be set (setting at the factory: presentation of the maximum accuracy of the transmitter)
-------------------	---

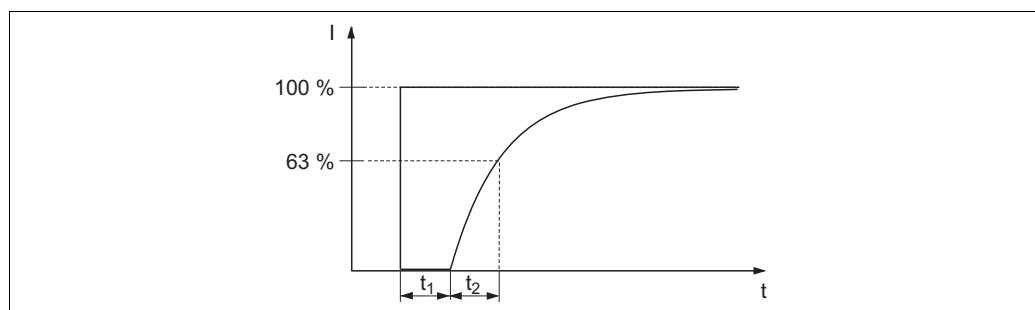**Dynamic behavior
current output**
Dead time, Time constant (T63)

Presentation of the dead time and the time constant

Type	Dead time t_1	Time constant (T63), t_2
PMD75	45 ms	<ul style="list-style-type: none"> ■ 10 mbar and 30 mbar measuring cell: 200 ms ■ 100 mbar measuring cell: 60 ms ■ 500 mbar measuring cell: 45 ms ■ 3 bar measuring cell: 40 ms ■ 16 bar and 40 bar measuring cell: 60 ms
FMD77, FMD78	dependent on the diaphragm seal	
PMD70, FMD76	90 ms	<ul style="list-style-type: none"> ■ 25 mbar measuring cell: 4700 ms ■ 100 mbar measuring cell: 280 ms ■ 500 mbar measuring cell: 210 ms ■ 3 bar measuring cell: 110 ms

Dynamic behavior HART
Dead time, Time constant (T63)

A typical cyclic parametrization for the PLC of 20 values per second results in the following total dead time:

Type	Dead time t_1	Time constant (T63), t_2
PMD75	295 ms	<ul style="list-style-type: none"> ■ 10 mbar and 30 mbar measuring cell: 200 ms ■ 100 mbar measuring cell: 60 ms ■ 500 mbar measuring cell: 45 ms ■ 3 bar measuring cell: 40 ms ■ 16 bar and 40 bar measuring cell: 60 ms
FMD77, FMD78	dependent on the diaphragm seal	
PMD70, FMD76	340 ms	<ul style="list-style-type: none"> ■ 25 mbar measuring cell: 4700 ms ■ 100 mbar measuring cell: 280 ms ■ 500 mbar measuring cell: 210 ms ■ 3 bar measuring cell: 110 ms

Reading cycle

- HART commands: on average 3 to 4 per second

Cycle time (Update time)

On average 250...330 ms.

Response time
 ≤ 250 ms

**Dynamic behavior
PROFIBUS PA**
Dead time, Time constant (T63)

A typical cyclic parametrization for the PLC of 20 values per second results in the following total dead time:

Type	Dead time t_1	Time constant (T63), t_2
PMD75	295 ms	<ul style="list-style-type: none"> ■ 10 mbar and 30 mbar measuring cell: 200 ms ■ 100 mbar measuring cell: 60 ms ■ 500 mbar measuring cell: 45 ms ■ 3 bar measuring cell: 40 ms ■ 16 bar and 40 bar measuring cell: 60 ms
FMD77, FMD78	dependent on the diaphragm seal	
PMD70, FMD76	340 ms	<ul style="list-style-type: none"> ■ 25 mbar measuring cell: 4700 ms ■ 100 mbar measuring cell: 280 ms ■ 500 mbar measuring cell: 210 ms ■ 3 bar measuring cell: 110 ms

Reading cycle

cyclic:

- max.: 100/s
- typical value: 20/s

acyclic:

- max.: 20/s
- typical value: 10/s

Cycle time (Update time)

- The cycle time in a bus segment in cyclic data communication depends on the number of devices, on the segment coupler used and on the internal PLC cycle time.
- The minimum cycle time is approx. 20 ms per device.

Response time

- cyclic: approx. 10 ms per request
- acyclic: < 50 ms

All values are typical values.

**Dynamic behavior
FOUNDATION Fieldbus**
Dead time, Time constant (T63)

If the macro cycle time (of the PLC) is set to a typical value of 250 ms, the following total dead time results:

Type	Dead time t_1	Time constant (T63), t_2
PMD75	295 ms	<ul style="list-style-type: none"> ■ 10 mbar and 30 mbar measuring cell: 200 ms ■ 100 mbar measuring cell: 60 ms ■ 500 mbar measuring cell: 45 ms ■ 3 bar measuring cell: 40 ms ■ 16 bar and 40 bar measuring cell: 60 ms
FMD77, FMD78	dependent on the diaphragm seal	
PMD70, FMD76	340 ms	<ul style="list-style-type: none"> ■ 25 mbar measuring cell: 4700 ms ■ 100 mbar measuring cell: 280 ms ■ 500 mbar measuring cell: 210 ms ■ 3 bar measuring cell: 110 ms

Reading cycle

- cyclic: up to 5/s, dependent on the number and type of function blocks used in a closed-control loop
- acyclic: 10/s

Cycle time (Update time)

250 ms

Response time

- cyclic: < 80 ms
- acyclic: < 40 ms

All values are typical values.

Damping

A damping affects all outputs (output signal, display).

- Via on-site display, handheld terminal or PC with operating program, continuous from 0...999 s
- Additionally for HART and PROFIBUS PA: via DIP-switch on the electronic insert, switch position "on" = set value and "off"
- Factory setting: 2 s


Power supply

Electrical connection

Note!

- When using the measuring device in hazardous areas, installation must comply with the corresponding national standards and regulations and the Safety Instructions or Installation or Control Drawings. → See also page 81, section "Safety Instructions" and "Installation/Control Drawings".
- Devices with integrated overvoltage protection must be earthed. → See also page 31.
- Protective circuits against reverse polarity, HF influences and overvoltage peaks are installed.

4...20 mA HART

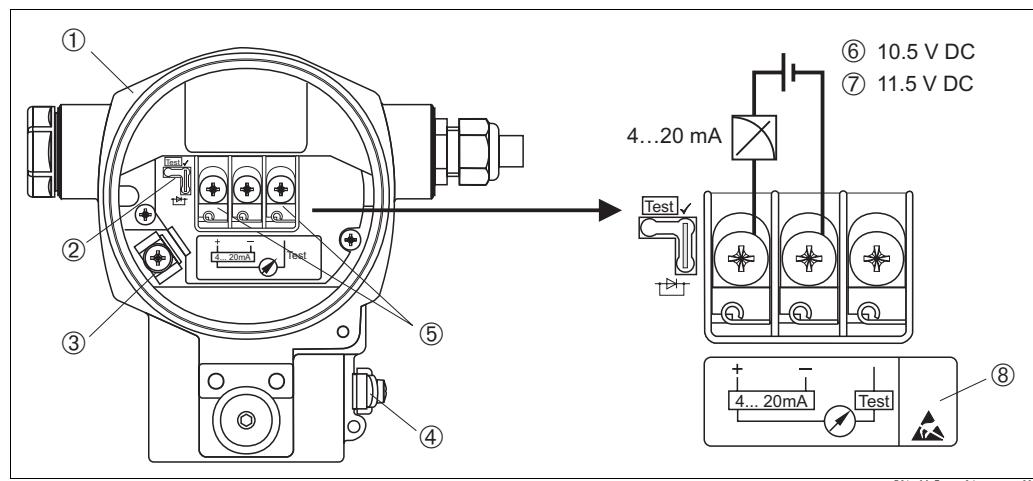

Electrical connection 4...20 mA HART

- Housing
- Jumper for 4...20 mA test signal. → See also page 22, section "Taking 4...20 mA test signal".
- Internal earth terminal
- External earth terminal
- 4...20 mA test signal between positive and test terminal
- minimum supply voltage = 10.5 V DC, jumper is inserted in accordance with the illustration.
- minimum supply voltage = 11.5 V DC, jumper is inserted in "Test" position.
- Devices with integrated overvoltage protection are labelled OVP (overvoltage protection) here (→ see also page 31).


PROFIBUS PA

The two-wire cable must be connected to the "PA+" and "PA-" terminals.

FOUNDATION Fieldbus


The two-wire cable must be connected to the "FF+" and "FF-" terminals.

Devices with Harting plug Han7D

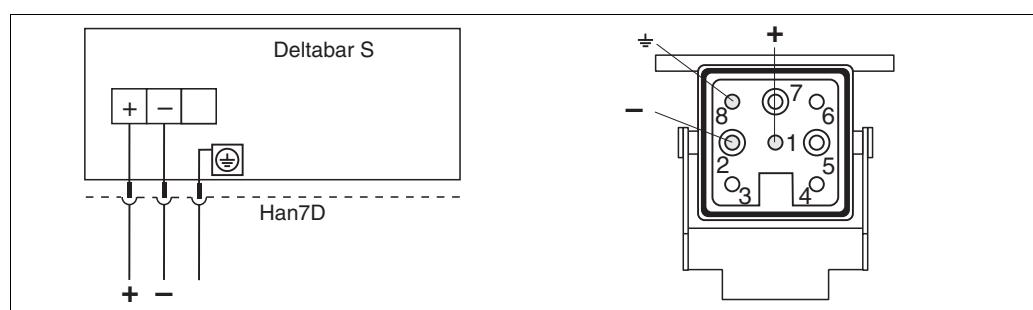

*Left: electrical connection for devices with Harting plug Han7D
Right: view of the plug connector at the device*

Devices with M12 plug

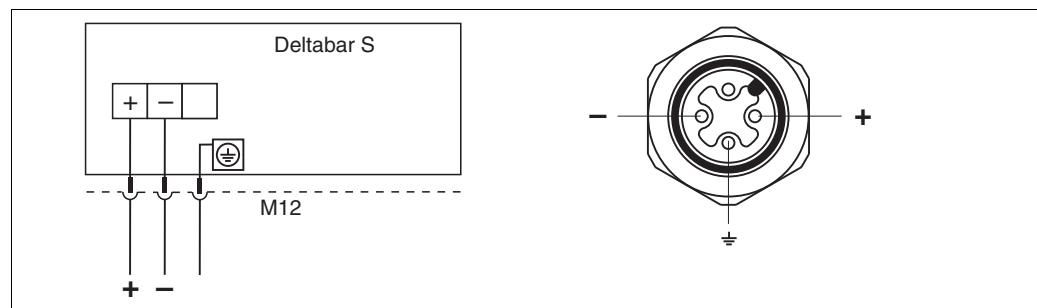

P01-xMD7xxxx-04-xx-xx-xx-008

*Left: electrical connection for devices with M12 plug
Right: view of the plug at the device*

Endress+Hauser offers for devices with M12 plug the following accessories:

Plug-in jack M 12x1, straight

- Material: Body PA; coupling nut CuZn, nickel-plated
- Degree of protection (fully locked): IP67
- Order number: 52006263


Plug-in jack M 12x1, elbowed

- Material: Body PBT/PA; coupling nut GD-Zn, nickel-plated
- Degree of protection (fully locked): IP67
- Order number: 51006327

Cable 4x0.34 mm² with M12 socket, elbowed, screw plug, 5 m length

- Material: Body PUR; coupling nut CuSn/Ni; cable PVC
- Degree of protection (fully locked): IP67
- Order number: 52010285

Devices with 7/8" plug

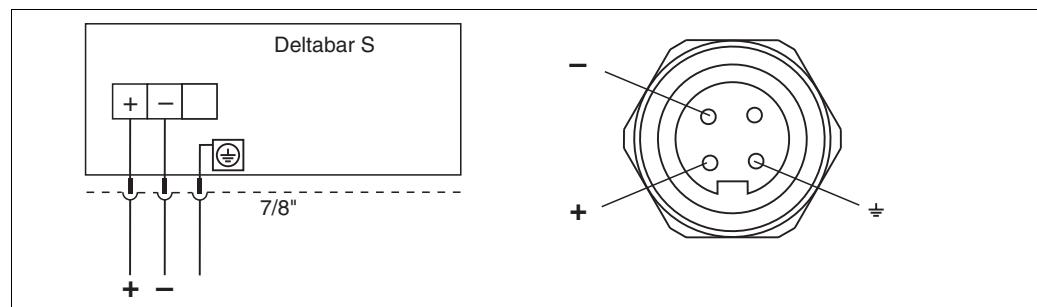

P01-xMD7xxxx-04-xx-xx-xx-009

*Left: electrical connection for devices with 7/8" plug
Right: view of the plug at the device*

Taking 4...20 mA test signal

A 4...20 mA signal may be measured via the positive and test terminal without interrupting the measurement. The minimum supply voltage of the device can be reduced by simply changing the position of the jumper. As a result, operation is also possible with lower voltage sources. Observe the position of the jumper in accordance with the following table.

Jumper position for test signal	Description
	<ul style="list-style-type: none"> - Taking 4...20 mA test signal via plus and test terminal: possible. (Thus, the output current can be measured without interruption via the diode.) - Delivery status - minimum supply voltage: 11.5 V DC
	<ul style="list-style-type: none"> - Taking 4...20 mA test signal via plus and test terminal: not possible. - minimum supply voltage: 10.5 V DC

Supply voltage

Note!

- When using the measuring device in hazardous areas, installation must comply with the corresponding national standards and regulations and the Safety Instructions or Installation or Control Drawings.
- All explosion protection data are given in separate documentation which is available upon request. The Ex documentation is supplied as standard with all devices approved for use in explosion hazardous areas. → See also page 81, sections "Safety Instructions" and "Installation/Control drawing".

4...20 mA HART

- Version for non-hazardous areas, jumper for 4...20 mA test signal in "Test" position (delivery status): 11.5...45 V DC
- Version for non-hazardous areas, jumper for 4...20 mA test signal in "Non-test" position: 10.5...45 V DC

PROFIBUS PA

- Version for non-hazardous areas: 9...32 V DC

FOUNDATION Fieldbus

- Version for non-hazardous areas: 9...32 V DC

Current consumption

- PROFIBUS PA: $11 \text{ mA} \pm 1 \text{ mA}$, switch-on current corresponds to IEC 61158-2, Clause 21
- FOUNDATION Fieldbus: $14 \text{ mA} \pm 1 \text{ mA}$, switch-on current corresponds to IEC 61158-2, Clause 21

Cable entry

→ See also page 67 ff, feature 30 "Housing, Cable entry, Protection".

Cable specification

- Endress+Hauser recommends using shielded, twisted-pair two-wire cables.
- Terminals for wire cross-sections $0.5 \dots 2.5 \text{ mm}^2$
- Cable external diameter: 5...9 mm

Residual ripple

Without influence on 4...20 mA signal up to $\pm 5\%$ residual ripple within the permitted voltage range [according to HART hardware specification HCF_SPEC-54 (DIN IEC 60381-1)]

Influence of power supply

$\leq 0.0006\% \text{ of URL/1 V}$

Performance characteristics – general

Reference operating conditions	<ul style="list-style-type: none"> ■ As per IEC 60770 ■ Ambient temperature T_U = constant, in the range of: +21...+33°C (+69.8...+91.4°F) ■ Humidity φ = constant, in the range of: 5...80 % r.H ■ Ambient pressure p_U = constant, in the range of: 860...1060 mbar ■ Position of the measuring cell: constant, in the range of: $\pm 1^\circ$ ■ Input of LOW SENSOR TRIM and HIGH SENSOR TRIM for lower range value and upper range value ■ Zero based span ■ Membrane material <ul style="list-style-type: none"> – PMD75: AISI 316L/1.4435, Alloy C276, Gold-Rhodium coated, Monel – FMD77, FMD78: AISI 316L/1.4435 – PMD70, FMD76: Al_2O_3 (Aluminium-oxide-ceramic) ■ Filling oil: silicone oil ■ Side flanges material PMD75: AISI 316L/1.4435 ■ Supply voltage: 24 V DC ± 3 V DC ■ Load with HART: 250 Ω
Long-term stability	<p>Measuring cells ≥ 500 mbar:</p> <ul style="list-style-type: none"> ■ $\pm 0.05\%$ of URL/year ■ $\pm 0.125\%$ of URL/5 years <p>Measuring cells ≤ 100 mbar:</p> <ul style="list-style-type: none"> ■ $\pm 0.18\%$ of URL/year
Influence of the installation position	<ul style="list-style-type: none"> ■ PMD70, FMD76: ≤ 3 mbar ^{1,3} ■ PMD75: ≤ 4 mbar ^{1,3} ■ FMD77: ≤ 32 mbar ^{2,3} <p>1) Device is rotated vertically to the membrane axis. 2) Device rotated vertically to the flange membrane. 3) The value is doubled for devices with inert oil.</p>

Note!

Position-dependent zero shift can be corrected. → See also page 27, section "General installation instructions" and page 63 ff, section "Installation instructions, Diaphragm seal systems".

Vibration effects	Device	Housing	Test standard	Vibration effects
	PMD70/ FMD76	optional on-site display on the side (T14)	GL	\leq reference accuracy to 10...18 Hz: ± 4 mm; 18...500 Hz: 5 g
	PMD75	optional on-site display on the side (T14)	IEC 61298-3	\leq reference accuracy to 10...60 Hz: ± 0.35 mm; 60...2000 Hz: 5 g
	PMD75	optional on-site display on the top (T15)		

Performance characteristics – metallic diaphragms

Reference accuracy – PMD75, FMD77, FMD78

The reference accuracy comprises the non-linearity according to limit point setting, hysteresis and non-reproducibility as per IEC 60770.

The following applies for the root-extracting characteristic curve:
The accuracy data of the Deltabar S is taken into the accuracy calculation of the flow rate with a factor of 0.5.

PMD75

10 mbar, 30 mbar measuring cells:

- TD 1:1: $\pm 0.15\%$ of the set span
- TD $> 1:1$: $\pm 0.15\%$ of the set span \times TD

100 mbar measuring cell:

- TD 1:1 to TD 4:1: $\pm 0.075\%$ of the set span
- TD $> 4:1$: $\pm (0.012 \times \text{TD} + 0.027)\%$ of the set span

Measuring cells ≥ 500 mbar:

- TD 1:1 to TD 15:1: $\pm 0.075\%$ of the set span
- TD $> 15:1$: $\pm (0.0015 \times \text{TD} + 0.053)\%$ of the set span

Platinum version,

Measuring cells ≥ 100 mbar:

- TD 1:1: $\pm 0.05\%$ of the set span

FMD77 (influence of the diaphragm seal included)

100 mbar measuring cell:

- TD 1:1 to TD 4:1: $\pm 0.15\%$ of the set span
- TD $> 4:1$: $\pm (0.03 \times \text{TD} + 0.03)\%$ of the set span

Measuring cells ≥ 500 mbar:

- TD 1:1 to TD 15:1: $\pm 0.075\%$ of the set span
- TD $> 15:1$: $\pm (0.0015 \times \text{TD} + 0.053)\%$ of the set span

FMD78 (influence of the diaphragm seal included)

100 mbar measuring cell:

- TD 1:1 to TD 4:1: $\pm 0.15\%$ of the set span
- TD $> 4:1$: $\pm (0.03 \times \text{TD} + 0.03)\%$ of the set span

Measuring cells ≥ 500 mbar:

- TD 1:1 to TD 4:1: $\pm 0.15\%$ of the set span
- TD $> 4:1$: $\pm (0.02 \times \text{TD} + 0.07)\%$ of the set span

Total performance – PMD75

The "Total performance" specification comprises the non-linearity including hysteresis, non-reproducibility, the thermal change of the zero point as well as the influence of the line pressure ($p_{st} = 70$ bar).

- AISI 316L/1.4435, Alloy, Gold-Rhodium coated or Monel membrane:
 $\pm 0.15\%$ of the set span^{1,2}
- Tantal membrane:
 $\pm 0.30\%$ of the set span^{1,2}

1. for measuring ranges ≥ 500 mbar to TD 2:1

2. All specifications apply to the temperature range $-10...+60^\circ\text{C}$ ($+14...+140^\circ\text{F}$).

Total Error

The total error comprises the long-term stability and the total performance:

AISI 316L/1.4435, Alloy, Gold-Rhodium coated or Monel membrane:

- 10 mbar, 30 mbar and 100 mbar measuring cell = 0,33% of URL/year
- ≥ 500 mbar measuring cell = 0,20% of URL/year

Tantal membrane:

- 10 mbar, 30 mbar and 100 mbar measuring cell = 0,48% of URL/year
- ≥ 500 mbar measuring cell = 0,35% of URL/year

**Warm-up period –
PMD75, FMD77, FMD78**

- 4...20 mA HART : < 10 s
- PROFIBUS PA: 6 s
- FOUNDATION Fieldbus: 50 s

Influence of the operating pressure on zero point and span – PMD75, FMD77, FMD78

Measuring cell	AISI 316L/1.4435, Alloy, Gold–Rhodium coated or Monel membrane		Tantal membrane	
	Influence of the operating pressure on the zero point	Influence of the operating pressure on the span	Influence of the operating pressure on the zero point	Influence of the operating pressure on the span
10 mbar	±0.15 % of URL/7 bar	±0.035 % of URL/7 bar	±0.28 % of URL/7 bar	±0.28 % of URL/7 bar
30 mbar	±0.35 % of URL/70 bar	±0.14 % of URL/70 bar	±0.70 % of URL/70 bar	±0.70 % of URL/70 bar
100 mbar	±0.15 % of URL/70 bar	±0.14 % of URL/70 bar	±0.42 % of URL/70 bar	±0.42 % of URL/70 bar
500 mbar	±0.075 % of URL/70 bar	±0.14 % of URL/70 bar	±0.14 % of URL/70 bar	±0.14 % of URL/70 bar
3 bar	±0.075 % of URL/70 bar	±0.14 % of URL/70 bar	±0.14 % of URL/70 bar	±0.14 % of URL/70 bar
16 bar	±0.075 % of URL/70 bar	±0.14 % of URL/70 bar	±0.14 % of URL/70 bar	±0.14 % of URL/70 bar
40 bar	±0.075 % of URL/70 bar	±0.14 % of URL/70 bar	±0.14 % of URL/70 bar	±0.14 % of URL/70 bar

Note!

The influence of the operating pressure on the zero point can be calibrated out.

Thermal change of the zero output and the output span – PMD75

–10...+60°C (+14...+140°F)

AISI 316L/1.4435, Alloy, Gold–Rhodium coated or Monel membrane:

- 10 mbar, 30 mbar measuring cell: ±(0.31 x TD + 0.06)% of the set span
- 100 mbar measuring cell: ±(0.18 x TD + 0.02)% of the set span
- 500 mbar, 3 bar measuring cell: ±(0.08 x TD + 0.05)% of the set span
- 16 bar measuring cell: ±(0.1 x TD + 0.1)% of the set span
- 40 bar measuring cell: ±(0.08 x TD + 0.05)% of the set span

–10...+60°C (+14...+140°F)

Tantal membrane:

- 10 mbar, 30 mbar measuring cell: ±(0.31 x TD + 0.06)% of the set span
- 100 mbar measuring cell: ±(0.24 x TD + 0.06)% of the set span
- 500 mbar, 3 bar measuring cell: ±(0.08 x TD + 0.05)% of the set span
- 16 bar measuring cell: ±(0.1 x TD + 0.1)% of the set span
- 40 bar measuring cell: ±(0.08 x TD + 0.05)% of the set span

–40...–10°C, +60...+85°C (–40...+14°F, +140...+185°F)

all membrane materials:

- 10 mbar, 30 mbar measuring cell: ±(0.45 x TD + 0.1)% of the set span
- 100 mbar measuring cell: ±(0.3 x TD + 0.15)% of the set span
- 500 mbar, 3 bar measuring cell: ±(0.12 x TD + 0.1)% of the set span
- 16 bar measuring cell: ±(0.15 x TD + 0.2)% of the set span
- 40 bar measuring cell: ±(0.37 x TD + 0.1)% of the set span

Performance characteristics – ceramic diaphragms

Reference accuracy – PMD70, FMD76

The reference accuracy comprises the non-linearity including hysteresis and non-reproducibility in accordance with the limit point method as per IEC 60770.

The following applies for the root-extracting characteristic curve:
The accuracy data of the Deltabar S is taken into the accuracy calculation of the flow rate with a factor of 0.5.

25 mbar measuring cell:

- TD 1:1: $\pm 0.15\%$ of the set span
- TD $> 1:1$: $\pm 0.15\%$ of the set span x TD

100 mbar measuring cell:

- TD 1:1 to TD 4:1: $\pm 0.075\%$ of the set span
- TD $> 4:1$: $\pm (0.012 \times TD + 0.027)\%$ of the set span

500 mbar, 3 bar measuring cell:

- TD 1:1 to TD 15:1: $\pm 0.075\%$ of the set span
- TD $> 15:1$: $\pm (0.0015 \times TD + 0.05252)\%$ of the set span

Platinum version,

100 mbar, 500 mbar, 3bar measuring cells:

- TD 1:1: $\pm 0.05\%$ of the set span

Total performance – PMD70, FMD76

The "Total performance" specification comprises the non-linearity including hysteresis, non-reproducibility, the thermal change of the zero point as well as the influence of the line pressure ($p_{st} = 70$ bar).

- $\pm 0.15\%$ of the set span ^{1,2}

1. for measuring ranges ≥ 500 mbar, TD 1:1

2. All specifications apply to the temperature range $-10...+60^\circ\text{C}$ ($+14...+140^\circ\text{F}$).

Total Error

The total error comprises the long-term stability and the total performance:

- 25 mbar and 100 mbar measuring cell = 0,33% of URL/year
- 500 mbar and 3 bar measuring cell = 0,20% of URL/year

Warm-up period – PMD70, FMD76

- 4...20 mA HART : < 10 s
- PROFIBUS PA: 6 s
- FOUNDATION Fieldbus: 50 s

Influence of the operating pressure on zero point and span – PMD70, FMD76

Measuring cell	Influence of the operating pressure on the zero point	Influence of the operating pressure on the span
25 mbar	$\pm 0.7\%$ of URL/7 bar	$\pm 0.14\%$ of URL/7 bar
100 mbar	$\pm 0.175\%$ of URL/70 bar	$\pm 0.14\%$ of URL/70 bar
500 mbar	$\pm 0.075\%$ of URL/70 bar	$\pm 0.14\%$ of URL/70 bar
3 bar	$\pm 0.075\%$ of URL/70 bar	$\pm 0.14\%$ of URL/70 bar

Note!

The influence of the operating pressure on the zero point can be calibrated out.

Thermal change of the zero output and the output span – PMD70, FMD76

$-10...+60^\circ\text{C}$ ($+14...+140^\circ\text{F}$):

- 25 mbar measuring cell: $\pm (0.35 \times TD + 0.05)\%$ of the set span
- ≥ 100 mbar measuring cells: $\pm (0.05 \times TD + 0.05)\%$ of the set span

$-20...-10^\circ\text{C}$, $+60...+85^\circ\text{C}$ ($-4...+14^\circ\text{F}$, $+140...+185^\circ\text{F}$):

- 25 mbar measuring cell: $\pm (0.3 \times TD + 0.15)\%$ of the set span
- ≥ 100 mbar measuring cells: $\pm (0.08 \times TD + 0.07)\%$ of the set span

Operating conditions (Installation)

General installation instructions

- The position-dependent zero shift can be corrected directly at the device via operating key, for devices with external operation even in hazardous areas. Diaphragm seals also shift the zero point, depending on the installation position (→ See also page 64 ff, "Installation instructions, Diaphragm seal systems").
- The housing of the Deltabar S can be rotated up to 380°. → See also page 29, section "Turn the housing".
- Endress+Hauser offers a mounting bracket for installing the device on pipes or walls. → See also page 28, section "Wall- and pipe-mounting".
- When measuring in media with solid proportions, such as dirty liquids, installing separators and drain valves is useful for capturing and removing sediment.
- Using a three-valve or five-valve manifold allows for easy commissioning, installation and maintenance without interrupting the process.
- General recommendations for the impulse piping can be found in DIN 19210 "Methods for measurement of fluid flow; differential piping for flow measurement devices" or the corresponding national or international standards.
- Install the impulse piping with a continuous gradient of at least 10%.
- When routing the impulse piping outdoors, ensure that sufficient anti-freeze protection is used, e.g. by using pipe heat tracing.
- For FMD77 and FMD78: See page 64 ff, "Installation instructions, Diaphragm seal systems" section.

Measuring arrangement

Flow measurement

- The PMD70 and PMD75 are best suited to flow measurement.
- Measuring arrangement for gases: Mount device above the measuring point.
- Measuring arrangement for liquids and vapours: Mount device below tapping point.
- For flow measurement in vapours, mount the condensate traps at the same level as the same the tapping point and at the same distance from Deltabar S.

Level measurement

- PMD70, PMD75, FMD76 and FMD77 are best suited to level measurement in open tanks. All Deltabar S devices are suitable for level measurement in closed tanks.

Measuring arrangement level measurement in open tanks

- PMD70, PMD75: Mount device below the lower measuring connection. The negative side is open to atmosphere pressure.
- FMD76, FMD77: Mount device direct on the tank. The negative side is open to atmosphere pressure.

Measuring arrangement level measurement in closed tanks and closed tanks with superimposed vapour


- PMD70, PMD75: Mount device below the lower measuring connection. Always connect the negative side above the maximum level.
- FMD76, FMD77: Mount device direct on the tank. Always connect the negative side above the maximum level.
- In the case of level measurement in closed tanks with superimposed vapour, a condensate trap ensures pressure which remains constant on the minus side.

Pressure measurement

- The PMD70 and PMD75 are best suited to differential pressure measurement.
- Measuring arrangement for gases: Mount device above the measuring point.
- Measuring arrangement for liquids and steams: Mount device below tapping point.
- For differential pressure measurement in vapour, mount the condensate traps at the same level as the same the tapping point and at the same distance from Deltabar S.

Heat insulation – FMD77

The FMD77 must only be insulated up to a certain height. The maximum permitted insulation height is labelled on the devices and applies to an insulation material with a heat conductivity $\leq 0.04 \text{ W}/(\text{m} \times \text{K})$ and to the maximum permitted ambient and process temperature (\rightarrow see table below). The data were determined under the most critical application "quiescent air".

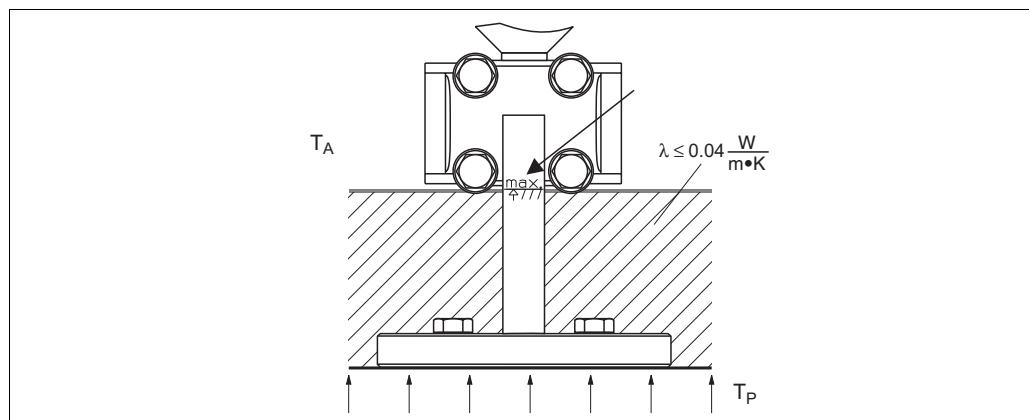

P01-FMD77xxxx-11-xx-xx-000

Maximum permitted insulation height


	FMD77
Ambient temperature (T_A)	$\leq 70^\circ\text{C}$ (158°F)
Process temperature (T_P)	max. 400°C (752°F), depending on the diaphragm seal filling oil used (\rightarrow see page 58)

Wall- and pipe-mounting

Endress+Hauser offers a mounting bracket for installing the device on pipes or walls. \rightarrow See also page 67 ff, feature 110, "Additional options 2".

Note!

If a valve block is used, its dimensions should also be taken into consideration.

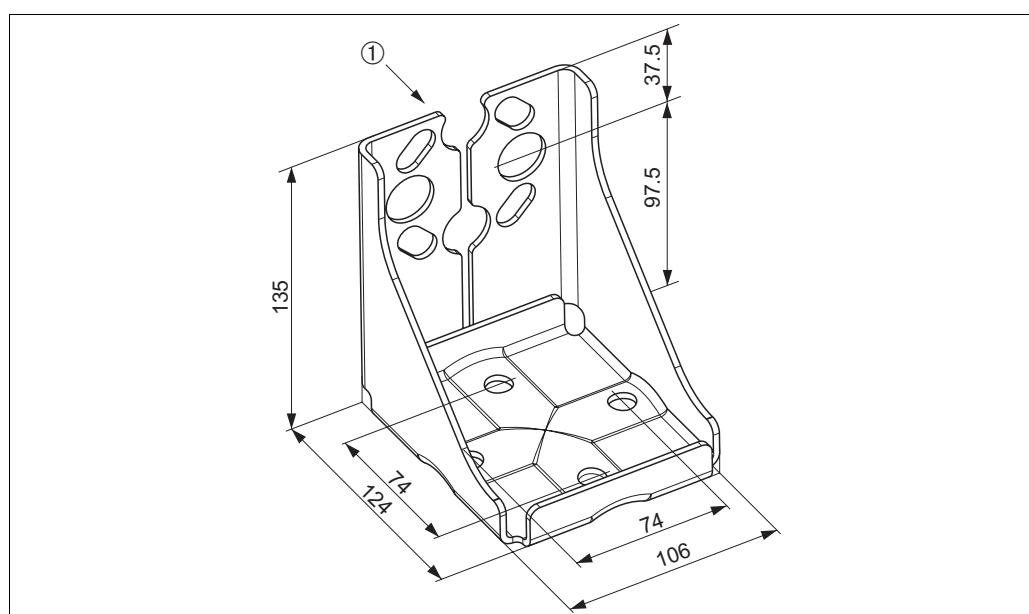

P01-xMD7xxxx-11-xx-xx-008

Mounting bracket for wall and pipe-mounting

A bracket including mounting accessories for pipe mounting is included with the device.

I *Device mounting*

"Separate housing" version

With the "separate housing" version, you are able to mount the housing with the electronics insert at a distance from the measuring point. This facilitates trouble-free measurement:

- Under particularly difficult measuring conditions (at installation locations that are cramped or difficult to access)
- If rapid cleaning of the measuring point is required
- If the measuring point is exposed to vibrations.


IP 69K applies for the process connection with sensor if FEP cable are used.

You can choose between different cable versions:

- PE (2 m, 5 m and 10 m)
- FEP (5 m).

→ See also Page 68 ff, Feature 110, "Additional options 2", Version "G".

→ For the dimensions, see Page 54.

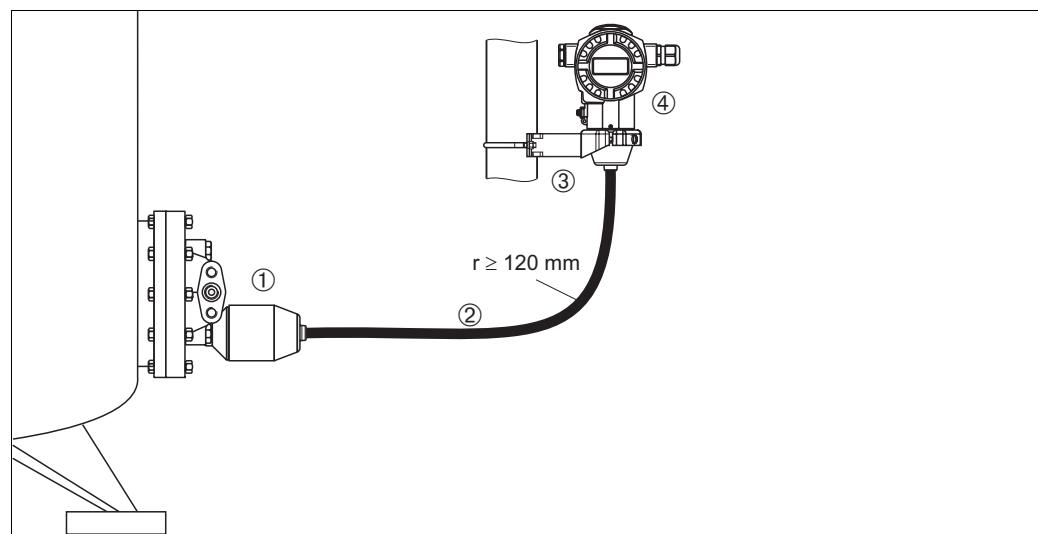

P01-xMD7xxxx-11-xx-xx-xx-010

In the case of the "separate housing" version, the sensor is delivered with the process connection and cable ready mounted. The housing and a mounting bracket are enclosed as separate units. The cable is provided with a socket at both ends. These sockets are simply connected to the housing and the sensor.

- 1 Process connection with sensor
- 2 Cable, both ends are fitted with a socket
- 3 Mounting bracket provided, suitable for pipe and wall mounting
- 4 Housing with electronic insert

Technical data of the PE and FEP cable:


- Minimum bending radius: 120 mm (4.72 inch)
- Cable extraction force: max. 450 N
- Resistance to UV light

Turn the housing

The housing can be rotated up to 380° by loosening the Allen screw.

Your benefits

- Simple mounting by optimally aligning the housing
- Good, accessible device operation
- Optimum readability of the on-site display (optional).

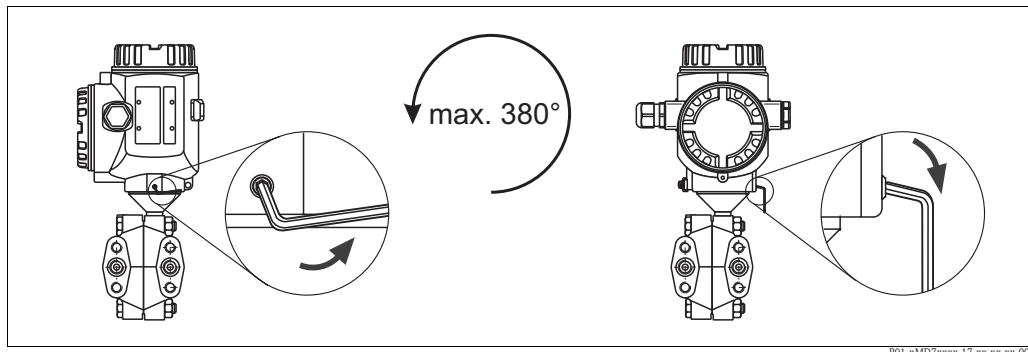

*Align the housing by loosening the Allen screw.
T14 and T15 housing: 2 mm Allen key; T17 housing: 3 mm Allen key*

Oxygen applications

Oxygen and other gases can react explosively to oils, grease and plastics, such that, among other things, the following precautions must be taken:

- All components of the system, such as measuring devices, must be cleaned in accordance with the BAM (DIN 19247) requirements.
- Dependent on the materials used, a certain maximum temperature and a maximum pressure for oxygen applications must not be exceeded.

The devices suitable for gaseous oxygen applications are listed in the following table with the specification p_{\max} .

Order code for devices cleaned for oxygen applications	p_{\max} for oxygen applications	T_{\max} for oxygen applications
PMD70 – * * * * * * * 2 * *, Devices with 500 mbar or 3000 mbar measuring cell	30 bar	60°C (140°F)
PMD70 – * * * * * * * 2 * *, Devices with 25 mbar or 100 mbar measuring cell	PN of the flange	60°C (140°F)
PMD75 – * * * * * * * K * *	160 bar	85°C (185°F)
PMD75 – * * * * * * * 2 * *	160 bar	60°C (140°F)
PMD75 – * * * * * * * 3 * *	160 bar	60°C (140°F)
FMD76 – * * * * * T * * *, Devices with 500 mbar or 3000 mbar measuring cell	30 bar	60°C (140°F)
FMD76 – * * * * * T * * *, Devices with 25 mbar or 100 mbar measuring cell	PN of the measuring cell	60°C (140°F)
FMD77 – * * * * T * F * *	PN of the flange	60°C (140°F)
FMD78 – * * * * * 4 * *	90 bar	85°C (185°F)
FMD78 – * * * * * D * *		

Ultra pure gas applications

Endress+Hauser also offers devices for special applications, such as ultra pure gas, cleaned from oil and grease. No special restrictions regarding the process conditions apply to these devices.

→ See also page 67 ff, PMD70 and PMD75: feature 80 "Seal", FMD76 and FMD77: feature 70 "Process connection low-pressure side, material, seal".

Diaphragms for materials with hydrogen build-up (Gold-Rhodium coating)

With regard to materials in which hydrogen build-up takes place, hydrogen atoms can diffuse through the metal diaphragms. This can result in incorrect measurement results.

Endress+Hauser offers diaphragms with Gold-Rhodium coating for this application.

→ See also page 70 "Ordering information PMD75", page 76 "Ordering information FMD77" or page 79 "Ordering information FMD78", feature 60 "Membrane material".

Operating conditions (Environment)

Ambient temperature range	<ul style="list-style-type: none"> ■ PMD75, FMD77, FMD78: -40...+85°C (-40...+185°F), devices for lower temperatures on request ■ PMD70, FMD76: -20...+85°C (-4...+185°F) ■ On-site display: -20...+70°C (-4...+158°F) <ul style="list-style-type: none"> Extended temperature application range with restrictions in optical properties such as display speed and contrast: -40...+85°C (-40...+185°F) ■ Separate housing: -40 to +60°C (-40 to +140°F) <p>For devices for use in hazardous areas, see Safety instructions, Installation or Control Drawing (→ See also page 81, sections "Safety Instruction" and "Installation/Control drawings").</p> <p>The device can be used in this temperature range. The values of the specification, such as thermal change, may be exceeded. → See also DIN 16086.</p>																		
Storage temperature range	<ul style="list-style-type: none"> ■ -40...+100°C (-40...+212°F) ■ On-site display: -40...+85°C (-40...+185°F) ■ Separate housing: -40 to +60°C (-40 to +140°F) 																		
Degree of protection	<ul style="list-style-type: none"> ■ → See page 67 ff, feature 30 "Housing, Cable entry, Protection". ■ Degree of protection IP 68 for T17 housing: 1.83 mH₂O for 24 h ■ Degree of protection IP 69K for process connection with sensor with separate housing and FEP cable. 																		
Climate class	Class 4K4H (air temperature: -20...55°C/-4...+131F, relative humidity: 4...100%) fulfilled as per DIN EN 60721-3-4 (condensation possible)																		
Vibration resistance	<table border="1"> <thead> <tr> <th>Device/Additional option</th> <th>Housing</th> <th>Test standard</th> <th>Vibration resistance</th> </tr> </thead> <tbody> <tr> <td>PMD70/ FMD76</td><td>optional on-site display on the side (T14)</td><td>GL</td><td>guaranteed for: 2...18 Hz: ±4 mm; 18...500 Hz: 5 g in all 3 planes</td></tr> <tr> <td>PMD75</td><td>optional on-site display on the side (T14)</td><td rowspan="2">IEC 61298-3</td><td rowspan="2">guaranteed for: 10...60 Hz: ±0.35 mm; 60...2000 Hz: 5 g in all 3 planes</td></tr> <tr> <td>PMD75</td><td>optional on-site display on the top (T15)</td></tr> <tr> <td>with mounting bracket</td><td></td><td>IEC 61298-3</td><td>guaranteed for: 10...60 Hz: ±0.15 mm; 60...500 Hz: 2 g in all 3 planes</td></tr> </tbody> </table>	Device/Additional option	Housing	Test standard	Vibration resistance	PMD70/ FMD76	optional on-site display on the side (T14)	GL	guaranteed for: 2...18 Hz: ±4 mm; 18...500 Hz: 5 g in all 3 planes	PMD75	optional on-site display on the side (T14)	IEC 61298-3	guaranteed for: 10...60 Hz: ±0.35 mm; 60...2000 Hz: 5 g in all 3 planes	PMD75	optional on-site display on the top (T15)	with mounting bracket		IEC 61298-3	guaranteed for: 10...60 Hz: ±0.15 mm; 60...500 Hz: 2 g in all 3 planes
Device/Additional option	Housing	Test standard	Vibration resistance																
PMD70/ FMD76	optional on-site display on the side (T14)	GL	guaranteed for: 2...18 Hz: ±4 mm; 18...500 Hz: 5 g in all 3 planes																
PMD75	optional on-site display on the side (T14)	IEC 61298-3	guaranteed for: 10...60 Hz: ±0.35 mm; 60...2000 Hz: 5 g in all 3 planes																
PMD75	optional on-site display on the top (T15)																		
with mounting bracket		IEC 61298-3	guaranteed for: 10...60 Hz: ±0.15 mm; 60...500 Hz: 2 g in all 3 planes																
Electromagnetic compatibility	<ul style="list-style-type: none"> ■ Electromagnetic compatibility to EN 61326 and NAMUR recommendation EMC (NE21). For details refer to the declaration of conformity. ■ With enhanced immunity against electromagnetic fields as per EN 61000-4-3: 30 V/m with closed cover (for devices with T14 or T15 housing) ■ Maximum deviation: < 0.5% of span¹ ■ All EMC measurements were performed with a turn down (TD) = 2:1. <p>1) Larger deviations possible with PMD70 with 25 mbar or 100 mbar sensor</p>																		
Overvoltage protection (optional)	<ul style="list-style-type: none"> ■ Overvoltage protection: <ul style="list-style-type: none"> – Nominal functioning DC voltage: 600 V – Nominal discharge current: 10 kA ■ Surge current check $i = 20 \text{ kA}$ as per DIN EN 60079-14: 8/20 μs satisfied ■ Arrester AC current check $I = 10 \text{ A}$ satisfied <p>→ See also page 68 ff, feature 100 "Additional options 1" and feature 110 "Additional options 2", version "M Overvoltage protection".</p> <p>Note! Devices with integrated overvoltage protection must be earthed.</p>																		

Operating conditions (Process)

Process temperature limits

- PMD70: -20...+85°C (-4...+185°F)
- FMD76: -20...+85 °C (-4...+185°F)
- PMD75 with impulse piping longer than 100 mm: -40...+120°C (-40...+248°F),
with side flanges C22.8 and impulse piping longer than 100 mm: -10...+120°C (14...+248°F)
- FMD77 and FMD78, depending on the diaphragm seal and filling oil: up to + 400°C (+752°F)

Note!

- For oxygen applications, observe page 30 "Oxygen applications" section.
- PMD70, FMD76, PMD75 and FMD78: Observe the Process temperature range of the seal.
→ See also the following section "Process temperature range, seals".
- FMD77 and FMD78: Observe the temperature application limits of the diaphragm seal oil.
→ See also page 58, sections "Diaphragm seal filling oils".
- FMD77 and FMD78: Do not use diaphragm seals with 0.09 mm PTFE foil on AISI 316L (1.4435/1.4405) for vacuum applications, upper temperature limit +204°C (+400°F).

Process temperature range, seals

PMD70 (with ceramic measuring diaphragms)

Versions for feature 80 in the order code	Seal	Process temperature range
A	FKM Viton	-20...+85°C (-4...+185°F)
B	EPDM	-20...+85°C (-4...+185°F)
D	Kalrez, Compound 4079	+5...+85°C (+41...+185°F)
E	Chemraz, Compound 505	-20...+85°C (-4...+185°F)
1	FKM Viton, cleaned from oil and greace	-10...+85°C (+14...+185°F)
2	FKM Viton, cleaned for oxygen service	-10...+60°C (+14...+140°F)

FMD76 (with ceramic measuring diaphragms)

Versions for feature 70 in the order code	Seal	Temperature operating range
B, D, F, G, U	FKM Viton	-20...+85°C (-4...+185°F)
K, L	EPDM FDA 21 CFR 177.2600	-20...+85°C (-4...+185°F)
M, N	Kalrez, Compound 4079	+5...+85°C (+41...+185°F)
P, Q	Chemraz, Compound 505	-20...+85°C (-4...+185°F)
S	FKM Viton, cleaned from oil and greace	-10...+85°C (+14...+185°F)
T	FKM Viton, cleaned for oxygen service	-10...+60°C (+14...+140°F)

PMD75 (with metallic measuring diaphragms)

Versions for feature 80 in the order code	Seal	Process temperature range ¹
A	FKM Viton	-20...+85°C (-4...+185°F)
C	PTFE	-40...+85°C (-40...+185°F)
F	NBR	-20...+85°C (-4...+185°F)
H	Copper	-40...+85°C (-40...+185°F)
K	Copper, cleaned for oxygen service	-20...+85°C (-4...+185°F)
1	FKM Viton, cleaned from oil and greace	-10...+85°C (+14...+185°F)
2	FKM Viton, cleaned for oxygen service	-10...+60°C (+14...+140°F)
3	PTFE, cleaned for oxygen service	-20...+60°C (-4...+140°F)

1) lower temperature on request

FMD77 (with metallic measuring diaphragms)

Versions for feature 70 in the order code	Seal on the LP side (-)	Process temperature range ¹
B, D, F, G	FKM Viton	-20...+85°C (-4...+185°F)
H, J	PTFE	-40...+85°C (-40...+185°F)
K, L	EPDM	-40...+85°C (-40...+185°F)
M, N	Kalrez, Compound 6375	+5...+85°C (+41...+185°F)
P, Q	Chemraz, Compound 505	-20...+85°C (-4...+185°F)
S	FKM Viton, cleaned from oil and grease	-10...+85°C (+14...+185°F)
T	FKM Viton, cleaned for oxygen service	-10...+60°C (+14...+140°F)

1) lower temperature on request


Pressure specifications

- The maximum pressure for the measuring device is dependent on the lowest-rated element with regard to pressure, see the following sections for this:
 - → page 14 ff, section "Measuring range"
 - → chapter "Mechanical construction".
- The MWP (maximum working pressure) is specified on the nameplate. This value refers to a reference temperature of 20°C (68°F) or 100°F for ANSI flanges and may be applied to the device for an unlimited time. Observe pressure-temperature dependency.
- The pressure values permitted at higher temperatures can be found in the following standards:
 - EN 1092-1: 2001 Tab. 18 ¹
 - ASME B 16.5a – 1998 Tab. 2-2.2 F316
 - ASME B 16.5a – 1998 Tab. 2.3.8 N10276
 - JIS B 2220
- For PMD70 and PMD75, the MWP applies for the temperature ranges specified in the "Ambient temperature range" (→ page 31) and "Process temperature limits" (→ page 32) sections.
- The test pressure corresponds to the over pressure limit of the measuring instrument (Over pressure limits OPL = 1.5 x MWP) and may fit only temporally limited, so that no permanent damage develops.
- The Pressure Equipment Directive (EC Directive 97/23/EC) uses the abbreviation "PS". The abbreviation "PS" corresponds to the MWP (maximum working pressure) of the measuring device.
- In the case of sensor range and process connections where the OPL (Over Pressure Limit) of the pressure connection is smaller than the nominal value of the sensor, the device is set at the factory, at the very maximum, to the OPL value of the process connection. If you want to use the entire sensor range, select a process connection with a higher OPL value (1.5 x PN; PN = MWP).
- In oxygen applications, the values for " p_{max} and T_{max} for oxygen applications" as per page 30, "Oxygen applications" may not be exceeded.

1) With regard to its stability property, the material 1.4435 is identical to 1.4404 which is grouped under 13EO in EN 1092-1 Tab. 18. The chemical composition of the two materials can be identical.

Mechanical construction

Housing dimensions T14,
optional display on the side

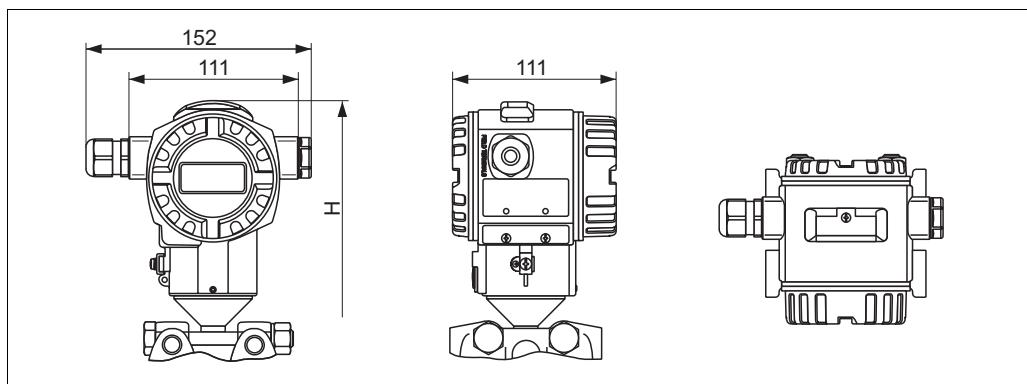


P01-xMD7xxxx-06-00-xx-xx-000

Front view, left-hand side view, top view

→ See the process connection in question for installation height. Housing weight see page 55.

Housing dimensions T15,
optional display on the top

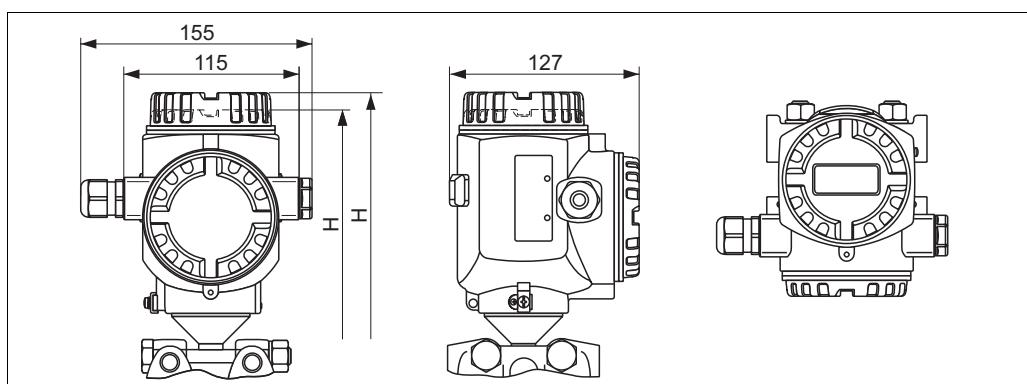


P01-xMD7xxxx-06-00-xx-xx-001

Front view, left-hand side view, top view

→ See the process connection in question for installation height. Housing weight see page 55.

Housing dimensions T17,
optional display on the top

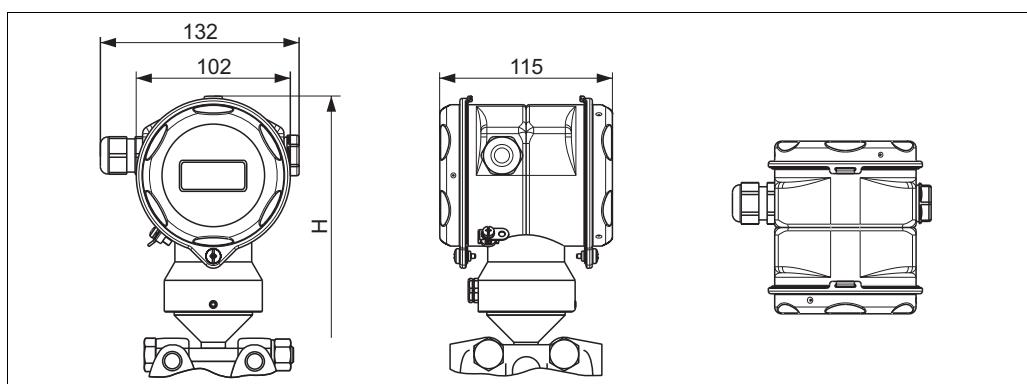

P01-xMD7xxxx-06-00-xx-xx-002


Front view, left-hand side view, top view

→ See the process connection in question for installation height. Housing weight see page 55.

**Process connections PMD70
with ceramic measuring
diaphragms**

Note!

Some device versions have CRN approval. For a CRN-approved device, a CRN-approved process connection (→ see page 68, feature 70 "Process connection") has to be ordered with a CSA approval (→ see page 67, feature 10 "Approval"). These devices are fitted with a separate plate bearing the registration number 0F10524.5C.

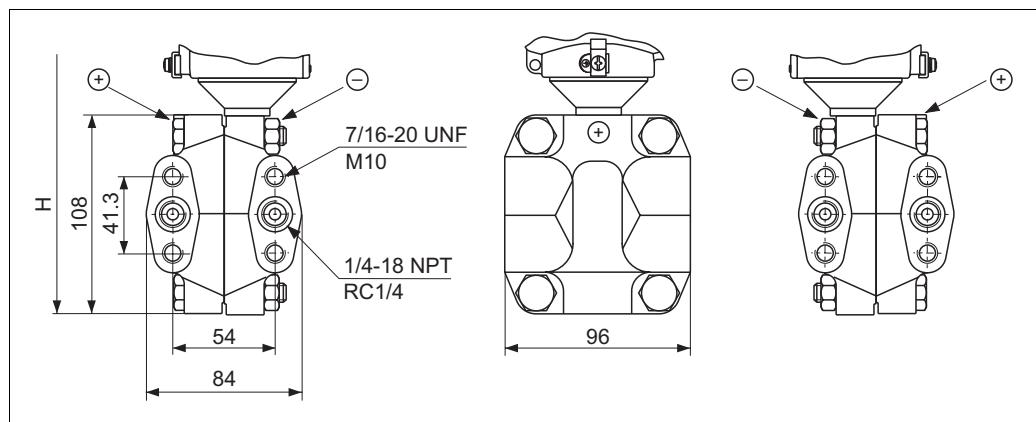

P01-PMD70xxx-06-09-xx-xx-000

Process connection PMD70, oval flange

H Device height → see page 36, section "Device height H"


Ver-sion	Connection	Mounting	Material	Accessories	Weight ¹
B	1/4-18 NPT IEC 61518	7/16-20 UNF	Steel C 22.8	2 vent valves (AISI 316L/1.4404) included	4.0 kg
D	1/4-18 NPT IEC 61518	7/16-20 UNF	AISI 316L ²		4.0 kg
F	1/4-18 NPT IEC 61518	7/16-20 UNF	Alloy C276 ³	Vent valves (Alloy C276/2.4819), see page 68 feature 110 "Additional options 2".	4.2 kg
U	RC 1/4	7/16-20 UNF	AISI 316L ²	2 vent valves (AISI 316L/1.4404) included	4.0 kg
1	1/4-18 NPT IEC 61518	PN 160: M10	Steel C 22.8		4.0 kg
2	1/4-18 NPT IEC 61518	PN 160: M10	AISI 316L ²		4.0 kg
3	1/4-18 NPT IEC 61518	PN 160: M10	Alloy C276 ³	Vent valves (Alloy C276/2.4819), see page 68, feature 110 "Additional options 2".	4.2 kg

1) Process connection weight, for housing weight see page 55

2) AISI 316L/1.4435

3) Alloy C276/2.4819

**Process connections PMD70
with ceramic measuring
diaphragms (continued)**

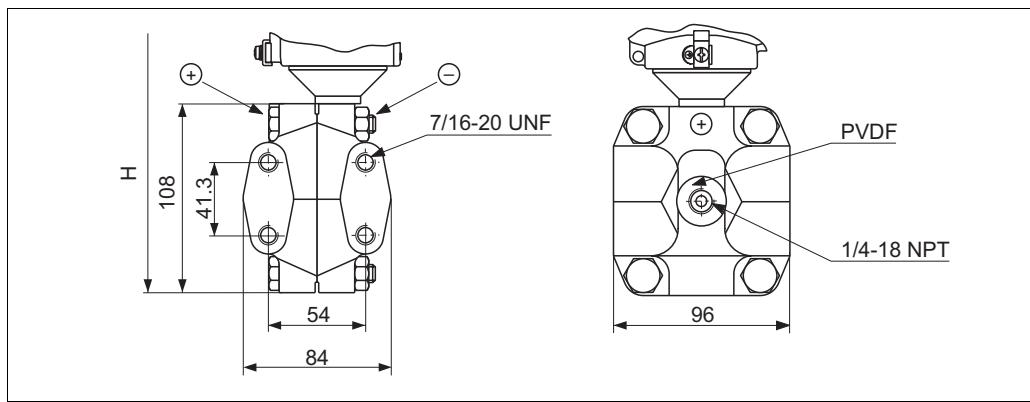

P01-PMD70xxx-06-09-xx-xx-001

Process connection PMD70, version G, PVDF inlay, PN = 10 bar, process temperature $T = -10\ldots+60^\circ\text{C}$ ($14\ldots+140^\circ\text{F}$)

H Device height → see page 36, section "Device height *H*"

Version	Connection	Mounting	Material	Weight ¹
G	1/4-18 NPT IEC 61518	7/16-20 UNF	PVDF	3.8 kg

1) Process connection weight, for housing weight see page 55

Device height *H*


Description	Device height <i>H</i>
T14 housing, optional display on the side	253 mm
T15 housing, optional display on the top, flat cover	259 mm
T15 housing, optional display on the top, high cover	270 mm
T17 housing, optional display on the side	269 mm

**Process connections PMD75
with metallic measuring
diaphragms**

Note!

Some device versions have CRN approval. For a CRN-approved device, a CRN-approved process connection (→ see page 70, feature 70 "Process connection") has to be ordered with a CSA approval (→ see page 68, feature 10 "Approval"). These devices are fitted with a separate plate bearing the registration number OF10524.5C.

Oval flange, connection 1/4-18 NPT or RC 1/4

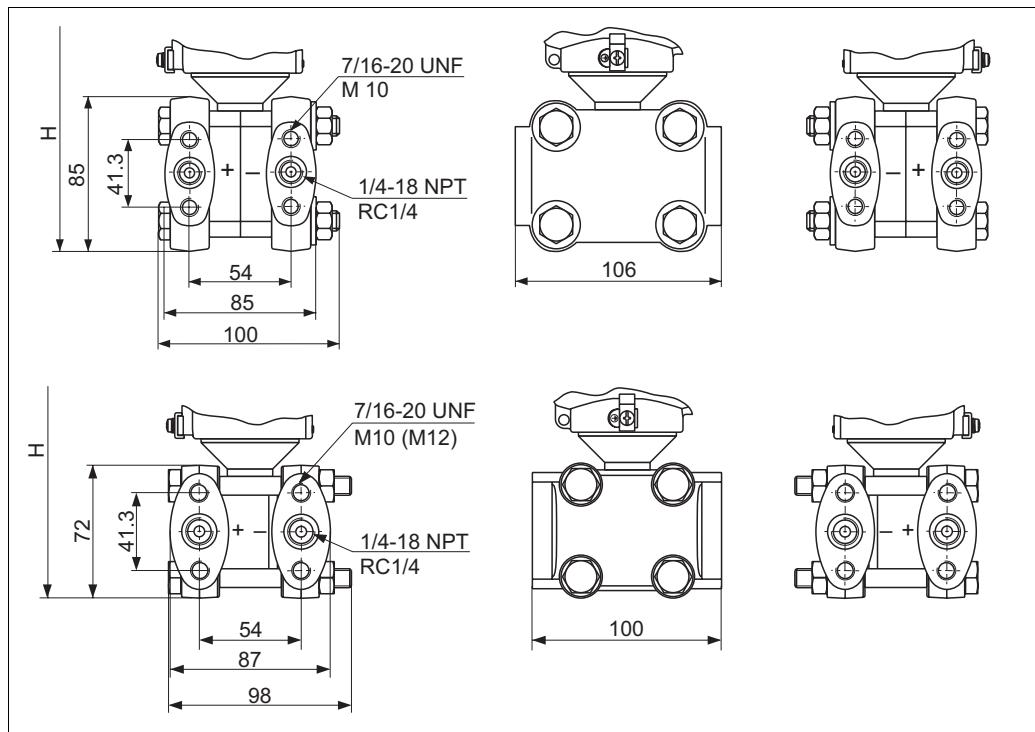

POI-PMD75xxx-06-09-xx-xx-005

*Process connection PMD75,
above 10 mbar and 30 mbar measuring cell; below: Measuring cell ≥ 100 mbar*

H Device height → see page 39, section "Device height H"

Ver-sion	Connection	Mounting	Material	Accessories	Weight ¹
B	1/4-18 NPT IEC 61518	7/16-20 UNF	Steel C 22.8	2 vent valves (AISI 316L/1.4404) included	4.2 kg
D	1/4-18 NPT IEC 61518	7/16-20 UNF	AISI 316L ²		4.2 kg
F	1/4-18 NPT IEC 61518	7/16-20 UNF	Alloy C276 ³	Vent valves (Alloy C276/2.4819), see page 71, feature 110 "Additional options 2".	4.5 kg
U	RC 1/4	7/16-20 UNF	AISI 316L ²	2 vent valves (AISI 316L/1.4404) included	4.2kg
1	1/4-18 NPT IEC 61518	– PN 160: M10 – PN 420: M12	Steel C 22.8		4.2 kg
2	1/4-18 NPT IEC 61518	– PN 160: M10 – PN 420: M12	AISI 316L ²		4.2 kg
3	1/4-18 NPT IEC 61518	– PN 160: M10 – PN 420: M12	Alloy C276 ³	Vent valves (Alloy C276/2.4819), see page 71, feature 110 "Additional options 2".	4.5 kg


1) Weight of process connections without vent valves with 10 mbar or 30 mbar sensors, process connections without vent valves with sensors ≥ 100 mbar weight approx. 800 g less. Housing weight see page 55.

2) AISI 316L/1.4435 or 1.4404

3) Alloy C276/2.4819


**Process connections PMD75
with metallic measuring
diaphragms (continued)**

Oval flange, connection 1/4-18 NPT or RC 1/4, with side vent

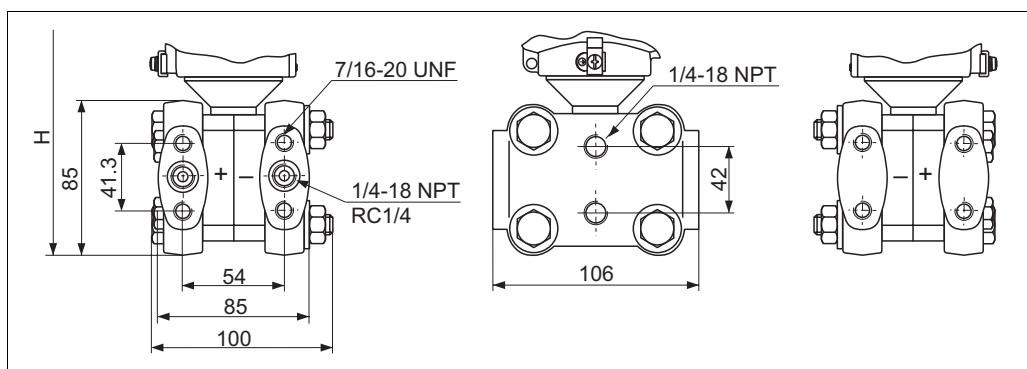

P01-PMD75xxx-06-09-xx-xx-004

Process connection PMD75, 10 mbar and 30 mbar measuring cell

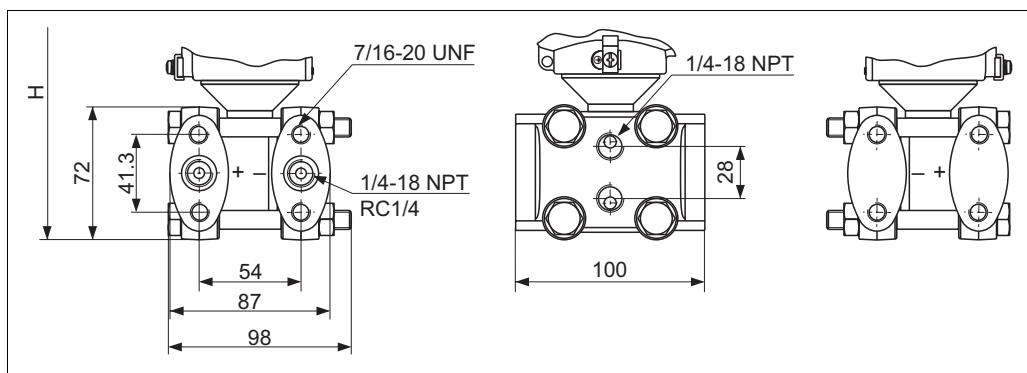

P01-PMD75xxx-06-09-xx-xx-003

Process connection PMD75, nominal value ≥ 100 mbar

H Device height → see page 39, section "Device height H"

Ver-sion	Connection	Mounting	Material	Accessories	Weight ¹
C	1/4-18 NPT IEC 61518	7/16-20 UNF	Steel C 22.8	4 locking screws and 2 vent valves included	4.2 kg
E	1/4-18 NPT IEC 61518	7/16-20 UNF	AISI 316L ²	(AISI 316L/1.4404)	4.2 kg
H	1/4-18 NPT IEC 61518	7/16-20 UNF	Alloy C276 ³	Vent valves (Alloy C276/2.4819), see page 71, feature 110 "Additional options 2".	4.5 kg
V	RC 1/4	7/16-20 UNF	AISI 316L ²	4 locking screws and 2 vent valves included	4.2 kg


1) Weight of process connections without vent valves with 10 mbar or 30 mbar sensors, process connections without vent valves with sensors ≥ 100 mbar weight approx. 800 g less. Housing weight see page 55

2) PN 160 bar measuring cells: AISI 316L/1.4435, PN 420 bar measuring cells: AISI 316L/1.4435 or 1.4404

3) Alloy C276/2.4819

**Process connections PMD75
with metallic measuring
diaphragms (continued)**

Oval flange, prepared for diaphragm seal mount

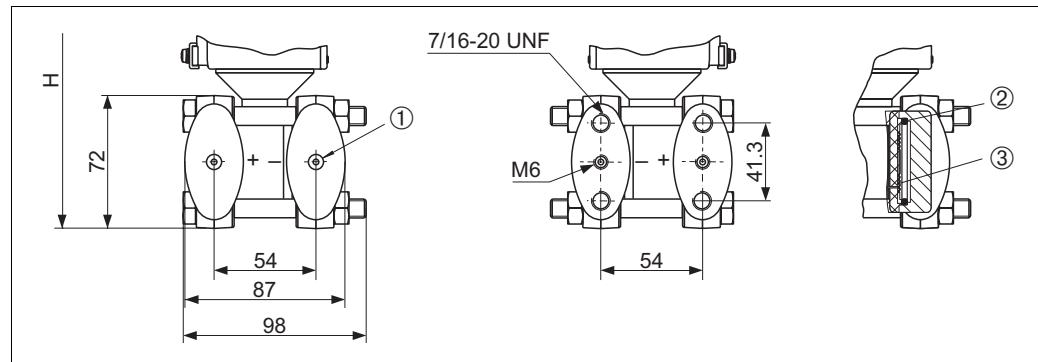

P01-PMD75xxx-06-09-xx-xx-002

*Left: Process connection PMD75, version W, prepared for diaphragm seal mount
Right: Position of the copper ring seal*

H Device height → see the following section "Device height H"

- 1 Diaphragm seal attachment*
- 2 Copper ring seal*
- 3 Cup diaphragm*

Device height H

Description	Device height H ¹
T14 housing, optional display on the side	217 mm (230 mm)
T15 housing, optional display on the top, flat cover	223 mm (236 mm)
T15 housing, optional display on the top, high cover	234 mm (247 mm)
T17 housing, optional display on the side	233 mm (246 mm)


¹⁾ Values for devices with 10 mbar and 30 mbar measuring cell in brackets

**Process connection FMD76
with ceramic measuring
diaphragms**

Note!

- Some device versions have CRN approval. For a CRN-approved device, a CRN-approved process connection (→ see page 73, feature 70 "Process connection") has to be ordered with a CSA approval (→ see page 72, feature 10 "Approval"). These devices are fitted with a separate plate bearing the registration number OF10524.5C.
- FMD76 devices with an EN/DIN flange DN 80 PN 40, an ANSI flange 3" 150 lbs or a JIS flange 80 A 10 K can only be mounted with an open-ended wrench.

EN/DIN flanges, connection dimensions as per EN 1092-1/DIN 2527

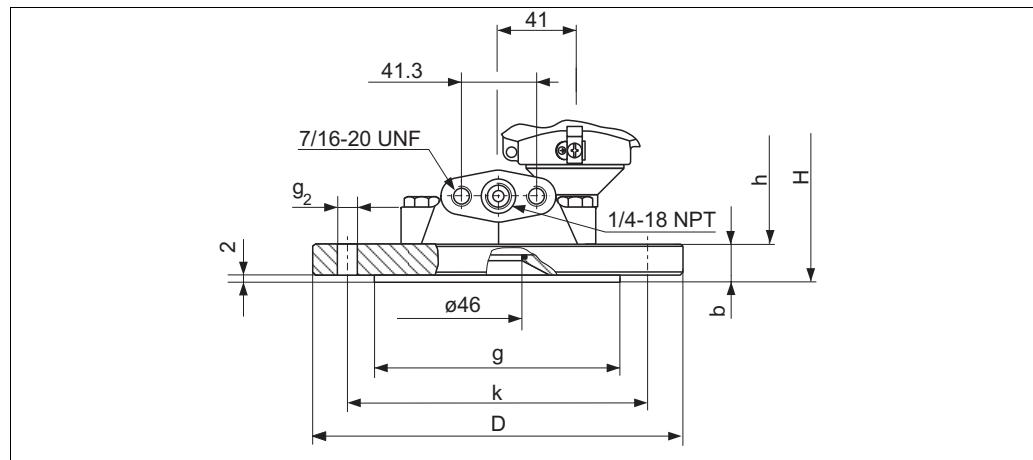

Process connection FMD76, high-pressure side: EN/DIN flange,
low-pressure side: connection 1/4-18 NPT

Application limits for version "G" in feature 70 "Process connection low-pressure side" with PVDF inlay:
PN = 10 bar, process temperature T = -10...+60°C (14...+140°F)

H Device height → see page 42, section "Device height H, devices with flange"
h Height of the device without flange thickness b

Version	Flange								Boltholes				Flange weight ² [kg]
	Material	Nominal diameter	Shape ¹	Nominal pressure	Diameter D [mm]	Thickness b [mm]	Raised face g [mm]	Quantity g ₂ [mm]	Diameter k [mm]	Hole circle			
B	AISI 316L	DN 80	B1 (D)	PN 10-40	200	24	138	8	18	160			5,3
D	ECTFE ³	DN 80	–	PN 10-40	200	24	–	8	18	160			5,3
E	Alloy C276 ⁴	DN 80	B1 (D)	PN 10-40	200	24	138	8	18	160			6
F	AISI 316L	DN 100	B1 (C)	PN 10-16	220	22	–	8	18	180			6
G	AISI 316L	DN 100	B1 (D)	PN 25-40	235	26	162	8	22	190			8
H	ECTFE ³	DN 100	–	PN 25-40	235	26	–	8	22	190			8
J	Alloy C276 ⁴	DN 100	B1 (D)	PN 25-40	235	26	162	8	22	190			9
L	ECTFE ³	DN 100	–	PN 10-16	220	22	–	8	18	180			6
M	Alloy C276 ⁴	DN 100	B1 (C)	PN 10-16	220	22	–	8	18	180			6,8

1) Designation as per DIN 2527 in brackets


2) Housing weight see page 55

3) ECTFE coating on AISI 316L/1.4435,
When operating in hazardous area, avoid electrostatic charge of the plastic surfaces.

4) Alloy C276/2.4819

**Process connection FMD76
with ceramic measuring
diaphragms (continued)**

**ANSI flanges, connection dimensions as per ANSI B 16.5, raised face RF and
JIS flanges, connection dimensions as per JIS B 2220, raised face RF**

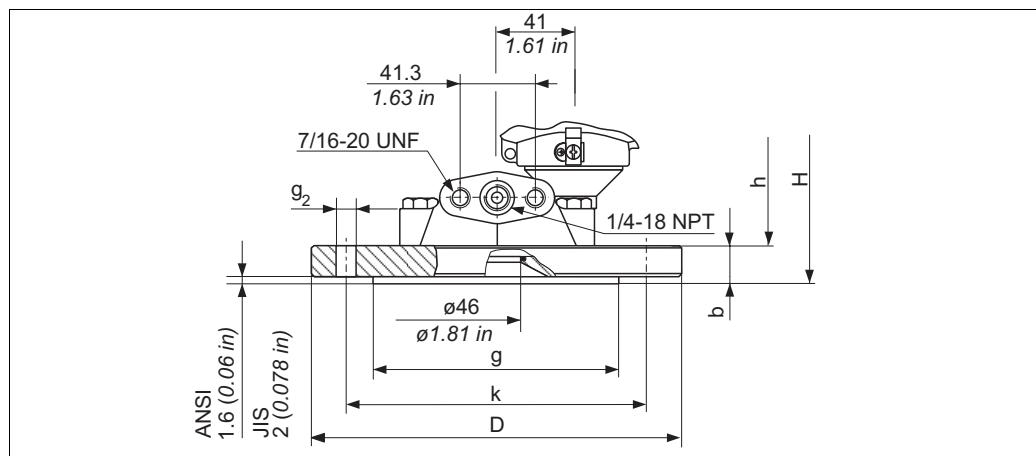

P01-FMD76xxxx-06-09-xx-xx-001

*Process connection FMD76, high-pressure side: ANSI or JIS flange (see table below),
low-pressure side: connection 1/4-18 NPT*

H Device height → see page 42, section "Device height H, devices with flange"

h Height of the device without flange thickness b

	Flange							Boltholes			
Version	Material	Nominal diameter	Class/ Nominal pressure	Diameter	Thickness	Raised face	Quantity	Diameter	Hole circle	Flange weight ¹	
				D [in] [mm]	b [in] [mm]	g [in] [mm]		g ₂ [in] [mm]	k [in] [mm]		
ANSI flanges											
P	AISI 316/ 316L ²	3 in	150 lb./sq.in	7.5 190.5	0.94 23.9	5 127	4	0.75 19.1	6 152.4	4.9	
R	ECTFE ³										
S	Alloy C276										
T	AISI 316/ 316L ²	4 in	150 lb./sq.in	9 228.5	0.94 23.9	6.19 157.2	8	0.75 19.1	7.5 190.5	7.1	
U	ECTFE ³										
V	Alloy C276										
W	AISI 316/ 316L ²	4 in	300 lb./sq.in	10 254	1.25 31.8	6.19 157.2	8	0.88 22.4	7.88 200.2	11.7	
JIS flanges											
1	AISI 316L/ 1.4435	80 A	10 K	7.32 185	0.71 18	5 127	8	0.75 19.1	5.9 150	3.3	
3	Alloy C276										
4	AISI 316L/ 1.4435	100 A	10 K	8.27 210	0.71 18	5.95 151	8	0.75 19.1	6.89 175	4.4	

1) Housing weight see page 55

2) Combination of AISI 316 for required pressure resistance and AISI 316L for required chemical resistance (dual rated)

3) ECTFE coating on AISI 316L/1.4435.


When operating in hazardous area, avoid electrostatic charge of the plastic surfaces.

**Process connection FMD76
with ceramic measuring
diaphragms (continued)**

Device height H, devices with flange

Description	Device height H (h + b)
T14 housing, optional display on the side	175 mm + flange thickness b (see tables)
T15 housing, optional display on the top, flat cover	181 mm + flange thickness b (see tables)
T15 housing, optional display on the top, high cover	192 mm + flange thickness b (see tables)
T17 housing, optional display on the side	191 mm + flange thickness b (see tables)

**Process connections FMD77
with metallic measuring
diaphragms, low-pressure
side**

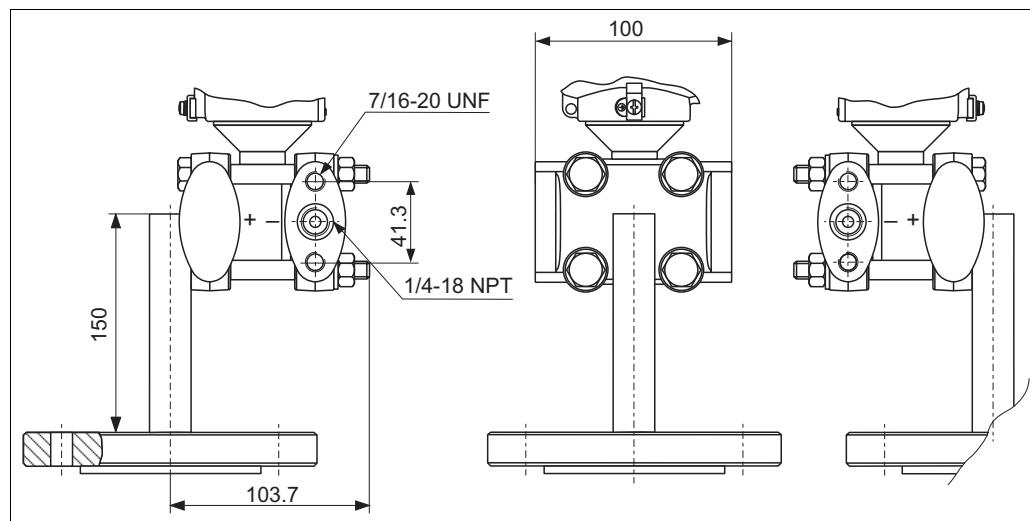

P01-FMD77xxx-06-xx-xx-xx-001


*Low-pressure side: connection 1/4-18 NPT, mounting optionally 7/16-20 UNF,
Side flanges material of the basic device: AISI 316L/1.4435 or 1.4404
high-pressure side, see the following section "Process connections, high-pressure side FMD77"*

**Process connections FMD77
with metallic measuring
diaphragms, high-pressure
side**

Note!

- Some device versions have CRN approval. For a CRN-approved device, a CRN-approved process connection (→ see page 76, feature 70 "Process connection") has to be ordered with a CSA approval (→ see page 75, feature 10 "Approval"). These devices are fitted with a separate plate bearing the registration number 0F10524.5C.
- Specifications for the " T_K Ambient" and " T_K Process" are listed in the following tables. These are typical values. These temperature coefficients apply to silicone oil and the membrane material AISI 316L/1.4435. For other filling oils, this temperature coefficient must be multiplied by the T_K correction factor of the corresponding filling oil. For the T_K correction factors, see also page 58, section "Diaphragm seal filling oils".

EN/DIN flanges, connections as per EN 1092-1/DIN 2527

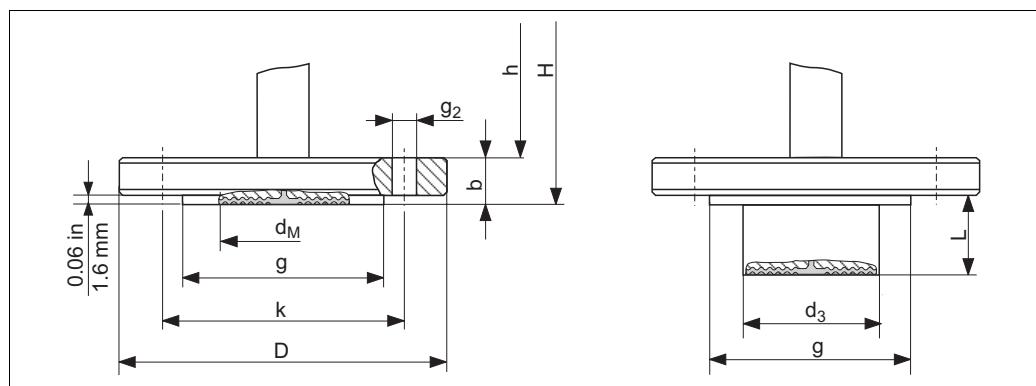

P01-FMD77xxxx-06-09-xx-xx-002

Process connection FMD77, high-pressure side EN/DIN flange with and without extended diaphragm seal, material AISI 316L

*H Device height see page 45, → section "Device height H"
h Height of the device without flange thickness b*


Version	Flange								Boltholes			Diaphragm seal			
	No-nominal dia-meter	Nominal pressure	Shape ¹	Dia-meter	Thick-ness	Raised face	Exten-sion length	Exten-sion dia-meter	Quan-tity	Dia-meter	Hole circle	max. Dia-phragm dia-meter	T_K Am-bient	T_K Pro-cess	Flange weight ²
			D [mm]	b [mm]	g [mm]	L [mm]	d ₃		g ₂ [mm]	k [mm]	d _M [mm]	[mbar/10 K]			
A	DN 50	PN 10-40	B1 (D)	165	20	102	—	—	4	18	125	59	+3.02	+1.25	3.0
B	DN 80	PN 10-40	B1 (D)	200	24	138	—	—	8	18	160	89	+0.23	+0.18	5.2
C	DN 80	PN 10-40	B1 (D)	200	24	—	50	76	8	18	160	72	+0.23	+0.11	6.2
							100								6.7
							200								7.8
F	DN 100	PN 10-16	B1 (C)	220	20	—	—	—	8	18	180	89	+0.23	+0.28	4.8
G	DN 100	PN 25-40	B1 (D)	235	24	162	—	—	8	22	190	89	+0.23	+0.11	6.7

1) Designation as per DIN 2527 in brackets

2) Housing weight see page 55

Process connections FMD77
with metallic measuring
diaphragms, high-pressure
side (continued)

ANSI flanges, connection dimensions as per B 16.5, raised face RF

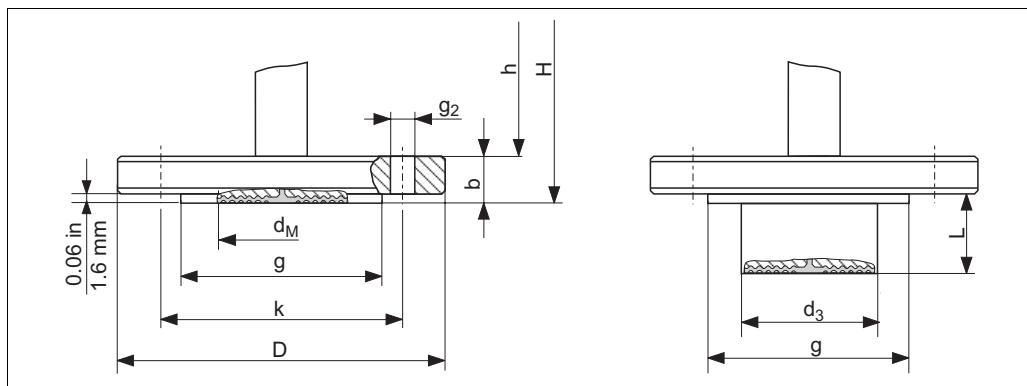

P01-FMD77xxx-06-09-xx-xx-000

Process connection FMD77, high-pressure side ANSI flange with and without extended diaphragm seal, material AISI 316/316L


H Device height → see page 45, section "Device height H"
 h Height of the device without flange thickness b

Version	Flange							Boltholes			Diaphragm seal			
	No-minal dia-meter	Class	Dia-meter	Thick-ness	Raised face	Extен-sion length	Extен-sion dia-meter	Quan-tity	Dia-meter	Hole circle	max. Dia-phragm dia-meter	T _K Am-bient	T _K Pro-cess	Flange weight ¹
			[lb./sq.in]	[in] [mm]	[in] [mm]	[in] [mm]	[in] [mm]	[in] [mm]	[in] [mm]	[in] [mm]	[mbar/10 K]			[kg]
N	2	150	6 152.4	0.75 19.1	3.62 91.9	—	—	4	0.75 19.1	4.75 120.7	2.32 59	+3.02	+0.90	2.6
P	3	150	7.5 190.5	0.94 23.9	5 127	—	—	4	0.75 19.1	6 152.4	3.50 89	+0.23	+0.18	5.1
Q	3	150	7.5 190.5	0.94 23.9	5 127	2 50.8	3 76.2	4	0.75 19.1	6 152.4	2.83 72	+0.23	+0.11	6
						4 101.6								6.6
						6 152.4								7.1
						8 203.8								7.7
T	4	150	9 228.6	0.94 23.9	6.19 157.2	—	—	8	0.75 19.1	7.5 190.5	3.50 89	+0.23	+0.11	7.2
W	4	300	10 254	1.25 31.8	6.19 157.2	—	—	8	0.88 22.4	7.88 200.2	3.50 89	+0.23	+0.11	11.7

1) Housing weight see page 55

**Process connections FMD77
with metallic measuring
diaphragms, high-pressure
side (continued)**

JIS flanges, connection dimensions as per JIS B 2220, raised face RF

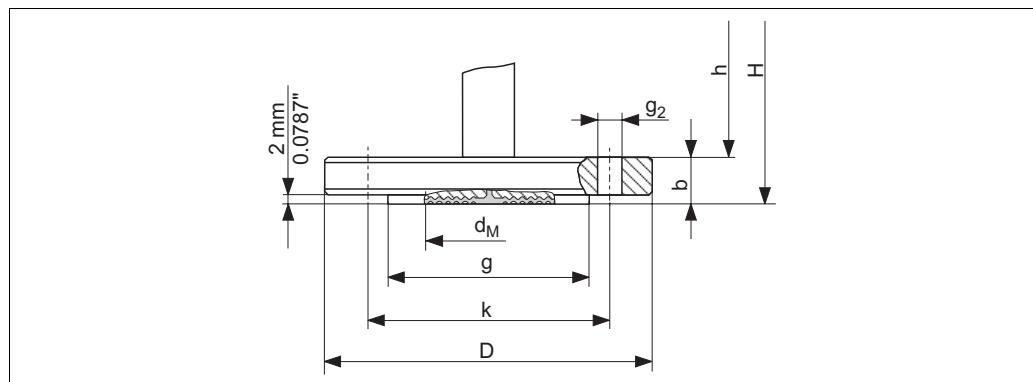

P01-FMD77xxxx-06-09-xx-xx-001

Process connection FMD77, high-pressure side, JIS flange, material AISI 316L/1.4435


H Device height → see the following section "Device height H"
h Height of the device without flange thickness b

Version	Flange					Boltholes			Diaphragm seal			
	Nominal diameter	Nominal pressure	Diameter D [mm] [in]	Thickness b [mm] [in]	Raised face g [mm] [in]	Quantity	Diameter g2 [mm] [in]	Hole circle k [mm] [in]	max. Diaphragm diameter dM [mm] [in]	T _K Ambient [mbar/10 K]	T _K Process	Flange weight ¹ [kg]
X	50 A	10 K	155 6.1	16 0.63	96 3.78	4	19 0.75	120 4.72	59 2.32	+3.02	+0.60	2.3
1	80 A	10 K	185 7.28	18 0.71	126 4.96	8	19 0.75	150 5.91	89 3.50	+0.23	+0.31	3.5
4	100 A	10 K	210 8.27	18 0.71	151 5.94	8	19 0.75	175 6.89	89 3.50	+0.23	+0.11	4.7

1) Housing weight see page 55

Device height H

Description	Device height H (h + b)
T14 housing, optional display on the side	325 mm + flange thickness b (see tables)
T15 housing, optional display on the top, flat cover	331 mm + flange thickness b (see tables)
T15 housing, optional display on the top, high cover	342 mm + flange thickness b (see tables)
T17 housing, optional display on the side	341 mm + flange thickness b (see tables)

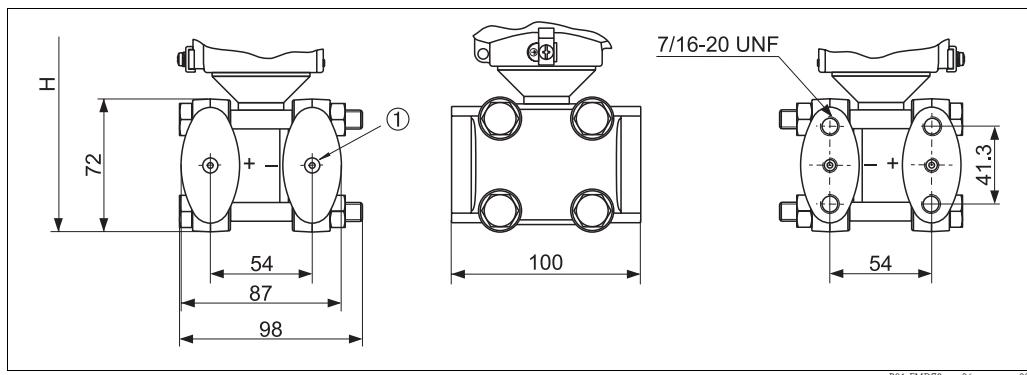FMD78 Basic unit

P01-FMD78xxx-06-xx-xx-xx-000

*FMD78 Basic unit**H Device height → the following section "Device height H"**1 Diaphragm seal attachment***Device height H**


Description	Device height
T14 housing, optional display on the side	217 mm
T15 housing, optional display on the top, flat cover	223 mm
T15 housing, optional display on the top, high cover	234 mm
T17 housing, optional display on the side	233 mm

**Process connection FMD78
with metallic measuring
diaphragms**

Note!

- Specifications for the "T_K Process" are listed in the following tables. These are typically values. These temperature coefficients apply to silicone oil and the membrane material AISI 316L/1.4435. For other filling oils, this temperature coefficient must be multiplied by the T_K correction factor of the corresponding filling oil. For the T_K correction factors, see also page 58, section "Diaphragm seal filling oils".
- The temperature coefficient "T_K Ambient" is listed in relation to the capillary length on page 59 in the "Influence of the temperature on the zero point" section.
- The weights of the diaphragm seals are given in the tables. See page 37 for the weight of the transmitter and page 55 for the weight of the housing.
- The following drawings are drawings that illustrate how the system works in principle. In other words, the dimensions of a diaphragm seal supplied can deviate from the dimensions given in this document.

Diaphragm seal cell structure

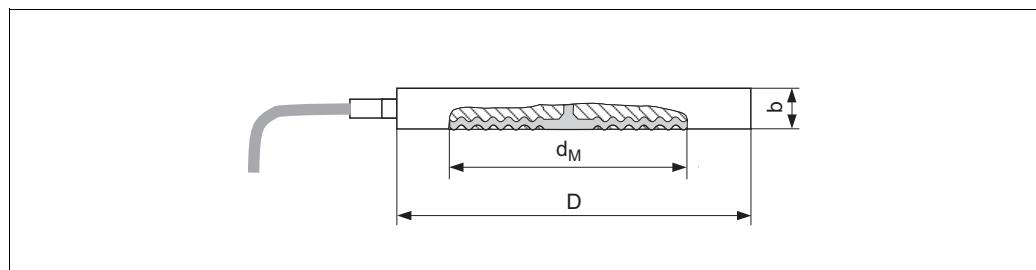

P01-FMD78xxx-06-09-xx-xx-000

Process connection FMD78, material AISI 316L


Version	Flange					Diaphragm seal		
	Nominal diameter	Nominal pressure ¹	Diameter D [mm]	Thickness b [mm]	max. Diaphragm diameter d _M [mm]	T _K Process [mbar/10K]	Weight of two diaphragm seals [kg]	
UF	DN 50	PN 16-400	102	20	59	+2.00	2.6	
UH	DN 80	PN 16-400	136	20	89	+0.20	4.6	
UJ	DN 100	PN 16-400	158	20	89	+0.30	6.2	

Version	Flange					Diaphragm seal		
	Nominal diameter [in]	Nominal pressure ¹ [lb/sq.in]	Diameter D [in] [mm]	Thickness b [in] [mm]	max. Diaphragm diameter d _M [in] [mm]	T _K Process [mbar/10K]	Weight of two diaphragm seals [kg]	
VF	2	150-2500	3.99 99	0.79 20	2.32 59	+1.25	2.6	
VH	3	150-2500	5.00 127	0.79 20	3.50 89	+0.25	4.6	
VJ	4	150-2500	6.22 158	0.79 20	3.50 89	+0.19	6.2	

1) The specified nominal pressure applies to the diaphragm seal. The maximum pressure for the measuring device is dependent on the lowest-rated element, with regard to pressure, of the selected components. → See also page 33, section "Pressure specifications".

**Process connection FMD78
with metallic measuring
diaphragms (continued)**

Threaded ISO 228 G 1/2 B and ANSI 1/2 MNPT, separator with PTFE seal

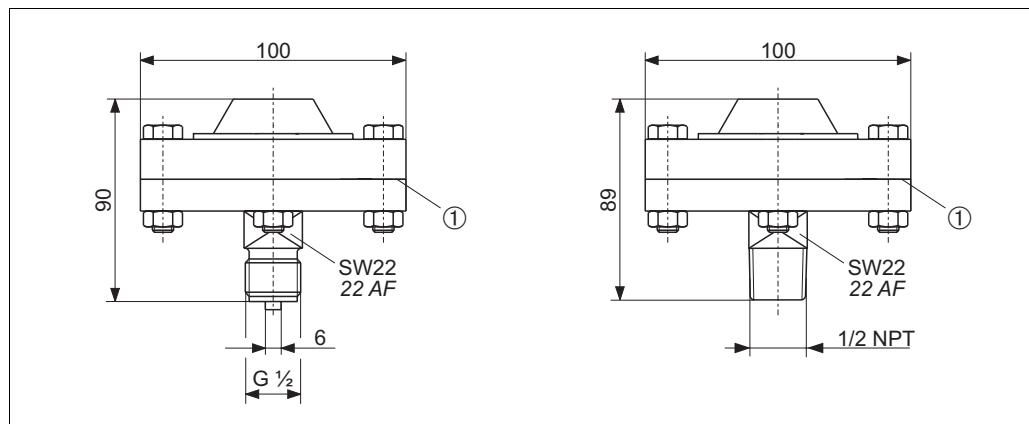


P01-FMD78xxx-06-09-xx-xx-002

Process connection FMD78, left: with threaded connection ISO 228 G 1/2 B, right: with threaded connection ANSI 1/2 MNPT

I PTFE seal as standard max. 260 °C/500 °F (higher temperatures on request)

Version	Material	Nominal pressure	T _K Process [mbar/10 K]	Weight of two diaphragm seals [kg]
GA	AISI 316L	PN 40	+0.75	2.9
RL	AISI 316L	PN 40	+0.55	2.9

Tri-Clamp ISO 2852

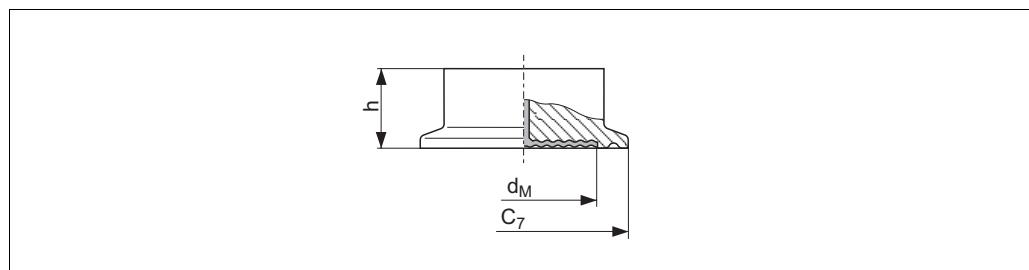


P01-FMD78xxx-06-09-xx-xx-003

*Process connection FMD78, Material: AISI 316L/1.4435, surface roughness of the wetted surfaces ≤ 0.8 µm as standard.
Lower surface roughness on request.*

Version	Nominal diameter ISO 2852	Nominal diameter DIN 32676	Nominal diameter [in]	Diameter C_7 [mm]	max. Diaphragm diameter d_M [mm]	Height h [mm]	T _K Process [mbar/10 K]	Weight of two diaphragm seals [kg]
TB	DN 25	DN 25	1	50.5	24	37	+10.45	0.64
TC	DN 38	DN 40	1 1/2	50.5	36	30	+2.40	2.0
TD	DN 51	DN 50	2	64	48	30	+1.00	2.2
TF	DN 76.1	-	3	91	73	30	+0.20	2.4

**Process connection FMD78
with metallic measuring
diaphragms (continued)**

Tri-Clamp pipe diaphragm seal ISO 2852

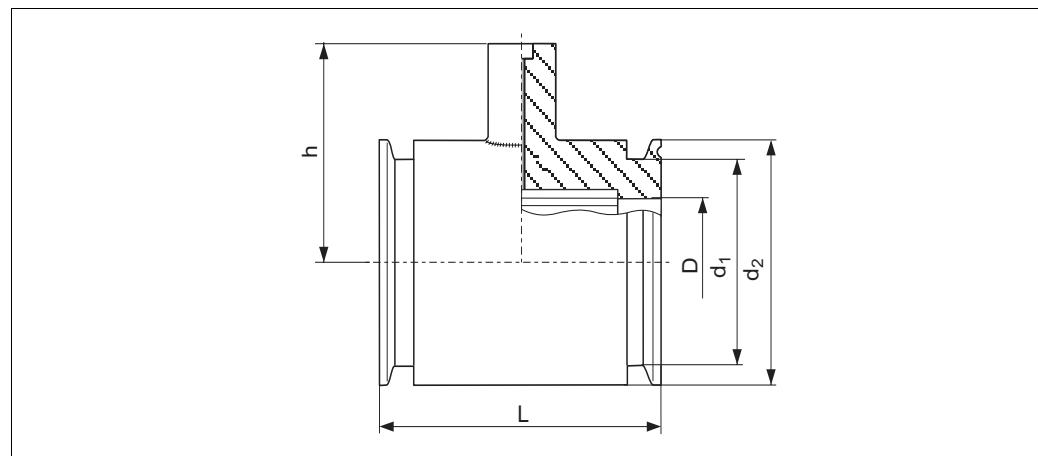


P01-FMD78xxxx-06-09-xx-xx-001

Process connection FMD78, Material: AISI 316L, surface roughness of the wetted surfaces $\leq 0.8 \mu\text{m}$ as standard. Lower surface roughness on request.

Version	Nominal diameter ISO 2852	Nominal diameter [in]	Diameter D [mm]	Diameter d ₁ [mm]	Diameter d ₂ [mm]	Height h [mm]	Face-to-face length L [mm]	T _K Process [mbar/10 K]	Weight of two diaphragm seals [kg]
SB	DN 25	1	22.5	43.5	50.5	67	126	+4.49	3.4
SC ¹	DN 38	1 1/2	35.5	43.5	50.5	67	126	+3.46	2
SD ¹	DN 51	2	48.6	56.5	64	79	100	+2.69	3.4

1) Including 3.1 and pressure test as per Pressure Equipment Directive, category II

Varivent N for pipes DN 40 – DN 162

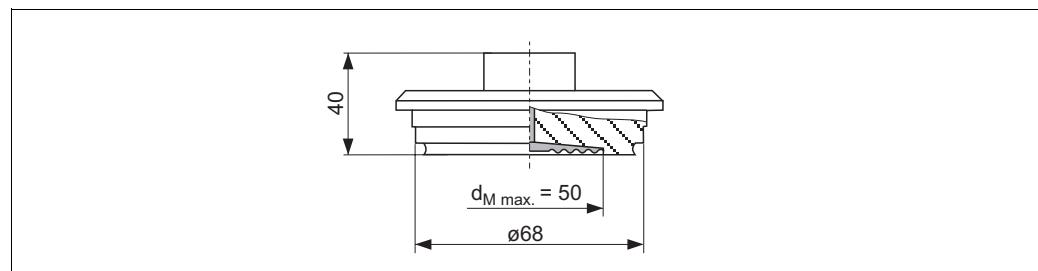


P01-FMD78xxxx-06-09-xx-xx-006

Process connection FMD78, surface roughness of the wetted surfaces $\leq 0.8 \mu\text{m}$ as standard. Lower surface roughness on request.

Version	Material	Nominal pressure [mbar/10 K]	T _K Process [mbar/10 K]	Weight of two diaphragm seals [kg]
TR	AISI 316L/1.4435	PN 40	+1.65	2.6

Process connection FMD78
with metallic measuring
diaphragms (continued)

DRD DN50 (65 mm)

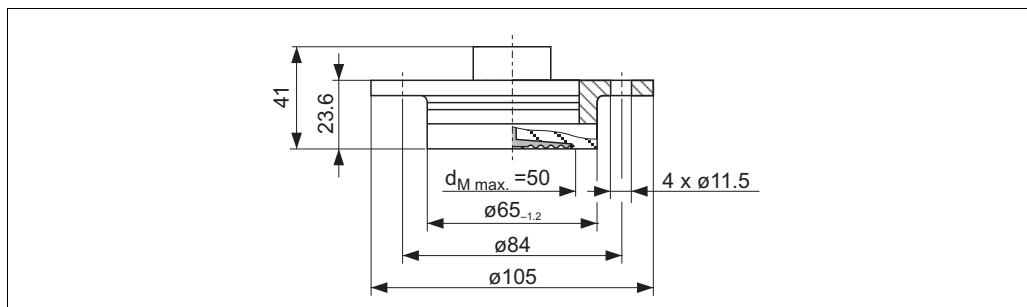


P01-FMD78xxx-06-09-xx-xx-002

Process connection FMD78, surface roughness of the wetted surfaces $\leq 0.8 \mu\text{m}$ as standard. Lower surface roughness on request.

Version	Material	Nominal pressure	T _K Process [mbar/10 K]	Weight of two diaphragm seals [kg]
TK	AISI 316L/1.4435	PN 25	+1.25	1.5

Hygienic connection, sanitary tank spud, extended diaphragm seal 2"

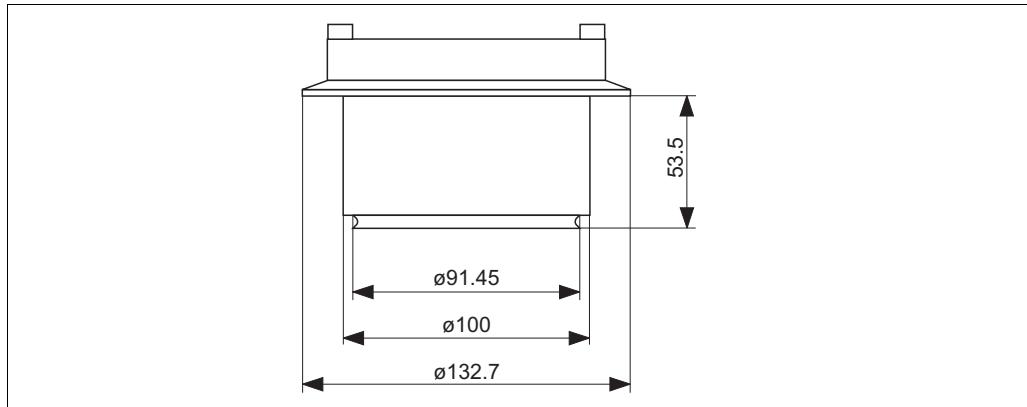


P01-FMD78xxx-06-09-xx-xx-011

Process connection FMD78, surface roughness of the wetted surfaces $\leq 0.8 \mu\text{m}$ as standard. Lower surface roughness on request.

Version	Material	T _K Process [mbar/10 K]	Weight of two diaphragm seals [kg]
WH	AISI 316L	+1.64	5

**Process connection FMD78
with metallic measuring
diaphragms (continued)**

Taper adapter with coupling nut, DIN 11851 (dairy fitting)

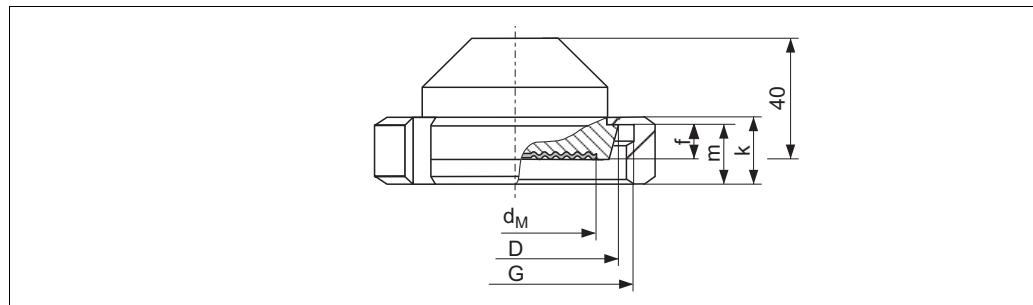


P01-FMD78xxxx-06-09-xx-xx-007

*Process connection FMD78, material AISI 316L/1.4435, surface roughness of the wetted surfaces $\leq 0.8 \mu\text{m}$ as standard.
Lower surface roughness on request.*

Version	Taper adapter				Slotted nut			Diaphragm seal		
	Nominal diameter	Nominal pressure	Diameter D [mm]	Adapter height f [mm]	Thread G	Height k [mm]	Height m [mm]	max. Diaphragm diameter d_M [mm]	T_K Process [mbar/10 K]	Weight of two diaphragm seals [kg]
MR	DN 50	PN 25	68.5	11	Rd 78 x 1/6"	22	19	52	+0.90	2.2
MS	DN 65	PN 25	86	12	Rd 95 x 1/6"	25	21	66	+0.29	4.0
MT	DN 80	PN 25	100	12	Rd 110 x 1/4"	30	26	81	+0.30	5.1

Threaded adapter, DIN 11851 (dairy fitting)

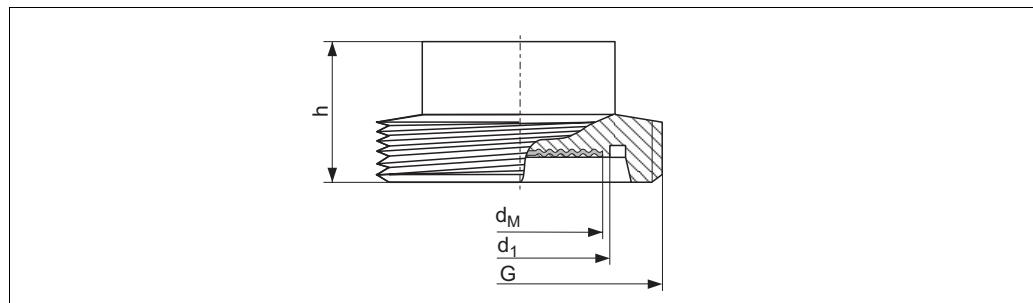


P01-FMD78xxxx-06-09-xx-xx-008

*Process connection FMD78, material AISI 316L/1.4435, surface roughness of the wetted surfaces $\leq 0.8 \mu\text{m}$ as standard.
Lower surface roughness on request.*

Version	Threaded adapter						Diaphragm seal		
	Nominal diameter	Nominal pressure	Diameter d_1 [mm]	Height h [mm]	Thread G	max. Diaphragm diameter d_M [mm]	T_K Process [mbar/10 K]	Weight of two diaphragm seals [kg]	
M3	DN 50	PN 25	54	35	Rd 78 x 1/6"	52	+0.95	1.8	
M4	DN 65	PN 25	71	40	Rd 95 x 1/6"	66	+0.29	3.4	
M5	DN 80	PN 25	85	40	Rd 110 x 1/4"	81	+0.19	4.0	

Process connection FMD78
with metallic measuring
diaphragms (continued)

EN/DIN flanges, connection dimensions as per EN 1092-1/DIN 2527
JIS flanges, connection dimensions as per JIS B 2220

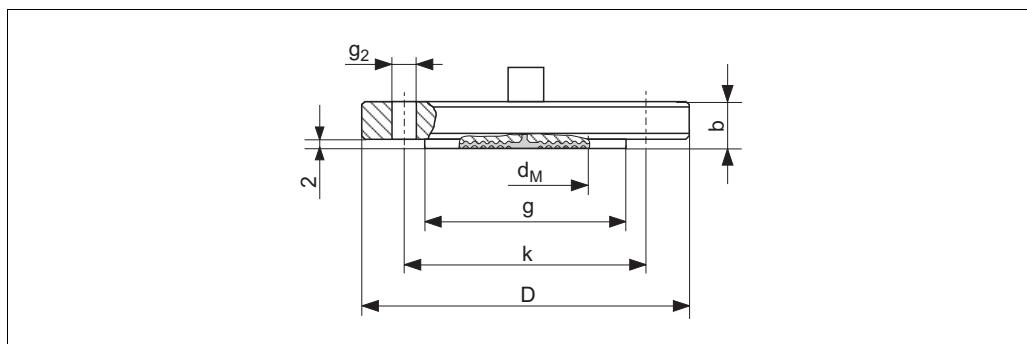

P01-FMD78xxx-06-09-xx-xx-009

Process connection FMD78, EN/DIN flange, Material AISI 316L


Version	EN/DIN flange						Boltholes			Diaphragm seal		
	Nominal diameter	Nominal pressure	Shape ¹	Diameter D [mm]	Thickness b [mm]	Raised face g [mm]	Quantity g ₂ [mm]	Diameter k [mm]	Hole circle d _M [mm]	T _K Process [mbar/10 K]	Weight of two diaphragm seals [kg]	
B3	DN 50	PN 10-40	B1 (D)	165	20	102	4	18	125	59	+1.50	6.0
B5	DN 80	PN 10-40	B1 (D)	200	24	138	8	18	160	89	+0.20	10.5
BT	DN 100	PN 10-16	B1 (C)	220	20	—	8	18	180	89	+0.35	9.5
B6	DN 100	PN 25-40	B1 (D)	235	24	162	8	22	190	89	+0.19	13.3

1) Designation as per DIN 2527 in brackets

Version	JIS flange						Boltholes			Diaphragm seal		
	Nominal diameter	Nominal pressure	Diameter D [mm]	Thickness b [mm]	Raised face g [mm]	Quantity g ₂ [mm]	Diameter k [mm]	Hole circle d _M [mm]	T _K Process [mbar/10 K]	Weight of two diaphragm seals [kg]		
KF	50 A	10 K	155	16	96	4	19	120	59	+0.81	4.6	
KL	80 A	10 K	185	18	127	8	19	150	89	+0.19	7.0	
KH	100 A	10 K	210	18	151	8	19	175	89	+0.25	9.4	

**Process connection FMD78
with metallic measuring
diaphragms (continued)**


ANSI flanges, connection dimensions as per ANSI B 16.5, raised face RF

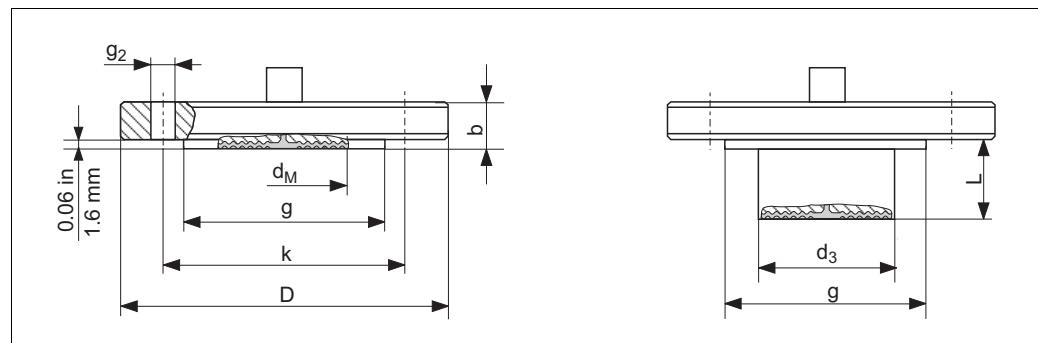


P01-FMD78xxx-06-09-xx-xx-010

Process connection FMD78, ANSI flange with and without extended diaphragm seal, material AISI 316/AISI 316L


Version	Flange								Boltholes			Diaphragm seal		
	Nominal dia-meter	Class	Dia-meter	Thick-ness	Raised face	Exten-sion length	Exten-sion dia-meter	Quan-tity	Dia-meter	Hole circle	max. Dia-phragm diameter	T _K Process	Weight of two dia-phragm seals	
				b [in] [mm]	g [in] [mm]	L [in] [mm]	d ₃ [in] [mm]	g ₂ [in] [mm]	k [in] [mm]	d _M [in] [mm]				
AF	2	150	6 152.4	0.75 19.1	3.62 91.9	—	—	4	0.75 19.1	4.75 120.7	2.32 59	+1.10	5.2	
AR	2	300	6.5 165.1	0.88 22.5	3.62 91.9	—	—	8	0.75 19.1	5 127	2.32 59	+0.75	6.8	
AG	3	150	7.5 190.5	0.94 23.9	5 127	—	—	4	0.75 19.1	6 152.4	3.50 89	+0.40	10.2	
AS	3	300	8.25 209.5	1.12 28.4	5 127	—	—	8	0.88 22.4	6.62 168.1	3.50 89	+0.35	14	
J4	3	150	7.5 190.5	0.94 23.9	5 127	2 50.8	3 76	4	0.75 19.1	6 152.4	2.83 72	+0.29	12	
						4 101.6							13.2	
						6 152.4							14.2	
						8 203.6							15.4	
AH	4	150	9 228.6	0.94 23.9	6.19 157.2	—	—	8	0.75 19.1	7.5 190.5	3.50 89	+0.25	14.4	
AT	4	300	10 254	1.25 31.8	6.19 157.2	—	—	8	0.88 22.4	7.88 200.1	3.50 89	+0.19	23.4	
J5	4	150	9 228.6	0.94 23.9	6.19 157.2	2 50.8	3.7 94	8	0.75 19.1	7.5 190.5	3.50 89	+0.19	17.3	
						4 101.6							19.8	
						6 152.4							22.3	
						8 203.6							24.8	

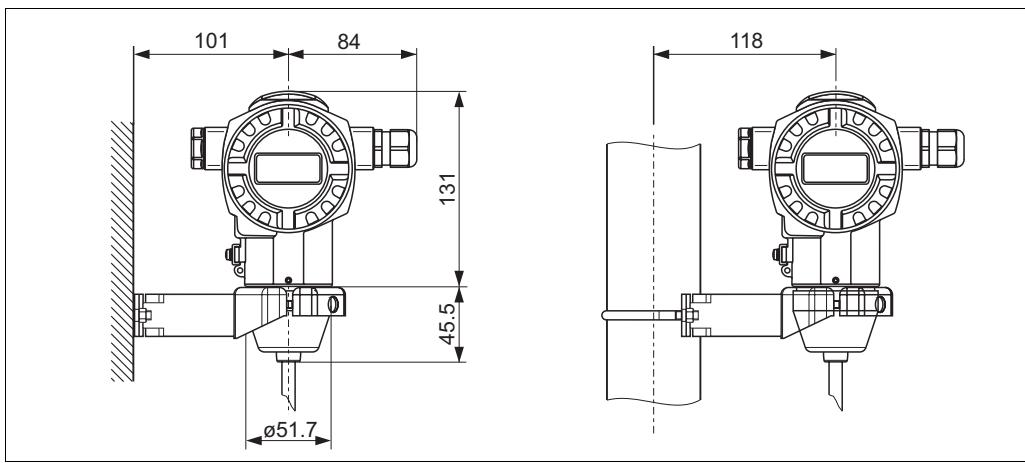"Separate housing" version

Dimensions T14 housing, optional display on the side. Housing weight see page 55.

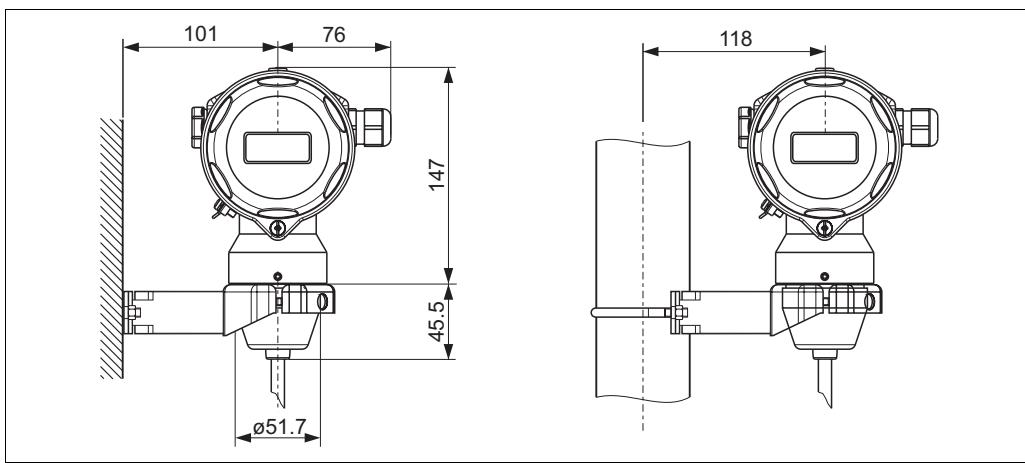

Dimensions T17 housing, optional display on the side. Housing weight see page 55.

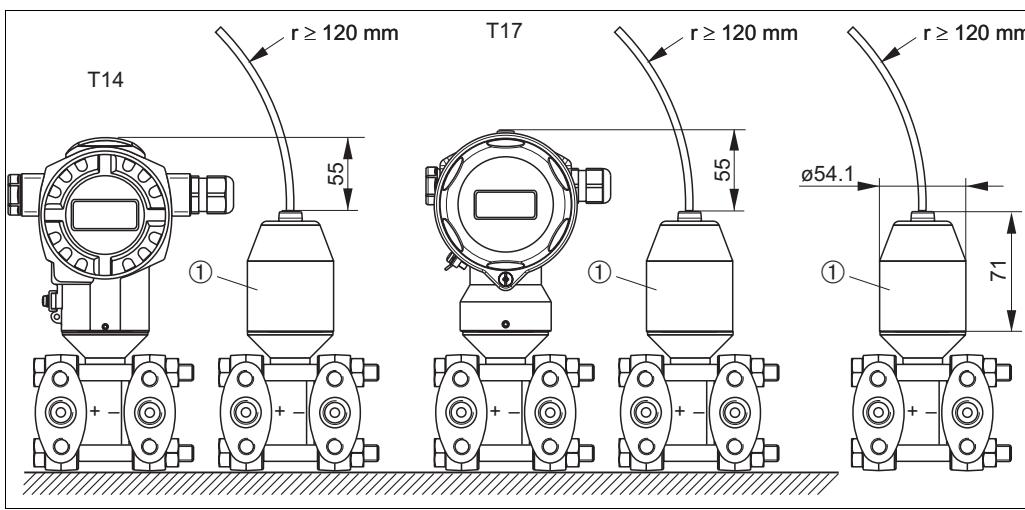Reduction of the mounting height of the process connection, for application of the separate housing.
1 Process connection adapter.

If the separate housing is used, the mounting height of the process connection is reduced by approx. 55 mm as compared to the dimensions of the standard version.

The minimum bending radius (r) for the cable is 120 mm (4.7").

Weight**Housing**

	T14		T15	T17	Separate housing
	Aluminium	AISI 316L	Aluminium	AISI 316L	
with electronic insert and display	1.2 kg	2.1 kg	1.8 kg	1.2 kg	Weight of housing T14, T15 or T17 + 0,5 kg.
with electronic insert without display	1.1 kg	2.0 kg	1.7 kg	1.1 kg	Weight of sensor + 0,5 kg.

Process connections

- Process connections PMD70 with ceramic measuring diaphragms: ab Seite 35 ff
- Process connections PMD75 with metallic measuring diaphragms: ab Seite 37 ff
- Process connection FMD76 with ceramic measuring diaphragms: ab Seite 40 ff
- Process connections FMD77 with metallic measuring diaphragms, low-pressure side: ab Seite 42 ff
- Process connection FMD78 with metallic measuring diaphragms: ab Seite 47 ff

Material**T14/T15 housing:**

- T14 housing, selectable:
 - Die-cast aluminium with protective powder-coating on polyester basis: RAL 5012 (blue), cover: RAL 7035 (grey)
 - Precision cast stainless steel AISI 316L (1.4435)
- T15 housing: Die-cast aluminium with protective powder-coating on polyester basis: RAL 5012 (blue), cover: RAL 7035 (grey)
- External operation (keys and key covering): Polycarbonate PC-FR, RAL 7035 (grey)
- Sight glass: Mineral glass
- Cable gland: Polyamid (PA)
- Pressure compensation filter: PA6 GF10
- Bind plug: PBT-GF30 FR, for Dust Ex, EEx d, FM XP and CSA XP: AISI 316L (1.4435)
- Seals:
 - Cable and blind plug seal: Silicone (VMQ)
 - Pressure compensation filter o-ring: Silicone (VMQ)
 - Cover: EPDM
 - Sight glass: Silicone (VMQ)
- Nameplates: AISI 304 (1.4301)

T17 housing:

- Housing: Stainless steel AISI 316L (1.4404)
- Sight glass:
 - Version for non-hazardous area, ATEX EEx ia, NEPSI Zone 0/1 Ex ia, IECEx Zone 0/1 Ex ia, FM NI, FM IS, CSA IS: Polycarbonate (PC)
 - ATEX 1/2 D, ATEX 1/3 D, ATEX 1 GD, ATEX 1/2 GD, ATEX 3 G, FM DIP, CSA Dust Ex: Mineral glass
- Cable gland: Polyamid (PA), for Dust-Ex: CuZn nickel-plated
- Blind plug: PBT-GF30 FR, for Dust-Ex: AISI 316L (1.4435)
- Pressure compensation filter: PA6 GF10
- Seals:
 - Cable and blind plug seal: Silicone (VMQ)
 - Pressure compensation filter o-ring: Silicone (VMQ)
 - Cover: EPDM
 - Sight glass: EPDM
- Nameplates: laseried

DIN/EN flanges

Endress+Hauser supplies DIN/EN flanges made of stainless steel AISI 316L with the material number 1.4435 or 1.4404. With regard to its stability property, the material 1.4435 is identical to 1.4404 which is grouped under 13EO in EN 1092-1 Tab. 18. The chemical composition of the two materials can be identical.

Cable for separate housing:

- PE cable:
Slip-resistant cable with strain-relief members made of Dynemo; shielded using aluminium-coated film; insulated with polyethylene (PE-LD), black; copper wires, twisted, UV resistant
- FEP cable:
Slip-resistant cable; shielded using galvanized steel wire netting; insulated with fluorinated ethylene propylene (FEP), black; copper wires, twisted, UV resistant

Miscellaneous:

- Measuring cell PMD70/FMD76, filling oil
 - 25 mbar and 100 mbar measuring cell: Silicone oil
 - 500 mbar and 3000 mbar measuring cell: Mineral oil
 - for oxygen and ultra pure gas applications: Inert oil (Voltalef 1A)
- Measuring cell PMD75/FMD77 and FMD78, filling oil (Silicone oil)
 - for oxygen and ultra pure gas applications: Inert oil (Halocarbon 6.3)
- Membrane material:
 - PMD70/FMD76: Al_2O_3 (Aluminium-oxide-ceramic)
 - PMD75, FMD77, FMD78:
 - AISI 316L (1.4435)
 - Alloy C276 (2.4819)
 - Monel 400 (2.4360)
 - Tantal
 - AISI 316L (1.4435) with Gold-Rhodium coating (FMD77/FMD78 only)
 - AISI 316L (1.4435) with 0.09 mm PTFE foil (FMD77/FMD78 only)
- Process diaphragm PMD70/FMD76: Al_2O_3 (Aluminium-oxide-ceramic)
- Mounting accessories: mounting bracket with screws AISI 304 (1.4301)
- Capillary: AISI 316 Ti (1.4571)
- Protective hose for capillary: AISI 304 (1.4301)
- External earth terminal: AISI 304 (1.4301)
- Screws and nuts for side flanges:
 - PMD70: hex.-headed bolt DIN 931-M10x50-A2-70, hex.-headed nut: DIN 934-M10-A4-70
 - PMD75 PN 160: hex.-headed bolt ISO 4014-M12x90-A4
 - PMD75 PN 420: hex.-headed nut ISO 4032-M12-A4-bs

→ For process connections, seals and filling oils see ordering information, page 53 ff.

Planning instructions, diaphragm seal systems

Applications

Diaphragm seal systems should be used if the process media and the device should be separated. Diaphragm seal systems offer clear advantages in the following instances:

- In the case of high process temperatures (→ See also page 32, section "Process temperature limits".)
- In the case of process media that crystallise
- In the case of corrosive or highly various process media or process media with solids content
- In the case of heterogeneous and fibrous process media
- If good and rapid measuring point cleaning is necessary
- If the measuring point is exposed to vibrations
- For mounting locations that are difficult to access

Design and operation mode

Diaphragm seals are separating equipment between the measuring system and the process medium.

A diaphragm seal system consists of:

- A diaphragm seal in a one-sided system, e.g. FMD77 or two diaphragm seals, in a two-sided system, e.g. FMD78
- One capillary tube or two capillary tubes
- Fill fluid and
- A differential pressure transmitter.

The process pressure acts via the diaphragm seal membrane on the liquid-filled system, which transfers the process pressure via the capillary tube onto the sensor of the differential pressure transmitter.

Endress+Hauser delivers all diaphragm seal systems as welded versions. The system is hermetically sealed, which ensures the highest reliability.

Note!

The correlations between the individual diaphragm seal components are presented in the following section. For further information and comprehensive diaphragm seal system designs, please contact your local Endress+Hauser Sales Center.

Diaphragm seal

The diaphragm seal determines the application range of the system by

- the diaphragm diameter
- the diaphragms: stiffness and material
- the design (oil volume).

Diaphragm diameter

The larger the diaphragm diameter (less stiffness), the smaller the temperature effect on the measurement result.

Note: To keep the temperature effect in practice-oriented limits, you should select diaphragm seals with a nominal diameter of \geq DN 80, in as far as the process connection allows for it.

Diaphragm stiffness

The stiffness is dependent on the diaphragm diameter, the material, any available coating and on the diaphragm thickness and shape. The diaphragm thickness and the shape are defined constructively. The stiffness of a diaphragm seal membrane influences the temperature operating range and the measuring error caused by temperature effects.

Capillary

Diaphragm seals are used with the following capillary internal diameters as standard:

- \leq DN 50: 1 mm
- $>$ DN 50: 2 mm

The capillary tube influences the T_K zero point, the ambient temperature operating range and the response time of a diaphragm seal system as a result of its length and internal diameter.

→ See also page 59 ff, sections "Influence of the temperature on the zero point", "Ambient temperature range" and "Response time".

→ Observe the installation instructions regarding capillary tubes. See page 64 ff, section "Installation instructions".

Filling oil

When selecting the filling oil, fluid and ambient temperature as well as the operating pressure are of crucial importance. Observe the temperatures and pressures during commissioning and cleaning. A further selection criterion is the compatibility of the filling oil with the requirements of the process medium. For this reason, only filling oils that are harmless to health are used in the food industry, such as vegetable oil or silicone oil. → See also the following section "Diaphragm seal filling oils".

The filling oil used influences the T_K zero point and the temperature operating range of a diaphragm seal system and the response time. → See also page 59 ff, sections "Influence of the temperature on the zero point" and "Response time".

Differential pressure transmitter

The differential pressure transmitter influences the temperature operating range, the T_K zero point and the response time as a result of the volume of its side flange and as a result of its volume change. The volume change is the volume that has to be shifted to pass through the complete measuring range.

Differential pressure transmitters from Endress+Hauser are optimised with regard to minimum volume change and side flange.

Diaphragm seal filling oils

Version ¹	Filling oil	Permissible temperature range at 0.05 bar ≤ p_{abs} ≤ 1 bar	Permissible temperature range at $p_{abs} \geq 1$ bar	Density [g/cm ³]	Viscosity [cSt at 25°C (77°F)]	Coefficient of thermal expansion [1/K]	T_K correction factor	Notes
FMD77: A FMD78: A, 1	Silicone oil	-40...+180°C (-40...+356°F)	-40...+250°C (-40...+482°F)	0.96	100	0.00096	1	suitable for foods FDA 21 CFR 175.105
FMD77: V FMD78: C, 3	High-temperature oil	-10...+200°C (+14...+392°F)	-10...+400°C (+14...+752°F)	1.07	37	0.0007	0.72	high temperatures
FMD77: F FMD78: D, 4	Inert oil	-40...+80°C (-40...+176°F)	-40...+175°C (-40...+347°F)	1.87	27	0.000876	0.91	Oil for ultra pure gas and oxygen applications
FMD77: D FMD78: B, 2	Vegetable oil	-10...+120°C (+14...+248°F)	-10...+200°C (+14...+392°F)	0.94	9.5	0.00101	1.05	suitable for foods FDA 21 CFR 172.856
FMD77: L FMD78: E, 5	Low temperature oil	-70...+80°C ² (-94...+176°F)	-70...+180°C ² (-94...+356°F)	0.92	4.4	—	—	low temperatures

1) Version for feature 90 in the order code

2) Observe temperature limits of the device (→ page 31 and page 32)


Influence of the temperature on the zero point

A temperature change results in a volume change of the filling oil. The volume change is dependent on the coefficient of thermal expansion of the filling oil and on the volume of the filling oil at calibration temperature (constant in the range: +21 to +33°C (+69.8 to 91.4°F)). → See also page 46, section "Diaphragm seal filling oils".

For example, the filling oil expands in the event of a temperature increase. The additional volume presses against the diaphragm seal membrane. The stiffer a diaphragm is, the greater its return force, which counteracts a volume change and acts on the measuring cell together with the operating pressure, thus shifting the zero point. For the "T_K Process", see page 47 ff, section "Process connections FMD78".

The following diagrams display the temperature coefficient "T_K Ambient" dependent on the capillary length. The following application is displayed: capillary temperature and transmitter temperature (ambient temperature) change, the process temperature corresponds to the calibration temperature.

The temperature coefficients obtained from the diagrams apply to silicone oil and the membrane material AISI 316L/1.4435. For other filling oils, these temperature coefficients must be multiplied by the T_K correction factor of the corresponding filling oil. For the T_K correction factors, see page 58, section "Diaphragm seal filling oils".

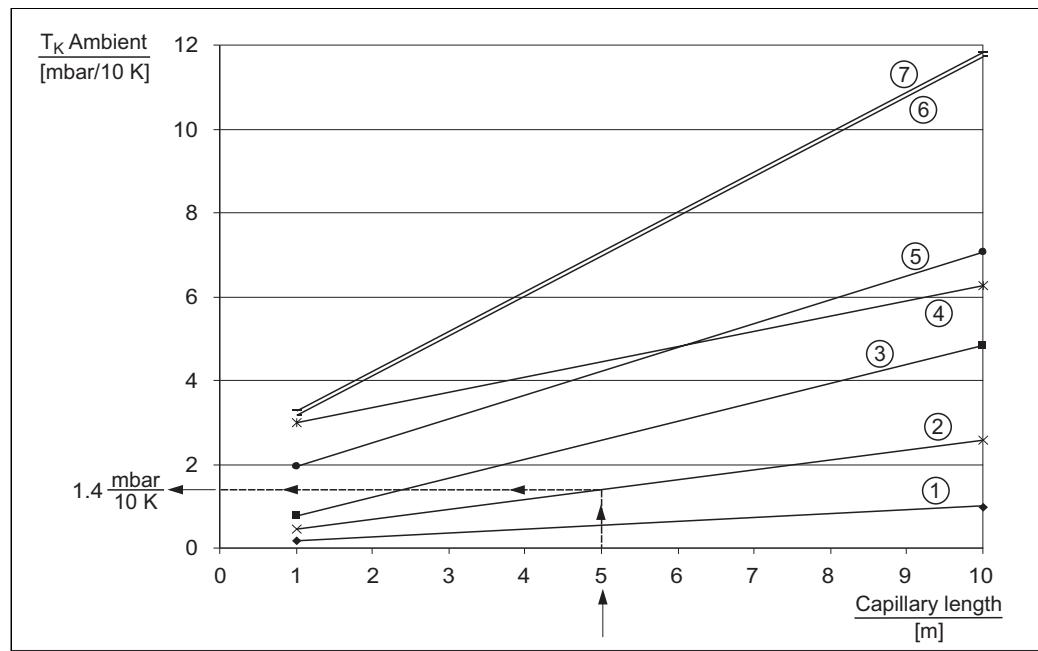

P01-FMD78xxx-05-xx-xx-xx-004

Example for:

- Diaphragm seal versions "B5, EN/DIN Flange DN 80 PN 10-40 B1, AISI 316L"
- Capillary length: 5 m
- Ambient temperature, capillary/transmitter: 45°C
- Filling oil: silicone oil


1. Select characteristic curve type for the diaphragm seal versions "B5" in accordance with the following table.
Result: characteristic curve type 2
2. Obtain value for T_K Ambient from the diagram.
Result: 1.4 mbar/10 K
3. $T_{\text{Ambient}} - T_{\text{Calibration}} = 45^\circ\text{C} - 25^\circ\text{C} = 20^\circ\text{C} \Rightarrow 1.4 \text{ mbar}/10 \text{ K} \times 20 \text{ K} = 2.8 \text{ mbar}$

Result: In this application, the zero point is shifted by 2.8 mbar.

Note!

- The influence of temperature on the zero point can be corrected with position calibration.
- The temperature influence can be minimised by using a filling oil with a smaller coefficient of thermal expansion, shorter capillaries, diaphragm seals with larger diaphragm diameter or by using a smaller capillary internal diameter.

Characteristic type	Version	Diaphragm seal
1	TF	Tri-Clamp, ISO 2852 DN 76.1 (3"), AISI 316L/1.4435
2	GA	Thread ISO 228 G 1/2 B, PN 40, AISI 316L, Separator, PTFE seal
	RL	Thread ANSI 1/2 FNPT, PN 40, AISI 316L, Separator, PTFE seal
	UH	Cell DN 80 PN 16-400, AISI 316L
	UJ	Cell DN 100 PN 16-400, AISI 316L
	VH	Cell 3" 150-2500 lbs, AISI 316L
	VJ	Cell 4" 150-2500 lbs, AISI 316L
	B5	EN/DIN flange DN 80 PN 10-40 B1, AISI 316L
	BT	EN/DIN flange DN 100 PN 10-16 B1, AISI 316L
	B6	EN/DIN flange DN 100 PN 25-40 B1, AISI 316L
	AG	ANSI flange 3" 150 lbs RF, AISI 316/316L
	AS	ANSI flange 3" 300 lbs RF, AISI 316/316L
	AH	ANSI flange 4" 150 lbs RF, AISI 316/316L
	J5	ANSI flange 4" 150 lbs RF, AISI 316/316L, Extensions: 2"/4"/6"/8"
	AT	ANSI flange 4" 300 lbs RF, AISI 316/316L
	KL	JIS flange 80 A 10 K RF, AISI 316L
	KH	JIS flange 100 A 10 K RF, AISI 316L
	MT	DIN 11851 DN 80 PN 25, AISI 316L
	M5	DIN 11851 DN 80 PN 25 socket, AISI 316L
3	MS	DIN 11851 DN 65 PN 25, AISI 316L
	M4	DIN 11851 DN 65 PN 25 socket, AISI 316L
	J4	ANSI flange 3" 150 lbs RF, AISI 316/316L, Extensions: 2"/4"/6"/8"
4	SC	Pipe seal diaphragm Tri Clamp, ISO 2852 DN 38 (1 1/2"), AISI 316L/1.4435
	SD	Pipe seal diaphragm Tri Clamp, ISO 2852 DN 51 (2"), AISI 316L/1.4435
5	UF	Cell DN 50 PN 16-400, AISI 316L
	VF	Cell 2" 150-2500 lbs, AISI 316L
	B3	EN/DIN flange DN 50 PN 10-40 B1, AISI 316L
	AF	ANSI flange 2" 150 lbs RF, AISI 316/316L
	AR	ANSI flange 2" 300 lbs RF, AISI 316/316L
	KF	JIS flange 50 A 10 K RF, AISI 316L
	MR	DIN 11851 DN 50 PN 25, AISI 316L
	M3	DIN 11851 DN 50 PN 25 socket, AISI 316L
6	TD	Tri-Clamp, ISO 2852 DN 51 (2"), DIN 32676 DN 50, AISI 316L/1.4435
7	TK	DRD DN50 (65 mm), PN 25, AISI 316L/1.4435
	TR	Varivent Type N for tubes DN 40 – DN 162, PN 40, AISI 316L/1.4435

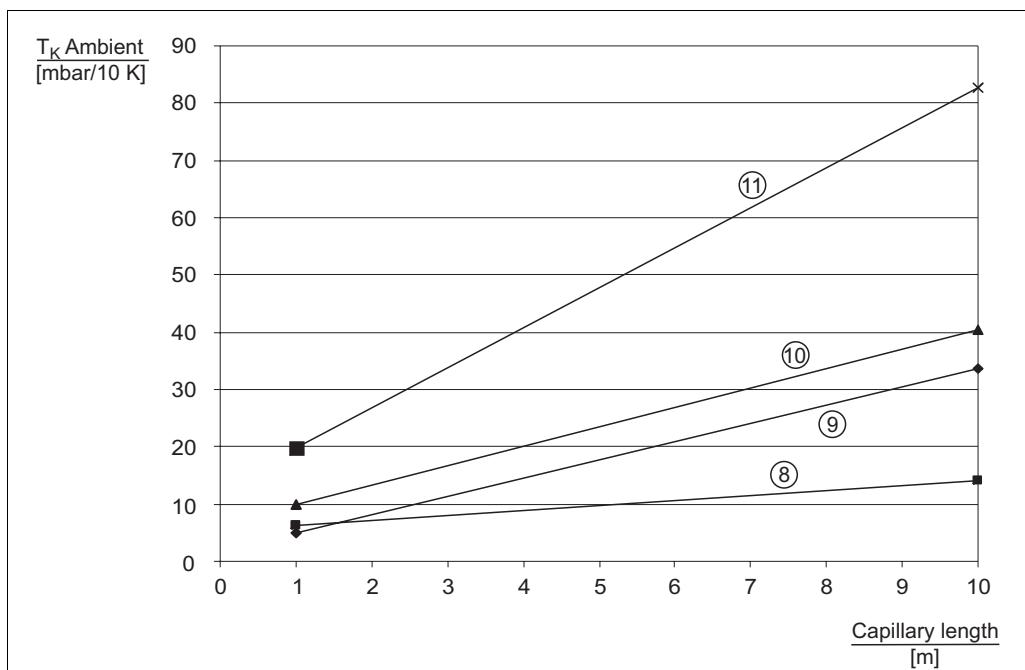







Characteristic type	Version	Diaphragm seal
8	SB	Pipe seal diaphragm Tri-Clamp, ISO 2852 DN 25 (1"), AISI 316L/1.4435
9	WH	Sanitary tank spud, AISI 316L/1.4435, Extensions 2"
10	TC	Tri-Clamp, ISO 2852 DN 38 (1 – 1 1/2"), DIN 32676 DN 40, AISI 316L/1.4435
11	TB	Tri-Clamp, ISO 2852 DN 25 (1"). DIN 32676 DN 25, AISI 316L/1.4435





Ambient temperature range

The filling oil, capillary length, capillary internal diameter, process temperature and the oil volume of the diaphragm seal determine the ambient temperature operating range of the diaphragm seal system. The following diagrams display the permitted ambient temperature operating range in relation to the capillary length. The diagrams apply to a process temperature of +25°C (+77°F) and to silicone oil. The operating range can be extended by using a filling oil with a smaller coefficient of expansion and by using shorter capillaries.

Note!

- Endress+Hauser recommends using low temperature oil for applications that require short response times or that are near the lower temperature limit. → See also page 58, "Diaphragm seal filling oils" section.
- For further information, comprehensive diaphragm seal system designs and measuring technology solutions acting close to the operating limits, please contact your local Endress+Hauser Sales Center.

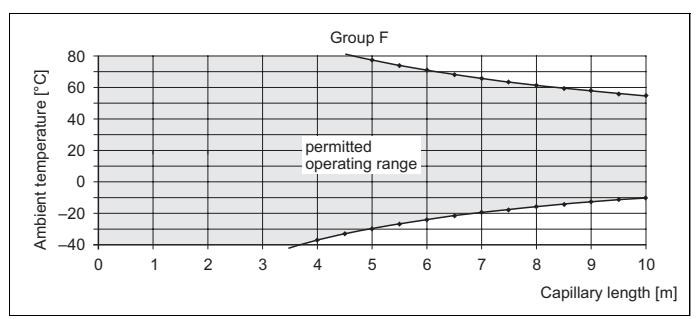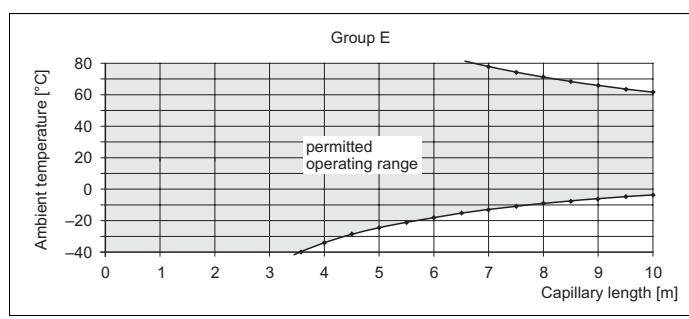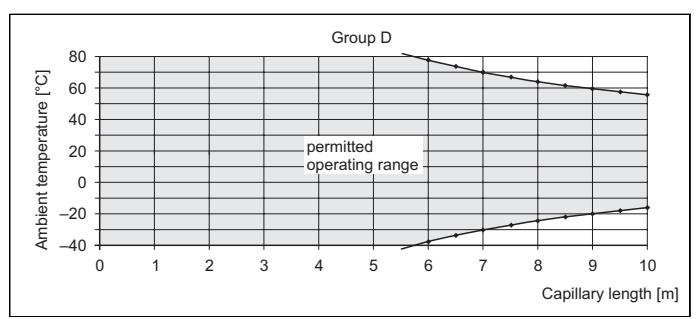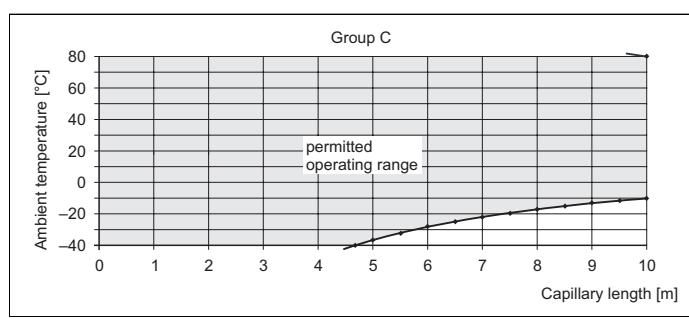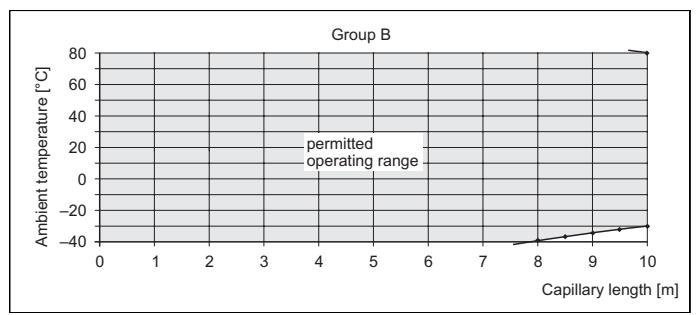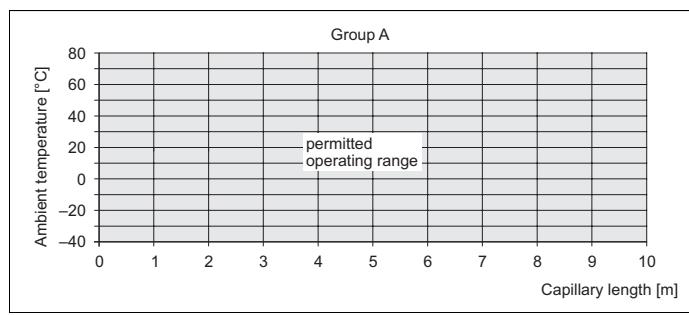

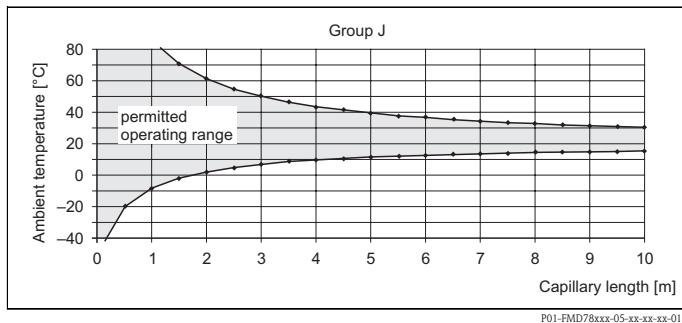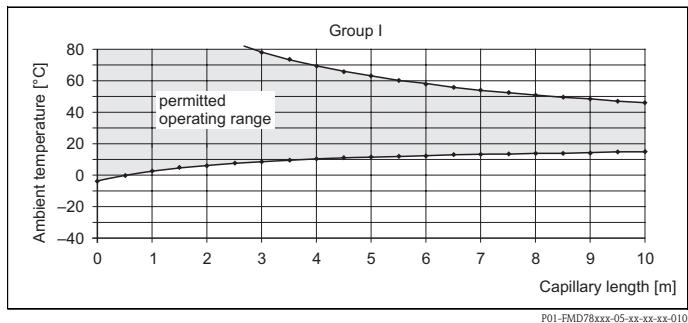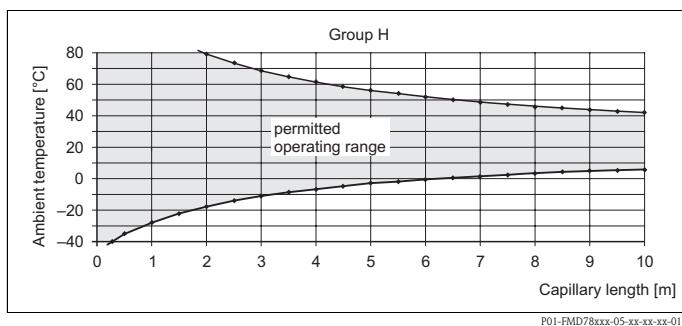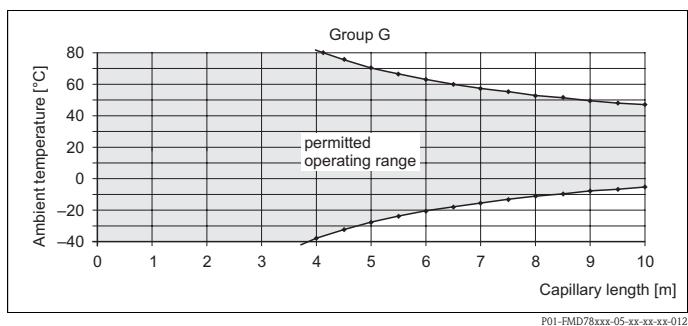


Group	Version	Diaphragm seal
A	SB	Pipe seal diaphragm Tri-Clamp, ISO 2852 DN 25 (1"), AISI 316L/1.4435
	SC	Pipe seal diaphragm Tri Clamp, ISO 2852 DN 38 (1 1/2"), AISI 316L/1.4435
	SD	Pipe seal diaphragm Tri Clamp, ISO 2852 DN 51 (2"), AISI 316L/1.4435
	GA	Thread ISO 228 G 1/2 B, PN 40, AISI 316L, Separator, PTFE seal
	RL	Thread ANSI 1/2 FNPT, PN 40, AISI 316L, Separator, PTFE seal
B	UF	Cell DN 50 PN 16-400, AISI 316L
	VF	Cell 2" 150-2500 lbs, AISI 316L
	B3	EN/DIN flange DN 50 PN 10-40 B1, AISI 316L
	AF	ANSI flange 2" 150 lbs RF, AISI 316/316L
	AR	ANSI flange 2" 300 lbs RF, AISI 316/316L
	KF	JIS flange 50 A 10 K RF, AISI 316L
	MR	DIN 11851 DN 50 PN 25, AISI 316L
	M3	DIN 11851 DN 50 PN 25 socket, AISI 316L
C	UH	Cell DN 80 PN 16-400, AISI 316L
	UJ	Cell DN 100 PN 16-400, AISI 316L
	VJ	Cell 4" 150-2500 lbs, AISI 316L
	B5	EN/DIN flange DN 80 PN 10-40 B1, AISI 316L
	BT	EN/DIN flange DN 100 PN 10-16 B1, AISI 316L
	B6	EN/DIN flange DN 100 PN 25-40 B1, AISI 316L
	AH	ANSI flange 4" 150 lbs RF, AISI 316/316L
	J5	ANSI flange 4" 150 lbs RF, AISI 316/316L, Extensions: 2"/4"/6"/8"
	AT	ANSI flange 4" 300 lbs RF, AISI 316/316L
	KH	JIS flange 100 A 10 K RF, AISI 316L
	MT	DIN 11851 DN 80 PN 25, AISI 316L
	M5	DIN 11851 DN 80 PN 25 socket, AISI 316L
D	VH	Cell 3" 150-2500 lbs, AISI 316L
	AG	ANSI flange 3" 150 lbs RF, AISI 316/316L
	AS	ANSI flange 3" 300 lbs RF, AISI 316/316L
	KL	JIS flange 80 A 10 K RF, AISI 316L
	TD	Tri-Clamp, ISO 2852 DN 51 (2"), DIN 32676 DN 50, AISI 316L/1.4435
	TF	Tri-Clamp, ISO 2852 DN 76.1 (3"), AISI 316L/1.4435
E	J4	ANSI flange 3" 150 lbs RF, AISI 316/316L, Extensions: 2"/4"/6"/8"
F	TK	DRD DN50 (65 mm), PN 25, AISI 316L/1.4435
	TR	Varivent Type N for tubes DN 40 – DN 162, PN 40, AISI 316L/1.4435
G	MS	DIN 11851 DN 65 PN 25, AISI 316L
	M4	DIN 11851 DN 65 PN 25 socket, AISI 316L
H	TC	Tri-Clamp, ISO 2852 DN 38 (1 – 1 1/2"), DIN 32676 DN 40, AISI 316L/1.4435
I	TB	Tri-Clamp, ISO 2852 DN 25 (1"). DIN 32676 DN 25, AISI 316L/1.4435
J	WH	Sanitary tank spud, AISI 316L/1.4435, Extensions 2"

Response time


The viscosity of the filling oil, the capillary length and the capillary internal diameter influence the frictional resistance. The greater the frictional resistance, the longer the response time.

Furthermore, the volume change of the measuring cell influences the response time. The lower the volume change of the measuring cell is, the less filling oil has to be shifted in the diaphragm seal system.

The following diagram shows typical response times (T_{90}) for the various filling oils dependent on the measuring cell and the capillary internal diameter. The values given are in seconds per metre of capillary length and must be multiplied by the actual length of the capillary. The response time of the transmitter must also be taken into consideration.

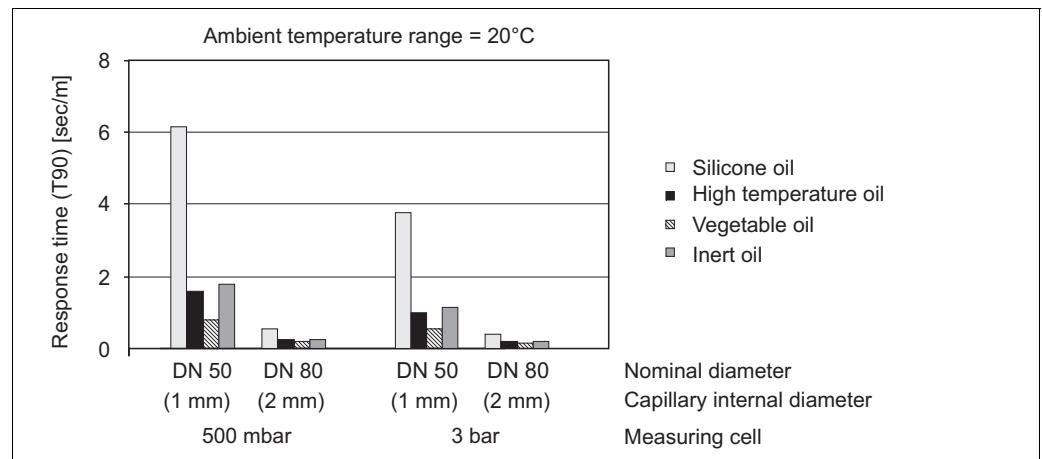

P01-FMD78xxx-05-xx-xx-xx-000

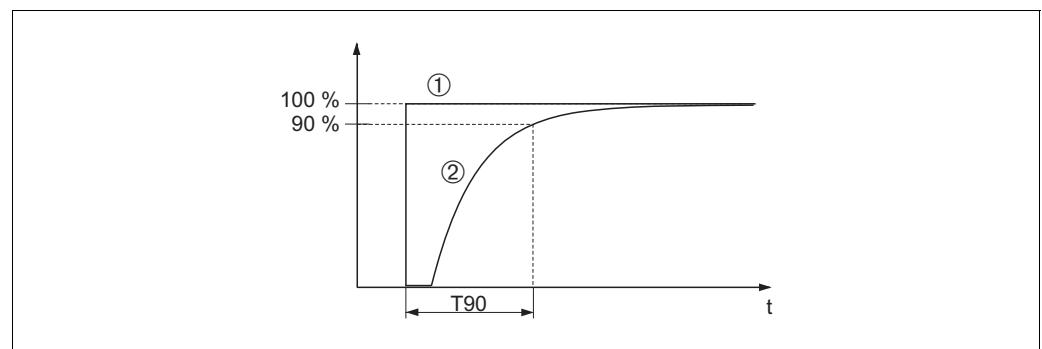

P01-xxxxxxxxx-05-xx-xx-xx-000


Presentation of the response time ($T_{90}\%$)

- 1 Pressure step
- 2 Output signal

Minimise response time by	Comments
Larger capillary internal diameter	The temperature effect increases with increasing diameter.
Shorter capillaries	—
Filling oil with lower viscosity	<ul style="list-style-type: none"> – Observe compatibility of the filling oil with the process fluid. – Observe the filling oil operating limits.

Installation instructions**Instructions for diaphragm seal systems**

- The diaphragm seal together with the transmitter form a closed, calibrated system, which is filled through ports in the diaphragm seal and in the measuring system of the transmitter. These ports are sealed and must not be opened.
- In the case of devices with diaphragm seals and capillaries, the zero point shift caused by the hydrostatic pressure of the filling liquid column in the capillaries must be taken into account when selecting the measuring cell. If a measuring cell with a small measuring range is selected, the sensor nominal range can be overdriven as a result of position adjustment. → See the following diagram and the following example.
- For devices with capillary a suitable fastening device (mounting bracket) is recommended.
- When using a mounting bracket, sufficient strain relief must be allowed for in order to prevent the capillary bending down (bending radius ≥ 100 mm).
- The temperature and length of both capillaries should be the same when using two-sided diaphragm seal systems.

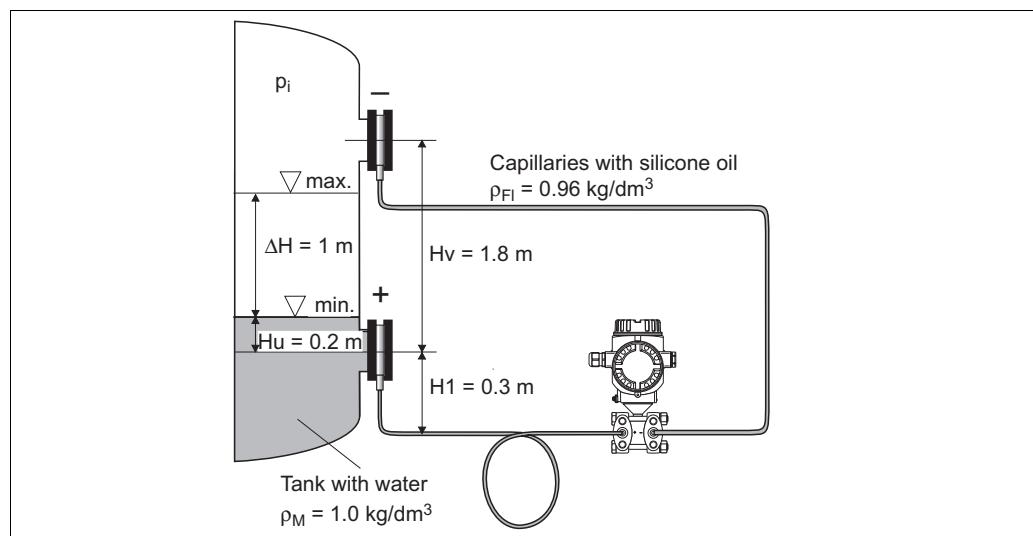Selecting the measuring cell (observe the hydrostatic pressure of the filling fluid column in the capillaries!)

P01-FMD78xxx-11-xx-xx-xx-004.eps

Pressure on the negative side of the differential pressure transmitter (p_-) when the tank is empty (min. level)

$$\begin{aligned}
 p_- &= p_{Hu} + p_{H1} = H_u \cdot \rho_M \cdot g + H_1 \cdot \rho_{Fl} \cdot g + p_i \\
 &= 0.2 \text{ m} \cdot 1 \frac{\text{kg}}{\text{dm}^3} \cdot 9.81 \frac{\text{m}}{\text{s}^2} + 0.3 \text{ m} \cdot 0.96 \frac{\text{kg}}{\text{dm}^3} \cdot 9.81 \frac{\text{m}}{\text{s}^2} + p_i \\
 &= 47.87 \text{ mbar} + p_i
 \end{aligned}$$

Pressure on the positive side of the differential pressure transmitter (p_+) when the tank is empty (min. level)

$$\begin{aligned}
 p_+ &= p_{Hu} + p_{H1} = H_u \cdot \rho_M \cdot g + H_1 \cdot \rho_{Fl} \cdot g + p_i \\
 &= 0.2 \text{ m} \cdot 1 \frac{\text{kg}}{\text{dm}^3} \cdot 9.81 \frac{\text{m}}{\text{s}^2} + 0.3 \text{ m} \cdot 0.96 \frac{\text{kg}}{\text{dm}^3} \cdot 9.81 \frac{\text{m}}{\text{s}^2} + p_i \\
 &= 197.77 \text{ mbar} + p_i
 \end{aligned}$$

Differential pressure at the transmitter ($\Delta p_{\text{Transmitter}}$) when the tank is empty

$$\begin{aligned}
 \Delta p_{\text{Transmitter}} &= p_+ - p_- \\
 &= 197.77 \text{ mbar} - 47.87 \text{ mbar} \\
 &= 149.90 \text{ mbar}
 \end{aligned}$$

Result:

If the tank were full, a differential pressure of -51.80 mbar would be present at the differential pressure transmitter. When the tank is empty, a differential pressure of -149.90 mbar is present. Therefore, a 500 mbar measuring cell is required for this application.

Installation instructions


In order to obtain more precise measurement results and to avoid a defect in the device, mount the capillaries as follows:

- vibration-free (in order to avoid additional pressure fluctuations)
- not in the vicinity of heating or cooling lines
- insulate if the ambient temperature is below or above the reference temperature
- with a bending radius of ≥ 100 mm.

Vacuum applications

For applications under vacuum, Endress+Hauser recommends mounting the pressure transmitter underneath the lower diaphragm seal. A vacuum load of the diaphragm seal caused by the presence of filling oil in the capillaries is hereby prevented.

When the pressure transmitter is mounted above the lower diaphragm seal, the maximum height difference H1 in accordance with the following illustration on the left must not be exceeded. The maximum height difference is dependent on the density of the filling oil and the smallest ever pressure that is permitted to occur at the diaphragm seal on the positive side (empty tank), see the following illustration, on the right.

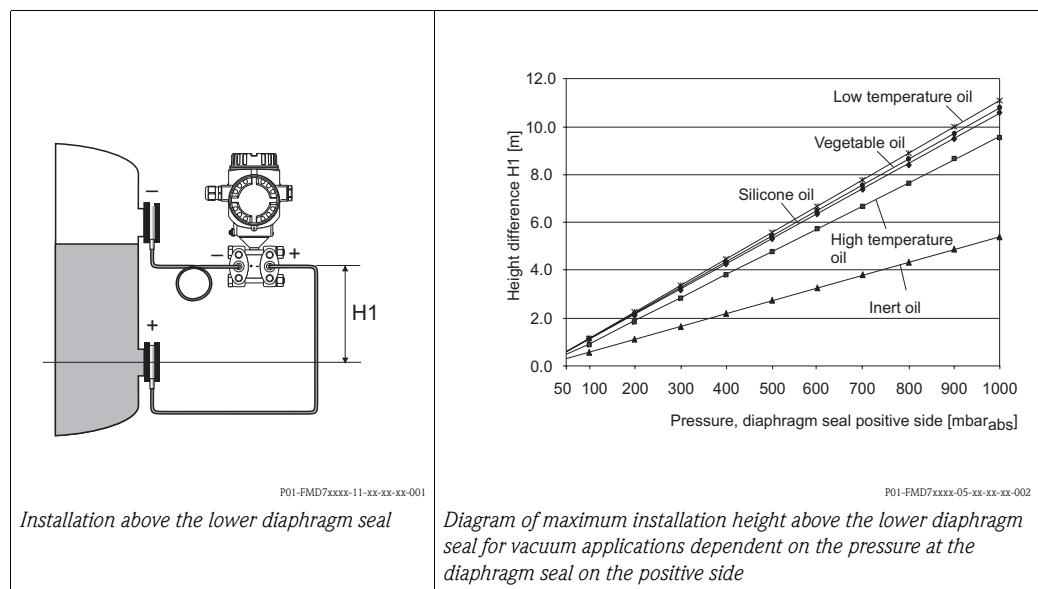




Certificates and approvals

CE mark	The device meets the legal requirements of the relevant EC directives. Endress+Hauser confirms that the device has been successfully tested by applying the CE mark.
Ex approvals	<ul style="list-style-type: none"> ■ ATEX ■ FM ■ CSA ■ NEPSI ■ IECEx ■ GOST on request ■ also combinations of different approvals <p>All explosion protection data are given in separate documentation which is available upon request. The Ex documentation is supplied as standard with all devices approved for use in explosion hazardous areas. → See also page 81 ff, sections "Safety Instructions" and "Installation/Control Drawings".</p>
Marine certificate	<ul style="list-style-type: none"> ■ GL: FMD76, FMD78, PMD70, PMD75 ■ ABS: FMD76, FMD78, PMD70, PMD75
Overspill protection	WHG (German Water Resources Act). See "Ordering information" → 67 (see also ZE259P/00/de).
CRN approvals	Some device versions have CRN approval. For a CRN-approved device, a CRN-approved process connection (→ see page 68, feature 70 "Process connection") has to be ordered with a CSA approval (→ see page 67, feature 10 "Approval"). These devices are fitted with a separate plate bearing the registration number OF10524.5C.
Pressure Equipment Directive (PED)	<p>The devices PMD70, PMD75, FMD76, FMD77 und FMD78 corresponds to Article 3 (3) of the EC directive 97/23/EC (Pressure Equipment Directive) and has been designed and manufactured according to good engineering practice.</p> <p>Additionally applies:</p> <ul style="list-style-type: none"> – FMD78 with pipe diaphragm seal $\geq 1.5"$/PN40: Suitable for stable gases in group 1, category II – PMD75, PN 420 Suitable for stable gases in group 1, category I
Standards and guidelines	<p>DIN EN 60770 (IEC 60770): Transmitters for use in industrial-process control systems Part 1: Methods for inspection and routine testing</p> <p>DIN 16086: Electrical pressure measuring instruments, pressure sensors, pressure transmitters, pressure measuring instruments, concepts, specifications in data sheets</p> <p>EN 61326-X: EMC product family standard for electrical equipment for measurement, control and laboratory use.</p>

Ordering information

PMD70

This overview does not mark options which are mutually exclusive.

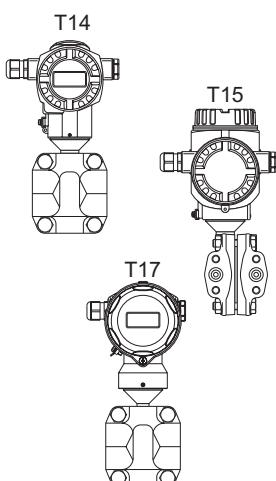

10	Approval:			
A	For non-hazardous areas			
1	ATEX II 1/2 G EEx ia IIC T6			
6	ATEX II 1/2 G EEx ia IIC T6, overspill protection WHG			
2	ATEX II 1/2 D			
4	ATEX II 1/3 D			
8	ATEX II 1 GD EEx ia IIC T6			
3	ATEX II 1/2 GD EEx ia IIC T6			
7	ATEX II 3 G EEx nA II T6			
S	FM IS, Class I, II, III Division 1, Groups A – G; NI Class I Division 2, Groups A – D; AEx ia			
Q	FM DIP, Class II, III Division 1, Groups E – G			
R	FM NI, Class I, Division 2, Groups A – D			
U	CSA IS, Class I, II, III Division 1, Groups A – G; Class I Division 2, Groups A – D, Ex ia			
W	CSA Class II, III Division 1, Groups E – G (Dust-Ex)			
H	NEPSI Ex ia IIC T6			
I	IECEx Zone 0/1 Ex ia IIC T6			
20	Output; Operation:			
A	4...20 mA HART, SIL operation outside, LCD (→ see Fig. ①, ③)			
B	4...20 mA HART, SIL operation inside, LCD (→ see Fig. ①, ④)			
C	4...20 mA HART, SIL operation inside (→ see Fig. ④)			
M	PROFIBUS PA, operation outside, LCD (→ see Fig. ①, ③)			
N	PROFIBUS PA, operation inside, LCD (→ see Fig. ①, ④)			
O	PROFIBUS PA, operation inside (→ see Fig. ④)			
P	FOUNDATION Fieldbus, operation outside, LCD (→ see Fig. ②, ③)			
Q	FOUNDATION Fieldbus, operation inside, LCD (→ see Fig. ②, ④)			
R	FOUNDATION Fieldbus, operation inside (→ see Fig. ④)			
30	Housing; Cable entry; Protection:			
A	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, Gland M 20x1.5			
B	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread G 1/2			
C	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread 1/2 NPT			
D	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, M12x1 PA plug			
E	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, 7/8" FF plug			
F	Aluminium T14 housing, optional display on the side, IP 65/NEMA 4X, Han7D plug, 90°			
J	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, Gland M 20x1.5			
K	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, Thread G 1/2			
L	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, Thread 1/2 NPT			
M	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, M12x1 PA plug			
N	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, 7/8" FF plug			
P	Aluminium T15 housing, optional display on the top, IP 65/NEMA 4X, Han7D plug, 90°			
1	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Gland M 20x1.5			
2	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread G 1/2			
3	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread 1/2 NPT			
4	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, M 12x1 PA plug			
5	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, 7/8" FF plug			
6	AISI 316L T14 housing, optional display on the side, IP 65/NEMA 4X, Han7D plug, 90°			
R	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Gland M 20x1.5			
S	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Thread G 1/2			
T	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Thread 1/2 NPT			
U	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, M 12x1 PA plug			
V	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, 7/8" FF plug			
Z	Housing: see additional specifications			
40	Nominal range; PN:			
		Nominal value		
	7B	25 mbar/2500 Pa/0.375 psi		
	7D	100 mbar/10 kPa/1.5 psi		
	7F	500 mbar/50 kPa/7.5 psi		
	7H	3 bar/300 kPa/45 psi		
	78	Prepared mounting DELTATOP/DELTASET		
PMD70			order code	




→ For continuation of PMD70 ordering information, see the following page.

PMD70 (continued)

50	Calibration; Unit:						
	1 Nominal range; mbar/bar 2 Nominal range; kPa/MPa 3 Nominal range; mmH ₂ O/mH ₂ O 4 Nominal range; inH ₂ O/ftH ₂ O 6 Nominal range; psi 8 Adjusted for Deltatop/Deltaset; see additional specification B Customised; see additional specification C Factory certificate 5-point; see additional specification D DKD certificate; see additional specification K Platinum; see additional specification L Platinum and factory certificate 5-point; see additional specification M Platinum and DKD certificate; see additional specification						
70	Process connection; Material:						
	B 1/4 – 18 NPT IEC 61518, mounting: 7/16 – 20 UNF, C22.8 (CRN) D 1/4 – 18 NPT IEC 61518, mounting: 7/16 – 20 UNF, AISI 316L (CRN) F 1/4 – 18 NPT IEC 61518, mounting: 7/16 – 20 UNF, Alloy C (CRN) G 1/4 – 18 NPT IEC 61518, mounting: 7/16 – 20 UNF, PVDF U RC 1/4 mounting: 7/16 – 20 UNF, AISI 316L (CRN) 1 1/4 – 18 NPT, mounting: PN 160: M10, C22.8 (CRN) 2 1/4 – 18 NPT, mounting: PN 160: M10, AISI 316L (CRN) 3 1/4 – 18 NPT, mounting: PN 160: M10, Alloy C (CRN)						
80	Seal:						
	A FKM Viton B EPDM D Kalrez E Chemraz 1 FKM Viton, cleaned from oil and greace 2 FKM Viton, cleaned for oxygen service Note application limits pressure/temp.						
100	Additional option 1:						
	A not selected E SIL2/IEC 61508 Declaration of conformity B Material test certificate for wetted components, inspection certificate as per EN 10204 3.1 acc. to specification 52005759 M Overvoltage protection N HistoROM/M-DAT S GL/ABS marine certificate V Mounting on shut-off valve from above W Mounting on shut-off valve from below 2 Test report acc. to EN10204 2.2 3 Routine test with certificate, inspection certificate as per EN 10204 3.1 4 Overpressure test with certificate, inspection certificate as per EN 10204 3.1						
110	Additional option 2:						
	A not selected E SIL2/IEC 61508 Declaration of conformity B Material test certificate for wetted components, inspection certificate as per EN10204 3.1 acc. to specification 52005759 G Separate housing, cable length see additional spec. + mounting bracket, wall/pipe, 316L K Vent valves (2 pieces), Alloy C M Overvoltage protection N HistoROM/M-DAT R Screws 7/16 UNF, length 1 1/2" (4 pieces) for oval flange adapter PZO S GL/ABS marine certificate U Mounting bracket for wall/pipe, AISI 304 2 Test report acc. to EN10204 2.2 3 Routine test with certificate, inspection certificate as per EN 10204 3.1 4 Overpressure test with certificate, inspection certificate as per EN 10204 3.1 5 Helium leak test EN 1518 with test certificate, inspection certificate as per EN 10204 3.1 Z Special version, to be specified						
PMD70							complete order code

PMD75

This overview does not mark options which are mutually exclusive.

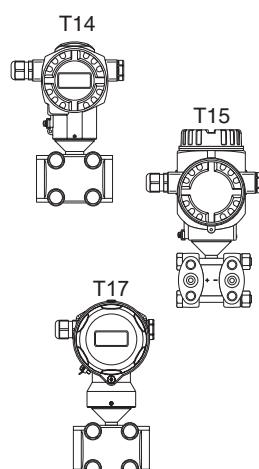

10	Approval:
A	For non-hazardous areas
1	ATEX II 1/2 G EEx ia IIC T6
6	ATEX II 1/2 G EEx ia IIC T6, overspill protection WHG
2	ATEX II 1/2 D
4	ATEX II 1/3 D
8	ATEX II 1 GD EEx ia IIC T6
3	ATEX II 1/2 GD EEx ia IIC T6
5	ATEX II 2 G EEx d IIC T6
7	ATEX II 3 G EEx nA II T6
S	FM IS, Class I, II, III Division 1, Groups A – G; NI Class I Division 2, Groups A – D; AEx ia
T	FM XP, Class I Division 1, Groups A – D; AEx d
Q	FM DIP, Class II, III Division 1, Groups E – G
R	FM NI, Class I, Division 2, Groups A – D
U	CSA IS, Class I, II, III Division 1, Groups A – G; Class I Division 2, Groups A – D, Ex ia
V	CSA XP, Class I Division 1, Groups B – D; Ex d
W	CSA Class II, III Division 1, Groups E – G (Dust-Ex)
G	NEPSI Exd IIC T6
H	NEPSI Ex ia IIC T6
I	IECEx Zone 0/1 Ex ia IIC T6
B	Combined certificates: ATEX II 1/2 G EEx ia IIC T6 + II G EEx d IIC T6
C	Combined certificates: FM IS and XP Class I Division 1, Groups A – D
D	Combined certificates: CSA IS and XP Class I Division 1, Groups A – D
E	Combined certificates: FM/CSA IS and XP Class I Division 1, Groups A – D
F	Combined certificates: ATEX II EEx ia / EEx d + FM/CSA IS + XP; ATEX II 1/2G EEx ia IIC T6+; ATEX II 2G EEx d IIC T6+; FM/CSA IS + XP Cl.I Div.1 Gr.A-D
20	Output; Operation:
A	4...20 mA HART, SIL operation outside, LCD (→ see Fig. ①, ③)
B	4...20 mA HART, SIL operation inside, LCD (→ see Fig. ①, ④)
C	4...20 mA HART, SIL operation inside (→ see Fig. ④)
M	PROFIBUS PA, operation outside, LCD (→ see Fig. ①, ③)
N	PROFIBUS PA, operation inside, LCD (→ see Fig. ①, ④)
O	PROFIBUS PA, operation inside (→ see Fig. ④)
P	FOUNDATION Fieldbus, operation outside, LCD (→ see Fig. ②, ③)
Q	FOUNDATION Fieldbus, operation inside, LCD (→ see Fig. ②, ④)
R	FOUNDATION Fieldbus, operation inside (→ see Fig. ④)
30	Housing; Cable entry, Protection:
A	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, Gland M 20x1.5
B	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread G 1/2
C	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread 1/2 NPT
D	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, M12x1 PA plug
E	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, 7/8" FF plug
F	Aluminium T14 housing, optional display on the side, IP 65/NEMA 4X, Han7D plug, 90°
J	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, Gland M 20x1.5
K	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, Thread G 1/2
L	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, Thread 1/2 NPT
M	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, M 12x1 PA plug
N	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, 7/8" FF plug
P	Aluminium T15 housing, optional display on the top, IP 65/NEMA 4X, Han7D plug, 90°
I	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Gland M 20x1.5
2	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread G 1/2
3	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread 1/2 NPT
4	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, M 12x1 PA plug
5	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, 7/8" FF plug
6	AISI 316L T14 housing, optional display on the side, IP 65/NEMA 4X, Han7D plug, 90°
R	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Gland M 20x1.5
S	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Thread G 1/2
T	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Thread 1/2 NPT
U	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, M 12x1 PA plug
V	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, 7/8" FF plug
Z	Housing: see additional specifications

PMD75							order code
-------	--	--	--	--	--	--	------------

→ For continuation of PMD75 ordering information, see the following page.

PMD75 (continued)

40				Nominal range; PN:	
				Nominal value	PN
			7B	10 mbar/1 kPa/0.15 psi	160 bar/16 MPa/2400 psi
			7C	30 mbar/3 kPa/0.45 psi	160 bar/16 MPa/2400 psi
			7D	100 mbar/10 kPa/1.5 psi	160 bar/16 MPa/2400 psi
			7F	500 mbar/50 kPa/7.5 psi	160 bar/16 MPa/2400 psi
			7H	3 bar/300 kPa/45 psi	160 bar/16 MPa/2400 psi
			7L	16 bar/1,6 MPa/240 psi	160 bar/16 MPa/2400 psi
			7M	40 bar/4 MPa/600 psi	160 bar/16 MPa/2400 psi
			8F	500 mbar/50 kPa/7.5 psi	420 bar/42 MPa/6300 psi
			8H	3 bar/300 kPa/45 psi	420 bar/42 MPa/6300 psi
			8L	16 bar/1.6 MPa/240 psi	420 bar/42 MPa/6300 psi
			8M	40 bar/4 MPa/600 psi	420 bar/42 MPa/6300 psi
			78	Prepared for Deltatop/Deltaset; PN = 160 bar	
			88	Prepared for Deltatop/Deltaset; PN = 420 bar	
50				Calibration; Unit:	
			1	Nominal range; mbar/bar	
			2	Nominal range; kPa/MPa	
			3	Nominal range; mmH ₂ O/mH ₂ O	
			4	Nominal range; inH ₂ O/ftH ₂ O	
			6	Nominal range; psi	
			8	Adjusted for Deltatop/Deltaset; see additional specification	
			B	Customised; see additional specification	
			C	Factory certificate 5-point; see additional specification	
			D	DKD certificate; see additional specification	
			K	Platinum; see additional specification	
			L	Platinum and factory certificate 5-point; see additional specification	
			M	Platinum and DKD certificate; see additional specification	
60				Membrane material:	
			1	AISI 316L	
			2	Alloy C	
			3	Monel	
			5	Tantal	
			6	AISI 316L with Gold-Rhodium coating	
70				Process connection; Material:	
			B	1/4 – 18 NPT IEC 61518, mounting: 7/16 – 20 UNF, C22.8 (CRN), including 2 vent valves (AISI 316L)	
			C	1/4 – 18 NPT IEC 61518, mounting: 7/16 – 20 UNF, C22.8, side vent, including 4 fastening bolt connections and 2 vent valves (AISI 316L)	
			D	1/4 – 18 NPT IEC 61518, mounting: 7/16 – 20 UNF, AISI 316L (CRN), including 2 vent valves (AISI 316L)	
			E	1/4 – 18 NPT IEC 61518, mounting: 7/16 – 20 UNF, AISI 316L, side vent, including 4 fastening bolt connections and 2 vent valves (AISI 316L)	
			F	1/4 – 18 NPT IEC 61518, mounting: 7/16 – 20 UNF, Alloy C (CRN), without screws/vents	
			H	1/4 – 18 NPT IEC 61518, mounting: 7/16 – 20 UNF, Alloy C, side vent, without screws/vents	
			U	RC 1/4 mounting: 7/16 – 20 UNF, AISI 316L (CRN), including 2 vent valves (AISI 316L)	
			V	RC 1/4 mounting: 7/16 – 20 UNF, C22.8, side vent, including 4 fastening bolt connections and 2 vent valves (AISI 316L)	
			W	Prepared for diaphragm seal mount	
			1	1/4 – 18 NPT, mounting: PN 160: M10, PN 420: M12, C22.8 (CRN), including 2 vent valves (AISI 316L)	
			2	1/4 – 18 NPT, mounting: PN 160: M10, PN 420: M12, AISI 316L (CRN), including 2 vent valves (AISI 316L)	
			3	1/4 – 18 NPT, mounting: PN 160: M10, PN 420: M12, Alloy C (CRN)	
PMD75					order code




→ For continuation of PMD75 ordering information, see the following page.

PMD75 (continued)

80							Seal:	
							A FKM Viton	
							C PTFE	
							F NBR	
							K Copper seal ring, cleaned for oxygen service	
							1 FKM Viton, cleaned from oil and grease	
							2 FKM Viton, cleaned for oxygen service	
							Note application limits pressure/temp.	
							3 PTFE, cleaned for oxygen service	
							H Copper seal ring	
100							Additional option 1:	
							A not selected	
							E SIL2/IEC 61508 Declaration of conformity	
							B Material test certificate for wetted components, inspection certificate as per EN 10204 3.1 acc. to specification 52005759	
							C NACE MR0175 (wetted parts)	
							D Material test certificate for wetted components as per EN 10204 3.1 and NACE MR0175 material, inspection certificate as per EN 10204 acc. to specification 52010806	
							M Overvoltage protection	
							N HistoROM/M-DAT	
							S GL/ABS marine certificate	
							V Mounting on shut-off valve from above	
							W Mounting on shut-off valve from below	
							2 Test report acc. to EN10204 2.2	
							3 Routine test with certificate, inspection certificate as per EN 10204 3.1	
							4 Overpressure test with certificate, inspection certificate as per EN 10204 3.1	
110							Additional option 2:	
							A not selected	
							E SIL2/IEC 61508 Declaration of conformity	
							B Material test certificate for wetted components, inspection certificate as per EN 10204 3.1 acc. to specification 52005759	
							G Separate housing, cable length see additional spec. + mounting bracket, wall/pipe, 316L	
							K Vent valves (2 pieces), Alloy C	
							L Vent valves (4 pieces), Alloy C	
							M Overvoltage protection	
							N HistoROM/M-DAT	
							R Screws 7/16 UNF, length 1 1/2" (4 pieces) for oval flange adapter PZO	
							S GL/ABS marine certificate	
							U Mounting bracket for wall/pipe, AISI 304	
							2 Test report acc. to EN10204 2.2	
							3 Routine test with certificate, inspection certificate as per EN 10204 3.1	
							4 Overpressure test with certificate, inspection certificate as per EN 10204 3.1	
							5 Helium leak test EN 1518 with test certificate inspection certificate as per EN 10204 3.1	
PMD75								complete order code

FMD76

This overview does not mark options which are mutually exclusive.

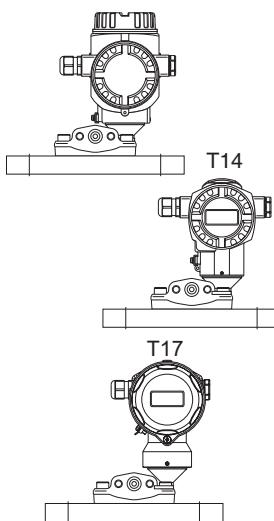

10	Approval:	
A	For non-hazardous areas	
1	ATEX II 1/2 G EEx ia IIC T6	
6	ATEX II 1/2 G EEx ia IIC T6, overspill protection WHG	
2	ATEX II 1/2 D EEx ia IIC T6	
8	ATEX II 1 GD EEx ia IIC T6	
3	ATEX II 1/2 GD EEx ia IIC T6	
7	ATEX II 3 G EEx nA II T6	
S	FM IS, Class I, II, III Division 1, Groups A – G; NI Class I Division 2, Groups A – D; AEx ia	
R	FM NI, Class I, Division 2, Groups A – D	
U	CSA IS, Class I, II, III Division 1, Groups A – G; Class I Division 2, Groups A – D, Ex ia	
H	NEPSI Ex ia IIC T6	
I	IECEx Zone 0/1 Ex ia IIC T6	
20	Output; Operation:	
A	4...20 mA HART, SIL operation outside, LCD (→ see Fig. ①, ③)	
B	4...20 mA HART, SIL operation inside, LCD (→ see Fig. ①, ④)	
C	4...20 mA HART, SIL operation inside (→ see Fig. ④)	
M	PROFIBUS PA, operation outside, LCD (→ see Fig. ②, ③)	
N	PROFIBUS PA, operation inside, LCD (→ see Fig. ②, ④)	
O	PROFIBUS PA, operation inside (→ see Fig. ④)	
P	FOUNDATION Fieldbus, operation outside, LCD (→ see Fig. ②, ③)	
Q	FOUNDATION Fieldbus, operation inside, LCD (→ see Fig. ②, ④)	
R	FOUNDATION Fieldbus, operation inside (→ see Fig. ④)	
30	Housing; Cable entry; Protection:	
A	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, Gland M 20x1.5	
B	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread G 1/2	
C	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread 1/2 NPT	
D	Aluminium T14 housing, optional display on the side, IP66/67/NEMA 6P, M12x1 PA plug	
E	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, 7/8" FF plug	
F	Aluminium T14 housing, optional display on the side, IP 65/NEMA 4X, Han7D plug, 90°	
J	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, Gland M 20x1.5	
K	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, Thread G 1/2	
L	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, Thread 1/2 NPT	
M	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, M 12x1 PA plug	
N	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, 7/8" FF plug	
P	Aluminium T15 housing, optional display on the top, IP 65/NEMA 4X, Han7D plug, 90°	
1	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Gland M 20x1.5	
2	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread G 1/2	
3	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread 1/2 NPT	
4	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, M 12x1 PA plug	
5	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, 7/8" FF plug	
6	AISI 316L T14 housing, optional display on the side, IP 65/NEMA 4X, Han7D plug, 90°	
R	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Gland M 20x1.5	
S	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Thread G 1/2	
T	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Thread 1/2 NPT	
U	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, M 12x1 PA plug	
V	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, 7/8" FF plug	
Z	Housing: see additional specifications	
40	Nominal range; PN:	
	Nominal value	PN
	7D 100 mbar/10 kPa/1.5 psi	16 bar/1,6 MPa/240 psi
	7F 500 mbar/50 kPa/7.5 psi	100 bar/10 MPa/1500 psi
	7H 3 bar/300 kPa/45 psi	100 bar/10 MPa/1500 psi
FMD76		order code

→ For continuation of FMD76 ordering information, see the following page.

FMD76 (continued)

50				Calibration; Unit:
				1 Nominal range; mbar/bar 2 Nominal range; kPa/MPa 3 Nominal range; mmH ₂ O/mH ₂ O 4 Nominal range; inH ₂ O/ftH ₂ O 6 Nominal range; psi B Customised; see additional specification C Factory certificate 5-point; see additional specification D DKD certificate; see additional specification K Platinum; see additional specification L Platinum and factory certificate 5-point; see additional specification M Platinum and DKD certificate; see additional specification
70				Process connection low-pressure side; Material; Seal:
				A Mounting: 7/16 – 20 UNF B 1/4 – 18 NPT IEC 61518, C22.8, FKM Viton (CRN) D 1/4 – 18 NPT IEC 61518, AISI 316L, FKM Viton (CRN) F 1/4 – 18 NPT IEC 61518, Alloy C, FKM Viton (CRN) G 1/4 – 18 NPT IEC 61518, PVDF, FKM Viton, Safety instructions, observe electrostatic charge. K 1/4 – 18 NPT IEC 61518, AISI 316L, EPDM (CRN) L 1/4 – 18 NPT IEC 61518, Alloy C, EPDM (CRN) M 1/4 – 18 NPT IEC 61518, AISI 316L, Kalrez (CRN) N 1/4 – 18 NPT IEC 61518, Alloy C, Kalrez (CRN) P 1/4 – 18 NPT IEC 61518, AISI 316L, Chemraz (CRN) Q 1/4 – 18 NPT IEC 61518, Alloy C, Chemraz (CRN) S 1/4 – 18 NPT IEC 61518, AISI 316L, FKM Viton, cleaned from oil and greace (CRN) T 1/4 – 18 NPT IEC 61518, AISI 316L, FKM Viton, cleaned for oxygen service (CRN) U RC 1/4, AISI 316L, FKM Viton (CRN)
80				Process connection high-pressure side; Material:
				B EN/DIN flanges B DN 80 PN 10-40 B1, AISI 316L D DN 80 PN 10-40, AISI 316L with ECTFE coating Safety instructions, observe electrostatic charge! E DN 80 PN 10-40 B1, Alloy C276 F DN 100 PN 10-16 B1, AISI 316L G DN 100 PN 25-40 B1, AISI 316L H DN 100 PN 25-40, AISI 316L with ECTFE coating Safety instructions, observe electrostatic charge! J DN 100 PN 25-40 B1, Alloy C276 L DN 100 PN 10-16, AISI 316L with ECTFE coating Safety instructions, observe electrostatic charge! M DN 100 PN 10-16 B1, Alloy C276 ANSI flanges P 3" 150 lbs RF, AISI 316/316L (CRN) R 3" 150 lbs, AISI 316/316L with ECTFE coating Safety instructions, observe electrostatic charge! S 3" 150 lbs RF, Alloy C276 (CRN) T 4" 150 lbs RF, AISI 316/316L (CRN) U 4" 150 lbs, AISI 316/316L with ECTFE coating Safety instructions, observe electrostatic charge! V 4" 150 lbs RF, Alloy C276 (CRN) W 4" 300 lbs RF, AISI 316/316L (CRN) JIS flanges 1 10K 80A RF, AISI 316L 3 10K 80A RF, Alloy C276 4 10K 100A RF, AISI 316L
				FMD76 order code


→ For continuation of FMD76 ordering information, see the following page.

FMD76 (continued)

100								Additional option 1:
								A not selected E SIL2/IEC 61508 Declaration of conformity B Material test certificate for wetted components, inspection certificate as per EN 10204 3.1 acc. to specification 52005759 M Overvoltage protection N HistoROM/M-DAT S GL/ABS marine certificate 2 Test report acc. to EN10204 2.2 3 Routine test with certificate, inspection certificate as per EN 10204 3.1 4 Overpressure test with certificate, inspection certificate as per EN 10204 3.1
110								Additional option 2:
								A not selected E SIL2/IEC 61508 Declaration of conformity G Separate housing, cable length see additional spec. + mounting bracket, wall/pipe, 316L K Vent valves (2 pieces), Alloy C M Overvoltage protection N HistoROM/M-DAT R Screws 7/16 UNF, length 1 1/2" (4 pieces) for oval flange adapter PZO S GL/ABS marine certificate U Mounting bracket for wall/pipe, AISI 304 2 Test report acc. to EN10204 2.2 3 Routine test with certificate, inspection certificate as per EN 10204 3.1 4 Overpressure test with certificate, inspection certificate as per EN 10204 3.1 5 Helium leak test EN 1518 with test certificate, inspection certificate as per EN 10204 3.1
FMD76								complete order code

FMD77

This overview does not mark options which are mutually exclusive.

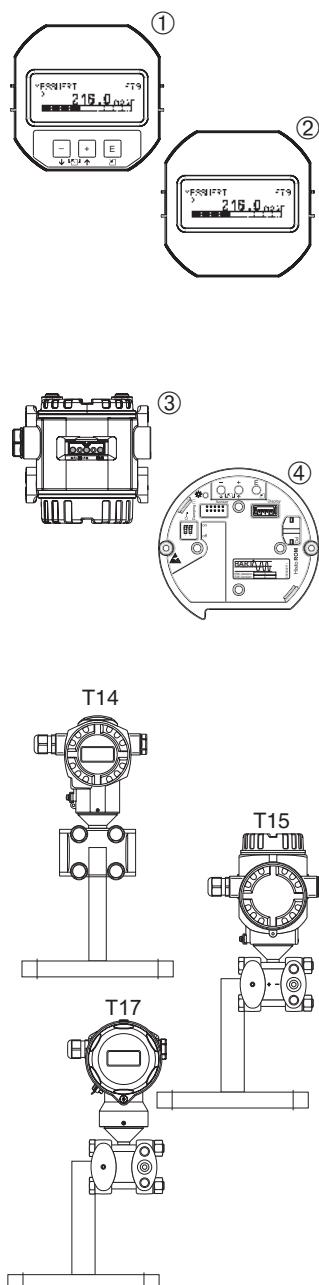

10	Approval:
A	For non-hazardous areas
1	ATEX II 1/2 G EEx ia IIC T6
6	ATEX II 1/2 G EEx ia IIC T6, overspill protection WHG
2	ATEX II 1/2 D
4	ATEX II 1/3 D
8	ATEX II 1 GD EEx ia IIC T6
3	ATEX II 1/2 GD EEx ia IIC T6
5	ATEX II 2 G EEx d IIC T6
7	ATEX II 3 G EEx nA II T6
S	FM IS, Class I, II, III Division 1, Groups A – G; NI Class I Division 2, Groups A – D; AEx ia
T	FM XP, Class I Division 1, Groups A – D; AEx ia
Q	FM DIP, Class II, III Division 1, Groups E – G
R	FM NI, Class I, Division 2, Groups A – D
U	CSA IS, Class I, II, III Division 1, Groups A – G; Class I Division 2, Groups A – D, Ex ia
V	CSA XP, Class I Division 1, Groups B – D; Ex d
W	CSA Class II, III Division 1, Groups E – G (Dust-Ex)
G	NEPSI Ex d IIC T6
H	NEPSI Ex ia IIC T6
I	IECEx Zone 0/1 Ex ia IIC T6
B	Combined certificates: ATEX II 1/2 G EEx ia IIC T6 + II G EEx d IIC T6
C	Combined certificates: FM IS and XP Class I Division 1, Groups A – D
D	Combined certificates: CSA IS and XP Class I Division 1, Groups A – D
E	Combined certificates: FM/CSA IS and XP Class I Division 1, Groups A – D
F	Combined certificates: ATEX II EEx ia / EEx d + FM/CSA IS + XP; ATEX II 1/2G EEx ia IIC T6+; ATEX II 2G EEx d IIC T6+; FM/CSA IS + XP Cl.I Div.1 Gr.A-D
20	Output; Operation:
A	4...20 mA HART, SIL operation outside, LCD (→ see Fig. ①, ③)
B	4...20 mA HART, SIL operation inside, LCD (→ see Fig. ①, ④)
C	4...20 mA HART, SIL operation inside (→ see Fig. ④)
M	PROFIBUS PA, operation outside, LCD (→ see Fig. ①, ③)
N	PROFIBUS PA, operation inside, LCD (→ see Fig. ①, ④)
O	PROFIBUS PA, operation inside (→ see Fig. ④)
P	FOUNDATION Fieldbus, operation outside, LCD (→ see Fig. ②, ③)
Q	FOUNDATION Fieldbus, operation inside, LCD (→ see Fig. ②, ④)
R	FOUNDATION Fieldbus, operation inside (→ see Fig. ④)
30	Housing; Cable entry, Protection:
A	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, Gland M 20x1.5
B	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread G 1/2
C	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread 1/2 NPT
D	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, M12x1 PA plug
E	Aluminium T14 housing, optional display on the side, IP 66/67/NEMA 6P, 7/8" FF plug
F	Aluminium T14 housing, optional display on the side, IP 65/NEMA 4X, Han7D plug, 90°
J	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, Gland M 20x1.5
K	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, Thread G 1/2
L	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, Thread 1/2 NPT
M	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, M 12x1 PA plug
N	Aluminium T15 housing, optional display on the top, IP 66/67/NEMA 6P, 7/8" FF plug
P	Aluminium T15 housing, optional display on the top, IP 65/NEMA 4X, Han7D plug, 90°
1	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Gland M 20x1.5
2	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread G 1/2
3	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread 1/2 NPT
4	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, M 12x1 PA plug
5	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, 7/8" FF plug
6	AISI 316L T14 housing, optional display on the side, IP 65/NEMA 4X, Han7D plug, 90°
R	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Gland M 20x1.5
S	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Thread G 1/2
T	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Thread 1/2 NPT
U	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, M 12x1 PA plug
V	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, 7/8" FF plug
Z	Housing: see additional specifications

FMD77

order code

→ For continuation of FMD77 ordering information, see the following page.

FMD77 (continued)

40				Nominal range; PN:	
				Nominal value	PN
			7D	100 mbar/10 kPa/1.5 psi	160 bar/16 MPa/2400 psi
			7F	500 mbar/50 kPa/7.5 psi	160 bar/16 MPa/2400 psi
			7H	3 bar/300 kPa/45 psi	160 bar/16 MPa/2400 psi
			7L	16 bar/1.6 MPa/240 psi	160 bar/16 MPa/2400 psi
50				Calibration, Units:	
				1 Calibration: nominal range, mbar/bar	
				2 Calibration: nominal range, kPa/MPa	
				3 Calibration: nominal range, mmH ₂ O/mH ₂ O	
				4 Calibration: nominal range, inH ₂ O/ftH ₂ O	
				6 Calibration: nominal range, psi	
				B Custom calibration: see additional specification	
				C Factory calibration: see additional specification, Factory calibration certificate, 5-point	
				D DKD calibration: see additional specification	
60				Membrane material (high-pressure side):	
				1 AISI 316L	
				2 Alloy C	
				3 Monel	
				5 Tantalum	
				6 AISI 316L with Gold-Rhodium coating	
				7 AISI 316L with 0.09 mm PTFE foil (not for vacuum applications)	
70				Process connection low-pressure side; Material; Seal:	
					Mounting: 7/16 – 20 UNF
				B	1/4 – 18 NPT IEC 61518, C22.8, FKM Viton (CRN)
				D	1/4 – 18 NPT IEC 61518, AISI 316L, FKM Viton (CRN)
				F	1/4 – 18 NPT IEC 61518, Alloy C276, FKM Viton (CRN)
				H	1/4 – 18 NPT IEC 61518, AISI 316L, PTFE+C4-ring (CRN)
				J	1/4 – 18 NPT IEC 61518, Alloy C, PTFE+C4-ring (CRN)
				K	1/4 – 18 NPT IEC 61518, AISI 316L, EPDM (CRN)
				L	1/4 – 18 NPT IEC 61518, Alloy C, EPDM (CRN)
				M	1/4 – 18 NPT IEC 61518, AISI 316L, Kalrez (CRN)
				N	1/4 – 18 NPT IEC 61518, Alloy C, Kalrez (CRN)
				P	1/4 – 18 NPT IEC 61518, AISI 316L, Chemraz (CRN)
				Q	1/4 – 18 NPT IEC 61518, Alloy C, Chemraz (CRN)
				S	1/4 – 18 NPT IEC 61518, AISI 316L, cleaned from oil and greace (CRN)
				T	1/4 – 18 NPT IEC 61518, AISI 316L, cleaned for oxygen service (CRN)
				U	RC 1/4, AISI 316L, FKM Viton (CRN)
80				Process connection high-pressure side; Material:	
					EN/DIN flanges
				A	DN 50 PN 10-40 B1, AISI 316L
				B	DN 80 PN 10-40 B1, AISI 316L
				C	DN 80 PN 10-40 B1, extended diaphragm seal: 50 mm/100 mm/200 mm, extended diaphragm seal: see additional specification
				F	DN 100 PN 10-16 B1, AISI 316L
				G	DN 100 PN 25-40 B1, AISI 316L
					ANSI flanges
				N	2" 150 lbs, RF, AISI 316/316L (CRN)
				P	3" 150 lbs, RF, AISI316/ 316L (CRN)
				Q	3" 150 lbs RF, AISI 316/316L, extended diaphragm seal: 2"/4"/6"/8", extended diaphragm seal: see additional specification
				T	4" 150 lbs RF, AISI 316L (CRN)
				W	4" 300 lbs RF, AISI 316L (CRN)
					JIS flanges
				X	10K 50A RF, AISI 316L
				1	10K 80A RF, AISI 316L
				4	10K 100 A RF, AISI 316L
					order code


→ For continuation of FMD77 ordering information, see the following page.

FMD77 (continued)

90									Fill fluid:
									A Silicone oil D Vegetable oil L Low temperature oil V High-temperature oil F Inert oil
100									Additional options 1:
									A Additional options 1 not selected B Material test certificate for wetted components, inspection certificate as per EN 10204 3.1 acc. to specification 52005759 C NACE MR0175 material D Material test certificate for wetted components as per EN 10204 3.1 and NACE MR0175 material, inspection certificate as per EN 10204 acc. to specification 52010806 M Overvoltage protection N HistoROM module 2 Test report acc. to EN 10204 2.2 3 Routine test with certificate, inspection certificate as per EN 10204 3.1 4 Overpressure test with certificate, inspection certificate as per EN 10204 3.1
110									Additional options 2:
									A Additional options 2 not selected E SIL2/IEC 61508 declaration of conformity G Separate housing, cable length see additional spec. + mounting bracket, wall/pipe, 316L M Overvoltage protection N HistoROM module R Screws 7/16 UNF, length 1 1/2" (4 pieces) for oval flange adapter PZO 2 Test report acc. to EN 10204 2.2 3 Routine test with certificate, inspection certificate as per EN 10204 3.1 4 Overpressure test with certificate, inspection certificate as per EN 10204 3.1
FMD77									complete order code

FMD78

This overview does not mark options which are mutually exclusive.

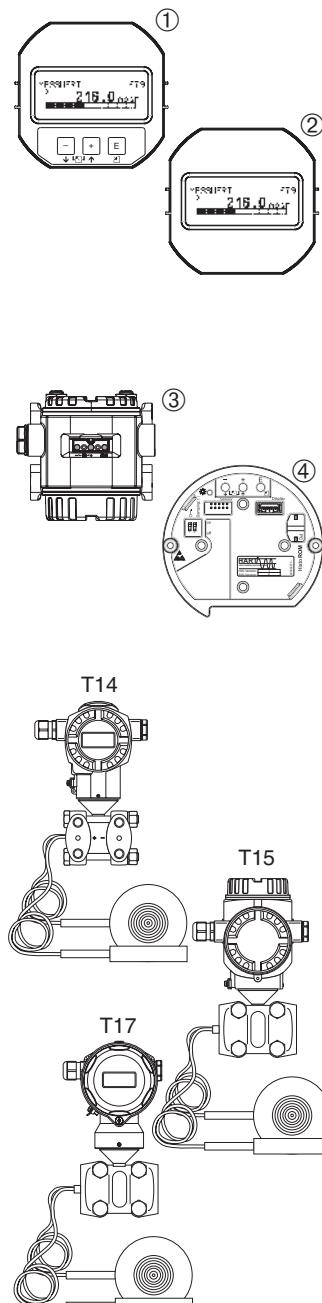

10	Approval:
A	For non-hazardous areas
1	ATEX II 1/2 G EEx ia IIC T6
6	ATEX II 1/2 G EEx ia IIC T6, overspill protection WHG
2	ATEX II 1/2 D
4	ATEX II 1/3 D
8	ATEX II 1 GD EEx ia IIC T6
3	ATEX II 1/2 GD EEx ia IIC T6
5	ATEX II 2 G EEx d IIC T6
7	ATEX II 3 G EEx nA II T6
S	FM IS, Class I, II, III Division 1, Groups A – G; NI Class I Division 2, Groups A – D; AEx ia
T	FM XP, Class I Division 1, Groups A – D; AEx ia
Q	FM DIP, Class II, III Division 1, Groups E – G
R	FM NI, Class I, Division 2, Groups A – D
U	CSA IS, Class I, II, III Division 1, Groups A – G; Class I Division 2, Groups A – D, Ex ia
V	CSA XP, Class I Division 1, Groups B – D; Ex d
W	CSA Class II, III Division 1, Groups E – G (Dust-Ex)
G	NEPSI Ex d IIC T6
H	NEPSI Ex ia IIC T6
I	IECEx Zone 0/1 Ex ia IIC T6
B	Combined certificates: ATEX II 1/2 G EEx ia IIC T6 + II G EEx d IIC T6
C	Combined certificates: FM IS and XP Class I Division 1, Groups A – D
D	Combined certificates: CSA IS and XP Class I Division 1, Groups A – D
E	Combined certificates: FM/CSA IS and XP Class I Division 1, Groups A – D
F	Combined certificates: ATEX II EEx ia / EEx d + FM/CSA IS + XP; ATEX II 1/2G EEx ia IIC T6+; ATEX II 2G EEx d IIC T6+; FM/CSA IS + XP Cl.I Div.1 Gr.A-D
20	Output; Operation:
A	4...20 mA HART, SIL operation outside, LCD (→ see Fig. ①, ③)
B	4...20 mA HART, SIL operation inside, LCD (→ see Fig. ①, ④)
C	4...20 mA HART, SIL operation inside (→ see Fig. ④)
M	PROFIBUS PA, operation outside, LCD (→ see Fig. ①, ③)
N	PROFIBUS PA, operation inside, LCD (→ see Fig. ①, ④)
O	PROFIBUS PA, operation inside (→ see Fig. ④)
P	FOUNDATION Fieldbus, operation outside, LCD (→ see Fig. ②, ③)
Q	FOUNDATION Fieldbus, operation inside, LCD (→ see Fig. ②, ④)
R	FOUNDATION Fieldbus, operation inside (→ see Fig. ④)
30	Housing; Cable entry, Protection:
A	Aluminum T14 housing, optional display on the side, IP 66/67/NEMA 6P, Gland M 20x1.5
B	Aluminum T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread G 1/2
C	Aluminum T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread 1/2 NPT
D	Aluminum T14 housing, optional display on the side, IP 66/67/NEMA 6P, M12x1 PA plug
E	Aluminum T14 housing, optional display on the side, IP 66/67/NEMA 6P, 7/8" FF plug
F	Aluminum T14 housing, optional display on the side, IP 65/NEMA 4X, Han7D plug, 90°
J	Aluminum T15 housing, optional display on the top, IP 66/67/NEMA 6P, Gland M 20x1.5
K	Aluminum T15 housing, optional display on the top, IP 66/67/NEMA 6P, Thread G 1/2
L	Aluminum T15 housing, optional display on the top, IP 66/67/NEMA 6P, Thread 1/2 NPT
M	Aluminum T15 housing, optional display on the top, IP 66/67/NEMA 6P, M 12x1 PA plug
N	Aluminum T15 housing, optional display on the top, IP 66/67/NEMA 6P, 7/8" FF plug
P	Aluminum T15 housing, optional display on the top, IP 65/NEMA 4X, Han7D plug, 90°
1	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Gland M 20x1.5
2	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread G 1/2
3	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, Thread 1/2 NPT
4	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, M 12x1 PA plug
5	AISI 316L T14 housing, optional display on the side, IP 66/67/NEMA 6P, 7/8" FF plug
6	AISI 316L T14 housing, optional display on the side, IP 65/NEMA 4X, Han7D plug, 90°
R	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Gland M 20x1.5
S	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Thread G 1/2
T	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, Thread 1/2 NPT
U	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, M 12x1 PA plug
V	AISI 316L T17 housing, optional display on the side, IP 66/68/NEMA 6P, 7/8" FF plug
Z	Housing: see additional specifications

FMD78							order code
-------	--	--	--	--	--	--	------------

→ For continuation of FMD78 ordering information, see the following page.

FMD78 (continued)

40				Nominal range; PN:			
				Nominal value		PN	
				7D	100 mbar/10 kPa/1.5 psi	160 bar/16 MPa/2400 psi	
				7F	500 mbar/50 kPa/7.5 psi	160 bar/16 MPa/2400 psi	
				7H	3 bar/300 kPa/45 psi	160 bar/16 MPa/2400 psi	
				7L	16 bar/1,6 MPa/240 psi	160 bar/16 MPa/2400 psi	
				7M	40 bar/4 MPa/600 psi	160 bar/16 MPa/2400 psi	
50				Calibration, Units:			
				1	Calibration: nominal range, mbar/bar		
				2	Calibration: nominal range, kPa/MPa		
				3	Calibration: nominal range, mmH ₂ O/mH ₂ O		
				4	Calibration: nominal range, inH ₂ O/ftH ₂ O		
				6	Calibration: nominal range, psi		
				B	Custom calibration: see additional specification		
				C	Factory calibration: see additional specification, Factory calibration certificate, 5-point		
				D	DKD calibration: see additional specification, DKD-Certificate		
60				Membrane material:			
				1	AISI 316L		
				2	Alloy C		
				3	Monel		
				5	Tantalum		
				6	AISI 316L with Gold-Rhodium coating		
				7	AISI 316L with 0.09 mm PTFE foil (not for vacuum applications)		
80				Process connection, Material:			
				Membrane diaphragm seal cell structure			
				UF	Cell DN 50 PN 16-400, AISI 316L		
				UH	Cell DN 80 PN 16-400, AISI 316L		
				UJ	Cell DN 100 PN 16-400, AISI 316L		
				VF	Cell 2" 150-2500 lbs, AISI 316L (CRN)		
				VH	Cell 3" 150-2500 lbs, AISI 316L (CRN)		
				VJ	Cell 4" 150-2500 lbs, AISI 316L (CRN)		
				Threaded connections			
				GA	Thread ISO 228 G 1/2 B, PN 40, AISI 316L, separator, PTFE seal		
				RL	Thread ANSI 1/2 MNPT, PN 40, AISI 316L, separator, PTFE seal		
				Clamp connections			
				TB	Tri-Clamp, ISO 2852 DN 25 (1"), DIN 32676 DN 25, 3A, AISI 316L		
				TC	Tri-Clamp, ISO 2852 DN 25 – DN 38 (1 – 1 1/2"), 3A, AISI 316L		
				TD	Tri-Clamp, ISO 2852 DN 40 – DN 51 (2")/DN 50, 3A, AISI 316L		
				TF	Tri-Clamp, ISO 2852 DN 70 – DN 76.1 (3"), 3 A, AISI 316L		
				Pipe diaphragm seal Clamp			
				SB	Tri-Clamp, ISO 2852 DN 25 (1"), 3A, AISI 316L		
				SC	Tri-Clamp, ISO 2852 DN 38 (1 1/2"), 3A, AISI 316L, 3.1 + Pressure test acc. to PED Cat. II		
				SD	Tri-Clamp, ISO 2852 DN 51 (2"), 3A, AISI 316L, 3.1 + Pressure test acc. to PED Cat. II		
				Hygienic connections			
				TR	Varivent model N for pipes DN 40 – DN 162, PN 40, 3A, AISI 316L		
				TK	DRD DN50 (65 mm), PN 25, 3A, AISI 316L		
				WH	Sanitary tank spud, 3A, AISI 316L, extended diaphragm seal 2"		
				MR	DIN 11851 DN 50 PN 25, 3A, AISI 316L		
				MS	DIN 11851 DN 65 PN 25, 3A, AISI 316L		
				MT	DIN 11851 DN 80 PN 25, 3A, AISI 316L		
				M3	DIN 11851 DN 50 PN 25 socket, 3A, AISI 316L		
				M4	DIN 11851 DN 65 PN 25 socket, 3A, AISI 316L		
				M5	DIN 11851 DN 80 PN 25 socket, 3A, AISI 316L		
				EN/DIN flanges			
				B3	DN 50 PN 10-40 B1, AISI 316L		
				B5	DN 80 PN 10-40 B1, AISI 316L		
				BT	DN 100 PN 10-16 B1, AISI 316L		
				B6	DN 100 PN 25-40 B1, AISI 316L		
FMD78				order code			

→ For continuation of FMD78 ordering information, see the following page.

FMD78 (continued)

							Process connection, Material (continued):
	80						ANSI flanges AF 2" 150 lbs RF, AISI 316/316L (CRN) AR 2" 300 lbs RF, AISI 316/316L (CRN) AG 3" 150 lbs RF, AISI 316/16L (CRN) AS 3" 300 lbs RF, AISI 316/316L (CRN) J4 3" 150 lbs RF, AISI 316/316L, extended diaphragm seal: 2"/4"/6"/8" (CRN), extended diaphragm seal: see additional specification AH 4" 150 lbs RF, AISI 316/316L (CRN) AT 4" 300 lbs RF, AISI 316/316L (CRN) J5 4" 150 lbs RF, AISI 316/316L, extended diaphragm seal: 2"/4"/6"/8" (CRN), extended diaphragm seal: see additional specification JIS flanges KF 10K 50A RF, AISI 316L KL 10K 80A RF, AISI 316L KH 10K 100A RF, AISI 316L
	90						Capillary, Fill fluid:
							1 ...m capillary, silicone oil 2 ...m capillary, vegetable oil 3 ...m capillary, high temperature oil 4 ...m capillary, oil for oxygen service 5 ...m capillary, low temperature oil A ...ft capillary, silicone oil B ...ft capillary, vegetable oil C ...ft capillary, high temperature oil D ...ft capillary, oil for oxygen service E ...ft capillary, low temperature oil
	100						Additional options 1:
							A Additional options 1 not selected B Material test certificate for wetted components, inspection certificate as per EN 10204 acc. to specification 52005759 C NACE MR0175 material D Material test certificate for wetted components as per EN 10204 3.1 and NACE MR0175 material, inspection certificate as per EN 10204 acc. to specification 52010806 M Overvoltage protection N HistoROM module S GL/ABS marine certificate 2 Test report acc. to EN 10204 2.2 3 Routine test with certificate, inspection certificate as per EN 10204 3.1 4 Overpressure test with certificate, inspection certificate as per EN 10204 3.1
	110						Additional options 2:
							A Additional options 2 not selected E SIL2/IEC61508 Declaration of conformity G Separate housing, cable length see additional spec. + mounting bracket, wall/pipe, 316L M Overvoltage protection N HistoROM module S GL/ABS marine certificate U Mounting bracket for wall and pipe, AISI 304 2 Test report acc. to EN 10204 2.2 3 Routine test with certificate, inspection certificate as per EN 10204 3.1 4 Overpressure test with certificate, inspection certificate as per EN 10204 3.1
	FMD78						complete order code

Further documentation

Innovation	<ul style="list-style-type: none"> ■ Cerabar S/Deltabar S/Deltapilot S, For process pressure, differential pressure, flow and level measurement: IN010P/00/en 																																				
Field of Activities	<ul style="list-style-type: none"> ■ Pressure measurement: Powerful instruments for process pressure, differential pressure, level and flow: FA004P/00/en 																																				
Technical Information	<ul style="list-style-type: none"> ■ Cerabar S: TI383P/00/en ■ Deltapilot S: TI416P/00/en ■ Deltatop/DeltaSet: TI297P/00/en ■ EMC test basic principles: TI241F/00/en 																																				
Operating Instructions	<p>4...20 mA HART: <ul style="list-style-type: none"> ■ Deltabar S: BA270P/00/en ■ Description of device functions Cerabar S/Deltabar S/Deltapilot S, Pressure and Differential pressure transmitters: BA274P/00/en </p> <p>PROFIBUS PA: <ul style="list-style-type: none"> ■ Deltabar S: BA294P/00/en ■ Description of device functions Cerabar S/Deltabar S/Deltapilot S, Pressure and Differential pressure transmitters: BA296P/00/en </p> <p>FOUNDATION Fieldbus: <ul style="list-style-type: none"> ■ Deltabar S: BA301P/00/en ■ Description of device functions Cerabar S/Deltabar S, Pressure and Differential pressure transmitters: BA303P/00/en </p>																																				
Brief operating instructions	<ul style="list-style-type: none"> ■ 4...20 mA HART, Deltabar S: KA1018P/00/en ■ PROFIBUS PA, Deltabar S: KA1021P/00/en ■ FOUNDATION Fieldbus, Deltabar S: KA1024P/00/en 																																				
Manual for Functional Safety (SIL)	<ul style="list-style-type: none"> ■ Deltabar S (4...20 mA): SD189P/00/en 																																				
Safety Instructions	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding: 5px;">Certificate/Type of Protection</th><th style="text-align: left; padding: 5px;">Device</th><th style="text-align: left; padding: 5px;">Electronic insert</th><th style="text-align: left; padding: 5px;">Documentation</th></tr> </thead> <tbody> <tr> <td style="padding: 5px;">ATEX II 1/2 G EEx ia IIC T6</td><td style="padding: 5px;">PMD70, PMD75, FMD76, FMD77, FMD78</td><td style="padding: 5px;"> <ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus </td><td style="padding: 5px;">– XA235P</td></tr> <tr> <td style="padding: 5px;">ATEX II 1/2 D</td><td style="padding: 5px;">PMD70, PMD75, FMD77, FMD78</td><td style="padding: 5px;"> <ul style="list-style-type: none"> – 4...20 mA HART – PROFIBUS PA, – FOUNDATION Fieldbus </td><td style="padding: 5px;">– XA237P – XA280P</td></tr> <tr> <td style="padding: 5px;">ATEX II 1/2 D EEx ia IIC T6</td><td style="padding: 5px;">FMD76</td><td style="padding: 5px;"> <ul style="list-style-type: none"> – 4...20 mA HART – PROFIBUS PA, – FOUNDATION Fieldbus </td><td style="padding: 5px;">– XA238P – XA281P</td></tr> <tr> <td style="padding: 5px;">ATEX II 1/3 D</td><td style="padding: 5px;">PMD70, PMD75, FMD77, FMD78</td><td style="padding: 5px;"> <ul style="list-style-type: none"> – 4...20 mA HART – PROFIBUS PA, – FOUNDATION Fieldbus </td><td style="padding: 5px;">– XA239P – XA282P</td></tr> <tr> <td style="padding: 5px;">ATEX II 2 G EEx d IIC T6</td><td style="padding: 5px;">PMD70, PMD75, FMD77, FMD78</td><td style="padding: 5px;"> <ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus </td><td style="padding: 5px;">– XA240P</td></tr> <tr> <td style="padding: 5px;">ATEX II 3 G EEx nA II T6</td><td style="padding: 5px;">PMD70, PMD75, FMD76, FMD77, FMD78</td><td style="padding: 5px;"> <ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus </td><td style="padding: 5px;">– XA241P</td></tr> <tr> <td style="padding: 5px;">ATEX II 1/2 GD EEx ia IIC T6</td><td style="padding: 5px;">PMD70, PMD75, FMD76, FMD77, FMD78</td><td style="padding: 5px;"> <ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus </td><td style="padding: 5px;">– XA243P</td></tr> <tr> <td style="padding: 5px;">ATEX II 1 GD EEx ia IIC T6</td><td style="padding: 5px;">PMD70, PMD75, FMD76, FMD77, FMD78</td><td style="padding: 5px;"> <ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus </td><td style="padding: 5px;">– XA275P</td></tr> </tbody> </table>	Certificate/Type of Protection	Device	Electronic insert	Documentation	ATEX II 1/2 G EEx ia IIC T6	PMD70, PMD75, FMD76, FMD77, FMD78	<ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA235P	ATEX II 1/2 D	PMD70, PMD75, FMD77, FMD78	<ul style="list-style-type: none"> – 4...20 mA HART – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA237P – XA280P	ATEX II 1/2 D EEx ia IIC T6	FMD76	<ul style="list-style-type: none"> – 4...20 mA HART – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA238P – XA281P	ATEX II 1/3 D	PMD70, PMD75, FMD77, FMD78	<ul style="list-style-type: none"> – 4...20 mA HART – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA239P – XA282P	ATEX II 2 G EEx d IIC T6	PMD70, PMD75, FMD77, FMD78	<ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA240P	ATEX II 3 G EEx nA II T6	PMD70, PMD75, FMD76, FMD77, FMD78	<ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA241P	ATEX II 1/2 GD EEx ia IIC T6	PMD70, PMD75, FMD76, FMD77, FMD78	<ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA243P	ATEX II 1 GD EEx ia IIC T6	PMD70, PMD75, FMD76, FMD77, FMD78	<ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA275P
Certificate/Type of Protection	Device	Electronic insert	Documentation																																		
ATEX II 1/2 G EEx ia IIC T6	PMD70, PMD75, FMD76, FMD77, FMD78	<ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA235P																																		
ATEX II 1/2 D	PMD70, PMD75, FMD77, FMD78	<ul style="list-style-type: none"> – 4...20 mA HART – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA237P – XA280P																																		
ATEX II 1/2 D EEx ia IIC T6	FMD76	<ul style="list-style-type: none"> – 4...20 mA HART – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA238P – XA281P																																		
ATEX II 1/3 D	PMD70, PMD75, FMD77, FMD78	<ul style="list-style-type: none"> – 4...20 mA HART – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA239P – XA282P																																		
ATEX II 2 G EEx d IIC T6	PMD70, PMD75, FMD77, FMD78	<ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA240P																																		
ATEX II 3 G EEx nA II T6	PMD70, PMD75, FMD76, FMD77, FMD78	<ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA241P																																		
ATEX II 1/2 GD EEx ia IIC T6	PMD70, PMD75, FMD76, FMD77, FMD78	<ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA243P																																		
ATEX II 1 GD EEx ia IIC T6	PMD70, PMD75, FMD76, FMD77, FMD78	<ul style="list-style-type: none"> – 4...20 mA HART, – PROFIBUS PA, – FOUNDATION Fieldbus 	– XA275P																																		

Certificate/Type of Protection	Device	Electronic insert	Documentation
ATEX II 1/2 G EEx ia IIC T6 + ATEX II 2G EEx d IIC T6	PMD75, FMD77, FMD78	– 4...20 mA HART, PROFIBUS PA, FOUNDATION Fieldbus	– XA242P
ATEX II EEx ia / EEx d + FM/CSA IS + XP ATEX II 1/2G EEx ia IIC T6+ ATEX II 2G EEx d IIC T6+ FM/CSA IS + XP Cl.I Div.1 Gr.A-D	PMD75, FMD77, FMD78	– 4...20 mA HART, PROFIBUS PA, FOUNDATION Fieldbus	– in preparation

Certificate/Type of Protection	Device	Electronic insert	Documentation
IECEx Zone 0/1 Ex ia IIC T6	PMD70, PMD75, FMD76, FMD77, FMD78	– 4...20 mA HART, PROFIBUS PA, FOUNDATION Fieldbus	– XB004P

Certificate/Type of Protection	Device	Electronic insert	Documentation
NEPSI Ex ia IIC T6	PMD70, PMD75, FMD76, FMD77, FMD78	– 4...20 mA HART, PROFIBUS PA, FOUNDATION Fieldbus	– XC004P
NEPSI Ex d IIC T6	PMD75, FMD77, FMD78	– 4...20 mA HART, PROFIBUS PA, FOUNDATION Fieldbus	– XC006P

Installation/Control Drawings

Certificate/Type of Protection	Device	Electronic insert	Documentation
FM IS Class I, II, III, Division 1, Groups A – G; NI, Class I Division 2, Groups A – D; AEx ia	PMD70, PMD75, FMD76, FMD77, FMD78	– 4...20 mA HART – PROFIBUS PA, FOUNDATION Fieldbus	– ZD141P – ZD188P
CSA IS Class I, II, III, Division 1, Groups A – G; Class I Division 2, Groups A – G	PMD70, PMD75, FMD76, FMD77, FMD78	– 4...20 mA HART – PROFIBUS PA, FOUNDATION Fieldbus	– ZD142P – ZD189P
FM IS + XP Class I, Division 1, Groups A – D	PMD75, FMD77, FMD78	– 4...20 mA HART – PROFIBUS PA, FOUNDATION Fieldbus	– ZD186P – ZD190P
CSA IS + XP Class I, Division 1, Groups A – D	PMD75, FMD77, FMD78	– 4...20 mA HART – PROFIBUS PA, FOUNDATION Fieldbus	– ZD153P – ZD191P
FM/CSA IS + XP Class I, Division 1, Groups A – D	PMD75, FMD77, FMD78	– 4...20 mA HART – PROFIBUS PA, FOUNDATION Fieldbus	– ZD153P + ZD186P – ZD190P + ZD191P
ATEX II EEx ia / EEx d + FM/CSA IS + XP ATEX II 1/2G EEx ia IIC T6+ ATEX II 2G EEx d IIC T6+ FM/CSA IS + XP Cl.I Div.1 Gr.A-D	PMD75, FMD77, FMD78	– 4...20 mA HART, PROFIBUS PA, FOUNDATION Fieldbus	– in preparation

Overspill protection

- WHG: ZE260P/00/de

Instruments International

Endress+Hauser
Instruments International AG
Kaegenstrasse 2
4153 Reinach
Switzerland

Tel. +41 61 715 81 00
Fax +41 61 715 25 00
www.endress.com
info@ii.endress.com

Endress+Hauser 
People for Process Automation

