

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	N/A	NEW DWG.				17-10-15

特性:

一、电气性能: ELECTRICAL

1. 额定电流: 5.0A
2. 接触阻抗: 30 MILLIOHMS MAX
3. 耐电压: 300V AC / 1 mA MAX
4. 绝缘阻抗: 250V DC/100 MEGA OHMS MIN

二、机械性能:

1. 插入力: 35N (3.57Kg f) MAX
2. 拔出力: 10N (1.02Kg f) MIN
3. 使用寿命: 10000次、拔出力 10N MIN
- 端子保持力: 0.8Kg f MIN

三、材料: MATERIAL

1. 塑胶: LCP黑色 UL94V-0
2. 端子: C7025 T=0.15MM
3. 外壳: SUS304 T=0.30MM
4. 卡勾: SUS304 T=0.12MM

四、电镀: FINISH








1. 端子: 接触点镀金30"MIN
PIN脚焊接区域镀亮锡100U"MIN.

2. 外壳: 镀镍80U"MIN (盐雾24H)

- 五、电镀品需做粘锡测试: 粘锡面积达到95%以上。
六、SMT回流焊 (峰值260° C±5° C) 不能起泡、熔胶、变色不良 (变形在公差范围以内)

七、工作温度: -55° C~+85° C

- 八、盐雾测试: 通过24H在浓度为5±1%盐水的盐雾测试无生锈现象

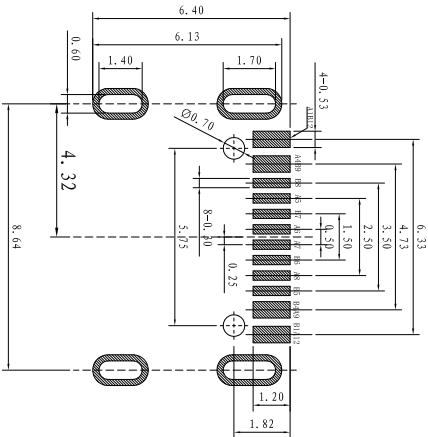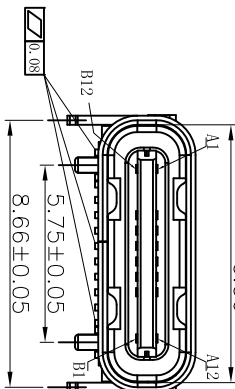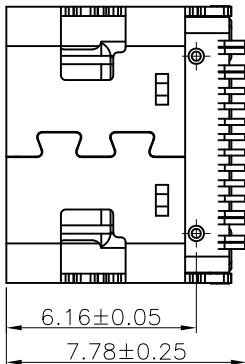

RECOMMENDED P.C.B LAYOUT

A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

UNITS	SCALE	REV.	SHEET	TITLE		
mm	1:1	A0	1 OF 1	深圳市辰丰达科技有限公司 SHENZHEN CHENFENGDA TECHNOLOGY CO., LTD		
		DATE	2017-10-15	USB TYPE CF 16PIN SMT 四脚DIP		
		DR.	DAP			
		CHK.	HWT			
		APPD.	TXQ			
		DWG.NO.	CFD-USB TC-001			
			A			
			PART NO.			
			SIZE			