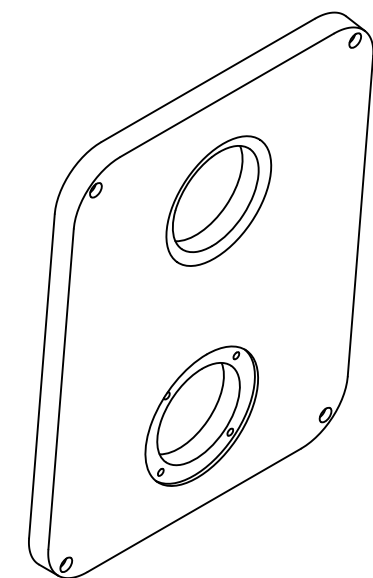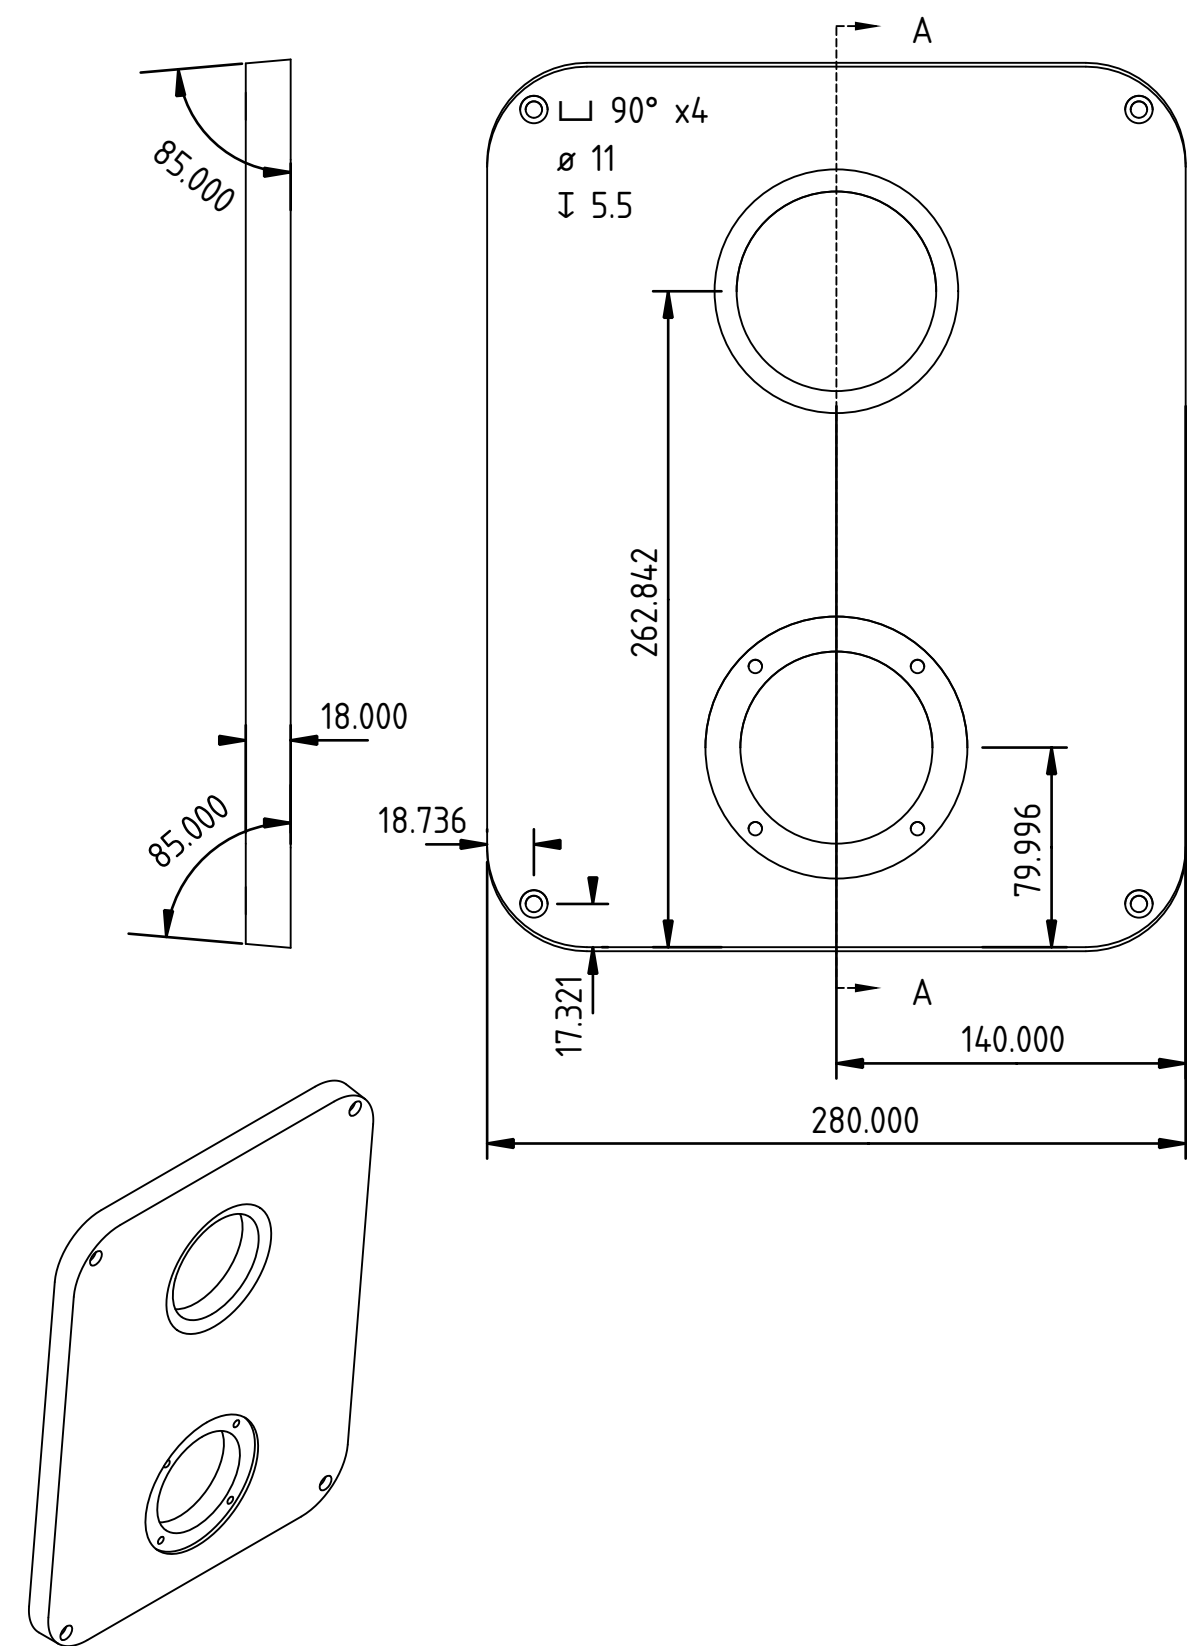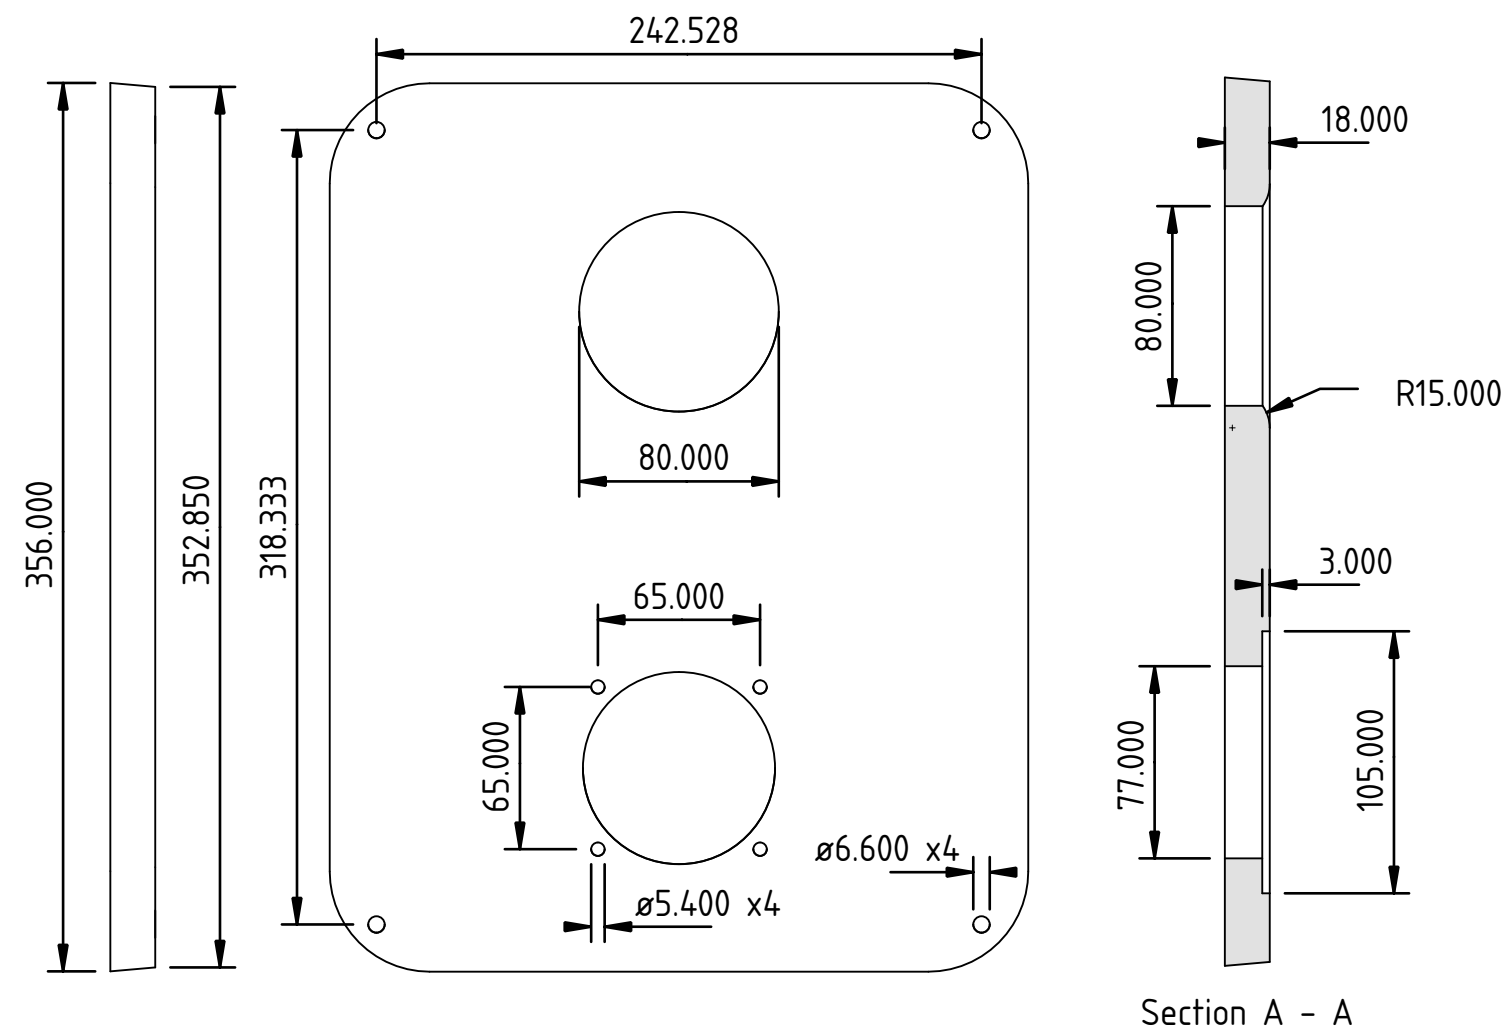(∗1) Connector terminal mount holes (M3) are evenly spaced on a ⌀91.92mm circle.

(∗2) Back plate perimeter filleted with radius 2.00mm.

(∗3) Back plate corner radius 40.00mm.

85.000

18.000

85.000

⌖ ⌴ 90° x4

⌀ 11

⤓ 5.5

262.842

18.736

17.321

79.996

140.000

280.000

356.000

352.850

318.333

242.528

80.000

65.000

65.000

⌀5.400 x4

⌀6.600 x4

18.000

80.000

R15.000

3.000

77.000

105.000

Section A - A

A

A

3D – 1:5

Copyright Eero Talus 2019

This documentation describes Open Hardware and is licensed under the CERN OHL v. 1.2.

You may redistribute and modify this documentation under the terms of the CERN OHL v.1.2. (http://ohwr.org/cernohl). This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING OF MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. Please see the CERN OHL v.1.2 for applicable conditions.

Created by: Eero Talus	Title: Two way speaker cabinet back plate			
Supplementary information: Material: Birch/laminated/18mm	Size: A3	Sheet: 2/6	Scale: 1:3
B: 13/08/2019 – Material thickness 20mm --> 18mm.	Part number: TWSC2			
C: 18/08/2019 – Add and fix annotations.	Drawing number:			
D: 15/10/2019 – Add port cutout.	Date: 16/10/2019		Revision: REV D